

NOTES REV 1.0:

1. +3.3V OUT (P1-2, P2-2) ONLY AVAILABLE WHEN POWERED THROUGH +5V LINES
2. USB PORT BY DEFAULT IS UNPOWERED
3. BOARD CANNOT BE POWERED THROUGH USB PORT
4. I2C PULLUPS ON I2C1 BUS 1 ONLY TO SUPPORT EEPROM
USER MUST PROVIDE PULL-UPS FOR OTHER I2C BUSES
5. USE OF I2C INTERNAL PULL-UPS ONLY NOT ADVISED
6. PB2 USED FOR ONBOARD USER LED. MAY BE DISABLED BY REMOVING R7

NOTES REV 1.0 -> 1.1

1. REVISED BOARD PINOUTS
2. BROUGHT OUT USB PINS TO HEADERS
3. REVISED +3.3V CORE SWITCHING
4. ADDED DIODE BLOCKED POWER TO VBAT IF EXT VBAT NOT PRESENT

STM32L152CCx PROCESSOR

VBAT	1	VBAT	48	+3.3V
PC13	2	PC13_TAMPER	47	GND
X3	3	PC14_OSC32I	46	PB9
X4	4	PC15_OSC32O	45	PB8
X1	5	PD0_OSCI	44	BOOT
X2	6	PD1_OSCO	43	PB7
MRST	7	RST	42	PB6
GND	8	VSSA	41	PB5
+3.3V	9	VDDA	40	PB4
PA0	10	PA0	39	PB3
PA1	11	PA1	38	PA15
PA2	12	PA2	37	SWCLK
PA3	13	PA3	36	+3.3V
PA4	14	PA4	35	GND
PA5	15	PA5	34	SWDIO
PA6	16	PA6	33	USB_DP
PA7	17	PA7	32	USB_DM
PB0	18	PB0	31	PA10
PB1	19	PB1	30	PA9
PB2	20	PB2	29	PA8
PB10	21	PB10	28	PB15
PB11	22	PB11	27	PB14
GND	23	VSS	26	PB13
+3.3V	24	VDD	25	PB12


STM32L152CCx

IO HEADERS


+5V	1	P1	+3.3V_OUT	1	P2
NC	2	2	+3.3V_IN	2	2
NC	3	3	PB9	3	3
VBAT_EXT	4	4	PB8	4	4
PC13	5	5	PB7	5	5
MRST	6	6	PB6	6	6
PA0	7	7	PB5	7	7
PA1	8	8	PB4	8	8
PA2	9	9	PB3	9	9
PA3	10	10	PA15	10	10
PA4	11	11	USB_DP	11	11
PA5	12	12	USB_DM	12	12
PA6	13	13	PA10	13	13
PA7	14	14	PA9	14	14
PB0	15	15	PA8	15	15
PB1	16	16	PB15	16	16
PB2	17	17	PB14	17	17
PB10	18	18	PB13	18	18
PB11	19	19	PB12	19	19
GND	20	20	GND	20	20

CONN_1x20


CONN_1x20

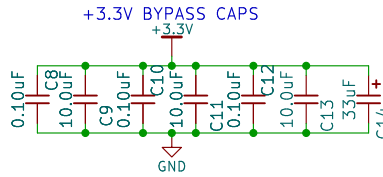


BOOT MODE JUMPER NORMALLY OFF FOR BOOT FROM FLASH






MANUAL RESET




ON-BOARD I2C EEPROM MICROCHIP 24FCxx MSOP-8 PKG 64K, 128K, 256K AVAILABLE SIZE

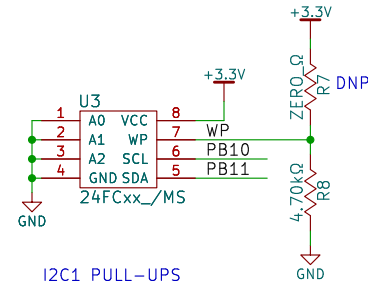


I2C1 PULL-UPS




USER / POWER LEDS




SWDIO DEBUG




12 MHz CRYSTAL




32KHz CRYSTAL



LDO REGULATOR (FOR +5V - +12V EXTERNAL POWER ONLY)

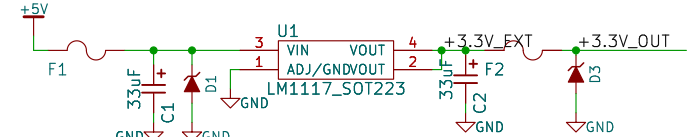

ON-BOARD USB NORMALLY UNPOWERED ZERO OHM JUMPERS FOR +5V OR +3.3V W/DIODE BLOCK CAN NOT POWER BOARD FROM USB PORT

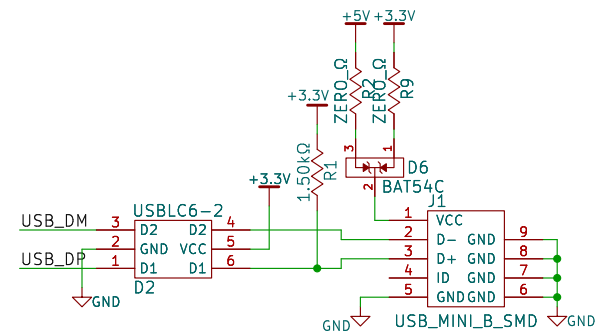

+3.3V POWER SOURCE SELECTION 1-2 - SOURCED FROM +5V TO +12V IN THROUGH LDO REGULATOR (P1-1, P2-1) 2-3 - SOURCED FROM EXTERNAL +3.3 REGULATED SOURCE (P1-3, P2-3)



CELERITOUS TECHNICAL SERVICES, CORP
COPYRIGHT 2018 ALL RIGHTS RESERVED
STM32L152CCX LOW POWER CORTEX M3 ARM MODULE
RELEASED UNDER CERN OSHW LICENSE VER 1.2

Sheet: /
File: working.kicad_sch

Title:

Size: USLetter Date: May 23rd, 2018

Rev: 1.1

KiCad E.D.A. eeschema 7.0.6

Id: 1/1