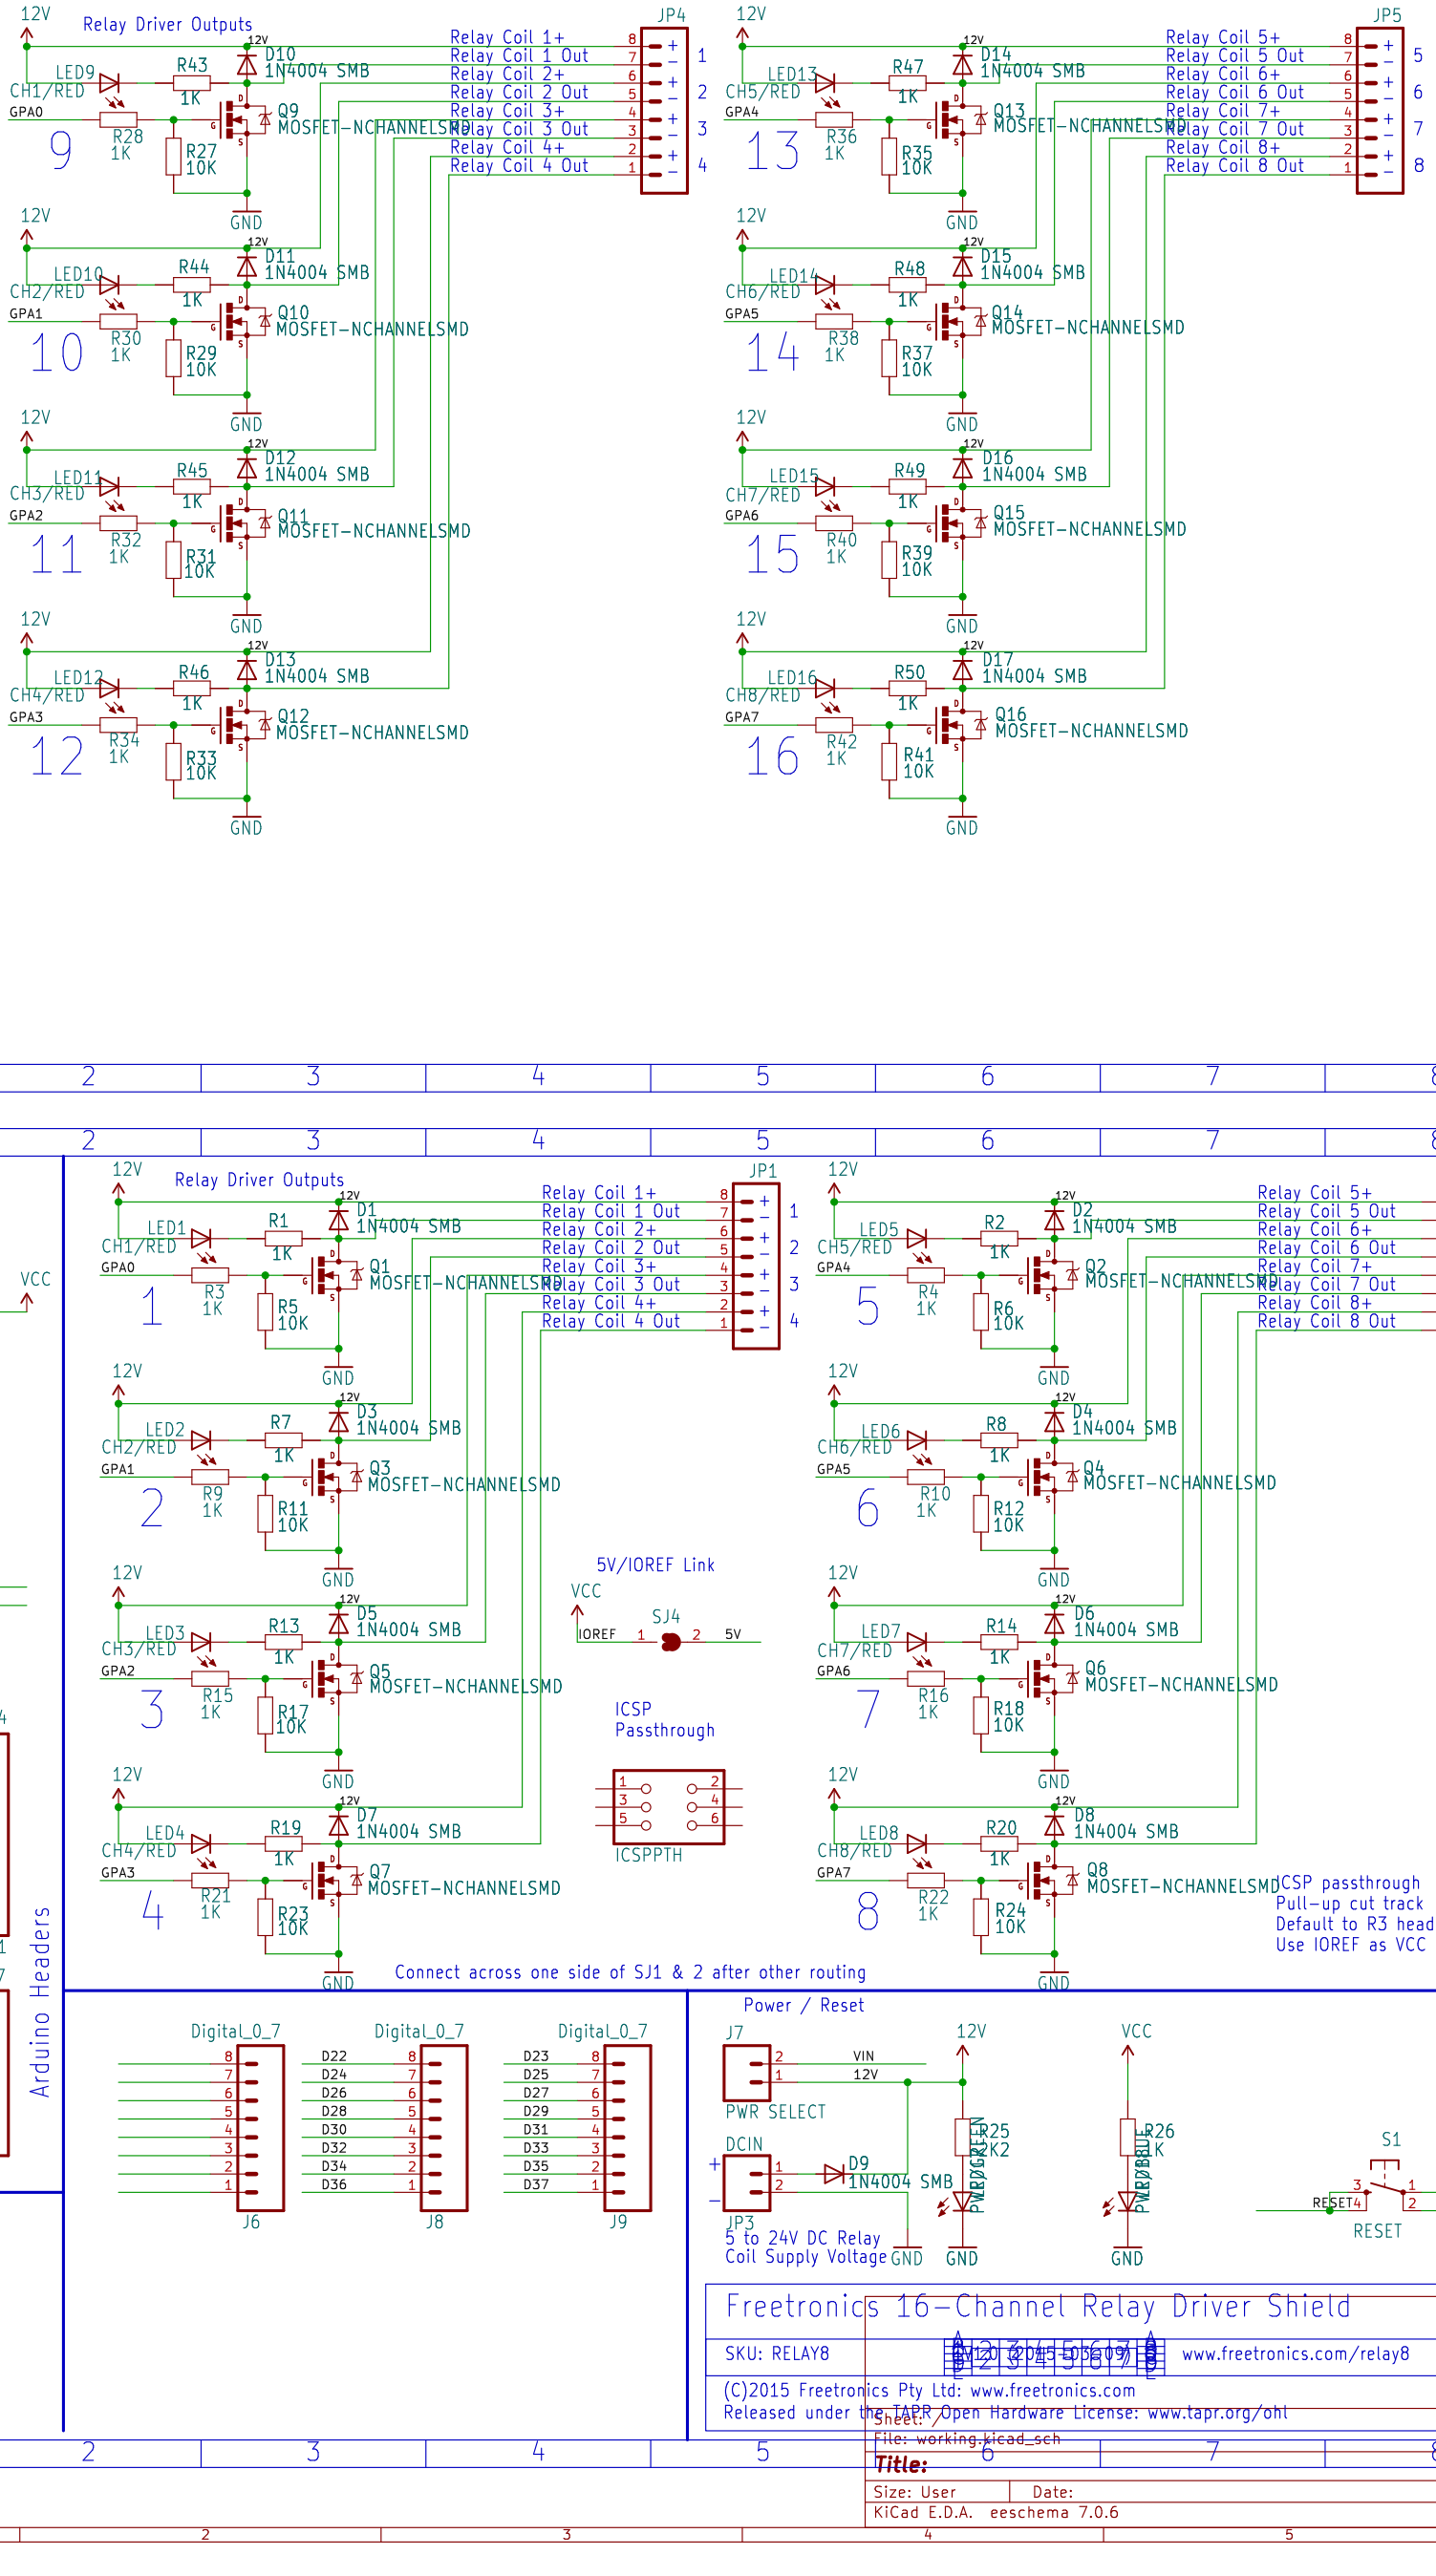
Relay Driver Outputs
JP4
JP5
Relay Coil 1+
Relay Coil 1 Out
Relay Coil 2+
Relay Coil 2 Out
Relay Coil 3+
Relay Coil 3 Out
Relay Coil 4+
Relay Coil 4 Out
Relay Coil 5+
Relay Coil 5 Out
Relay Coil 6+
Relay Coil 6 Out
Relay Coil 7+
Relay Coil 7 Out
Relay Coil 8+
Relay Coil 8 Out
12V
GND
LED9
CH1/RED
GPA0
R28 1K
R27 10K
R43 1K
D10 1N4004 SMB
Q9 MOSFET-NCHANNELSMD
9
LED10
CH2/RED
GPA1
R30 1K
R29 10K
R44 1K
D11 1N4004 SMB
Q10 MOSFET-NCHANNELSMD
10
LED11
CH3/RED
GPA2
R32 1K
R31 10K
R45 1K
D12 1N4004 SMB
Q11 MOSFET-NCHANNELSMD
11
LED12
CH4/RED
GPA3
R34 1K
R33 10K
R46 1K
D13 1N4004 SMB
Q12 MOSFET-NCHANNELSMD
12
LED13
CH5/RED
GPA4
R36 1K
R35 10K
R47 1K
D14 1N4004 SMB
Q13 MOSFET-NCHANNELSMD
13
LED14
CH6/RED
GPA5
R38 1K
R37 10K
R48 1K
D15 1N4004 SMB
Q14 MOSFET-NCHANNELSMD
14
LED15
CH7/RED
GPA6
R40 1K
R39 10K
R49 1K
D16 1N4004 SMB
Q15 MOSFET-NCHANNELSMD
15
LED16
CH8/RED
GPA7
R42 1K
R41 10K
R50 1K
D17 1N4004 SMB
Q16 MOSFET-NCHANNELSMD
16

Arduino Headers
J2
POWER
NC
IOREF
RESET
3V3
5V
GND
GND
VIN
VCC
Analog
J1
A0
A1
A2
A3
A4_SDA
A5_SCL
J4
M100.1
R3_SCL
R3_SDA
AREF
GND
D13_SCK
D12_MISO
D11_MOSI
D10
D9
D8
Digital_0_7
J3
D7
D6
D5
D4
D3
D2
D1_TX
D0_RX
Arduino Headers
Relay Driver Outputs
JP1
JP2
Relay Coil 1+
Relay Coil 1 Out
Relay Coil 2+
Relay Coil 2 Out
Relay Coil 3+
Relay Coil 3 Out
Relay Coil 4+
Relay Coil 4 Out
Relay Coil 5+
Relay Coil 5 Out
Relay Coil 6+
Relay Coil 6 Out
Relay Coil 7+
Relay Coil 7 Out
Relay Coil 8+
Relay Coil 8 Out
12V
GND
LED1
CH1/RED
GPA0
R3 1K
R5 10K
R1 1K
D1 1N4004 SMB
Q1 MOSFET-NCHANNELSMD
1
LED2
CH2/RED
GPA1
R9 1K
R11 10K
R7 1K
D3 1N4004 SMB
Q3 MOSFET-NCHANNELSMD
2
LED3
CH3/RED
GPA2
R15 1K
R17 10K
R13 1K
D5 1N4004 SMB
Q5 MOSFET-NCHANNELSMD
3
LED4
CH4/RED
GPA3
R21 1K
R23 10K
R19 1K
D7 1N4004 SMB
Q7 MOSFET-NCHANNELSMD
4
LED5
CH5/RED
GPA4
R4 1K
R6 10K
R2 1K
D2 1N4004 SMB
Q2 MOSFET-NCHANNELSMD
5
LED6
CH6/RED
GPA5
R10 1K
R12 10K
R8 1K
D4 1N4004 SMB
Q4 MOSFET-NCHANNELSMD
6
LED7
CH7/RED
GPA6
R16 1K
R18 10K
R14 1K
D6 1N4004 SMB
Q6 MOSFET-NCHANNELSMD
7
LED8
CH8/RED
GPA7
R22 1K
R24 10K
R20 1K
D8 1N4004 SMB
Q8 MOSFET-NCHANNELSMD
8
5V/IOREF Link
SJ4
IOREF
5V
ICSP
Passthrough
ICSPPTH
ICSP passthrough
Pull-up cut track
Default to R3 headers
Use IOREF as VCC
Connect across one side of SJ1 & 2 after other routing
Digital_0_7
J6
J8
J9
D22
D24
D26
D28
D30
D32
D34
D36
D23
D25
D27
D29
D31
D33
D35
D37
Power / Reset
J7
PWR SELECT
VIN
12V
DCIN
JP3
5 to 24V DC Relay
Coil Supply Voltage
D9
1N4004 SMB
R25
1K2
R26
1K
PWR GREEN
PWR BLUE
S1
RESET
Freetronics 16-Channel Relay Driver Shield
SKU: RELAY8
www.freetronics.com/relay8
(C)2015 Freetronics Pty Ltd: www.freetronics.com
Released under the TAPR Open Hardware License: www.tapr.org/ohl
Sheet: /
File: working.kicad_sch
Title:
Size: User
Date:
KiCad E.D.A. eeschema 7.0.6
Rev:
Id: 1/1