

FEATHERWING ASSIGNMENTS

- SERCOM3+5.2

SERCOM3+5.3

SERCOM3.0+5.1

SERCOM3.1+5.0
- D10 - PA20 - GPIO0 w/JUMPER

D11 - PA21 - BUSY

D12 - PA22 - RESET

D13 - PA23 - CS
- TX - PB16 -SERCOM5.0

RX - PB17 -SERCOM5.1
- MISO - PB23 - SERCOM1+5.3

MOSI - PA00 - SERCOM1.0

SCK - PA01 - SERCOM1.1


TX - PA17 - SERCOM1.1+3.0

RX - PA16 - SERCOM1.0+3.1
- SCK - PA17 - SERCOM1.1+3.0




MOSI - PB23 - SERCOM1+5.3

MISO - PA00 - SERCOM1.0


POWER AND FILTERING

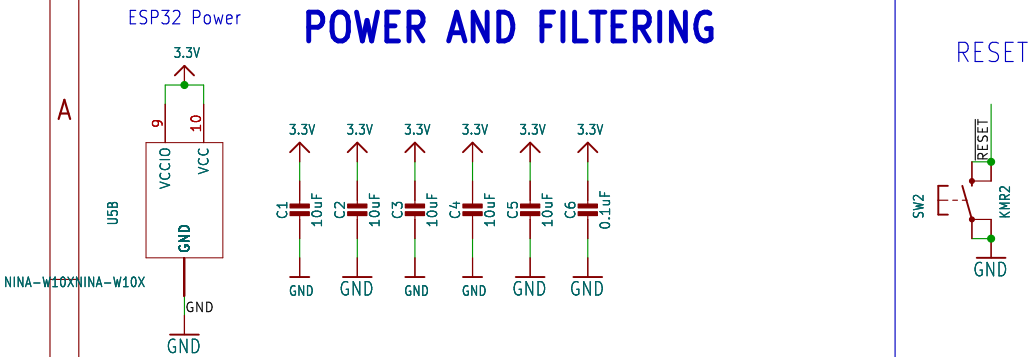


RESET

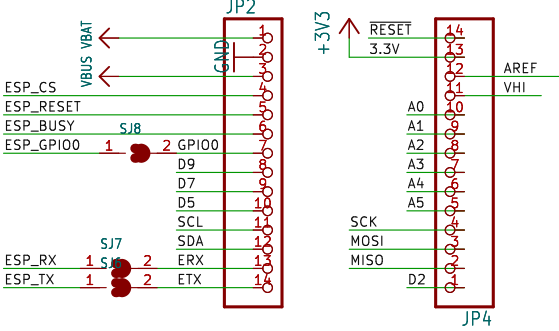


RGB LED

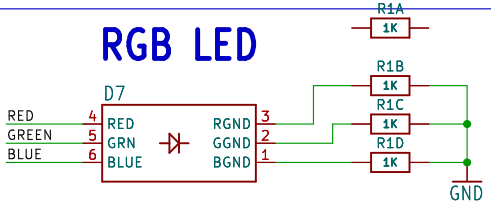

Opt. Crypto Chip



MISO Tri-state

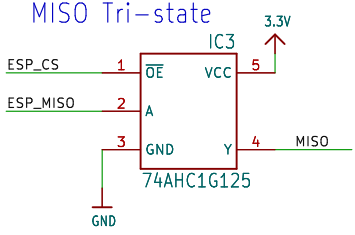

SERCOM0: (avail on A1, A4, A5, D2)
SERCOM1: SPI
SERCOM2: I2C
SERCOM3: UART
SERCOM4: (NEOPIX DMA MOSI)
SERCOM5: (avail on D10-D13)

U5A	NINA-W10XNINA-W10X	RESET_N	19	ESP_RESET
2	ADC2/GPIO34	GPIO12	36	
3	ADC3/GPIO39	JTCLK/GPIO13	35	
4	ADC4/GPIO36	JTMS/GPIO14	31	MOSI
34	ADC34/GPIO35	JTDO/GPIO15	32	
7	GPIO33	LPO_IN/GPIO32	5	
ESP_BUSY		ANT	13	
ESP_CS	28	SPIV_CS/GPIO5		
SCK	29	SPIV_CLK/GPIO18		
ESP_MISO	1	SPIV_DI/GPIO23		
	8	SPIV_HD/RMIL_TXEN/GPIO21		
GREEN	16	RMIL_RXD0/DAC16/GPIO25		
RED	17	RMIL_RXD1/DAC17/GPIO26		
BLUE	18	RMIL_CRSDV/GPIO27		
	24	RMIL_MDIO/GPIO4		
	25	RMIL_MDC/LK/GPIO2		
ESP_GPIO0	27	RMIL_CLK/GPIO0		
	21	UART_CTS/RMIL_TXD0/SPIV_D0/GPIO19		
	20	UART_RTS/RMIL_TXD1/SPIV_WP/GPIO22		
ESP_TX	22	UART_TXD/GPIO1		
ESP_RX	23	UART_RXD/GPIO3		

ISSUE	\${COMPANY}		© \${YEAR}	
DRAWN	TITLE		REV	
DATE	DATE		DRG NO	
DATE	FILE: \${PROJECTNAME}		PAGE: \${#}/\${##}	

File: working.kicad_sch	Title:		
Size: User	Date:		Rev:
KiCad E.D.A.	kicad-cli 7.0.6-7.0.6-ubuntu22.04.1		Id: 1/1