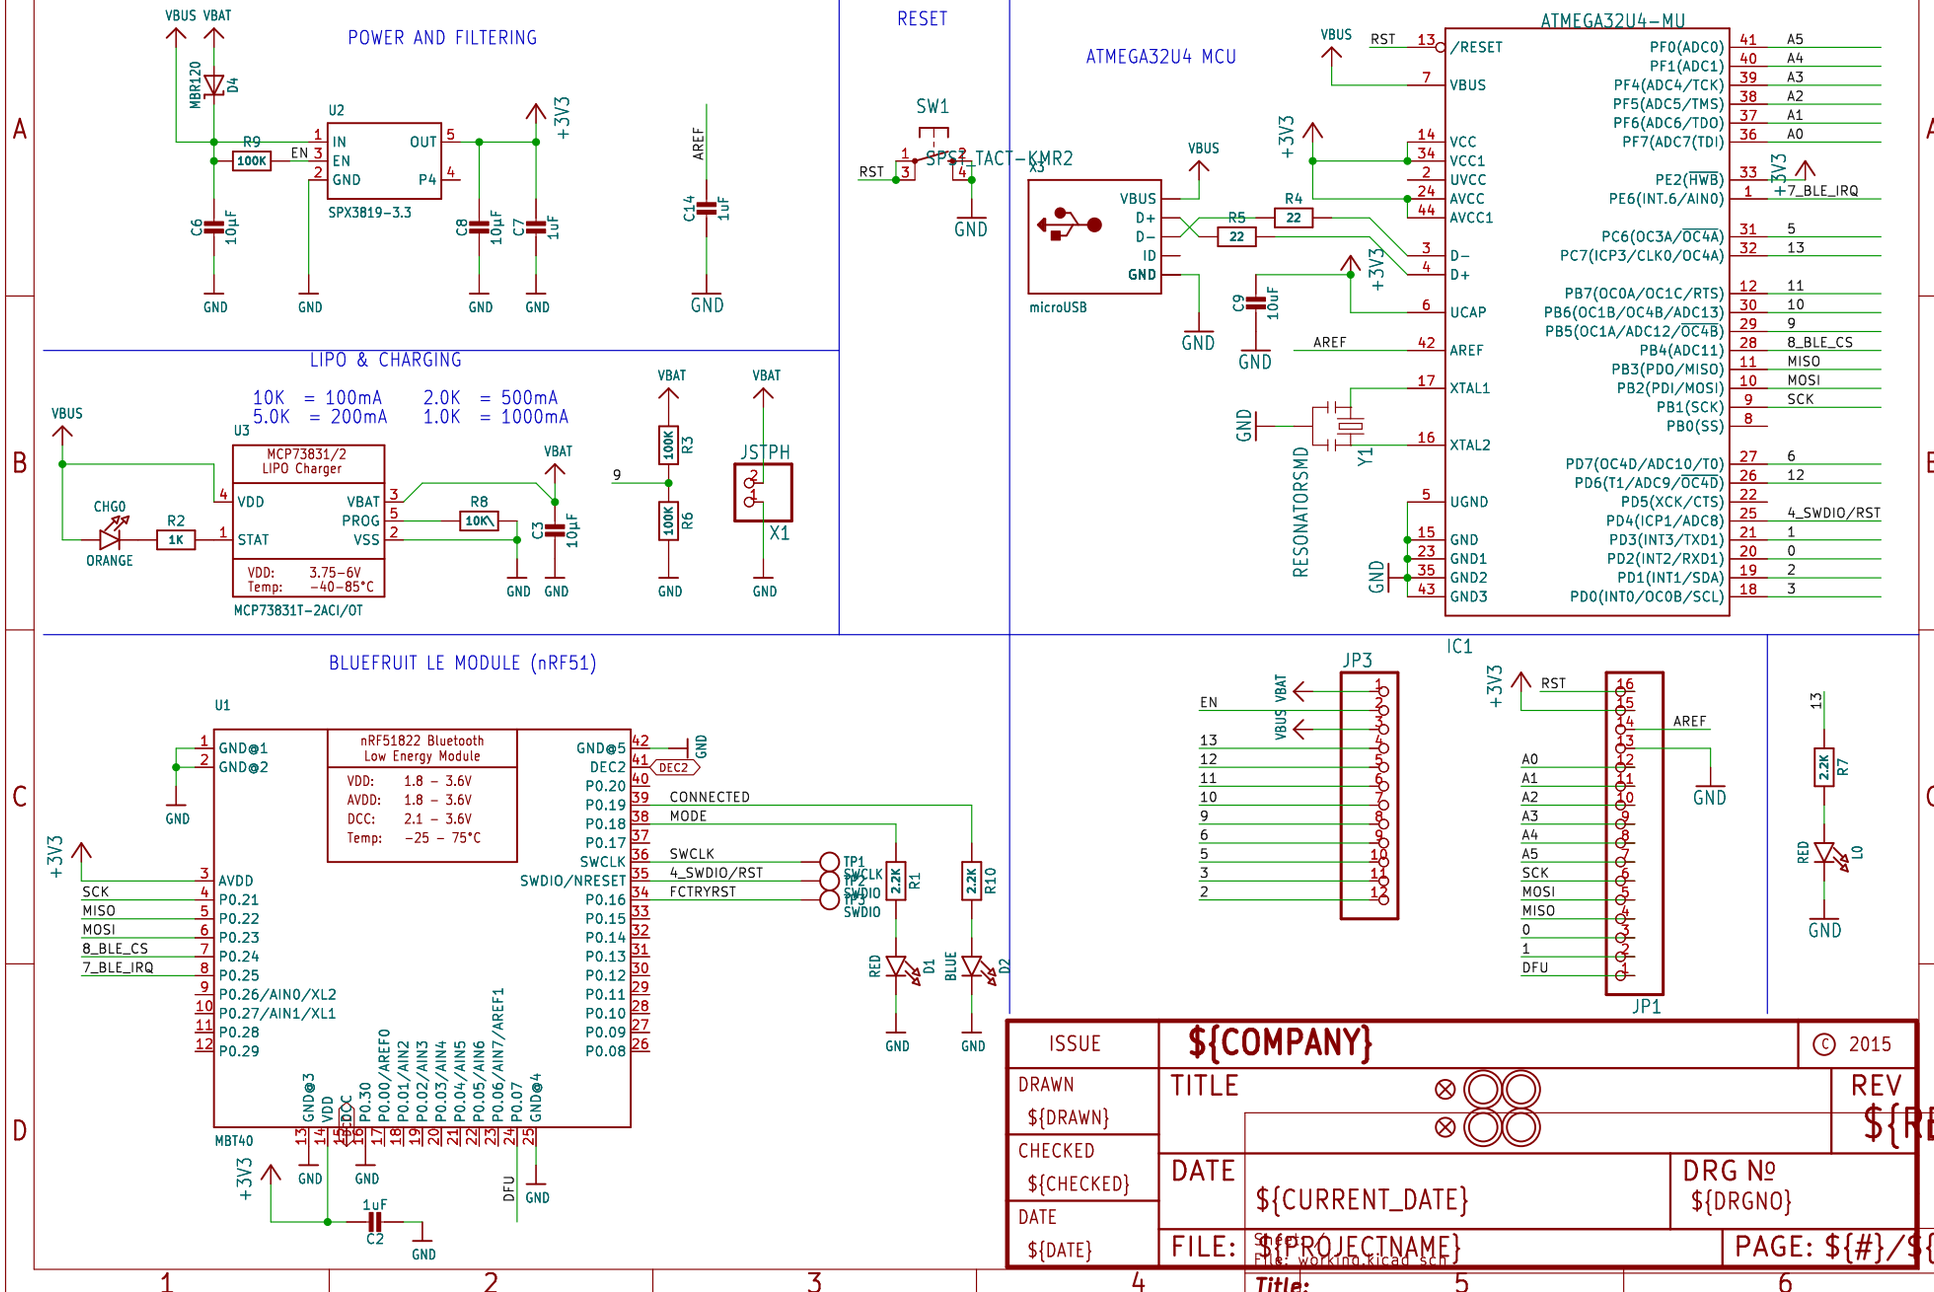

POWER AND FILTERING
VBUS VBAT
MBR120
D4
R9
100K
U2
SPX3819-3.3
IN
EN
GND
OUT
P4
C6
10µF
C8
10µF
C7
1uF
+3V3
AREF
C14
1uF
RESET
SW1
SPST-TACT-KMR2
RST
GND
ATMEGA32U4 MCU
ATMEGA32U4-MU
X3
microUSB
VBUS
D+
D-
ID
GND
R5
22
R4
22
C9
10uF
/RESET
VCC
VCC1
UVCC
AVCC
AVCC1
D-
D+
UCAP
AREF
XTAL1
XTAL2
UGND
GND
GND1
GND2
GND3
Y1
RESONATORSMD
PF0(ADC0)
PF1(ADC1)
PF4(ADC4/TCK)
PF5(ADC5/TMS)
PF6(ADC6/TDO)
PF7(ADC7(TDI)
PE2(HWB)
PE6(INT.6/AIN0)
PC6(OC3A/OC4A)
PC7(ICP3/CLK0/OC4A)
PB7(OC0A/OC1C/RTS)
PB6(OC1B/OC4B/ADC13)
PB5(OC1A/ADC12/OC4B)
PB4(ADC11)
PB3(PDO/MISO)
PB2(PDI/MOSI)
PB1(SCK)
PB0(SS)
PD7(OC4D/ADC10/T0)
PD6(T1/ADC9/OC4D)
PD5(XCK/CTS)
PD4(ICP1/ADC8)
PD3(INT3/TXD1)
PD2(INT2/RXD1)
PD1(INT1/SDA)
PD0(INT0/OC0B/SCL)
+7_BLE_IRQ
LIPO & CHARGING
10K = 100mA 2.0K = 500mA
5.0K = 200mA 1.0K = 1000mA
U3
MCP73831/2
LIPO Charger
VDD
STAT
VBAT
PROG
VSS
VDD: 3.75-6V
Temp: -40-85°C
MCP73831T-2ACI/OT
CHG0
R2
1K
ORANGE
R8
10K
C3
10µF
R3
100K
R6
100K
JSTPH
X1
BLUEFRUIT LE MODULE (nRF51)
U1
nRF51822 Bluetooth
Low Energy Module
VDD: 1.8 - 3.6V
AVDD: 1.8 - 3.6V
DCC: 2.1 - 3.6V
Temp: -25 - 75°C
MBT40
GND@1
GND@2
AVDD
P0.21
P0.22
P0.23
P0.24
P0.25
P0.26/AIN0/XL2
P0.27/AIN1/XL1
P0.28
P0.29
GND@5
DEC2
P0.20
P0.19
P0.18
P0.17
SWCLK
SWDIO/NRESET
P0.16
P0.15
P0.14
P0.13
P0.12
P0.11
P0.10
P0.09
P0.08
SCK
MISO
MOSI
8_BLE_CS
7_BLE_IRQ
CONNECTED
MODE
4_SWDIO/RST
FCTRYRST
TP1
TP2
TP3
R1
2.2K
R10
2.2K
D1
RED
D2
BLUE
C2
1uF
DFU
JP3
IC1
JP1
R7
2.2K
L0
RED
ISSUE
DRAWN
${DRAWN}
CHECKED
${CHECKED}
DATE
${DATE}
${COMPANY}
© 2015
TITLE
REV
${REV}
DATE
${CURRENT_DATE}
DRG №
${DRGNO}
FILE: ${PROJECTNAME}
PAGE: ${#}/${##}
Title:
Size: User
Date:
KiCad E.D.A. eeschema 7.0.6
Rev:
Id: 1/1