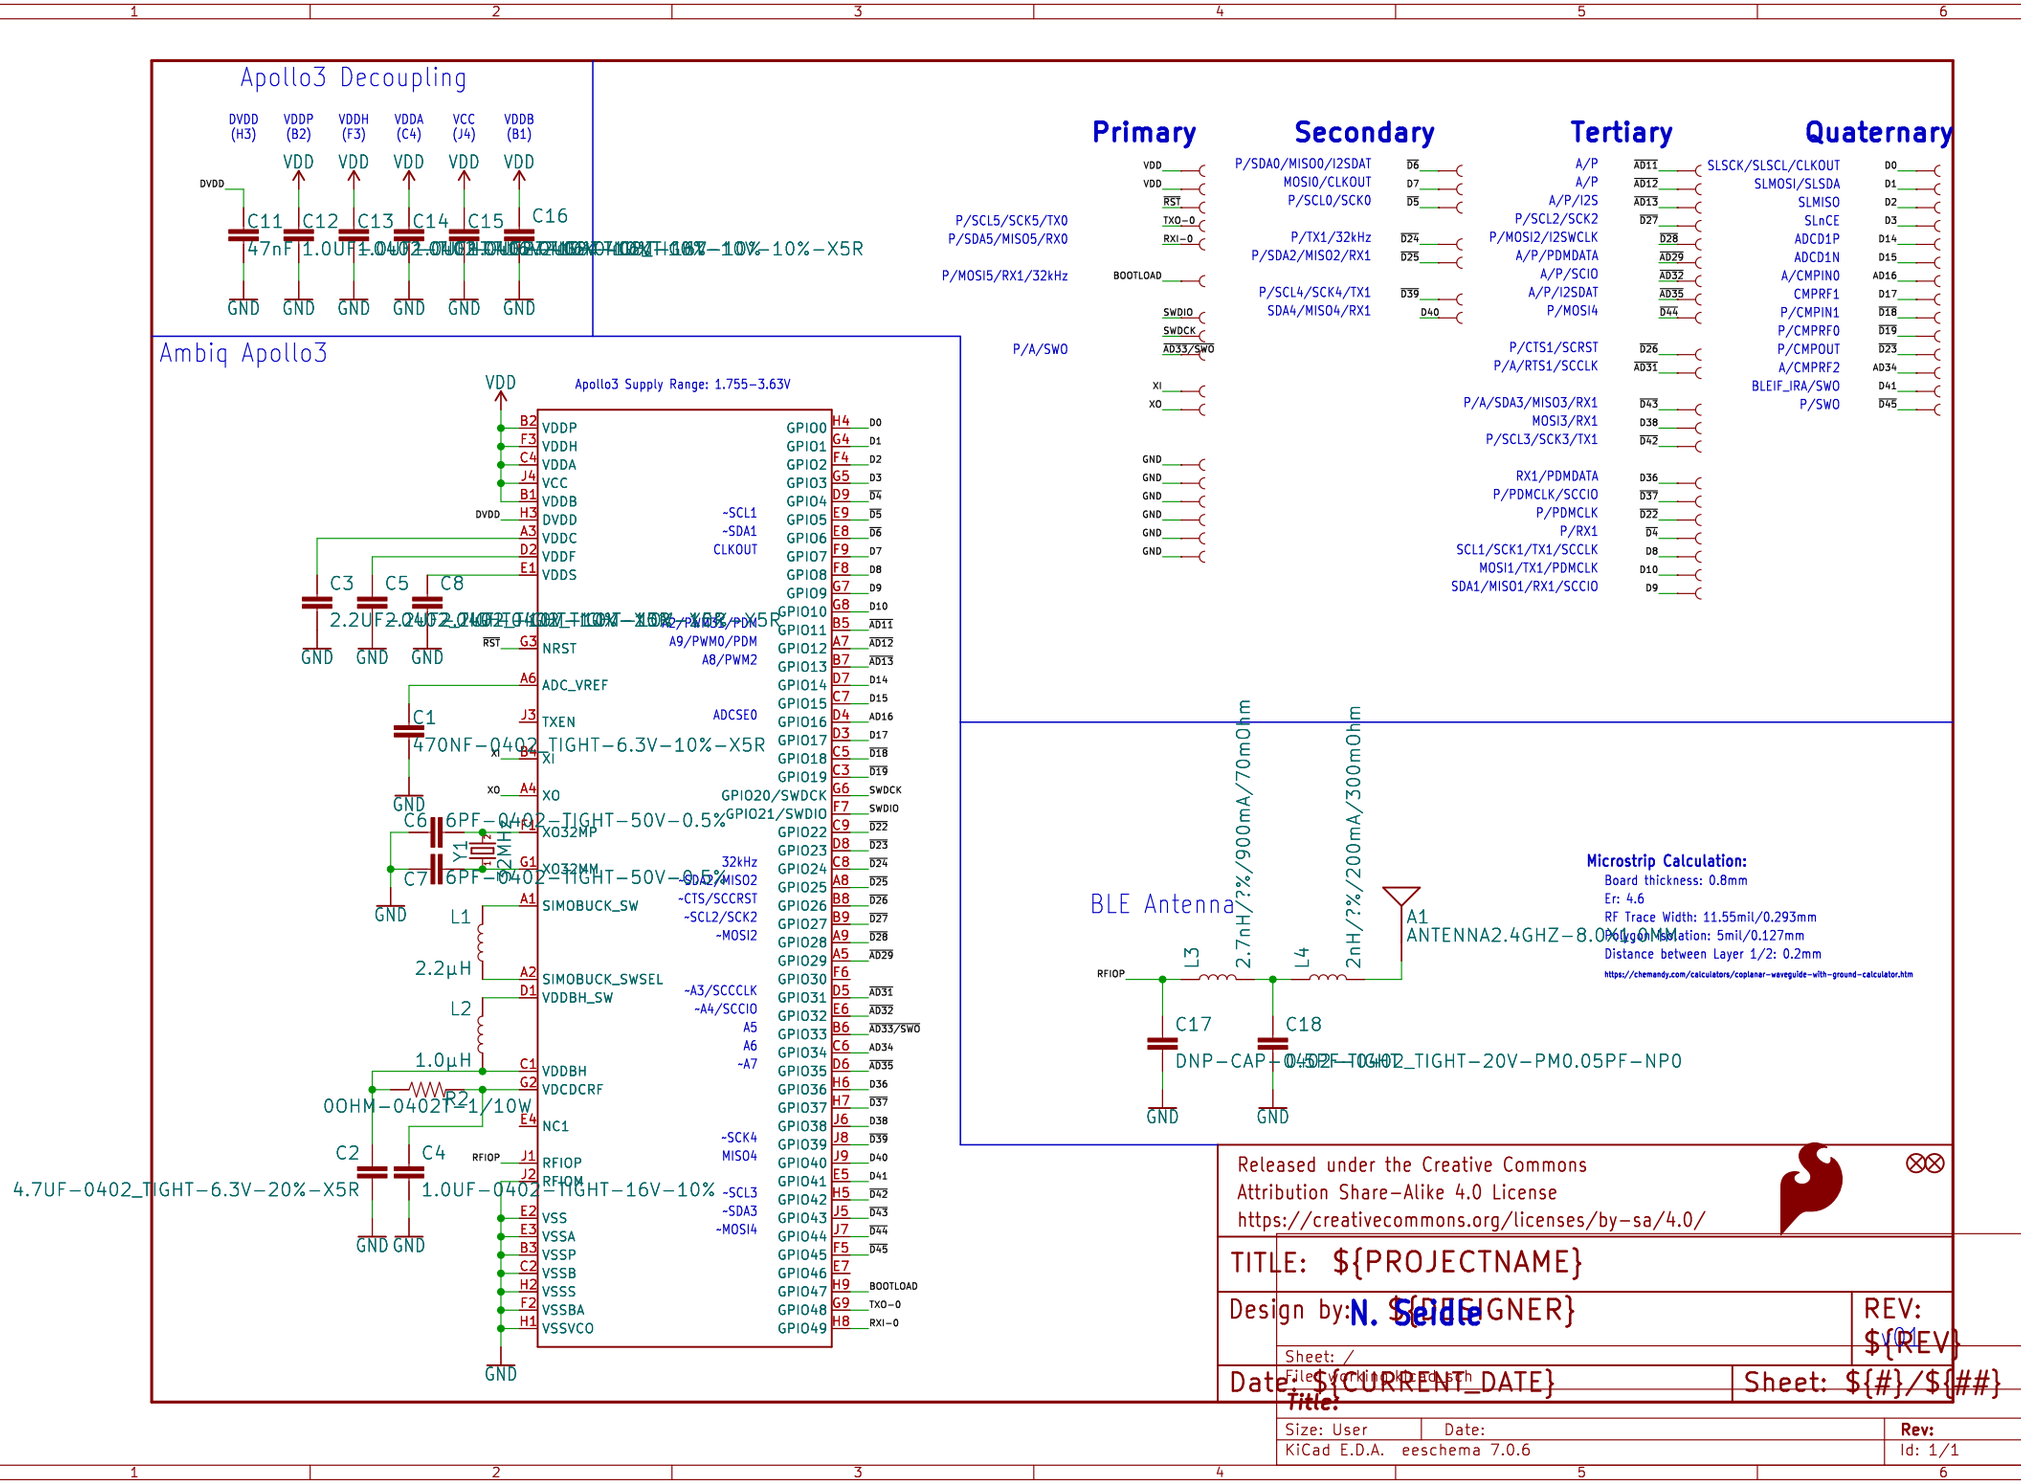

Apollo3 Decoupling
DVDD (H3)
VDDP (B2)
VDDH (F3)
VDDA (C4)
VCC (J4)
VDDB (B1)
C11 47nF
C12 1.0UF
C13 1.0UF
C14 1.0UF
C15 1.0UF
C16 1.0UF
Ambiq Apollo3
Apollo3 Supply Range: 1.755–3.63V
C3 2.2UF
C5 2.2UF
C8 2.2UF
C1 470NF
C6 6PF
C7 6PF
Y1 32.768KHZ
L1 2.2µH
L2 1.0µH
R2 0OHM
C2 4.7UF
C4 1.0UF
Primary
Secondary
Tertiary
Quaternary
BLE Antenna
L3 2.7nH/?%/900mA/70mOhm
L4 2nH/?%/200mA/300mOhm
A1 ANTENNA2.4GHZ–8.0X4.0MM
C17 DNP–CAP–0402_TIGHT–20V–PM0.05PF–NP0
C18 0.5PF–0402_TIGHT–20V–PM0.05PF–NP0
Microstrip Calculation:
Board thickness: 0.8mm
Er: 4.6
RF Trace Width: 11.55mil/0.293mm
Trace Separation: 5mil/0.127mm
Distance between Layer 1/2: 0.2mm
https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: N. Seidle
REV: ${REV}
Sheet: /
File: ${KICAD_MAIN_SHEET_FILENAME}
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1