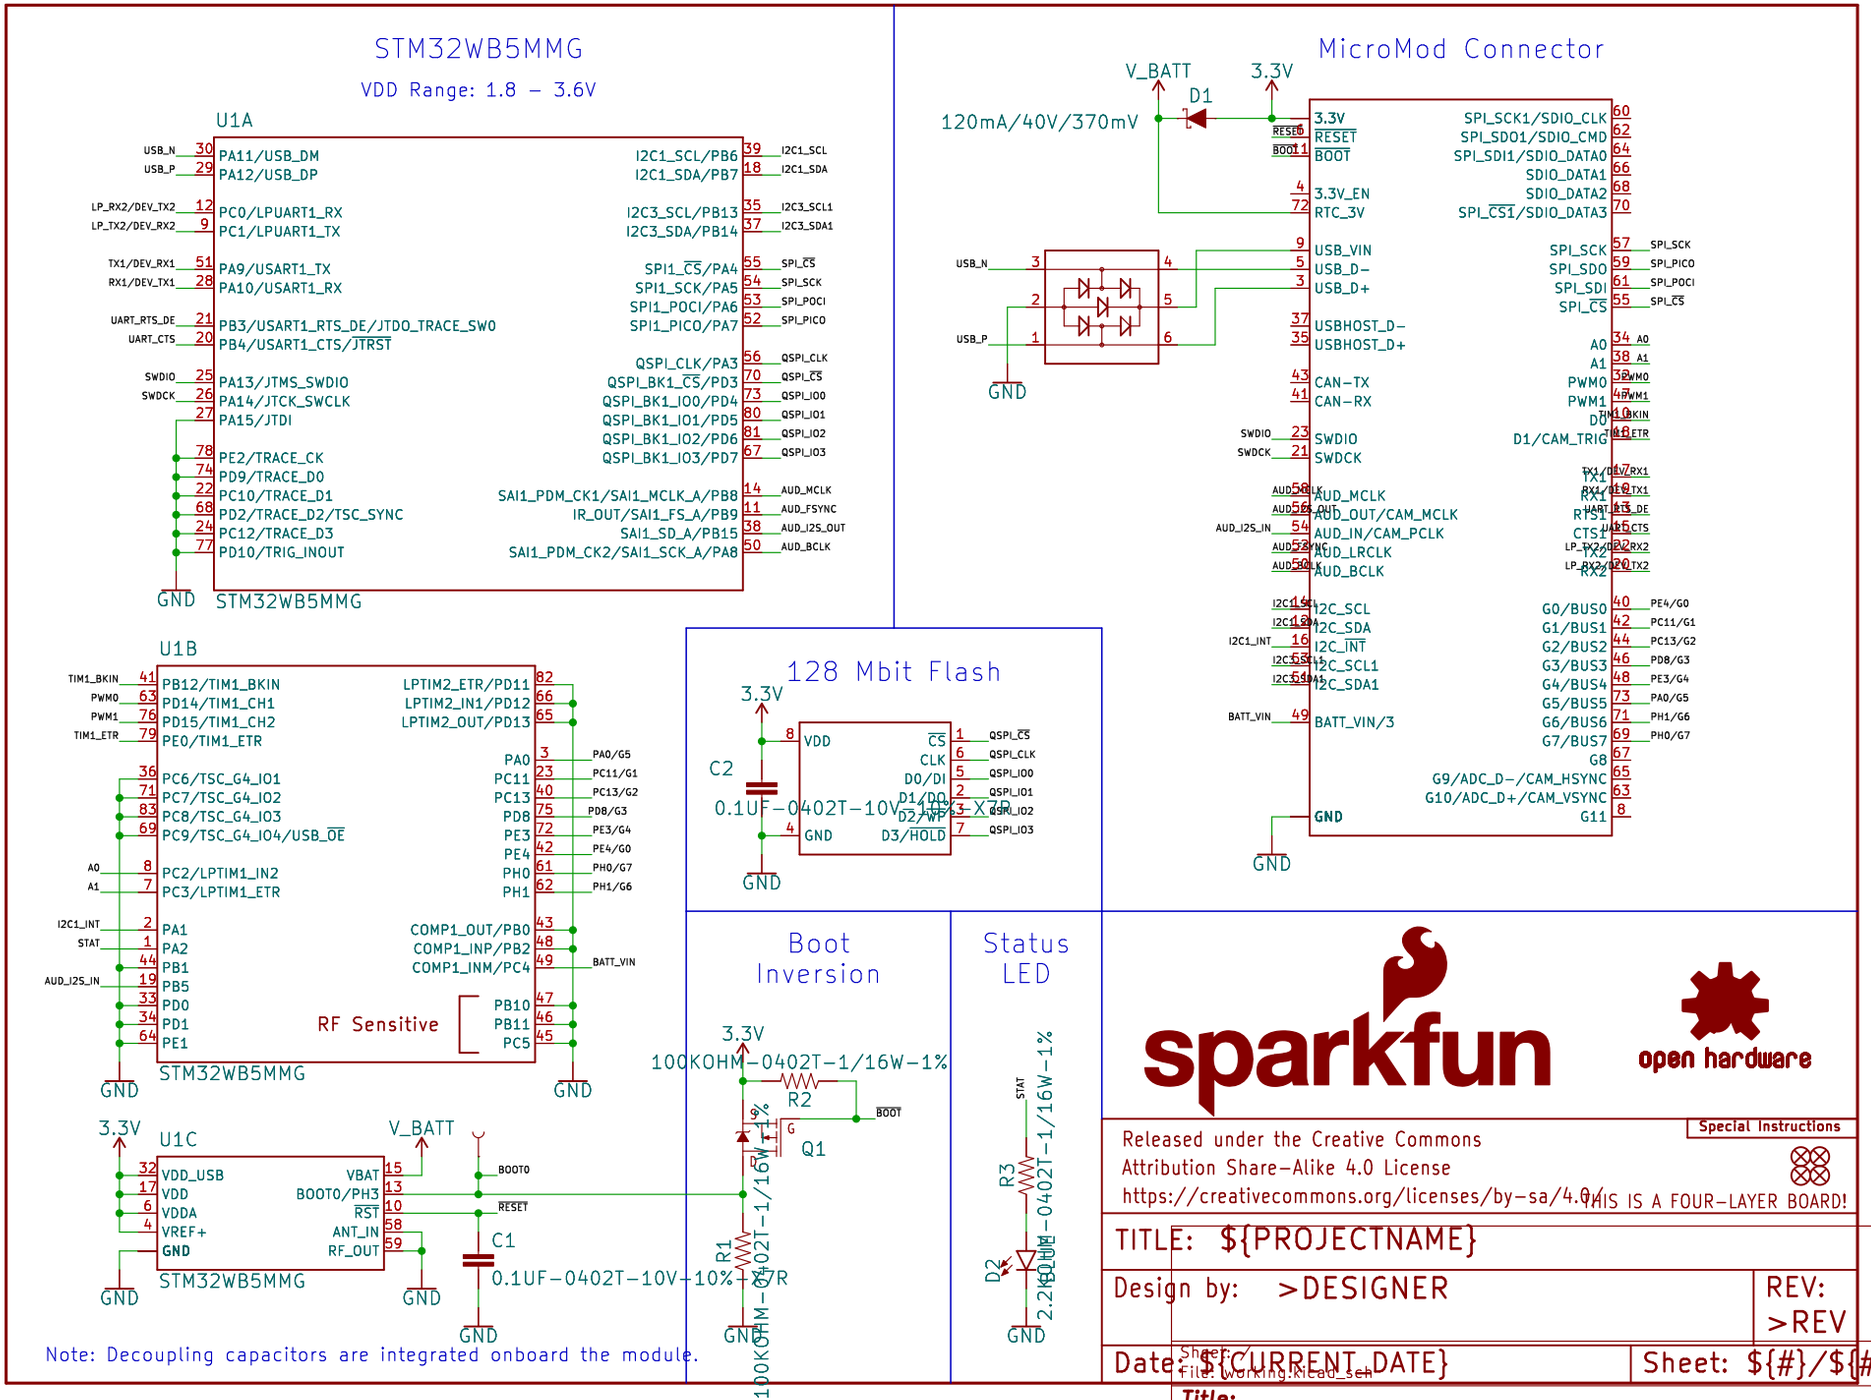
STM32WB5MMG
VDD Range: 1.8 – 3.6V
U1A
PA11/USB_DM
PA12/USB_DP
PC0/LPUART1_RX
PC1/LPUART1_TX
PA9/USART1_TX
PA10/USART1_RX
PB3/USART1_RTS_DE/JTDO_TRACE_SWO
PB4/USART1_CTS/JTRST
PA13/JTMS_SWDIO
PA14/JTCK_SWCLK
PA15/JTDI
PE2/TRACE_CK
PD9/TRACE_D0
PC10/TRACE_D1
PD2/TRACE_D2/TSC_SYNC
PC12/TRACE_D3
PD10/TRIG_INOUT
I2C1_SCL/PB6
I2C1_SDA/PB7
I2C3_SCL/PB13
I2C3_SDA/PB14
SPI1_CS/PA4
SPI1_SCK/PA5
SPI1_POCI/PA6
SPI1_PICO/PA7
QSPI_CLK/PA3
QSPI_BK1_CS/PD3
QSPI_BK1_IO0/PD4
QSPI_BK1_IO1/PD5
QSPI_BK1_IO2/PD6
QSPI_BK1_IO3/PD7
SAI1_PDM_CK1/SAI1_MCLK_A/PB8
IR_OUT/SAI1_FS_A/PB9
SAI1_SD_A/PB15
SAI1_PDM_CK2/SAI1_SCK_A/PA8
GND
STM32WB5MMG
MicroMod Connector
V_BATT
3.3V
D1
120mA/40V/370mV
3.3V
RESET
BOOT
3.3V_EN
RTC_3V
USB_VIN
USB_D-
USB_D+
USBHOST_D-
USBHOST_D+
CAN-TX
CAN-RX
SWDIO
SWDCK
AUD_MCLK
AUD_OUT/CAM_MCLK
AUD_IN/CAM_PCLK
AUD_LRCLK
AUD_BCLK
I2C_SCL
I2C_SDA
I2C_INT
I2C_SCL1
I2C_SDA1
BATT_VIN/3
SPI_SCK1/SDIO_CLK
SPI_SDO1/SDIO_CMD
SPI_SDI1/SDIO_DATA0
SDIO_DATA1
SDIO_DATA2
SPI_CS1/SDIO_DATA3
SPI_SCK
SPI_SDO
SPI_SDI
SPI_CS
A0
A1
PWM0
PWM1
D0
D1/CAM_TRIG
TX1
RX1
RTS1
CTS1
TX2
RX2
G0/BUS0
G1/BUS1
G2/BUS2
G3/BUS3
G4/BUS4
G5/BUS5
G6/BUS6
G7/BUS7
G8
G9/ADC_D-/CAM_HSYNC
G10/ADC_D+/CAM_VSYNC
G11
GND
128 Mbit Flash
3.3V
C2
0.1UF-0402T-10V-10%-X7R
VDD
CS
CLK
DO/DI
D1/D0
D2/WP
GND
D3/HOLD
Boot Inversion
3.3V
100KOHM-0402T-1/16W-1%
R2
BOOT
Q1
R1
100KOHM-0402T-1/16W-1%
Status LED
STAT
R3
2.2KOHM-0402T-1/16W-1%
D2
U1B
PB12/TIM1_BKIN
PD14/TIM1_CH1
PD15/TIM1_CH2
PE0/TIM1_ETR
PC6/TSC_G4_IO1
PC7/TSC_G4_IO2
PC8/TSC_G4_IO3
PC9/TSC_G4_IO4/USB_OE
PC2/LPTIM1_IN2
PC3/LPTIM1_ETR
PA1
PA2
PB1
PB5
PD0
PD1
PE1
LPTIM2_ETR/PD11
LPTIM2_IN1/PD12
LPTIM2_OUT/PD13
PA0
PC11
PC13
PD8
PE3
PE4
PH0
PH1
COMP1_OUT/PB0
COMP1_INP/PB2
COMP1_INM/PC4
PB10
PB11
PC5
RF Sensitive
STM32WB5MMG
GND
U1C
VDD_USB
VDD
VDDA
VREF+
GND
VBAT
BOOT0/PH3
RST
ANT_IN
RF_OUT
STM32WB5MMG
BOOT0
RESET
C1
0.1UF-0402T-10V-10%-X7R
Note: Decoupling capacitors are integrated onboard the module.
sparkfun
open hardware
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
Special Instructions
THIS IS A FOUR-LAYER BOARD!
TITLE: ${PROJECTNAME}
Design by: >DESIGNER
REV: >REV
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Sheet:
File: working.kicad_sch
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1