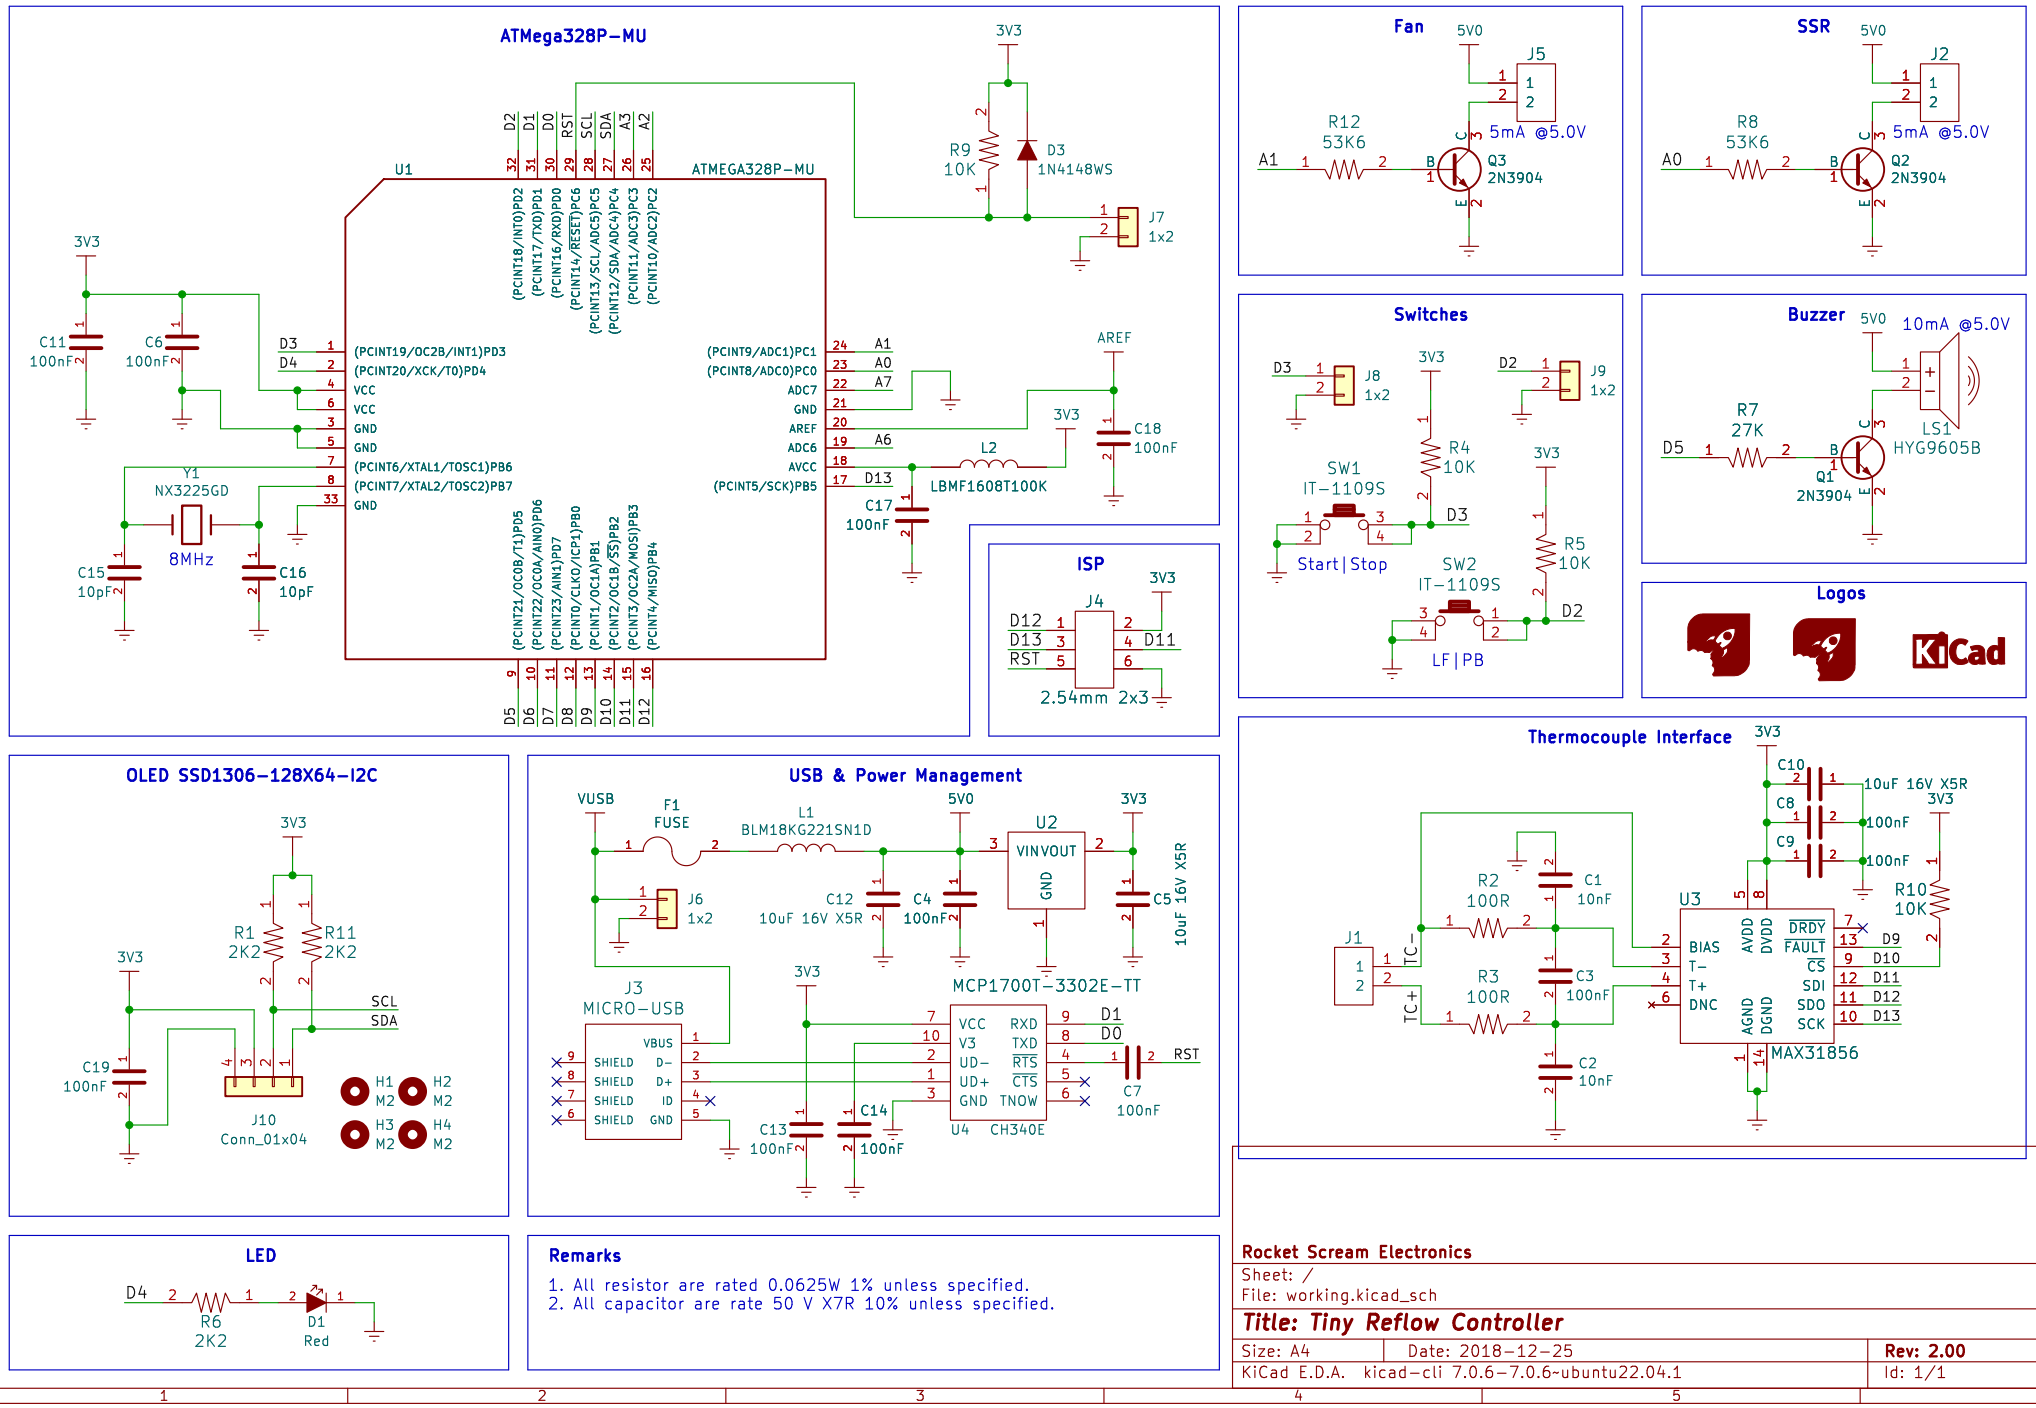
ATMega328P-MU
U1
ATMEGA328P-MU
3V3
C11
100nF
C6
100nF
Y1
NX3225GD
8MHz
C15
10pF
C16
10pF
R9
10K
D3
1N4148WS
J7
1x2
C17
100nF
L2
LBMF1608T100K
C18
100nF
AREF
ISP
J4
2.54mm 2x3
Fan
J5
R12
53K6
Q3
2N3904
5mA @5.0V
SSR
J2
R8
53K6
Q2
2N3904
5mA @5.0V
Switches
J8
1x2
J9
1x2
SW1
IT-1109S
Start|Stop
SW2
IT-1109S
LF|PB
R4
10K
R5
10K
Buzzer
10mA @5.0V
R7
27K
Q1
2N3904
LS1
HYG9605B
Logos
KiCad
OLED SSD1306-128X64-I2C
R1
2K2
R11
2K2
C19
100nF
J10
Conn_01x04
H1 M2
H2 M2
H3 M2
H4 M2
SCL
SDA
USB & Power Management
VUSB
F1
FUSE
L1
BLM18KG221SN1D
J6
1x2
J3
MICRO-USB
U2
VINVOUT
GND
MCP1700T-3302E-TT
C12
10uF 16V X5R
C4
100nF
C5
10uF 16V X5R
U4
CH340E
C13
100nF
C14
100nF
C7
100nF
RST
Thermocouple Interface
J1
TC-
TC+
R2
100R
R3
100R
C1
10nF
C3
100nF
C2
10nF
U3
MAX31856
BIAS
T-
T+
DNC
AVDD
DVDD
AGND
DGND
DRDY
FAULT
CS
SDI
SDO
SCK
C10
10uF 16V X5R
C8
100nF
C9
100nF
R10
10K
LED
D4
R6
2K2
D1
Red
Remarks
1. All resistor are rated 0.0625W 1% unless specified.
2. All capacitor are rate 50 V X7R 10% unless specified.
Rocket Scream Electronics
Sheet: /
File: working.kicad_sch
Title: Tiny Reflow Controller
Size: A4
Date: 2018-12-25
Rev: 2.00
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1
Id: 1/1