
P-400
Feed Supply Pump (upstream)

E-400
Feed Preheater (hot oil)

D-400
Flash Drum

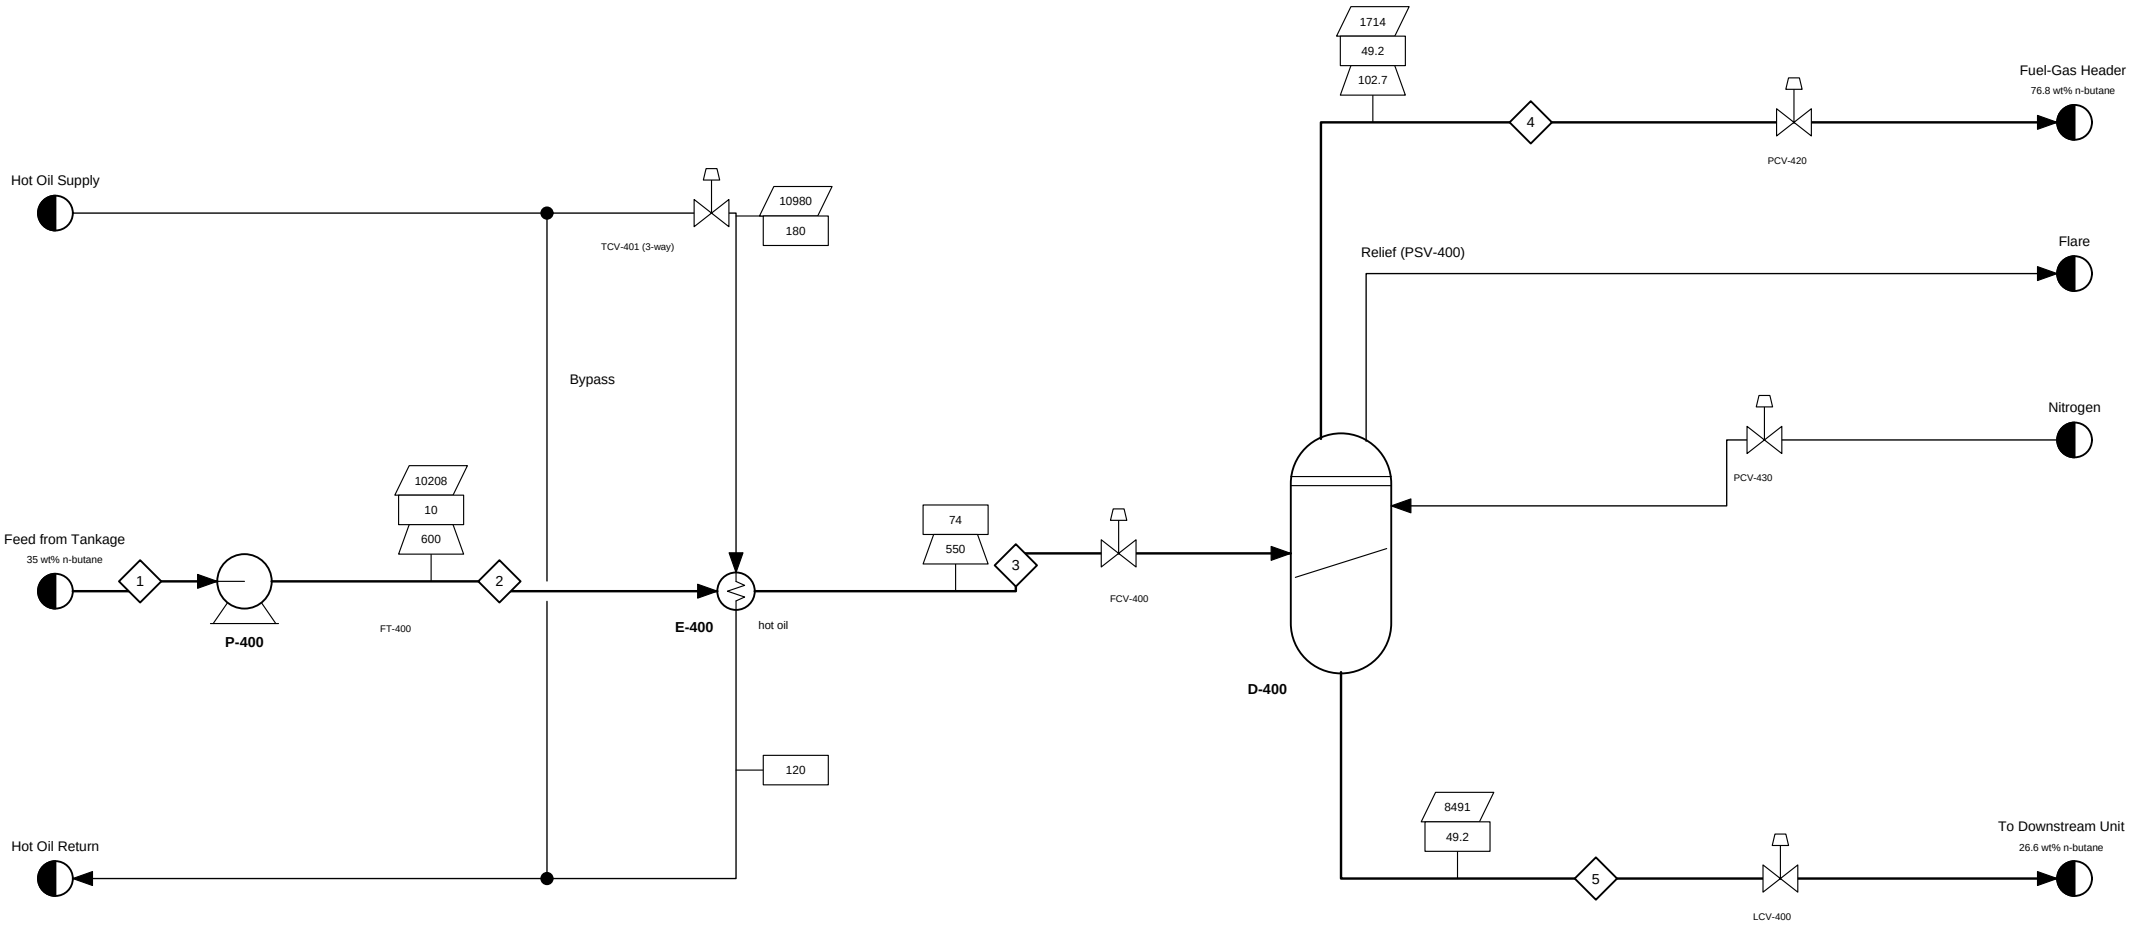

DESIGN BASIS

Feed 16 m3/h, 35 wt% n-butane / 65 wt% n-hexane

D-400 1.6 m ID x 4.8 m T/T, 102.7 kPa g, 49.2 °C

E-400 duty about 420 kW, hot oil 180 -> 120 °C

NOTES

1. Flows in kg/h; temperatures in °C; pressures in kPa g. Stream data: D-400 design case.
2. P-400 and the hot-oil system are outside the unit; shown as supplies.
3. PSV-400 set 450 kPa g (MAWP). N2 blanket PCV-430 holds 30 kPa g.

LEGEND

- Mass Flow (kg/h)
- Temperature (°C)
- Pressure (kPa g)
- Process Line
- Utility Line
- Control Valve
- Process Input / Output
- Stream Number
- Line Crossing
- Centrifugal Pump
- Heat Exchanger
- Separator

FLASH DRUM VER 1 - OPERATOR TRAINING SIMULATOR

PROCESS FLOW DIAGRAM

D-400 FLASH DRUM UNIT - FEED PREHEAT, LET-DOWN AND FLASH

DRAWING No.	REV.	SIZE	SHEET
FD-400-PFD-001	0	A4	1 OF 1
DRAWN	**CHECKED**	**SCALE**	**DATE**
Apinan Soottitantawat		NTS	2026-09-29