

QCM frequency and dissipation estimation using DDS excitation, gain–phase detection and complex-admittance reconstruction

openQCM NEXT impedance-analysis working group*

Draft v0.1 — 2026-10-06

Abstract

Impedance analysis gives the resonance frequency and the half-bandwidth of a quartz crystal microbalance (QCM) directly from the conductance spectrum, but the vector network analysers that produce it are costly and bulky. We describe and test a measurement method in which a direct digital synthesiser sweeps a quartz sensor placed in a resistive voltage divider, an AD8302 gain/phase detector returns the magnitude and the *unsigned* phase of the divider transfer function, and the complex admittance of the sensor is reconstructed by exact inversion of the divider. The detector’s phase ambiguity is resolved where the phase crosses zero and left unsigned where it does not, which the conductance tolerates because it is even in the sign of the phase. The resonance frequency f_{res} and the half-bandwidth Γ are then estimated either from the maximum and the half-height width of the conductance or by fitting the phase-shifted Lorentzian of Johannsmann et al. We derive in closed form the bias of the simpler estimators for a rotated resonance ($f_{G\text{max}} - f_{\text{res}} = \Gamma \tan(\varphi/2)$; half-height width $\Gamma\sqrt{1 + 2\tan^2(\varphi/2)}$) and verify it on 45 sweeps. On one instrument the rotation angle is $\varphi = -8^\circ$ to -27° from the fundamental (5 MHz) to the 9th overtone, stable to 0.3° between sweeps and to $0.2\text{--}1.5^\circ$ between air and liquid on overtones 3–9, and coincides with the board phase obtained from an independent two-channel forward model: it is an instrument property. Against the Kanazawa–Gordon prediction for water and isopropanol at 25°C , the air-to-liquid frequency shifts on overtones 3–9 deviate by $+52$ to $+92\%$ with the magnitude channel alone, by $+20$ to $+30\%$ with the maximum of the reconstructed conductance and by -1.4 to $+8.2\%$ with the phase-shifted Lorentzian, while the bandwidth shifts are within $\pm 7.4\%$ with the half-height width and within -3.9 to $+9.3\%$ with the fit. The Newtonian ratio $|\Delta f|/\Delta\Gamma$ is $0.98\text{--}1.08$ with the fit against $1.17\text{--}1.34$ with the conductance maximum. The fundamental deviates by $+29$ to $+37\%$ in bandwidth with every estimator and is attributed to the sensor mounting. A second campaign on a different instrument and crystal, in air, water and glucose solutions of 5, 7.5 and 10 % w/v, tests these conclusions independently: the same estimators give a Newtonian ratio of $1.20\text{--}1.41$ (conductance maximum) against $1.01\text{--}1.16$ (fit) on overtones 3–9 in all four liquids and a water frequency shift of $+20$ to $+36\%$ against $+6$ to $+13\%$ over the theory; the fit also collapses the overtone-normalised frequency shifts onto the $\sqrt{n}$ law of the theory to $2.4\text{--}2.9\%$ ($6\text{--}7\%$ with the maximum); concentration steps of 2.5 % w/v are resolved at more than 13 standard deviations of the replica scatter, with a noise-equivalent resolution of $0.1\text{--}0.2\%$ w/v, while an unexplained offset of the 5 % plateau (10–18 Hz, $0.5\text{--}1.7\%$ w/v equivalent) limits the accuracy. The rotation angle of the second board agrees with the first within $1\text{--}3^\circ$ on four of five overtones but is not monotonic in frequency, and its fundamental follows the theory (bandwidth $+4$ to $+7\%$). A forward model with a board phase acting on the measured transfer function shows that the rotated-Lorentzian correction is exact only when the motional resistance is large compared with the divider resistor, which holds in liquid, and quantifies the residual. All raw data and analysis scripts are released.

Keywords: quartz crystal microbalance; QCM-D; impedance analysis; AD8302; gain–phase detector; direct digital synthesis; phase-shifted Lorentzian; Kanazawa–Gordon; open-source instrumentation.

*Author list and affiliations to be finalised.

1 Introduction

A quartz crystal microbalance (QCM) reports the mass and the mechanical properties of what touches its surface through two numbers: the shift of its resonance frequency, Δf , and the shift of its half-bandwidth, $\Delta\Gamma$, or equivalently of the dissipation factor $D = 2\Gamma/f_{\text{res}}$ [1–3]. The second number is what distinguishes a rigid film from a viscoelastic one and a Newtonian liquid from a structured one, and it is the one that simple oscillator circuits do not provide: an oscillator locks on one frequency and reports one number, and its definition of that frequency moves with the load [4, 5]. Ring-down (QCM-D) instruments obtain D from the decay of the free oscillation [6] and impedance analysers obtain f_{res} and Γ from a fit of the admittance trace [3, 7, 8]. Both are commercial, bench-sized instruments.

Between the oscillator and the network analyser sits a class of compact sweep-based instruments that excite the crystal with a direct digital synthesiser (DDS) and record the response with a scalar detector. The open-source openQCM family [9–12] uses an AD9851 DDS, a voltage divider formed by the sensor and a series resistor, and an AD8302 gain/phase detector [13], which outputs two DC voltages proportional to the logarithmic magnitude ratio and to the *modulus* of the phase difference between its inputs. In its production software, such an instrument reads the resonance frequency as the maximum of the magnitude curve and a “dissipation” as the width of that curve a fixed number of decibels below the maximum. The magnitude of a divider transfer function is not the conductance of the crystal: its peak sits between the series and the parallel resonance and moves with the static capacitance and the load, and its width has no counterpart in the theory [3]. We show below that in liquid this estimator overshoots the Kanazawa–Gordon frequency shift by 50–90 % on the overtones.

The phase channel of the AD8302 is what makes a vector measurement possible, and it is what has been left unused: the detector cannot tell the sign of the phase difference, its output folds at zero, and it carries an offset. This article asks whether the two detector outputs, inverted exactly through the known divider, yield a complex admittance good enough to apply the standard QCM impedance-analysis estimators, and which estimator should then be used. The phase-shifted Lorentzian we end up recommending is not new — it is the fit function of Johannsmann and co-workers [3, 8, 14] and the same mathematics as the “background phase” of microwave-resonator circle fits [15–18] — and neither are the hardware blocks. What we believe is new is the chain and its test: exact complex-admittance reconstruction from a gain/phase detector in a resistive divider, a treatment of the detector’s phase ambiguity that uses the resonance itself, closed-form expressions for the bias of the conductance-maximum and half-height estimators when the resonance is rotated, an interpretation of the fitted rotation angle as the board phase of the detector chain, and a quantitative comparison of three estimators on the same sweeps against Kanazawa–Gordon on five overtones in two liquids, with raw data released.

The contributions are therefore: (i) the exact inversion $M = |Z_q + R_{17}|$, $R_q = M \cos \phi - R_{17}$, $X_q = -M \sin \phi$, $Y_q = 1/Z_q$ from the AD8302 outputs, with the constants verified against the schematic and the data sheet; (ii) a documented treatment of the folded, offset, unsigned phase reading, and the observation that the conductance — hence f_{res} and Γ — needs only the unsigned phase but is sensitive to its offset; (iii) the closed forms $f_{G\text{max}} = f_{\text{res}} + \Gamma \tan(\varphi/2)$, $\Gamma_{\text{hh}} = \Gamma \sqrt{1 + 2 \tan^2(\varphi/2)}$, $f_{\text{mid}} = f_{\text{res}} + 2\Gamma \tan(\varphi/2)$ for the rotated Lorentzian, and their verification; (iv) the finding that the rotation angle is an instrument constant equal to the board phase; (v) the experimental ranking of the estimators against Kanazawa–Gordon, including the separation of what complex-admittance reconstruction buys from what the rotation correction buys; (vi) a forward model that bounds the validity of the rotated-Lorentzian correction for this front end; (vii) an independent second campaign on a different instrument and crystal, with water and glucose solutions, that tests the estimator ranking, the Kanazawa–Gordon agreement and the resolution of small concentration changes.

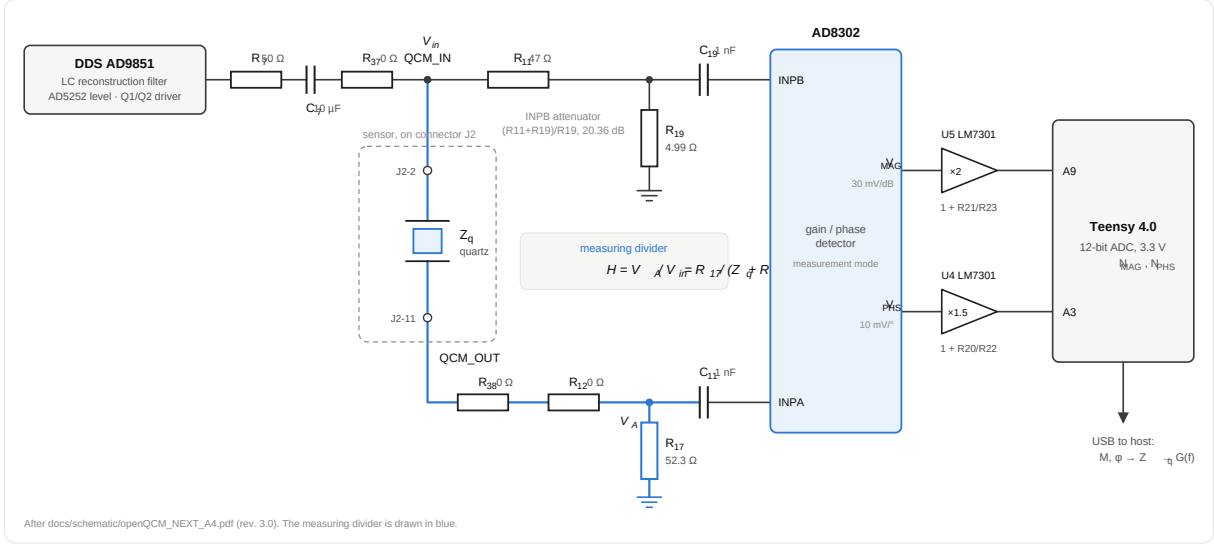


Figure 1: Measurement circuit: the quartz sensor in a divider with R_{17} , read by the AD8302 gain/phase detector; drawn after the openQCM NEXT schematic (repository figure).

2 Measurement principle and hardware

The sensor is a 5 MHz AT-cut quartz crystal (openQCM NEXT holder, gold electrodes, 14 mm blank) operated on its fundamental and 3rd, 5th, 7th and 9th overtones (5–45 MHz). The instrument (openQCM NEXT, board 1920) comprises an AD9851 DDS clocked at 125 MHz (its specified maximum at 3.3 V), an LC reconstruction filter and a level-setting driver, the crystal as the series element of a voltage divider loaded by $R_{17} = 52.3 \Omega$ to ground, an AD8302 gain/phase detector whose input A reads the node across R_{17} and whose input B reads the drive through a resistive attenuator ($K = (R_{11} + R_{19})/R_{19} = 10.419, 20.356 \text{ dB}$), two output buffers (gains 2 and 1.5) and the 12-bit ADC of a Teensy 4.0, which averages 500 readings per frequency point and streams the pair of counts to the host (Fig. 1). A Peltier element holds the sensor at a set temperature (25.00 °C here). The firmware sweeps 18 001 points at 1 Hz step over a window of $-12 \text{ kHz}/+6 \text{ kHz}$ around the previous resonance of each overtone; a sweep takes about 1.8 s per overtone.

The host software (Python) converts the counts to the detector voltages V_{MAG} and V_{PHS} , removes the attenuator from V_{MAG} , smooths both channels (Savitzky–Golay, 51 points, order 3, followed by a smoothing spline, $s = 10^{-3}$, on the 1 Hz grid), reconstructs $G(f)$ and $B(f)$ as described in Section 3 and estimates f_{res} and Γ as described in Section 4. The datalog records, per sweep and overtone, f_{res} and $D = 2\Gamma/f_{\text{res}}$. On request the software also writes the raw per-point triplets (frequency, V_{MAG} , V_{PHS}), which are the input of every result in this paper.

3 Complex-admittance reconstruction

3.1 Divider and detector laws

The divider transfer function is

$$H(f) = \frac{V_A}{V_{\text{in}}} = \frac{R_{17}}{Z_q(f) + R_{17}}, \quad \frac{V_{\text{INPA}}}{V_{\text{INPB}}} = K H(f). \quad (1)$$

The AD8302 obeys, with $V_{\text{CP}} = 0.900 \text{ V}$ [13],

$$V_{\text{MAG}} = V_{\text{CP}} + 0.600 \text{ V} \cdot \log_{10} \frac{|V_{\text{INPA}}|}{|V_{\text{INPB}}|}, \quad V_{\text{PHS}} = V_{\text{CP}} - 0.010 \text{ V}/^\circ \cdot (|\angle V_{\text{INPA}} - \angle V_{\text{INPB}}| - 90^\circ). \quad (2)$$

After the attenuator is removed ($V_{\text{MAG}} \leftarrow V_{\text{MAG}} - 0.030 \cdot 20 \log_{10} K = V_{\text{MAG}} - 0.6107 \text{ V}$; the 0.36 dB by which the attenuator differs from one decade is 4 % on M and up to 22 % on the motional resistance in air, so the constant must be computed, not rounded), the magnitude of the sum $Z_q + R_{17}$ follows from Eqs. (1)–(2):

$$M \equiv |Z_q + R_{17}| = R_{17} 10^{(V_{\text{CP}} - V_{\text{MAG}})/0.6}. \quad (3)$$

The phase of the divider is $\angle H = -\angle(Z_q + R_{17})$. Writing $\phi = \angle H$, so that $Z_q + R_{17} = M e^{-j\phi}$,

$$R_q = M \cos \phi - R_{17}, \quad X_q = -M \sin \phi, \quad (4)$$

$$G = \frac{R_q}{R_q^2 + X_q^2} = \frac{M \cos \phi - R_{17}}{(M \cos \phi - R_{17})^2 + (M \sin \phi)^2}, \quad B = \frac{-X_q}{R_q^2 + X_q^2}. \quad (5)$$

Equations (3)–(5) were derived independently of the instrument code and agree with it to machine precision; a short ($Z_q = 0$) gives $M = R_{17}$ and $\phi = 0$, as required. The inversion is ill-conditioned near the series resonance of a lightly damped crystal, where $X_q \rightarrow 0$ and $R_q = M \cos \phi - R_{17}$ is a difference of close numbers: a relative error $k - 1$ on M propagates to R_m as $(k - 1)(1 + R_{17}/R_m)$, i.e. amplified $2.5\times$ in air ($R_m \approx 36 \Omega$ at the fundamental) and not at all in liquid ($R_m \approx 1 \text{ k}\Omega$). The frequency and bandwidth estimates of Section 4, which depend on the *shape* of $G(f)$, are much less sensitive to the magnitude scale (Section 6.7).

3.2 The phase reading: fold, offset, sign

The detector returns the modulus of the phase difference. The reading in degrees, $r = (1.8 \text{ V} - V_{\text{PHS}})/0.010 \text{ V}$, follows the model

$$r(f) = |\phi(f) + \phi_b| - \delta, \quad (6)$$

in which ϕ_b is a phase of the board and cabling that enters *inside* the modulus and δ is a voltage offset of the phase channel that enters *outside* it. Two regimes occur (Fig. 2). For a lightly damped crystal (air) the argument of the modulus crosses zero near the series resonance; the reading has a V-shaped minimum (“fold”) whose vertex value is $-\delta$ exactly, so the offset is *measured* by the fold, and the sign of the phase is restored by negating the branch past the vertex. For a damped crystal (water, isopropanol, $n \geq 3$ here) the static capacitance keeps the phase away from zero, the reading has a smooth minimum tens of degrees above zero, there is no fold, δ is not identifiable from the sweep, and the reading is taken as the signed phase with $\phi_b - \delta$ left in it. The instrument decides between the two regimes from how close the reading’s peak gets to zero relative to its off-resonance baseline (depth ≥ 0.88) and from the position of that peak relative to the conductance maximum (within 5Γ); the decision is latched over two sweeps. This rule is an implementation detail calibrated on this board, and we report its one observed fragility in Section 6.8.

The conductance (5) depends on ϕ only through $\cos \phi$ and $\sin^2 \phi$: it is even in the sign of the phase. The susceptance is odd. Hence $G(f)$, and with it f_{res} and Γ , can be computed from the *unsigned* reading on every load, while $B(f)$ and the admittance locus need the sign and are correct only where a fold identifies it. Evenness in the sign does not extend to the offset: $G(\phi + \delta) \neq G(\phi)$, and an uncorrected δ of a few degrees distorts the peak shape — it is one of the two quantities that the rotation angle of Section 4.2 absorbs on damped loads (Section 6.6). Figure 3 shows G , B and the locus $B(G)$ for the three cases of Fig. 2.

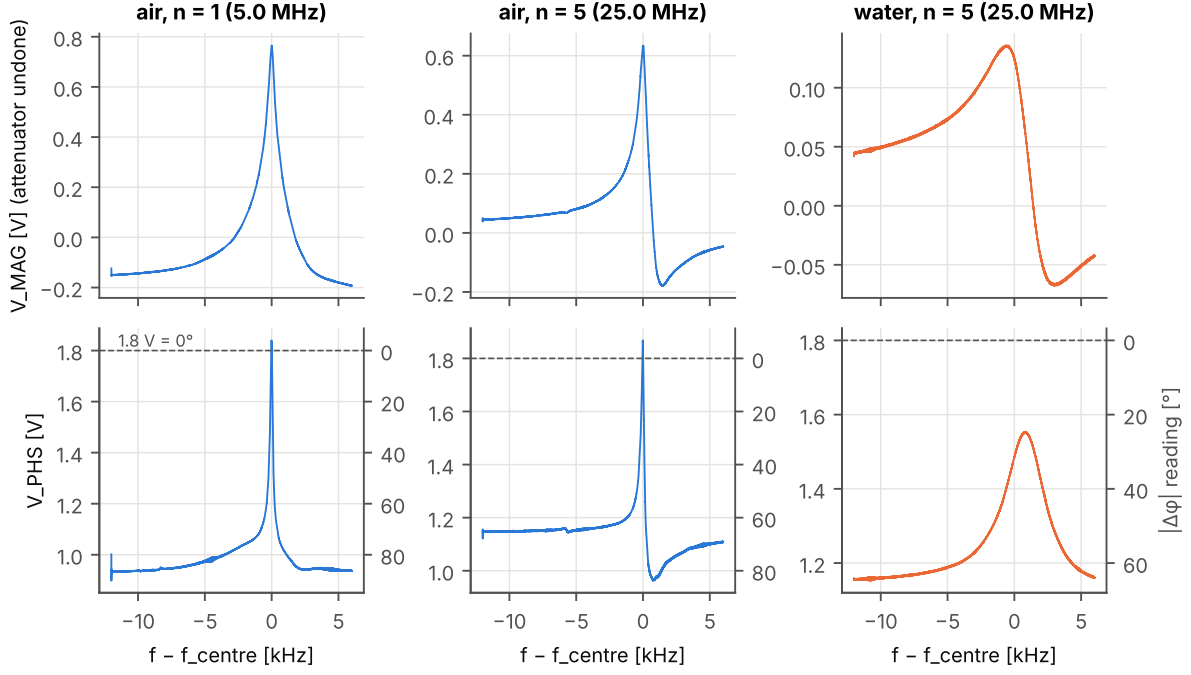


Figure 2: Raw detector voltages for the fundamental and the 5th overtone in air and for the 5th overtone in water (board 1920, 2026-09-11). Right axis: the unsigned phase reading $|\Delta\phi| = (1.8 \text{ V} - V_{\text{PHS}})/10 \text{ mV}$. In air the reading folds at zero (and overshoots it, the signature of the offset δ); in water it does not reach zero.

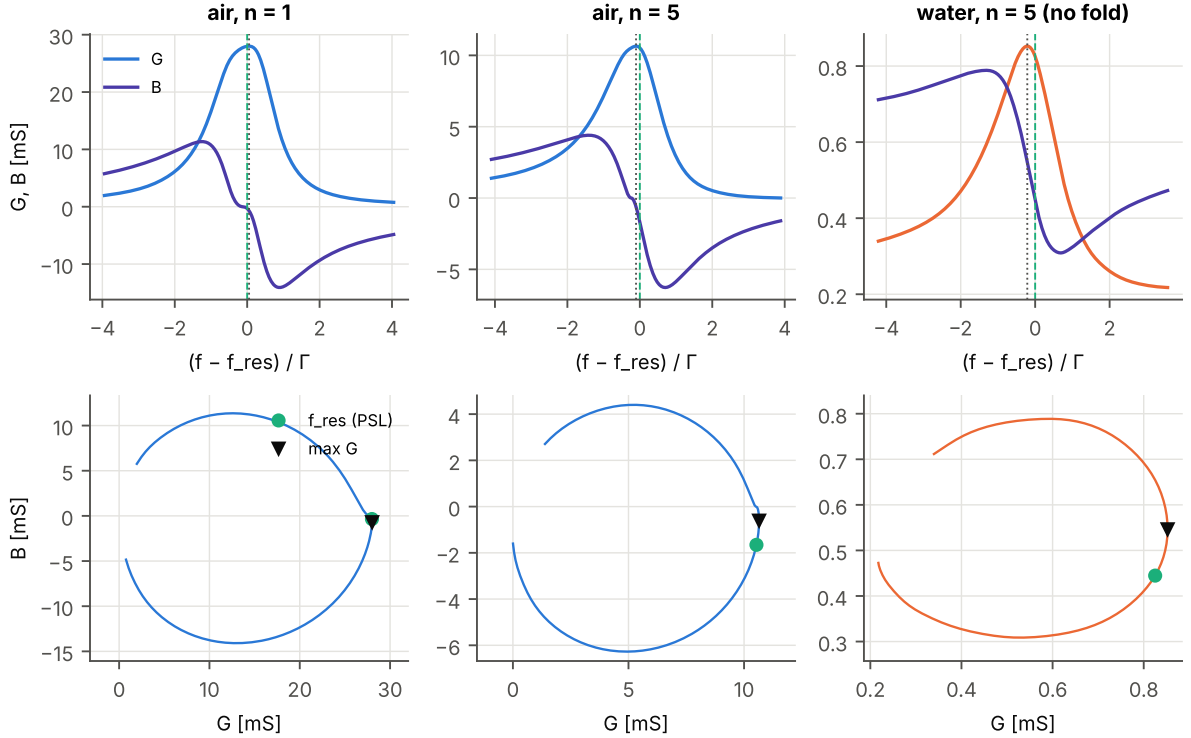


Figure 3: Reconstructed conductance and susceptance (top) and admittance locus (bottom) on $\pm 4\Gamma$ around the resonance for the sweeps of Fig. 2. Dotted: the maximum of G ; dashed/marker: f_{res} from the phase-shifted Lorentzian. The maximum of G sits below f_{res} and the locus is rotated with respect to the G axis.

4 Resonance parameter estimation

4.1 Conductance maximum and half-height width

The standard estimator of the instrument takes $f_{G_{\max}}$, the frequency of the sample where G is maximum on the 1 Hz grid, and the half-height half width $\Gamma_{\text{hh}} = (f_+ - f_-)/2$, where $f_{\pm}$ are the linearly interpolated crossings of $G - G_0$ with half its maximum and G_0 is the mean of the first 100 samples of the sweep (an off-resonance baseline for a window sized for air). Then $D = 2\Gamma_{\text{hh}}/f_{G_{\max}}$. The midpoint $(f_+ + f_-)/2$ is a second frequency estimator that costs nothing.

4.2 The phase-shifted Lorentzian and why the conductance maximum is biased

Near a resonance the motional admittance is $Y_m \propto 1/(\Gamma - j\Delta)$ with $\Delta = f_{\text{res}} - f$ [3, Eqs. 9–10]. A calibration error that multiplies the admittance by a complex constant $e^{j\varphi}$ — a residual phase of the measurement chain — rotates the resonance circle about its offset and gives

$$G(f) = G_{\max}\Gamma \frac{\Gamma \cos \varphi - \Delta \sin \varphi}{\Delta^2 + \Gamma^2} + G_{\text{off}}, \quad B(f) = G_{\max}\Gamma \frac{\Gamma \sin \varphi + \Delta \cos \varphi}{\Delta^2 + \Gamma^2} + B_{\text{off}}. \quad (7)$$

This is the phase-shifted Lorentzian of Johannsmann et al. [3, Eq. 13] in the rotation form; as printed there the G line carries $+\Delta \sin \varphi$, which with a common φ in both lines is not a single rotation — fitting G alone, the two conventions differ only in the sign of φ , and we quote φ with the sign of Eq. (7) (negative on this board). The dispersive term $-\Delta \sin \varphi/(\Delta^2 + \Gamma^2)$ is antisymmetric about f_{res} and skews the peak. Setting $dG/d\Delta = 0$ gives $\sin \varphi \Delta^2 - 2\Gamma \cos \varphi \Delta - \Gamma^2 \sin \varphi = 0$, whose maximum is at $\Delta = -\Gamma \tan(\varphi/2)$:

$$f_{G_{\max}} = f_{\text{res}} + \Gamma \tan \frac{\varphi}{2}, \quad (8)$$

so with $\varphi < 0$ the maximum lies below the resonance by 0.07Γ at -8° and 0.25Γ at -28° . The peak height is $(G_{\max}) \cos^2(\varphi/2)$ above G_{off} , and solving for the half-height crossings ($c = \cos^2(\varphi/2)$) gives $\Delta_{\pm} = \Gamma[-\sin \varphi \pm \sqrt{c(2-c)}]/c$, hence

$$\Gamma_{\text{hh}} = \Gamma \sqrt{1 + 2 \tan^2 \frac{\varphi}{2}}, \quad f_{\text{mid}} = f_{\text{res}} + 2\Gamma \tan \frac{\varphi}{2} : \quad (9)$$

the half-height width over-estimates Γ by 0.5 % at -8° and 6 % at -28° , and the midpoint is biased twice as much as the maximum, in the same direction. Equations (8)–(9) were checked on noise-free model curves to the 1 Hz grid (Supplementary table `closed_forms_check.csv`). A *symmetric* Lorentzian fitted to a rotated one has no closed-form bias; numerically its centre is displaced by $1.3\text{--}2.1 \Gamma \tan(\varphi/2)$ with a constant background and by $\approx 1.25 \Gamma \tan(\varphi/2)$ with a linear background, in the same direction as the maximum.

4.3 Fitting

The five parameters $(G_{\max}, f_{\text{res}}, \Gamma, \varphi, G_{\text{off}})$ of the G line of Eq. (7) are fitted to the smoothed $G(f)$ by Levenberg–Marquardt on the window $|f - f_{G_{\max}}| \leq 3\Gamma_{\text{hh}}$, seeded with $f_{G_{\max}}$, Γ_{hh} , $\varphi = 0$ and $G_{\text{off}} = \min G$; frequencies are scaled to kHz about the seed and conductances to mS so that the Jacobian is well conditioned. The fit is accepted if it converges, f_{res} lies inside the window, $0.3 \leq \Gamma/\Gamma_{\text{hh}} \leq 3$, $|\varphi| \leq 60^\circ$ and the rms residual is below 5 % of the range of G on the window; otherwise the instrument falls back to the estimator of Section 4.1 and logs the reason. $D = 2\Gamma/f_{\text{res}}$. The same code path serves the instrument and the offline analysis; the analysis of this paper uses an independent re-implementation from the equations above, which reproduces the instrument’s regression values to all printed digits on the 45 sweeps.

5 Experimental methods

Two measurement campaigns are reported. The first, on which the method was developed and every estimator is characterised, used one instrument and one crystal in air, water and isopropanol (Sections 6.1–6.10). The second, acquired two years earlier on a different instrument and crystal with the production software of the time, used water and three glucose solutions and is analysed with the same chain, unchanged, as an independent test of the conclusions of the first (Section 7).

First campaign — sensor and instrument. 5 MHz AT-cut quartz (openQCM NEXT sensor), gold electrodes, in the openQCM NEXT cell; instrument board 1920, DDS clock 125 MHz, firmware 0.1.5c, host software of the `impedance-analysis` branch at commit `37fce4b`. Sensor temperature 25.00 °C (Peltier; logged 24.93–25.00 °C, 25.00 °C on every plateau). The liquid temperature was not measured (see Section 8).

First campaign — protocol (2026-09-11). Air, then deionised water, then isopropanol poured into the cell in sequence, one acquisition of 75 min; overtones 1, 3, 5, 7, 9 swept in turn, $-12\text{ kHz}/+6\text{ kHz}$ at 1 Hz, 500 ADC readings per point. Three raw sweep sets per liquid were copied during the plateaus (air 12:25, 12:46, 12:50; water 12:57, 13:08, 13:15; isopropanol 13:20, 13:24, 13:30), 45 sweeps in all. A second, shorter run on the same board and sensor (2026-09-10, air $\rightarrow$ isopropanol $\rightarrow$ water, 23 min) provides a replicate of the datalog comparison, and five air sweeps of 2026-09-03 (same board class, 125 MHz clock) a second day for the rotation angle.

Second campaign (2024-05-29). A second openQCM NEXT, with a second 5 MHz sensor, was measured on 2024-05-29 with the production software and firmware 0.1.5: air, deionised water, then glucose solutions of 5, 7.5 and 10 % w/v poured in sequence, three raw sweep sets per phase on overtones 1–9 (75 sweeps), same window and step. The board and its DDS clock, the sensor and the liquid temperature were not recorded (sensor temperature 24.95–25.02 °C in the datalog); no open/short/load sweep of that board exists; the 5 % w/v solution was a commercial glucose solution for infusion (Galenica Senese s.r.l., Italy, AIC 029863065; 55 g L⁻¹ pharmaceutical-grade D-glucose monohydrate, i.e. 50 g L⁻¹ anhydrous glucose, in water for injections; sterile and pyrogen-free), and the 7.5 and 10 % w/v solutions were prepared in the same way (pharmaceutical-grade glucose for infusion in water for injections). The raw files of that software hold the two channels as instrument units — column 2 is $(V_{\text{MAG,uncomp.}} - 0.9\text{ V})/0.030$, column 3 is $90^\circ - |\Delta\phi|$ — and were converted to volts with the attenuator removed ($V_{\text{MAG}} = 0.9 + 0.030 c_2 - 0.6107\text{ V}$, $V_{\text{PHS}} = 0.9 + 0.010 c_3\text{ V}$). The software of 2024 also wrote a second family of files that carry the same two channels with the wrong attenuator constant (0.600 V); they were verified to be identical to the converted raw files to 2×10^{-16} and excluded. The firmware of 2024 has the same sweep-average carry-over as 0.1.5c (below). The dataset is archived with its datalog in `research/glucose-2024-05-29/`. No tabulated $\rho\eta$ of the glucose solutions is used: for them only quantities free of liquid constants are compared with the theory — the Newtonian ratio $|\Delta f|/\Delta\Gamma$, the $\sqrt{n}$ structure of the shifts and the ratio $\rho\eta/(\rho\eta)_{\text{water}} = (\Delta f/\Delta f_{\text{water}})^2$ from the air-referenced shifts. The campaign was designed to test four statements: that the instrument resolves small changes of glucose concentration; that the phase-shifted Lorentzian improves on the conductance maximum; that the water shifts compare with Kanazawa–Gordon in detail; and that the gain in agreement with the theory brought by the rotation correction holds on a second instrument under different conditions.

Firmware correction. Firmware versions up to 0.1.5c did not reset the per-point sums, so each printed point carried 1/500 of the previous one ($+0.2\%$ on the counts). The recursion is exact and was undone offline ($m_i = v_i - v_{i-1}/500$); every result was computed with and without the correction. It changes f_{res} and Γ by $\leq 2\text{ Hz}$ on 44 of 45 sweeps of 2026 and the error summaries by ≤ 2 percentage points; the exception is discussed in Section 6.8. On the 75 sweeps of 2024 it changes f_{res} by $\leq 4\text{ Hz}$, Γ by $\leq 1\text{ Hz}$ and φ by $\leq 0.2^\circ$. Uncorrected values are reported unless stated.

Processing. All estimators run on the same smoothed $G(f)$ (Section 2). Estimators:

(M) magnitude only — maximum of the divider ratio in dB on the same grid, with its -3 dB full width where it exists inside the window (the production software’s -0.3 dB width is logged by the instrument and reported from the datalog); (A) maximum of G and half-height half width (Section 4.1); (MP) midpoint of the half-height crossings; (S) symmetric Lorentzian with constant background (4 parameters) and with linear background (5); (P) phase-shifted Lorentzian (Section 4.3); (C) for reference, the Butterworth–Van Dyke admittance-circle fit of the repository’s offline tool, on $G + jB$. Shifts are liquid minus air for the same estimator, mean of three sweeps; their standard deviation is the quadrature sum of the two replica standard deviations.

Theory. Kanazawa–Gordon in the small-load form normalised to the fundamental f_F [2, 3]: $\Delta f_n = -\sqrt{n} f_F^{3/2} \sqrt{\rho\eta/(\pi\rho_q\mu_q)}$, $\Delta\Gamma_n = -\Delta f_n$, with $\rho_q = 2648 \text{ kg m}^{-3}$, $\mu_q = 2.947 \times 10^{10} \text{ Pa}$, $f_F = 5\,004\,596 \text{ Hz}$ (air), water $\rho = 997.05 \text{ kg m}^{-3}$, $\eta = 0.890 \text{ mPa s}$ and isopropanol $\rho = 781.0 \text{ kg m}^{-3}$, $\eta = 2.038 \text{ mPa s}$ at 25°C , giving $673.6 \sqrt{n} \text{ Hz}$ and $901.5 \sqrt{n} \text{ Hz}$. Error metrics: $\epsilon_f = \Delta f/\Delta f_{\text{KG}} - 1$, $\epsilon_\Gamma = \Delta\Gamma/\Delta\Gamma_{\text{KG}} - 1$ and the Newtonian ratio $\rho_N = |\Delta f|/\Delta\Gamma$, whose prediction (unity) does not depend on $\rho\eta$ or on temperature.

Reproducibility. Raw sweeps (`research/air-ipa-water-1920-2026-09-11/data/sweep_dumps_2026-09-11.npz`, `research/glucose-2024-05-29/data/sweep_raw_2024-05-29.npz`), datalogs, the analysis package (`paper/analysis/`: `qcmchain.py`, `run_estimators.py`, `run_shifts.py`, `run_datalogs.py`, `run_bias_theory.py`, `run_forward_model.py`, `run_glucose.py`, `make_figures.py`) and all result tables are in the repository; every figure lists its source and parameters in `results/figure_provenance.md`.

6 Results — first campaign: board 1920, water and isopropanol

6.1 Raw sweeps and reconstructed admittance

Figure 2 shows the detector outputs and Fig. 3 the reconstructed spectra. In air the divider ratio at resonance is -4.5 dB (fundamental) to -14 dB (9th) with 16 – 32 dB of contrast; in liquid the whole sweep lies at -22 to -37 dB with 1.6 – 14 dB of contrast, against a specified AD8302 range of ± 30 dB. The phase reading folds in air on every overtone (vertex -0.6° to -6.9° , i.e. $\delta = +0.6^\circ$ to $+6.9^\circ$ after sign) and on the fundamental in liquid; on $n \geq 3$ in liquid its minimum stays 9 – 45° above zero. The reconstructed $G(f)$ peaks at 10.8 mS (air, 5th) and 0.4 – 1.6 mS (liquids); $B(f)$ has the dispersive shape expected for a resonance and the locus $B(G)$ is a circle to 1 – 7% of its radius in air and 5 – 18% in liquid, visibly rotated with respect to the G axis.

6.2 Symmetric against phase-shifted Lorentzian

Figure 4 shows both fits and their residuals on three sweeps. The symmetric Lorentzian (with linear background) leaves the same S-shaped residual in every one of the 45 sweeps — negative below the peak, positive above, reversing one width out — with an rms of 2.0 – 3.5% of the range of G in liquid and 3.4 – 4.1% in air; the phase-shifted Lorentzian leaves 0.15 – 0.65% in liquid and 1.0 – 2.7% in air, where the remaining feature is a 20 – 50 Hz wide bump at the top of the peak caused by the rounding of the detector’s phase fold, which does not move f_{res} or Γ . All 45 fits of both models converged, and all 45 phase-shifted fits passed the instrument’s acceptance gate (fallback rate 0%). The two fits place f_{res} on opposite sides of the conductance maximum: the symmetric one 10 – 200 Hz below it, the phase-shifted one 2 – 47 Hz above it in air and 80 – 700 Hz above it in liquid.

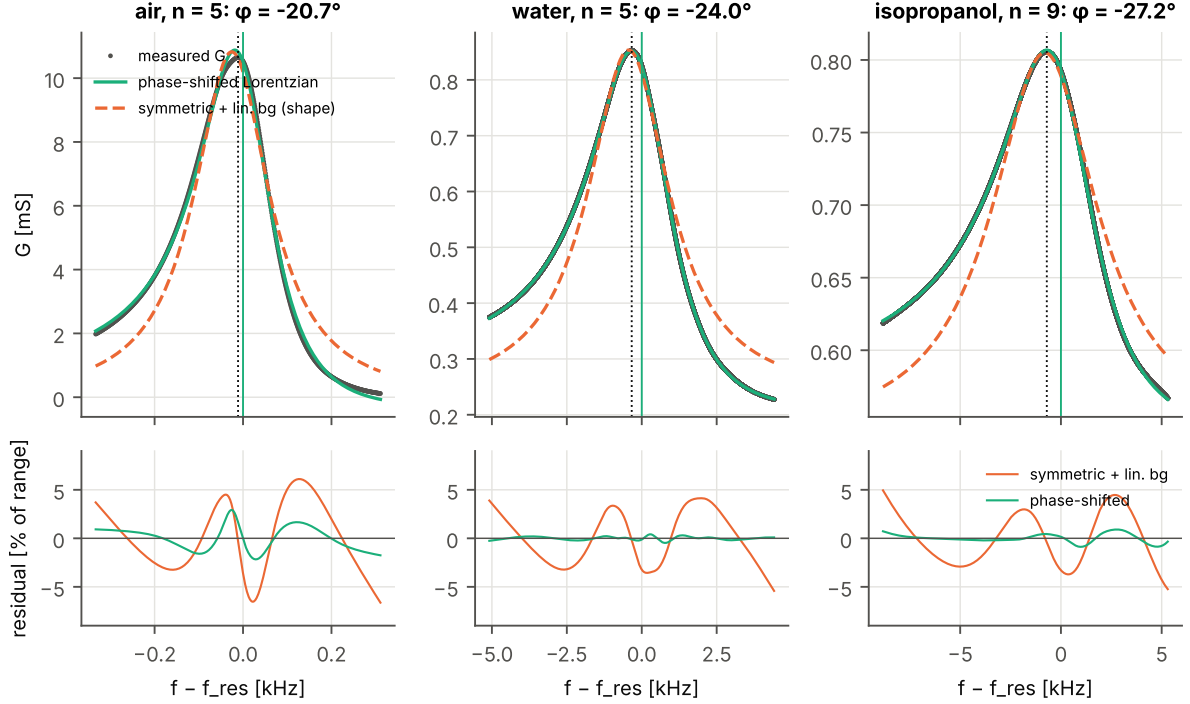


Figure 4: Conductance (dots) with the phase-shifted Lorentzian (solid) and the symmetric Lorentzian with linear background (dashed; drawn without its linear term) on $\pm 3\Gamma_{\text{hh}}$; below, the residuals in percent of the range of G . Dotted vertical line: maximum of G ; solid: f_{res} of the phase-shifted fit.

6.3 The bias of the conductance maximum

Figure 5 compares the measured offset $f_{G_{\text{max}}} - f_{\text{res}}$ on the 45 sweeps with the prediction of Eq. (8) from the fitted Γ and φ : the difference is $+1 \pm 28$ Hz (sd), at most 77 Hz, i.e. 0.016Γ on average and 0.12Γ at worst; the largest residuals (-40 to -45 Hz) are the liquid fundamentals, where the fold plateau sits under the peak. The offset is 2–47 Hz in air (0.03 – 0.25Γ) and 80–700 Hz in liquid (0.09 – 0.25Γ). The 75 sweeps of the second campaign are added to Fig. 5 and discussed in Section 7.2. The half-height width is 0.3 – 8% above the fitted Γ in air, as Eq. (9) predicts (0.5 – 5.5%), and 1 – 8% below it in liquid, where the baseline taken on the first 100 samples sits on the skirt of the broadened peak (13 – 74% of the peak height on $n \geq 3$) and raises the half level; the two biases are of opposite sign and the second dominates in liquid.

6.4 The rotation angle is an instrument property

The fitted angle (Fig. 6) is $\varphi = -8.0, -14.5, -20.6, -22.9, -26.8^\circ$ on $n = 1 \dots 9$ in air, with a standard deviation over the three replicas (4–25 min apart) of at most 0.06° . In water and isopropanol it is $-5.0, -13.6 / -14.3, -24.0 / -24.7, -22.5 / -21.4, -27.9 / -27.2^\circ$: equal to the air value within 0.2 – 1.5° on $n = 3, 7, 9$, 3 – 4° more negative on $n = 5$ and 3° less negative on $n = 1$. One water sweep ($n = 3$, replica 3) gives -17.9° instead of -13.6° ; it is the sweep whose fold decision sits on the threshold (Section 6.8). Five air sweeps of 2026-09-03 on a 125 MHz board give $-7.8, -17.5, -22.6, -25.7, -28.9^\circ$. The angle therefore depends on the overtone and on the board, not on the load, to within a few degrees.

Two independent estimates support the interpretation of φ as the phase of the detector chain. First, the repository’s two-channel forward model, which fits a Butterworth–Van Dyke crystal through the divider and the detector laws to V_{MAG} and V_{PHS} jointly with a board phase ϕ_b inside the modulus of Eq. (6), gives $\phi_b = -7.6, -13.8, -19.9, -22.1, -20.4^\circ$ in air: equal to φ

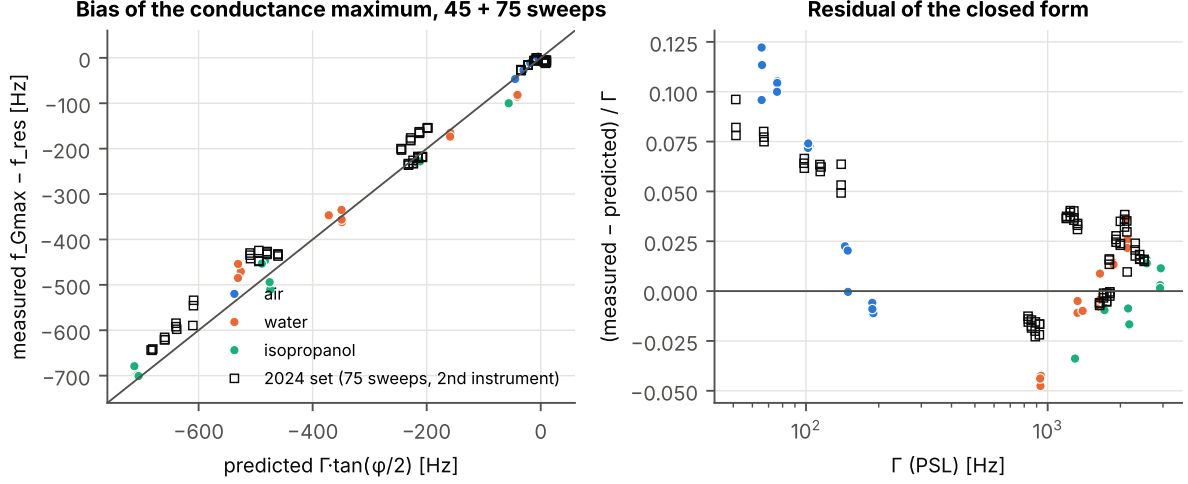


Figure 5: Left: measured $f_{G_{\max}} - f_{\text{res}}$ against $\Gamma \tan(\varphi/2)$ from the fit, 45 sweeps of 2026 (filled) and 75 sweeps of the second instrument (open squares); the line is the identity. Right: residual of the closed form in units of Γ .

within $0.3\text{--}0.8^\circ$ on $n = 1\text{--}7$ (crosses in Fig. 6). Second, the forward model of Section 6.7 returns $\varphi_{\text{fit}} = \phi_b$ to 0.5° when a board phase is imposed on the transfer function. The angle is not a pure propagation delay: the short and $50\ \Omega$ standards measured on the same front end give a phase slope of $0.27\text{--}0.40^\circ\ \text{MHz}^{-1}$ ($0.74\text{--}1.10\ \text{ns}$), i.e. $1.4\text{--}2.0^\circ$ at 5 MHz and $12\text{--}18^\circ$ at 45 MHz, whereas φ grows roughly as $f^{0.55}$ (dotted and dashed lines in Fig. 6).

6.5 Air-to-liquid shifts against Kanazawa–Gordon

Table 1 gives f , Γ and D per load and overtone for the two main estimators; Table 2 the shifts and the three error metrics for all estimators on overtones 3–9; Fig. 7 the shifts against the theory; Fig. 8 the error metrics per estimator.

Table 1. Resonance frequency, half-bandwidth and dissipation per load and overtone (mean $\pm$ sd of three sweeps): A = maximum of G + half height; P = phase-shifted Lorentzian (φ in degrees).

load	n	f (A) [Hz]	f (P) [Hz]	Γ (A) [Hz]	Γ (P) [Hz]	D (A) [10^{-6}]	D (P) [10^{-6}]	φ [$^\circ$]
air	1	5 004 598 ± 2	5 004 596 ± 2	65.4 ± 0.2	65.6 ± 0.1	26.1	26.2	-8.0
air	3	14 988 738 ± 8	14 988 740 ± 7	78.0 ± 0.1	76.0 ± 0.1	10.4	10.1	-14.5
air	5	24 973 688 ± 13	24 973 699 ± 13	108.0 ± 0.8	102.4 ± 0.7	8.6	8.2	-20.6
air	7	34 957 566 ± 22	34 957 593 ± 21	158.7 ± 2.6	147.6 ± 2.3	9.1	8.4	-22.9
air	9	44 943 110 ± 23	44 943 157 ± 23	203.7 ± 0.8	188.7 ± 1.0	9.1	8.4	-26.8
water	1	5 003 826 ± 3	5 003 909 ± 2	937 ± 3	934 ± 4	374.5	373.5	-5.0
water	3	14 987 288 ± 52	14 987 478 ± 16	1318 ± 33	1351 ± 38	175.9	180.3	-15.0
water	5	24 971 737 ± 24	24 972 088 ± 13	1582 ± 2	1646 ± 1	126.7	131.8	-24.0
water	7	34 955 379 ± 19	34 955 726 ± 18	1823 ± 3	1872 ± 3	104.3	107.1	-22.5

load	n	f (A) [Hz]	f (P) [Hz]	Γ (A) [Hz]	Γ (P) [Hz]	D (A) [10 ⁻⁶]	D (P) [10 ⁻⁶]	φ [°]
water	9	44 940 695 ± 37	44 941 165 ± 29	2100 ± 1	2130 ± 10	93.4	94.8	-27.9
isopropanol	1	5 003 555 ± 2	5 003 656 ± 2	1286 ± 1	1297 ± 1	513.9	518.4	-5.0
isopropanol	3	14 986 825 ± 3	14 987 054 ± 5	1670 ± 1	1719 ± 1	222.9	229.3	-14.3
isopropanol	5	24 971 122 ± 10	24 971 627 ± 1	2025 ± 4	2167 ± 13	162.2	173.5	-24.7
isopropanol	7	34 954 645 ± 5	34 955 093 ± 0.3	2383 ± 2	2570 ± 2	136.4	147.0	-21.4
isopropanol	9	44 939 783 ± 1	44 940 476 ± 12	2710 ± 3	2925 ± 12	120.6	130.2	-27.2

Table 2. Air-to-liquid shifts on overtones 3–9 against Kanazawa–Gordon at 25 °C, range over n and both liquids. $\epsilon_f = \Delta f / \Delta f_{\text{KG}} - 1$; $\epsilon_\Gamma = \Delta \Gamma / \Delta \Gamma_{\text{KG}} - 1$; $\rho_N = |\Delta f| / \Delta \Gamma$. The magnitude estimator’s “ Γ ” is half its -3 dB width, undefined on $n \geq 5$ in liquid.

estimator	ϵ_f [%]	ϵ_Γ [%]	ρ_N	$\max \epsilon_f $ [%]	$\max \epsilon_\Gamma $ [%]
(M) magnitude maximum	+52 ... +92	+40 ... +309	0.42 ... 1.08	92	309
(A) max of G + half height	+19.5 ... +29.5	-7.4 ... +6.3	1.17 ... 1.34	29.5	7.4
(MP) half-height midpoint	+33 ... +47	-7.4 ... +6.3	1.27 ... 1.53	47	7.4
(S) symmetric, constant bg	+33 ... +52	+8 ... +30	1.15 ... 1.34	52	30
(S) symmetric, linear bg	+24.5 ... +34.4	-3.0 ... +11.3	1.14 ... 1.33	34	11
(C) BVD circle (repository)	-2.5 ... +37.9	-9.6 ... +25.7	1.01 ... 1.14	38	26
(P) phase-shifted Lorentzian	-1.4 ... +8.2	-3.9 ... +9.3	0.98 ... 1.08	8.2	9.3

Per overtone, the phase-shifted Lorentzian gives $\epsilon_f = +8.2, +7.0, +4.8, -1.4$ % (water, $n = 3, 5, 7, 9$) and $+7.9, +2.7, +4.8, -1.0$ % (isopropanol), $\epsilon_\Gamma = +9.3, +2.5, -3.3, -3.9$ % (water) and $+5.1, +2.3, +1.5, +1.1$ % (isopropanol), and $\rho_N = 0.99, 1.04, 1.08, 1.03$ (water) and $1.03, 1.00, 1.03, 0.98$ (isopropanol). The maximum of G gives $\epsilon_f = +24, +30, +23, +20$ % (water) and $+23, +27, +22, +23$ % (isopropanol) with $\rho_N = 1.17\text{--}1.34$, and $\epsilon_\Gamma = +6.3, -2.1, -6.6, -6.2$ % (water) and $+1.9, -5.0, -6.8, -7.4$ % (isopropanol). The slopes of a line through the origin against $\sqrt{n}$ ($n = 1\text{--}9$) are 696 Hz ($-\Delta f$) and 677 Hz ($\Delta \Gamma$) in water against 674 Hz predicted, and 926 and 932 Hz in isopropanol against 902 Hz, with the phase-shifted fit; 827/656 Hz and 1112/867 Hz with the maximum of G . The $\sqrt{n}$ law itself holds for every estimator (the five points lie on a line through the origin in both cases); what changes between estimators is the slope of the frequency line.

6.6 What reconstruction buys and what the rotation buys

Table 2 separates the two steps. Going from the magnitude channel to the reconstructed conductance (M $\rightarrow$ A) removes two thirds of the frequency error ($+52\text{...}+92$ % $\rightarrow$ $+20\text{...}+30$ %) and, more importantly, produces a bandwidth with a physical definition: the magnitude curve’s -3 dB width is undefined inside the sweep window for $n \geq 5$ in liquid and its -0.3 dB width (the production software’s “dissipation”) grows to 3.7–6.4 kHz at $n = 9$, ten times the theory’s $\Delta \Gamma$, with no counterpart in it (Section 6.9). The half-height width of G is within ± 7.4 % of Kanazawa–Gordon on overtones 3–9. Going from the maximum of G to the phase-shifted fit

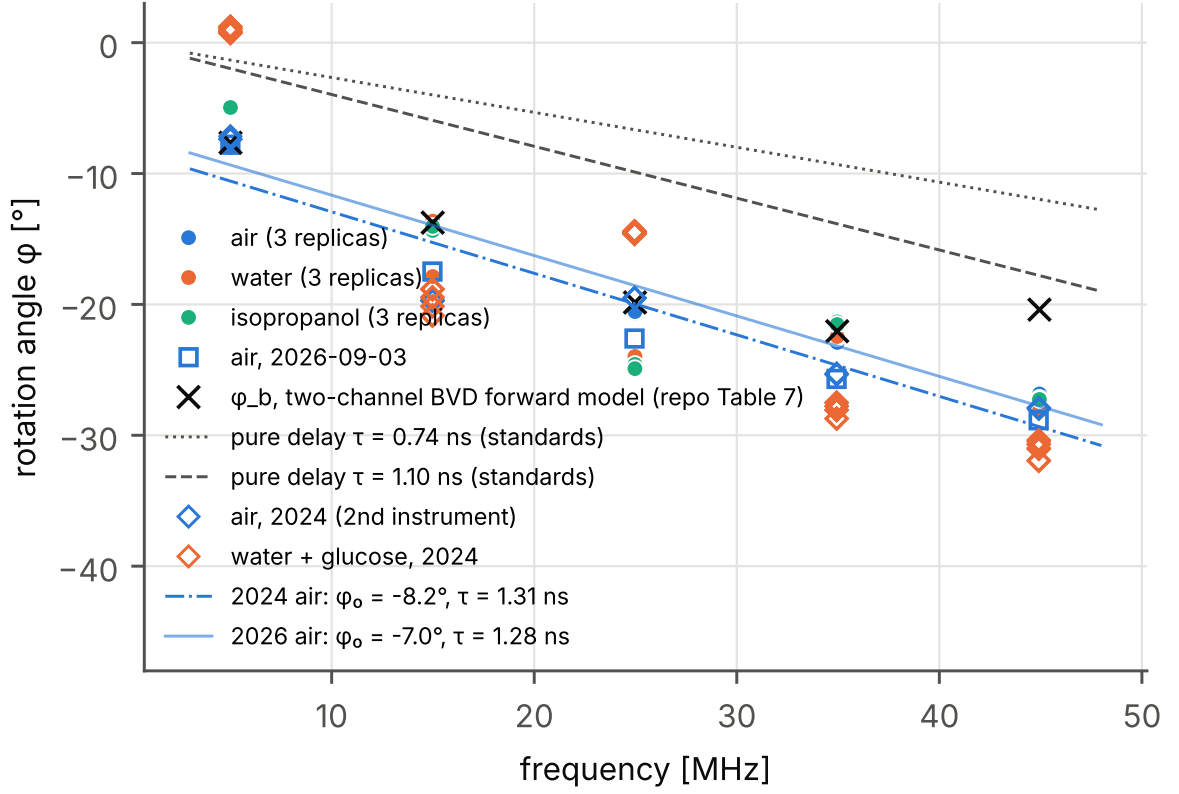


Figure 6: Rotation angle φ of the phase-shifted Lorentzian against frequency: three replicas per load on 2026-09-11; air sweeps of 2026-09-03; the board phase ϕ_b of the repository's two-channel forward model (crosses); the second instrument of 2024 in air and in the four liquids (open diamonds); the phase of a pure delay for the two delays measured on the resistive standards, and the least-squares lines $\varphi_0 - 360^\circ f\tau$ for the two instruments in air.

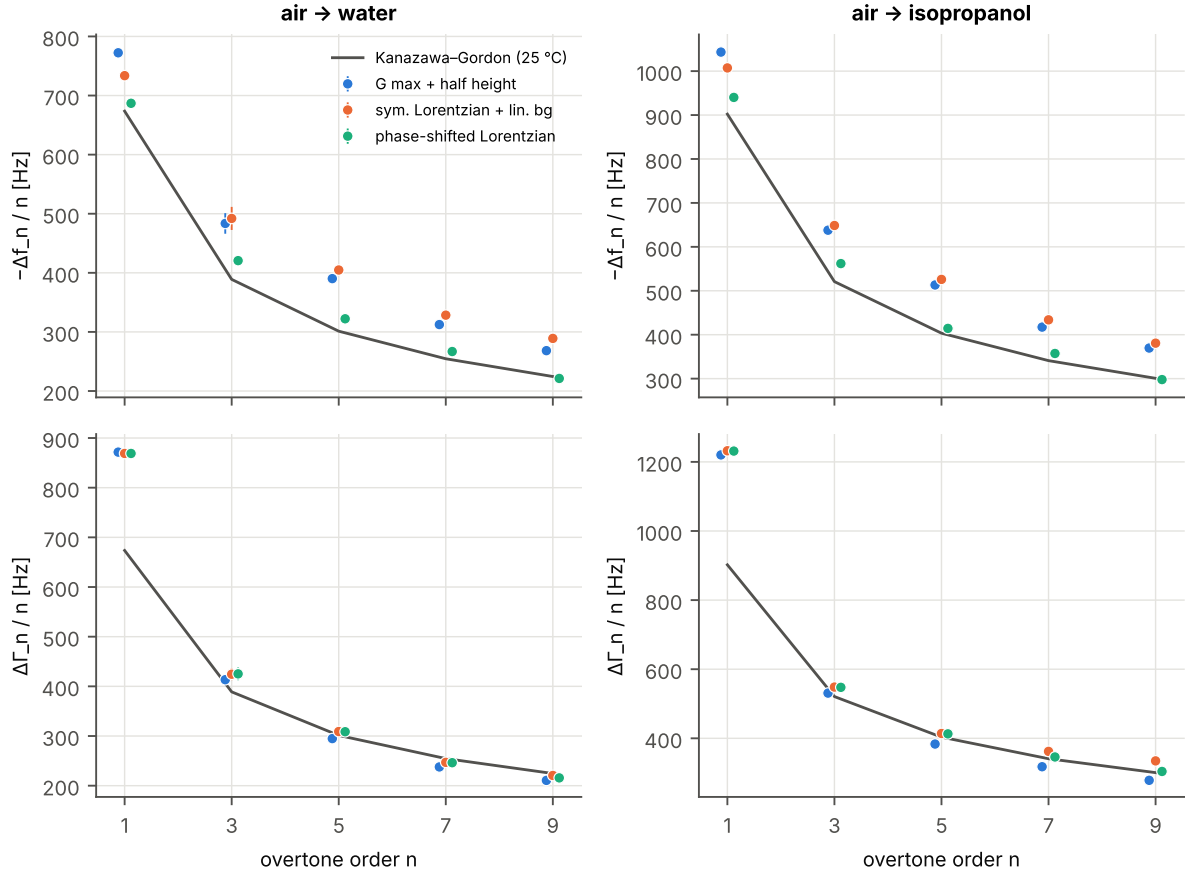


Figure 7: Overtone-normalised shifts $-\Delta f_n/n$ (top) and $\Delta \Gamma_n/n$ (bottom) against the overtone order for the maximum of G , the symmetric Lorentzian with linear background and the phase-shifted Lorentzian, with the Kanazawa-Gordon prediction at 25 °C. Error bars (mostly within the markers) are the replica scatter divided by n .

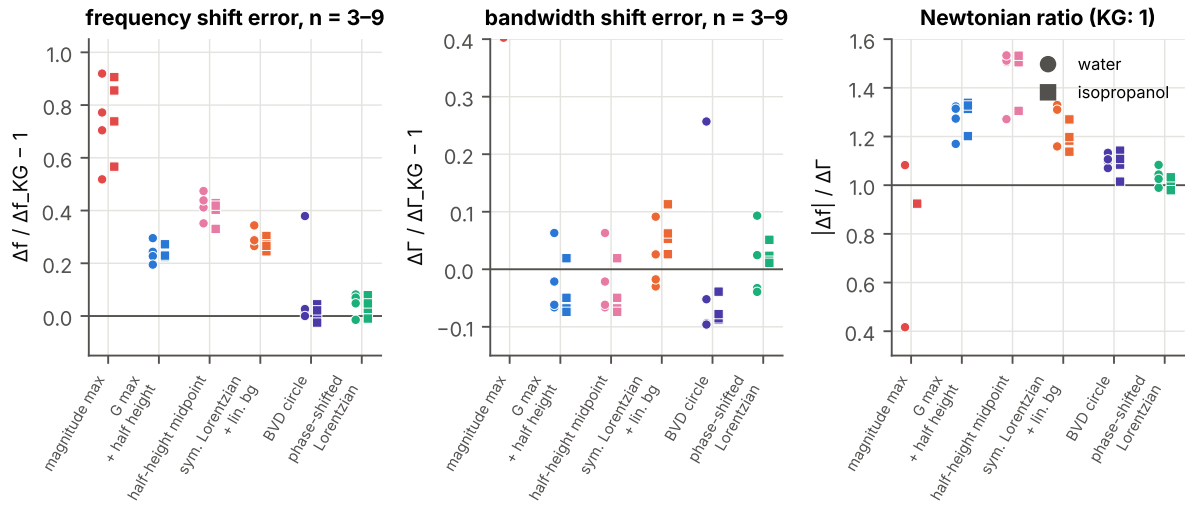


Figure 8: The three error metrics on overtones 3–9 (circles water, squares isopropanol) for six estimators.

(A $\rightarrow$ P) removes the remaining +20...+30 % on frequency, which Eq. (8) attributes to the rotation, and leaves the bandwidth essentially unchanged (−3.9...+9.3 %, the +9.3 % being the two-state water sweep of Section 6.8; the fitted Γ is 2–8 % above the half-height width in liquid, which corrects the baseline bias of Section 6.3). The improvement produced by the rotated Lorentzian is therefore a *frequency* improvement; the bandwidth was already right after reconstruction, and the symmetric Lorentzian — which models the shape but not the rotation — improves neither (its ϵ_f is +24...+34 %, worse than the maximum of G , as the $\approx 1.25 \Gamma \tan(\varphi/2)$ bias of Section 4.2 predicts).

6.7 Forward model: when is the rotated Lorentzian the right model?

A board phase does not multiply the admittance; it multiplies the *measured transfer function*, $H_{\text{meas}} = H e^{j\phi_b}$. Inverting exactly with that phase gives $Y' = 1/[(Z_q + R_{17})e^{-j\phi_b} - R_{17}]$, a Möbius transformation of Y_q that reduces to the rotation $Y_q e^{j\phi_b}$ only when $|Z_q| \gg R_{17}$. We therefore built a Butterworth–Van Dyke crystal of known f_s , Γ , R_1 and C_0 , sent it through the divider and the detector laws with a board phase on $\angle H$, an offset δ , the fold, the ADC quantisation and the firmware carry-over, and ran the same chain and estimators (Fig. 10, Supplementary `forward_model.md`). Findings: (i) the fitted angle equals the imposed board phase to 0.5° on every case; (ii) with $\phi_b = 0$ both estimators recover f_s to the grid; (iii) with $\phi_b = -8$ to -25° the maximum of G is off by −91 to −743 Hz on liquid-like cases, the phase-shifted fit by −7 to −59 Hz (≤ 2 % of Γ), the symmetric fit by −96 to −833 Hz; (iv) the residual error of the phase-shifted fit scales as $\approx -0.34 \Gamma (R_{17}/R_1)$ at $\phi_b = -20^\circ$: −344 Hz at $R_1 = R_{17}$ and −12 Hz at $R_1 = 1.6 \text{ k}\Omega$ for $\Gamma = 1 \text{ kHz}$, so for the air-like cases ($\Gamma = 65\text{--}190 \text{ Hz}$, $R_1 = 36\text{--}204 \Omega$) it is −12 to −39 Hz, one third to one half of the argmax bias there; (v) when a fold exists, the offset δ is removed and does not move f_{res} or Γ ($\leq 0.5 \text{ Hz}$ for $\delta = -3...+7^\circ$), but the smoothing rounds the vertex and the recovered δ is $1.0\text{--}2.3^\circ$ more negative than the true one; (vi) when there is no fold, an uncorrectable δ of $\pm 5^\circ$ enters the fitted angle almost one to one ($\varphi_{\text{fit}} \approx \phi_b - \delta$) and moves f_{res} by $\leq 10 \text{ Hz}$ and Γ by $\leq 7 \text{ Hz}$; (vii) a ± 5 % error on the magnitude slope (± 3 to ± 15 % on M) moves f_{res} by $\leq 15 \text{ Hz}$ and Γ by ≤ 1 %, but $R_m = 1/G_{\text{max}}$ by 10–40 %, and even with an ideal magnitude channel R_m is 24–39 % low in liquid because the peak height is reduced by $\cos^2(\varphi/2)$ and by the baseline; (viii) the firmware carry-over moves f_{res} by $\leq 2 \text{ Hz}$. The instrument’s smoothing (Savitzky–Golay 51 points plus spline) widens a 65 Hz half-bandwidth by 6.6 Hz (+10 %) and a 190 Hz one by 3.5 Hz; it is negligible in liquid.

6.8 Repeatability, failure modes and the firmware correction

Over the three sweeps of each plateau the standard deviation of f_{res} is 1.5–23 Hz in air (growing with n because the air baseline was still drifting at −0.3 to −2 Hz/min) and 0.3–29 Hz in liquid for both estimators, and that of Γ is $\leq 2.6 \text{ Hz}$ in air and $\leq 13 \text{ Hz}$ in liquid (Fig. 9). The phase-shifted fit is at least as repeatable as the maximum of G and better on $n \geq 5$ in isopropanol (0.3–12 Hz against 0.6–10 Hz on f). The fit’s covariance gives 0.1–0.8 Hz on f_{res} , an order of magnitude below the replica scatter, because the residual is structured; the replica scatter is the number to quote. One sweep is anomalous: water, $n = 3$, replica 3, whose phase peak grazes zero (fold depth 0.880 against a threshold of 0.88); the instrument’s datalog shows the logged pair alternating between two states 105 Hz apart from 13:12 onwards, the fitted φ is 4.3° off its replicas, and the 0.2 % firmware correction flips its fold decision and moves its f_{res} by 37 Hz (phase-shifted) and 111 Hz (maximum of G). On the other 44 sweeps the correction changes f_{res} by $\leq 2.2 \text{ Hz}$ and Γ by $\leq 1.7 \text{ Hz}$. The repository’s BVD circle estimator returns a scatter of 309 Hz on that overtone, because the sign of B depends on the same decision; the conductance-only estimators do not use B and carry only the 50 Hz state change.

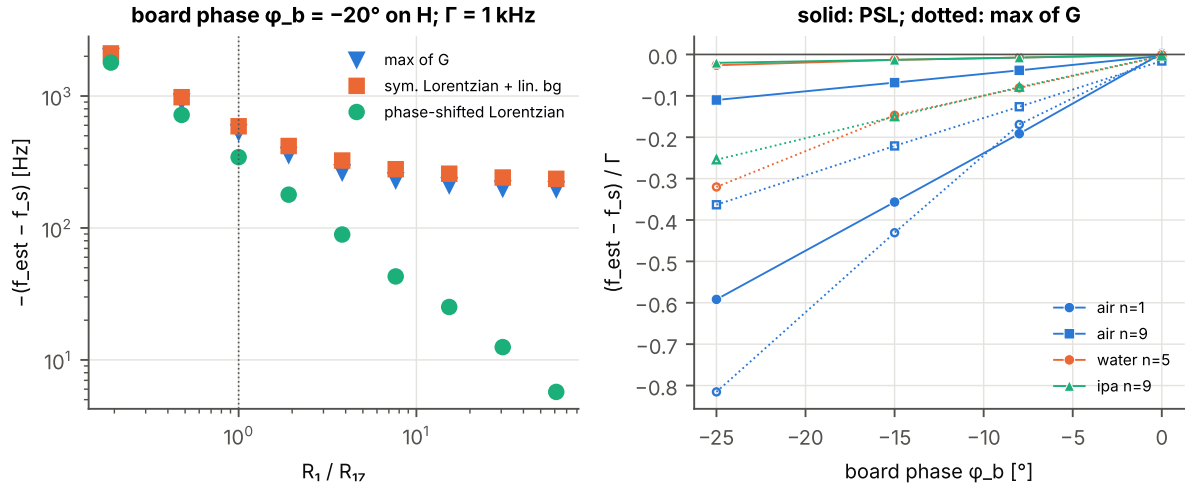


Figure 9: Forward model. Left: error of three estimators against R_1/R_{17} for a board phase of -20° on the transfer function ($\Gamma = 1$ kHz). Right: error in units of Γ against the board phase for four measured-like cases; solid: phase-shifted fit; dotted: maximum of G .

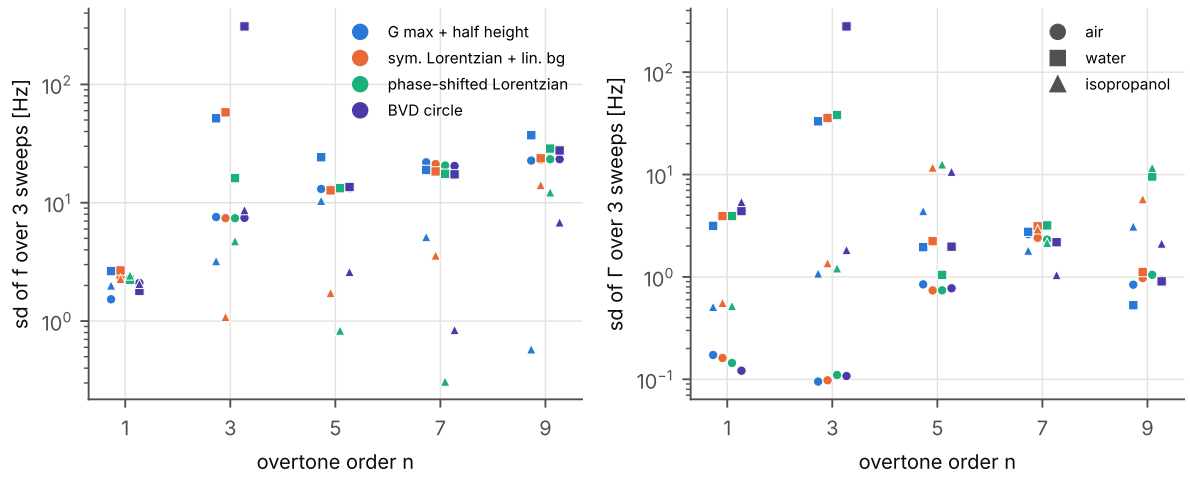


Figure 10: Standard deviation over the three plateau sweeps of f_{res} (left) and Γ (right) per estimator, overtone and load.

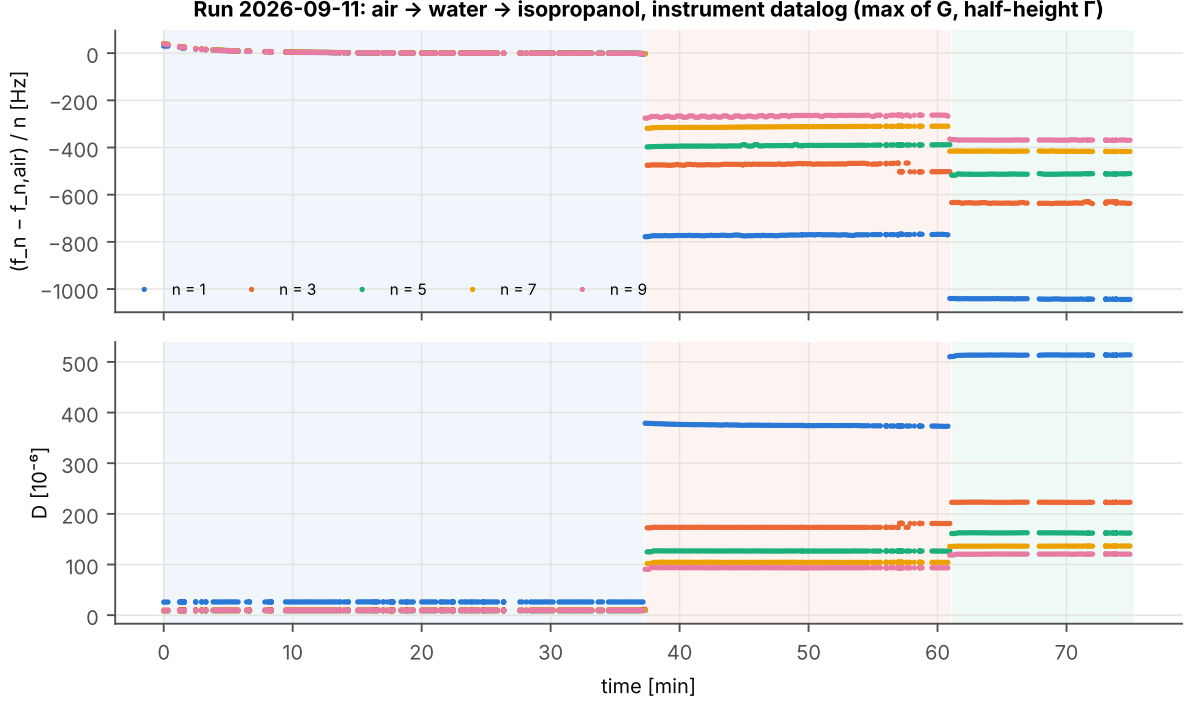


Figure 11: The run of 2026-09-11 as logged by the instrument (maximum of G , half-height Γ): overtone-normalised frequency relative to the air value and dissipation factor against time; shaded: air, water, isopropanol.

6.9 The production estimator on the same acquisitions

The instrument logged, at the same instants, the production magnitude estimator (maximum of the baseline-corrected magnitude in dB and its full width 0.3 dB below the maximum) and the conductance estimator (Fig. 11, Supplementary `dataloggs.md`). On the last 10 min of each plateau of 2026-09-11 (duplicate rows written in bursts, 95 of 486, removed) the magnitude maximum gives $\epsilon_f = +51, +69, +76, +89$ % (water, $n = 3-9$) and $+57, +74, +85, +90$ % (isopropanol), against $+23, +29, +22, +18$ % and $+22, +27, +22, +22$ % for the maximum of G logged live; the run of 2026-09-10 (2.5 min plateaus) gives $+51 \dots +98$ % and $+22 \dots +30$ %. The -0.3 dB width changes by 0.77–3.7 kHz (water) and 1.1–6.4 kHz (isopropanol) on $n = 3-9$, where the theory's $\Delta\Gamma$ is 1.2–2.7 kHz; in air it is 63–70 Hz at the fundamental against $\Gamma = 49-65$ Hz. The live conductance estimator reproduces the offline analysis of the same sweeps within the plateau drift.

6.10 The fundamental

The fundamental does not follow the theory with any estimator: $\epsilon_\Gamma = +29$ % (water) and $+35-37$ % (isopropanol), $\rho_N = 0.76-0.89$, while ϵ_f is $+2$ to $+4$ % with the phase-shifted fit. Its dissipation in air is 26×10^{-6} (2026-09-11) and 19.6×10^{-6} (2026-09-10) against 8–10 and $5-6 \times 10^{-6}$ on the overtones, and the smoothing bias of Section 6.7 accounts for only a tenth of the air value. The excess is in the bandwidth and is present before the liquid is added: we attribute it to the sensor and its mounting rather than to the method (Section 8). The second campaign bears on this attribution (Section 7.6).

7 Results — second campaign: water and glucose solutions on a second instrument

7.1 Purpose and design

The first campaign characterised the estimators on one instrument. The second asks whether its conclusions survive a change of board, crystal, software version, operator day and liquid, and whether the method resolves a small, graded change of a liquid’s properties. The dataset (Section 5) is 75 sweeps: air, water and glucose 5, 7.5 and 10 % w/v, three replicas per phase, overtones 1–9, processed with the chain and the estimators of Sections 3–4 unchanged, including the gate and every constant. Four statements are tested below: that the instrument resolves small changes of glucose concentration (Section 7.4); that the phase-shifted Lorentzian improves on the conductance maximum (7.2); that the water shifts agree with Kanazawa–Gordon in detail and the glucose shifts with its structure (7.3); and that the gain in agreement with the theory holds on a second instrument (7.2–7.3, 7.7). The board, the crystal and the liquid temperature were not recorded (Section 5), which bounds what the campaign can say about absolute values; the comparisons below are therefore internal to the campaign or free of liquid constants wherever possible.

7.2 The estimators on four liquids

The ranking of the estimators found on board 1920 repeats on the second instrument, on four liquids (Table 3, Fig. 12, Fig. 13). Against air, the Newtonian ratio on overtones 3–9 is 1.20–1.41 with the maximum of G and 1.01–1.16 with the phase-shifted Lorentzian in water and in the three glucose solutions alike (the midpoint gives 1.31–1.68, the symmetric Lorentzian with linear background 1.17–1.47, the circle 0.90–1.16). For water against Kanazawa–Gordon, $\Delta f/\Delta f_{\text{KG}}$ is 1.20–1.36 with the maximum of G and 1.06–1.13 with the fit, while $\Delta\Gamma/\Delta\Gamma_{\text{KG}}$ is 0.96–1.00 and 0.96–1.05 respectively: as on board 1920, the fit changes the frequency and leaves the bandwidth. The residual pattern over the overtones is not random: with the fit the Newtonian ratio is 1.15, 1.01, 1.16, 1.12 on $n = 3, 5, 7, 9$ in water and the same to ± 0.02 in the three glucose solutions, i.e. a zig-zag that is identical in four liquids and therefore instrumental; it coincides with the anomaly of φ on the same board ($|\varphi|$ smallest on $n = 5$, where the ratio is closest to one), which suggests that the residual error after the rotation correction tracks what the single-angle model does not capture of this board’s phase response. The closed form of the bias of the conductance maximum, Eq. (8), holds on the 75 sweeps as on the 45 of the first campaign: measured minus predicted $f_{G\text{max}} - f_{\text{res}}$ is $+21 \pm 28$ Hz, at most 80 Hz (0.096 Γ), with the same sign pattern (positive on the narrow air peaks, where the fold plateau sits under the maximum; within ± 0.04 Γ in liquid; open squares in Fig. 5). All 75 fits converged and passed the gate; the three replicas of each phase, 3–10 min apart on a quieter baseline than in 2026, scatter by ≤ 3 Hz in air and ≤ 8 Hz in liquid for the fit, against ≤ 36 Hz for the maximum of G (water, $n = 9$, a flat peak on a 1 Hz grid).

Table 3. Second instrument (2024-05-29): air-to-liquid shifts on overtones 3–9, range over n . Water against Kanazawa–Gordon at 25 °C; the Newtonian ratio for all four liquids. A = maximum of G + half height; P = phase-shifted Lorentzian.

quantity	A	P
water, $\Delta f/\Delta f_{\text{KG}}$	1.20 ... 1.36	1.06 ... 1.13
water, $\Delta\Gamma/\Delta\Gamma_{\text{KG}}$	0.96 ... 1.00	0.96 ... 1.05
$\rho_N = \Delta f /\Delta\Gamma$, water	1.20 ... 1.41	1.01 ... 1.16
ρ_N , glucose 5 / 7.5 / 10 %	1.21 ... 1.40	1.02 ... 1.14
fundamental: $\Delta\Gamma_1/\Delta\Gamma_{\text{KG}}$, ρ_N (water)	1.04, 1.04	1.07, 1.01

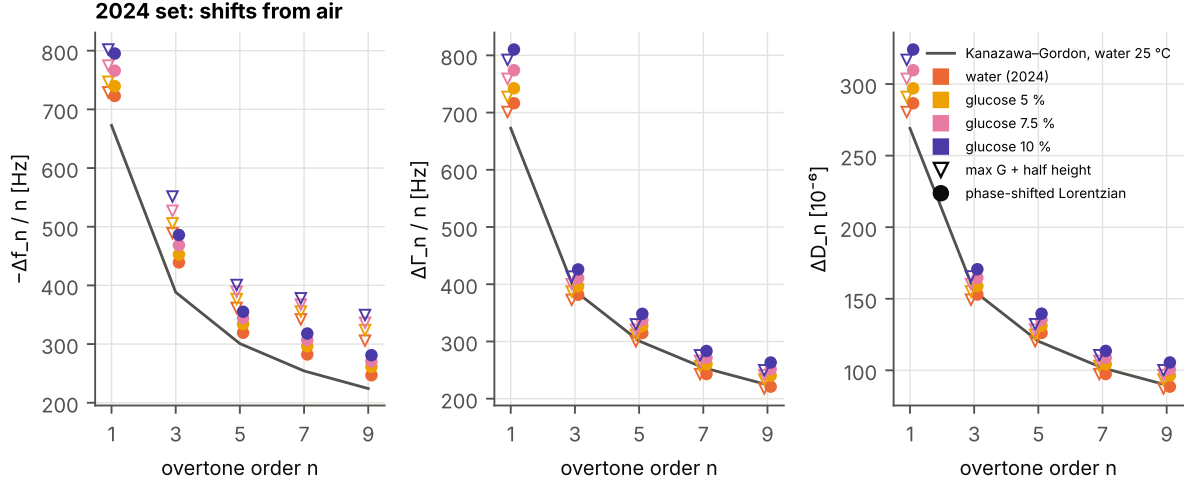


Figure 12: Second instrument: overtone-normalised shifts from air, $-\Delta f_n/n$, $\Delta \Gamma_n/n$ and ΔD_n , for water and the three glucose solutions, with the maximum of G (open triangles) and the phase-shifted Lorentzian (filled circles) and the Kanazawa–Gordon prediction for water.

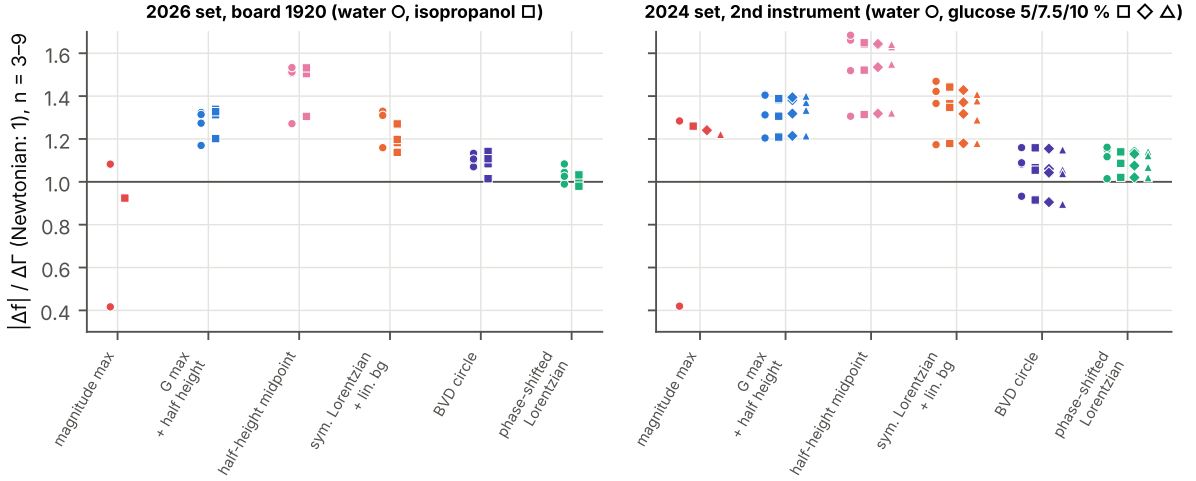


Figure 13: The Newtonian ratio on overtones 3–9 per estimator on the two instruments: board 1920 (water, isopropanol) and the instrument of 2024 (water and glucose 5, 7.5, 10 % w/v).

7.3 Water against Kanazawa–Gordon, and the $\sqrt{n}$ structure of all four liquids

For water the frequency shift exceeds the theory by +20 to +36 % with the maximum of G and by +6 to +13 % with the phase-shifted Lorentzian on overtones 3–9, while the bandwidth shift is within $-4 \dots 0$ % and $-4 \dots +5$ % respectively (Table 3): the same pattern as on board 1920 (Table 2), with a residual frequency excess after the fit (+6 to +13 %) somewhat larger than there (+2 to +8 %) and within what the unmeasured liquid temperature allows. The production software of 2024 logged its own magnitude estimator during the same acquisition; on the last 8 min of each phase it exceeds the theory by +17, +27, +22, +38, +42 % on $n = 1 \dots 9$, less than the +51 to +90 % of the magnitude estimator on board 1920 and close to the maximum of G on this board (+8 to +36 %): on this instrument the reconstruction of the conductance alone buys little in frequency, and the rotation correction carries the whole improvement. Its -0.3 dB width changes by 0.67–2.55 kHz against a theoretical $\Delta\Gamma$ of 0.67–2.02 kHz, again without a physical definition.

The theory predicts that $-\Delta f_n/\sqrt{n}$ and $\Delta\Gamma_n/\sqrt{n}$ are the same number for every overtone of a given Newtonian liquid, whatever its $\rho\eta$. This is a test that needs no liquid constants and applies to the glucose solutions as well (Fig. 15). Over $n = 3$ –9 the coefficient of variation of $-\Delta f_n/\sqrt{n}$ is 5.8–6.7 % with the maximum of G , 7.8–8.1 % with the symmetric Lorentzian and 2.4–2.9 % with the phase-shifted Lorentzian, on water and on the three glucose solutions alike; that of $\Delta\Gamma_n/\sqrt{n}$ is 1.9–2.0 % with the half-height width and 3.1–3.8 % with the fit. On this board the fit therefore brings the frequency shifts onto the $\sqrt{n}$ law 2.5 times better than the maximum, while the bandwidth already obeyed it. On board 1920 the same statistic was 1.9–3.4 % (maximum of G) and 3.6–4.1 % (fit) for the frequency: there the rotation bias grows smoothly with n and scales nearly as the shift itself, so it does not spoil the collapse, whereas on the second board the angle is not monotonic in n (Section 7.5) and the bias it produces is removed only by the fit. The improvement in the *shape* of the overtone dependence is thus instrument-specific; the improvement in the *level* against the theory is common to both boards.

7.4 Resolving the glucose concentration

Relative to water, the glucose solutions shift the fitted resonance by -17 to -72 Hz (fundamental) and -128 to -307 Hz (9th overtone) at 10 % w/v and broaden it by +94 to +379 Hz (Fig. 14). A straight line through the four concentrations (0, 5, 7.5, 10 % w/v) has slopes of $-7.1, -13.8, -17.8, -24.7, -30.4$ Hz per % w/v in Δf_n , $+9.2, +13.1, +16.6, +28.0, +37.8$ Hz per % w/v in $\Delta\Gamma_n$ and $3.68, 1.75, 1.33, 1.60, 1.68 \times 10^{-6}$ per % w/v in ΔD_n for $n = 1 \dots 9$ (phase-shifted Lorentzian, ordinary least squares with intercept); the maximum of G gives the same bandwidth slopes within 1 Hz per % and frequency slopes 1–30 % steeper on $n \geq 3$, because its bias grows with the width. The 5 % plateau is less loaded than the line through the four concentrations on *every* overtone: its residual is +10 to +18 Hz in Δf (fit; +11 to +26 Hz with the maximum of G) and -9 to -14 Hz in $\Delta\Gamma$, roughly constant in hertz from $n = 1$ to 9, so it does not scale as $\sqrt{n}$ and is not an error of $\rho\eta$; it lowers R^2 to 0.91 and 0.94 on $n = 1$ and 3, where the slopes are smallest, and leaves 0.986–0.990 on $n \geq 5$. The replica scatter inside the plateaus is 0.3–3 Hz. A drift of the baseline cannot explain it: the slope of f_{res} over the three replicas is at most 0.4 Hz min^{-1} inside the glucose plateaus and -0.2 to -1.0 Hz min^{-1} in water (growing with n , confirmed by the datalog), the 5 % plateau sits 4.3 min off the line of plateau times against concentration, so a time-linear drift maps into a 5 %-point residual of at most ≈ 4 Hz, and explaining the residual by drift alone would require -2 to -6 Hz min^{-1} , five to fifteen times what is measured. Drift explains at most ≈ 4 Hz; the rest is unresolved, and without a return to water between concentrations the experiment cannot tell a property of the first solution from a step of the instrument. The square of the air-referenced frequency shift relative to water, $(\Delta f/\Delta f_{\text{water}})^2 = \rho\eta/(\rho\eta)_{\text{water}}$ for a Newtonian liquid, averaged over $n = 3$ –9, is 1.094, 1.171 and 1.256 at 5, 7.5 and 10 % w/v with the phase-shifted Lorentzian and 1.089,

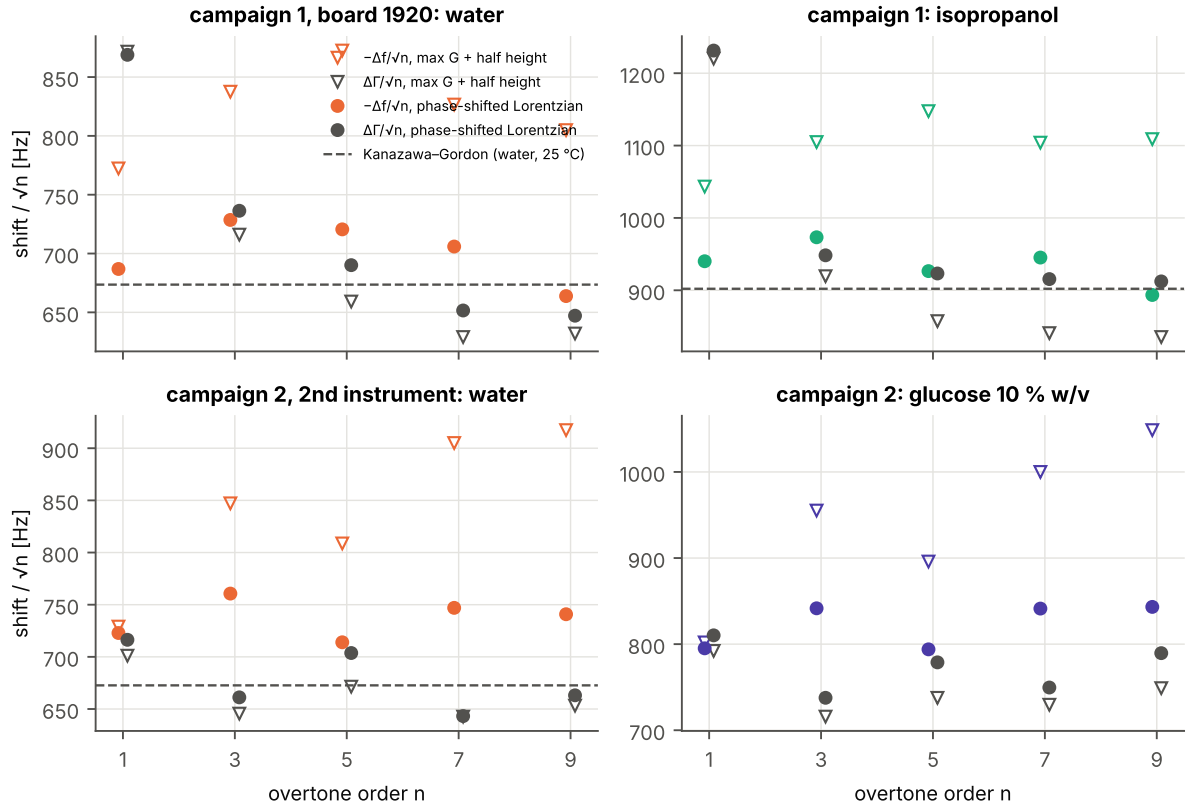


Figure 14: Overtone-normalised shifts $-\Delta f_n/\sqrt{n}$ (coloured) and $\Delta\Gamma_n/\sqrt{n}$ (grey) against the overtone order for the two campaigns, with the maximum of G (open triangles) and the phase-shifted Lorentzian (filled circles); a Newtonian liquid gives one horizontal line for both quantities, drawn for water at 25 °C.

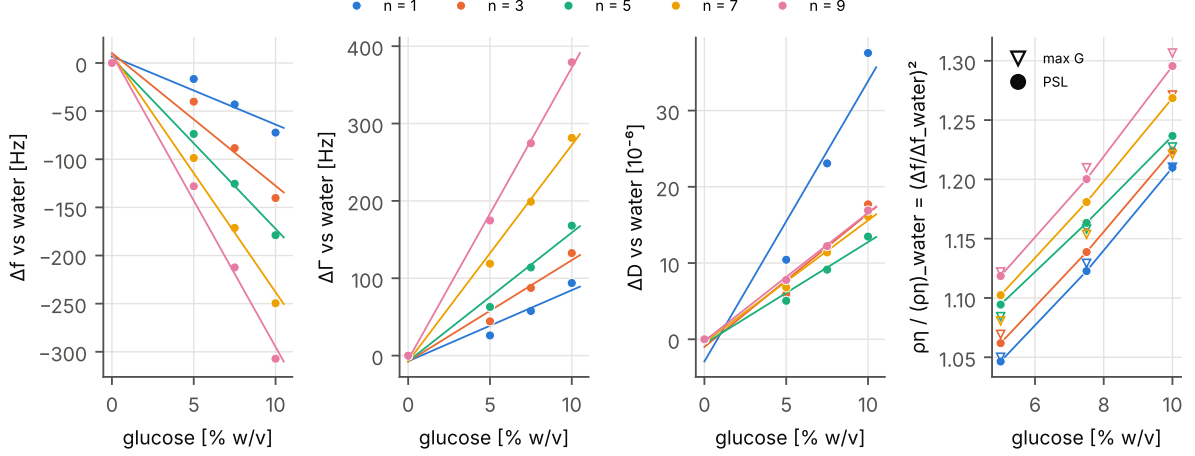


Figure 15: Second instrument: shifts relative to water of the fitted resonance frequency, half-bandwidth and dissipation against glucose concentration, one line per overtone (ordinary least squares with intercept), and the ratio $\rho\eta/(\rho\eta)_{\text{water}}$ from the air-referenced frequency shifts with the two estimators.

1.171 and 1.257 with the maximum of G : the two estimators agree on the ratio to 0.5 % although they disagree on each shift by 20–30 %, because the rotation bias is a nearly constant fraction of the shift at a given overtone and cancels in the quotient. The same ratio from the bandwidth, $(\Delta\Gamma/\Delta\Gamma_{\text{water}})^2$, agrees with the frequency-based one on $n = 3$ and 5 (within 0.02) and departs from it on $n = 7$ and 9 , and partly on $n = 1$: at 10 % w/v it is 1.36 ($n = 7$) and 1.42 ($n = 9$) against 1.27 and 1.30 from the frequency; the departure is not monotonic in n , and on $n = 9$ it appears with the fit (1.42) but not with the half-height width (1.31). The $\pm 3\Gamma$ fit window is clipped by the sweep edge on those overtones (2.5–2.6 Γ available on the right on $n = 9$, 2.9–3.1 Γ on $n = 7$); refitting with a symmetric window limited by the edge moves the $n = 9$ ratio from 1.418 to 1.395, about a fifth of the gap, and changes nothing on $n = 7$. The remainder is unexplained; a surface-roughness term, which in the Daikhin–Urbakh description adds to Δf a contribution proportional to ρn without a counterpart in $\Delta\Gamma$ [19], would act in this direction and grow with the overtone, but cannot be tested on these data. No tabulated density or viscosity of the glucose solutions is used here.

Whether the instrument *resolves* these steps is a question of the replica scatter against the step. From water to 5 % w/v the fitted resonance moves by -17 to -128 Hz and the half-bandwidth by $+26$ to $+175$ Hz; each further 2.5 % w/v moves them by -26 to -95 Hz and $+32$ to $+105$ Hz. Against the replica scatter inside the plateaus (0.3–8 Hz for the fit) every step on every overtone is at least 13 standard deviations in frequency and 15 in bandwidth with the phase-shifted Lorentzian, and at least 4.5 in frequency with the maximum of G (whose 36 Hz scatter on water, $n = 9$, is the limiting case). Three replica standard deviations divided by the concentration slope give a noise-equivalent resolution of 0.10–0.17 % w/v on frequency and 0.03–0.29 % w/v on bandwidth with the fit, against 0.4–1.1 % w/v on frequency with the maximum of G . This is the precision of a plateau against the next; the *accuracy* of a concentration read from the line is limited instead by the unexplained offset of the 5 % plateau ($+10$ to $+18$ Hz), which is 0.5–1.7 % w/v in concentration units, an order of magnitude above the noise and not explained by drift (above).

7.5 The rotation angle on the second board

On the second board (Fig. 6, open diamonds) the angle in air is $-7.3, -19.7, -19.5, -25.3, -27.9^\circ$ on $n = 1 \dots 9$ (sd over three replicas $\leq 0.13^\circ$) and in the four liquids $+0.7$ to $+1.2^\circ, -18.8$ to

-20.8° , -14.3 to -14.6° , -27.5 to -28.7° , -30.4 to -31.9° ($\text{sd} \leq 0.07^\circ$). Three facts follow. The two instruments agree within $1\text{--}3^\circ$ on $n = 1, 5, 7, 9$ in air, but differ by 5° on $n = 3$, where the second instrument reads -19.7° against -14.5° : on that board $\varphi(3) \approx \varphi(5)$ in air and $\varphi(5)$ is *smaller* in magnitude than $\varphi(3)$ in liquid, so the angle is not a monotonic function of frequency. The angle is independent of the glucose concentration within 2° on every overtone, which confirms it as an instrument property rather than a property of the load, and its sign on the fundamental in liquid is opposite between the instruments ($+1^\circ$ against -5°), with the first instrument reading -8° in air on the same overtone. A least-squares decomposition into a constant and a delay, $\varphi = \varphi_0 - 360^\circ f\tau$, gives $\varphi_0 = -8.2^\circ$, $\tau = 1.31$ ns (rms 2.6°) for the second instrument in air and $\varphi_0 = -7.0^\circ$, $\tau = 1.28$ ns (rms 1.2°) for board 1920 in air (-7.9° , 1.40 ns on 2026-09-03), i.e. the same two parameters on both boards within the scatter; in the liquids of 2024 the fundamental at $+1^\circ$ pulls φ_0 to 0 to -1° (rms $4.6\text{--}5.4^\circ$) and on $n = 3\text{--}9$ alone $\varphi_0 = -7.4$ to -11.0° . This decomposition is an approximation — the rms is $1\text{--}5^\circ$ and both parameters move when $n = 1$ is excluded — and it is reported to make the comparison between instruments explicit; the resistive standards of board 1920 had given only the delays above and intercepts of -0.1° and -3.5° , and the $f^{0.55}$ growth, not a constant offset.

7.6 The fundamental on the second crystal

The fundamental of the first campaign deviated from the theory by $+29$ to $+37\%$ in bandwidth with every estimator (Section 6.10). The second instrument and crystal do not show that excess: there $\Delta\Gamma_1/\Delta\Gamma_{\text{KG}} = 1.04$ (maximum of G) and 1.07 (fit) and the Newtonian ratio on the fundamental is 1.04 and 1.01 , while the air dissipation of that crystal's fundamental is even higher ($44\text{--}46 \times 10^{-6}$, $\Gamma = 110\text{--}115$ Hz). The fundamental excess of 2026 therefore follows the first sensor or board, not the method and not the air damping as such; the two-board, two-sensor cross test of the remaining experiments is what separates sensor from board.

7.7 What the two campaigns establish together

Of the four statements the second campaign was designed to test, the data support the following. (1) *Small changes of glucose concentration are resolved*: steps of 2.5% w/v are 13 or more replica standard deviations apart with the phase-shifted Lorentzian on every overtone, with a noise-equivalent resolution of $0.1\text{--}0.2\%$ w/v; the accuracy of an absolute concentration reading is limited by an unexplained $10\text{--}18$ Hz offset of one plateau ($0.5\text{--}1.7\%$ w/v equivalent) that drift cannot account for and that a protocol with a return to water between concentrations would isolate. (2) *The phase-shifted Lorentzian improves on the conductance maximum* on this instrument as on the first, and in the same way: the Newtonian ratio moves from $1.20\text{--}1.41$ to $1.01\text{--}1.16$ on four liquids, the water frequency shift from $+20\ldots+36\%$ to $+6\ldots+13\%$ over the theory, and the $\sqrt{n}$ collapse of the frequency shifts from $6\text{--}7\%$ to $2.4\text{--}2.9\%$; the bandwidth, right before the fit, is not improved by it. (3) *The comparison with Kanazawa–Gordon* is quantitative for water (frequency $+6\ldots+13\%$, bandwidth $-4\ldots+5\%$, Newtonian ratio $1.01\text{--}1.16$, $\sqrt{n}$ law to $2.4\text{--}3.8\%$) and structural for the glucose solutions, whose $\rho\eta$ relative to water (1.09 , 1.17 , 1.26) is estimator-independent. (4) *The rotation correction brings the measurement closer to the theory on two instruments under different conditions* — two boards, two crystals, two software versions, two years apart, three liquids of two kinds — and the bias law $f_{G\text{max}} - f_{\text{res}} = \Gamma \tan(\varphi/2)$ holds on 120 sweeps with a residual of 0.02Γ . Two things do not transfer: the angle $\varphi(n)$ differs between boards (by 5° on $n = 3$) and is not monotonic in frequency on the second, so it must be measured per instrument; and the fundamental's bandwidth excess of the first campaign is absent on the second crystal. Both campaigns share the unmeasured liquid temperature and a residual frequency excess of a few percent after the fit.

8 Discussion

Physical response, instrumental rotation, detector limits. The data separate into three layers. The physical QCM response — the $\sqrt{n}$ scaling of both shifts, their equality for a Newtonian liquid, their magnitude for water and isopropanol — is recovered on overtones 3–9 to within +8 % in frequency and ± 9 % in bandwidth once the resonance is read with the phase-shifted Lorentzian, and the Newtonian ratio, which is independent of the liquid constants, is 0.98–1.08. The instrumental rotation φ is reproducible to 0.1–0.3°, equal in air and in liquid to a few degrees, equal to the board phase of an independent two-channel model, and it is the whole of the 20–30 % frequency excess of the conductance maximum, as Eq. (8) predicts to $+1 \pm 28$ Hz on 45 sweeps. Its frequency dependence ($f^{0.55}$, not linear) rules out a pure cable delay as the only cause; the AD8302’s own phase response (non-linear within $\sim 18^\circ$ of 0° and 180°), the drive network and the input matching are candidates that only a calibration with reference loads in the operating range will separate. The detector’s limits are visible in the residuals: the fold is rounded over 20–50 Hz in air (the detector compresses the last degrees towards 0°), the divider ratio in liquid sits at the edge of the specified range and the locus is 5–18 % out of round there, and the one unstable sweep is the one whose phase peak grazes zero.

Correction and model assumptions. The rotated Lorentzian assumes that the error is a multiplication of the admittance by a complex constant. The forward model shows that for a phase error on the transfer function this is exact only when $|Z_q| \gg R_{17}$; in liquid ($R_m/R_{17} = 12$ –24) the residual is ≤ 2 % of Γ , i.e. ≤ 60 Hz, and in air ($R_m/R_{17} = 0.7$ –4) the correction removes only half to two thirds of the argmax bias — which in air is 2–47 Hz and matters little for shifts of hundreds of hertz, but matters if absolute air values are compared between instruments. The residual +2 to +8 % frequency excess of the phase-shifted fit on $n = 3$ –7 is of the size of the sum of the Möbius residual, the ± 2 –3 % uncertainty from the unmeasured liquid temperature and the clipping of the $\pm 3\Gamma$ window by the sweep on the right side for $n \geq 5$ in isopropanol (2.2–3.0 Γ available); the data do not separate these.

Robustness. The result does not depend on the smoothing (f_{res} within 5 Hz, Γ within 29 Hz between raw and smoothed data, repository block A2), on the phase offset ($\pm 5^\circ \rightarrow \leq 21$ Hz), on the fit window (± 2 to $\pm 6 \Gamma \rightarrow \leq 60$ Hz) or on the 0.2 % firmware bias (≤ 2 Hz), with the single exception of the sweep whose fold decision sits on the threshold. The acceptance gate never fired on 45 sweeps; its parameters were set at ten times the observed spread and are instrument-specific.

The second campaign. The water–glucose campaign (Section 7) tests the method where it was not tuned: another board, another crystal, the production software of the time, four liquids. The ranking of the estimators and the size of the correction repeat (Newtonian ratio 1.20–1.41 $\rightarrow$ 1.01–1.16; water frequency shift +20...+36 % $\rightarrow$ +6...+13 %; $\sqrt{n}$ collapse of the frequency shifts 6–7 % $\rightarrow$ 2.4–2.9 %), the bandwidth is again right before the fit, the closed form of the bias holds ($+21 \pm 28$ Hz on 75 sweeps), and glucose steps of 2.5 % w/v are resolved at ≥ 13 standard deviations with a noise-equivalent resolution of 0.1–0.2 % w/v. Two things do not repeat: the rotation angle differs by 5° on the 3rd overtone and is not monotonic in frequency on that board, so $\varphi(n)$ must be measured per instrument and cannot be written as a universal function; and the fundamental follows the theory there, which places the +29...+37 % excess of 2026 on the first sensor or board. The residual zig-zag over the overtones, identical in four liquids, says that a single angle per overtone leaves a few percent of instrument response uncorrected, consistent with the Möbius residual and with whatever in the board’s phase makes $\varphi(5)$ anomalous.

Highly damped loads. Three things degrade together as damping grows: the contrast of the divider ratio falls to 1.6 dB, the sweep window sized for air clips the fit window, and the half-height baseline moves onto the skirt. The phase-shifted fit tolerates the first two better than the half-height estimator (its Γ does not inherit the baseline bias) but the fit window should scale with Γ and the reference resistor should be larger, or switchable, for liquids: with $R_{17} =$

52.3 Ω against 1–4 k Ω of load the detector works 22–37 dB down.

Calibration. The frequency and bandwidth estimates are shape estimates and tolerate a few percent of error on the magnitude scale and a few degrees of phase offset; the motional resistance does not, and is not a validated output of this method: the resistive standards read M 8–14 % low and the forward model shows R_m from $1/G_{\max}$ biased by the rotation and by the baseline. A one-port calibration with known loads cannot change the roundness of the locus (a bilinear map preserves circles) but would fix M and ϕ_b .

Extension. Nothing in the chain is specific to this board: any divider or thru configuration read by a gain/phase detector, or any scalar analyser with a phase channel, can be inverted exactly if the reference impedance is known, and the rotation of Eq. (7) then absorbs the residual phase of the chain to first order. The fold treatment is specific to detectors that return an unsigned phase.

Limitations. One board, one sensor, one day for the main dataset, three sweeps per plateau; a second board and sensor only in a 2024 dataset whose board, sensor and glucose preparation are not recorded; liquid temperature not measured in either; no reference impedance analyser on the same crystal; the fundamental unexplained; the sweep window fixed; the dataset carries a corrected firmware bias; the circle estimator is the repository’s and is unstable on one sweep. The remaining experiments are listed in the Supplementary notes (`running_list.md`, Section H): a reference-analyser measurement of the same crystal, a second board and sensor, a measured liquid temperature or a glycerol series, bench calibration of δ and ϕ_b , a long plateau with the fit running live, a larger R_{17} , a Γ -scaled window and re-acquisition with the corrected firmware.

9 Conclusion

On a DDS-swept quartz sensor read by an AD8302 gain/phase detector in a 52.3 Ω divider, exact inversion of the divider turns the two detector voltages into the complex admittance of the crystal, and the conductance — which needs only the unsigned phase — carries the resonance. On one 5 MHz sensor in air, water and isopropanol at 25 °C, overtones 1–9: the magnitude channel alone overshoots the Kanazawa–Gordon frequency shifts by 52–92 % on overtones 3–9; the maximum of the reconstructed conductance overshoots them by 20–30 % while its half-height width is within ± 7.4 % of the theory; fitting the phase-shifted Lorentzian brings the frequency shifts to $-1.4 \dots +8.2$ % and leaves the bandwidth within $-3.9 \dots +9.3$ %, with a Newtonian ratio of 0.98–1.08. The 20–30 % frequency excess is the bias $\Gamma \tan(\varphi/2)$ of the conductance maximum for a resonance rotated by $\varphi = -8$ to -27° , an angle that is a property of the instrument (reproducible to 0.3° , equal to the board phase from an independent model) and not of the load. The rotation correction is exact for this front end only when the motional resistance is large compared with the divider resistor, which holds in liquid; in air it removes half to two thirds of a bias that is itself small. The fundamental deviates by +29 to +37 % in bandwidth with every estimator and is attributed to the sensor mounting; in a second campaign on a different instrument and crystal (water and glucose 5–10 % w/v) it follows the theory, while the estimator ranking repeats (Newtonian ratio 1.20–1.41 against 1.01–1.16 on four liquids; water frequency shift +20...+36 % against +6...+13 %), glucose steps of 2.5 % w/v are resolved at more than 13 standard deviations of the replica scatter, and the rotation angle agrees within 1–3° on four overtones but is not monotonic in frequency. These numbers are from two boards and two sensors on two days and are limited by the unmeasured liquid temperature; the raw data and the analysis are released so that they can be extended.

10 Data and code availability

Raw sweeps, datalogs, calibration sweeps and all analysis scripts are in the `impedance-analysis` branch of the openQCM NEXT repository (`research/`, `paper/analysis/`), including the 2024-

05-29 glucose set ([research/glucose-2024-05-29/](#)); the instrument software and firmware are in the same repository.

References

- [1] Günter Sauerbrey. Verwendung von Schwingquarzen zur Wägung dünner Schichten und zur Mikrowägung. *Zeitschrift für Physik*, 155(2):206–222, 1959. doi: 10.1007/BF01337937.
- [2] K. Keiji Kanazawa and Joseph G. Gordon. Frequency of a quartz microbalance in contact with liquid. *Analytical Chemistry*, 57(8):1770–1771, 1985. doi: 10.1021/ac00285a062.
- [3] Diethelm Johannsmann, Arne Langhoff, and Christian Leppin. Studying soft interfaces with shear waves: principles and applications of the quartz crystal microbalance (QCM). *Sensors*, 21(10):3490, 2021. doi: 10.3390/s21103490.
- [4] Antonio Arnau. A review of interface electronic systems for AT-cut quartz crystal microbalance applications in liquids. *Sensors*, 8(1):370–411, 2008. doi: 10.3390/s8010370.
- [5] L. Rodríguez-Pardo, J. Fariña, C. Gabrielli, H. Perrot, and R. Brendel. Methodology of design of electronic circuit oscillators for QCM sensors in liquid media. In *Proceedings of the 2004 IEEE International Frequency Control Symposium and Exposition*, pages 800–805, 2004. DOI not verified.
- [6] Michael Rodahl, Fredrik Höök, Anatol Krozer, Peter Brzezinski, and Bengt Kasemo. Quartz crystal microbalance setup for frequency and Q-factor measurements in gaseous and liquid environments. *Review of Scientific Instruments*, 66(7):3924–3930, 1995. doi: 10.1063/1.1145396. Volume/pages verified; DOI from memory, not verified online.
- [7] Stephen J. Martin, Victoria Edwards Granstaff, and Gregory C. Frye. Characterization of a quartz crystal microbalance with simultaneous mass and liquid loading. *Analytical Chemistry*, 63(20):2272–2281, 1991. doi: 10.1021/ac00020a015.
- [8] Diethelm Johannsmann and Ilya Reviakine. Quartz crystal microbalance with dissipation monitoring for studying soft matter at interfaces. *Nature Reviews Methods Primers*, 4, 2024. doi: 10.1038/s43586-024-00340-4. Article number not verified; author list from indexed record.
- [9] openQCM / Novaetech S.r.l. openQCM Q-1 electronics; openQCM Q-1 shield for Teensy 4.0; openQCM Q-1 GUI software (github openqcm/openqcm_q-1). <https://openqcm.com/openqcm-q-1-electronics>, 2026. Vendor documentation, accessed 2026-10-06.
- [10] openQCM / Novaetech S.r.l. openQCM NEXT electronics and technical specifications; openQCM NEXT software and firmware (github openqcm/openqcm-next). <https://openqcm.com/openqcm-next-electronics>, 2026. Vendor documentation, accessed 2026-10-06.
- [11] Rens J. Horst, Antonis Katzourakis, Bastian T. Mei, and Sissi de Beer. Design and validation of a low-cost open-source impedance based quartz crystal microbalance for electrochemical research. *HardwareX*, 12:e00374, 2022. doi: 10.1016/j.ohx.2022.e00374.
- [12] G. G. Muñoz, M. J. Millicovsky, J. M. Reta, J. I. Cerrudo, A. Peñalva, M. Machtey, R. M. Torres, and M. A. Zalazar. Quartz crystal microbalance with dissipation monitoring for biomedical applications: open source and low cost prototype with active temperature control. *HardwareX*, 14, 2023. Article number and DOI not verified; Elsevier PII S2468067223000238.

- [13] Analog Devices. AD8302: LF–2.7 GHz RF/IF gain and phase detector, data sheet rev. a. <https://www.analog.com/media/en/technical-documentation/data-sheets/ad8302.pdf>, 2002. Accessed 2026-10-06.
- [14] Christian Leppin, Sven Hampel, Frederick Sebastian Meyer, Arne Langhoff, Ursula Elisabeth Adriane Fittschen, and Diethelm Johannsmann. A quartz crystal microbalance, which tracks four overtones in parallel with a time resolution of 10 milliseconds: application to inkjet printing. *Sensors*, 20(20):5915, 2020. doi: 10.3390/s20205915.
- [15] Darko Kajfez and Eugene J. Hwan. Q-factor measurement with network analyzer. *IEEE Transactions on Microwave Theory and Techniques*, 32(7):666–670, 1984. doi: 10.1109/TMTT.1984.1132751. Volume/pages verified; DOI from memory, not verified online.
- [16] Paul J. Petersan and Steven M. Anlage. Measurement of resonant frequency and quality factor of microwave resonators: comparison of methods. *Journal of Applied Physics*, 84(6):3392–3402, 1998. doi: 10.1063/1.368498. Volume/page verified; DOI from memory, not verified online.
- [17] M. S. Khalil, M. J. A. Stoutimore, F. C. Wellstood, and K. D. Osborn. An analysis method for asymmetric resonator transmission applied to superconducting devices. *Journal of Applied Physics*, 111(5):054510, 2012. doi: 10.1063/1.3692073. Volume/article verified; DOI from memory, not verified online.
- [18] S. Probst, F. B. Song, P. A. Bushev, A. V. Ustinov, and M. Weides. Efficient and robust analysis of complex scattering data under noise in microwave resonators. *Review of Scientific Instruments*, 86(2):024706, 2015. doi: 10.1063/1.4907935.
- [19] Leonid Daikhin and Michael Urbakh. Effect of surface film structure on the quartz crystal microbalance response in liquids. *Langmuir*, 12(26):6354–6360, 1996. doi: 10.1021/la950763d. DOI from memory; not verified online.