
Device Parameters Summary

Device ID : S72026

Actuator Type: A5L3.3(C1)

Actuator Mode : Gimbal-less Dual-Axis Quasistatic

Mirror Type and Size : Bonded mirror of 4.2mm diameter

Mirror Coating : Aluminum

Maximum Mech. Angle - X Axis [degrees] : 2.7280

Maximum Mech. Angle - Y Axis [degrees] : 2.7298

Maximum Vdifference - X Axis [V] : 175

Maximum Vdifference - Y Axis [V] : 175

Driver Bias Voltage (Vbias) [V] : 90

Maximum Mech. Angle - Coupled Axes [degrees] : 3.4188

Resonant Frequency - X Axis [Hz] : 889

Resonant Frequency - Y Axis [Hz] : 891

Quality Factor - X Axis : 52


Quality Factor - Y Axis : 56

Recommended LPF Cutoff Frequency (6th Order Bessel) [Hz] : 380


Date and Time Report was Created: 24-May-2023 at 13:47:14

Static Response

Voltage vs. Mech. Angle - Individual Axes

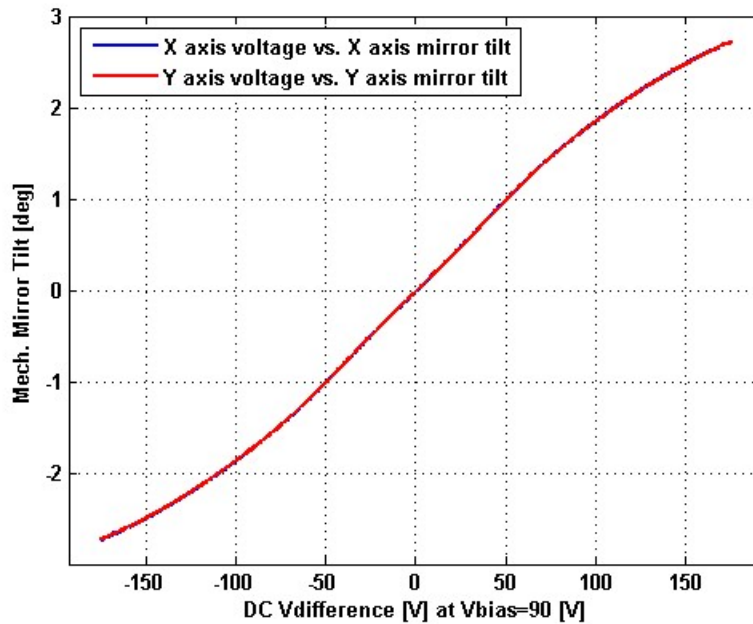


Voltage vs. Mech. Angle - Coupled Axes

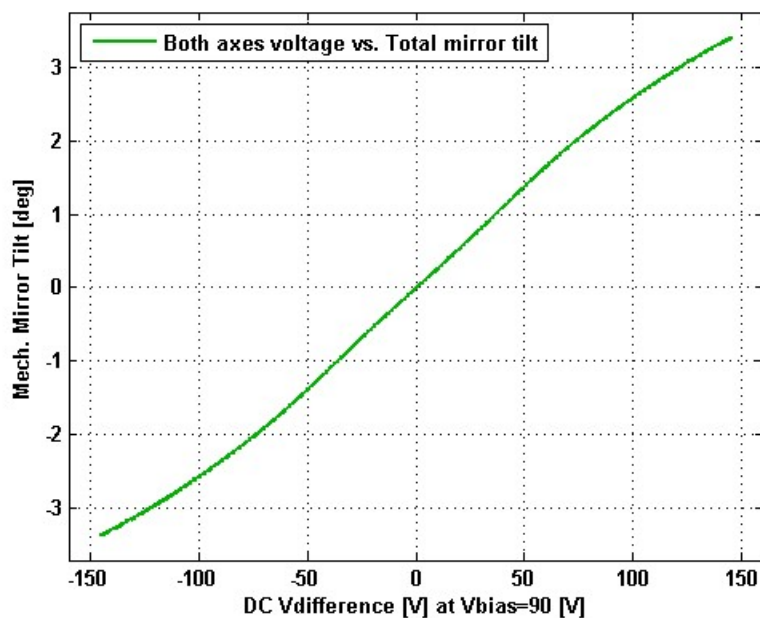


Frequency Response

Small Signal Frequency Response - Magnitude

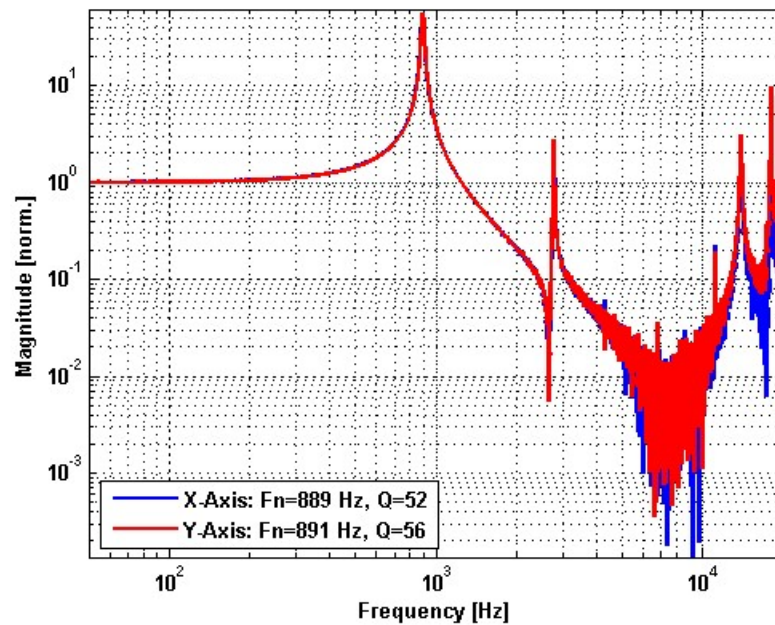


Small Signal Frequency Response - Phase

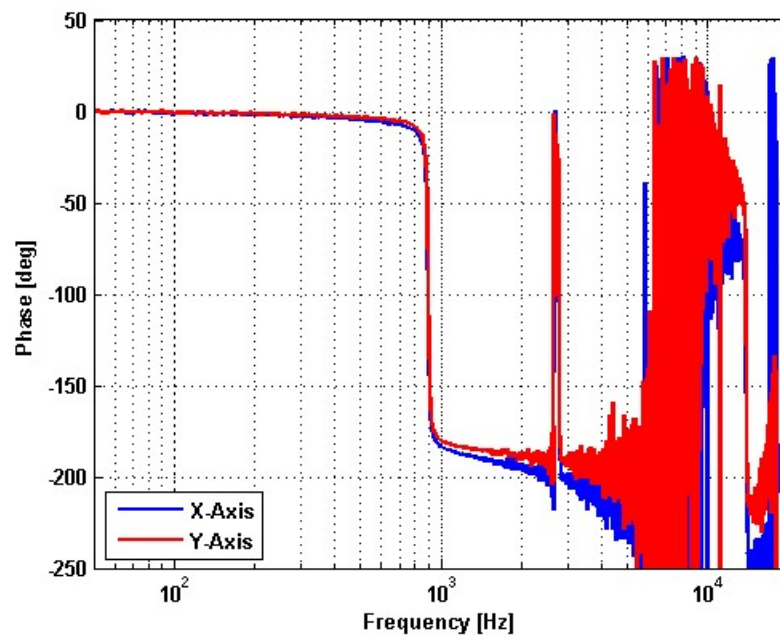


Step Response

X-Axis Step Response

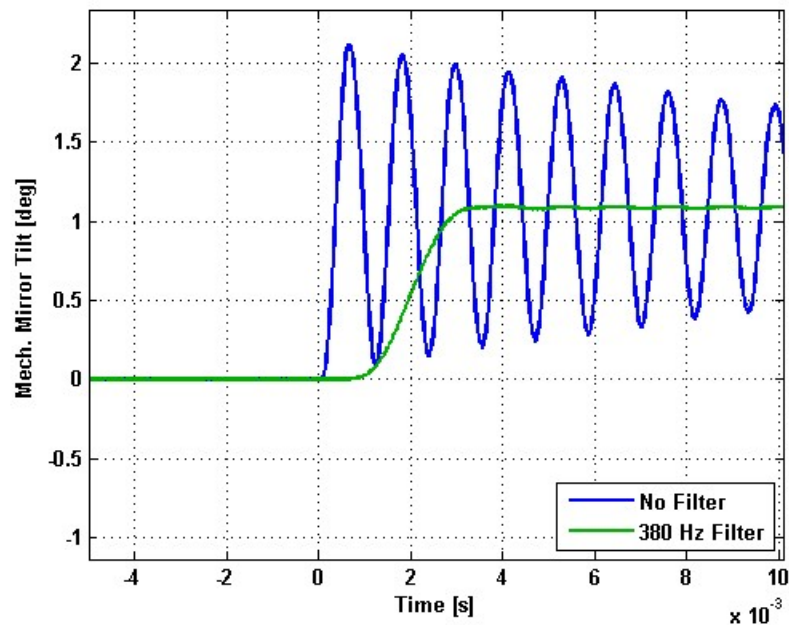


Y-Axis Step Response

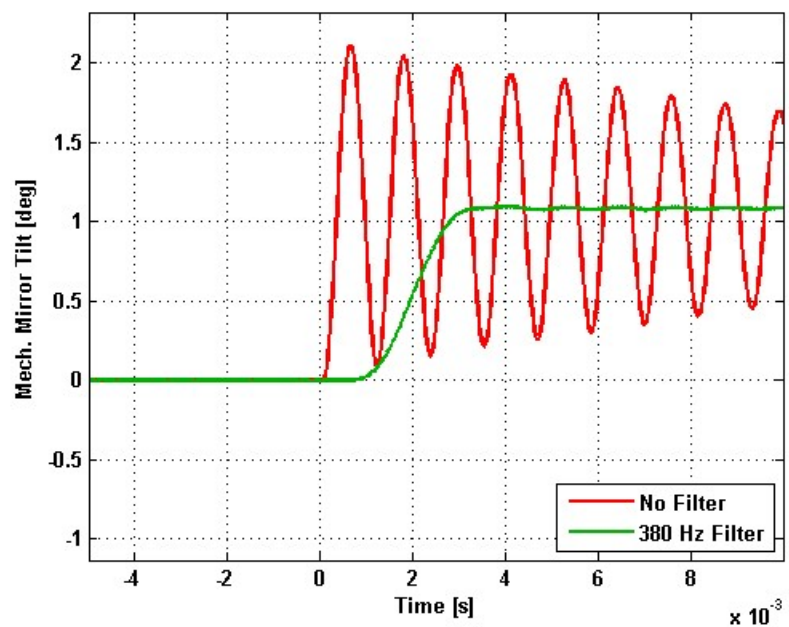


2D Lookup Tables

Voltage vs. X Mech. Angle - Lookup Table

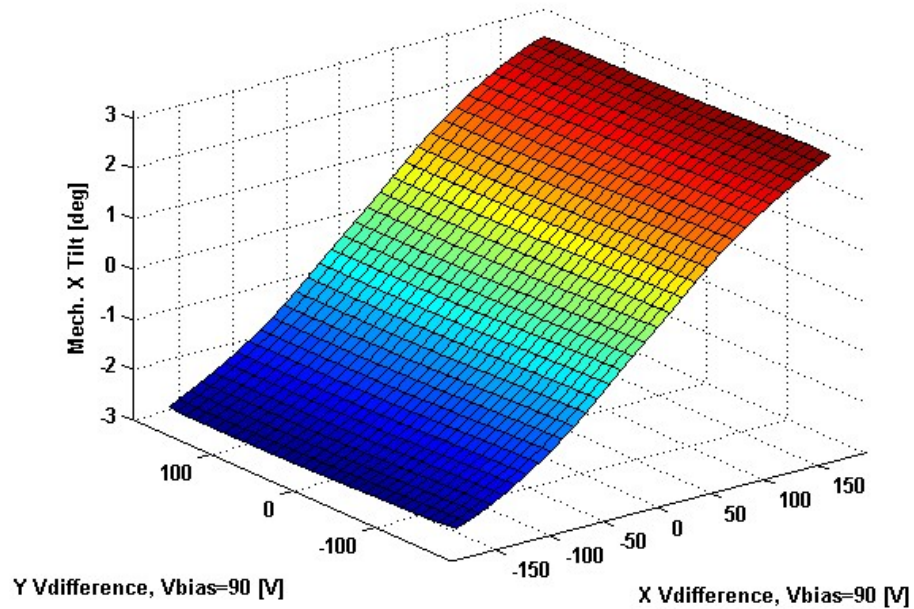

Voltage vs. Y Mech. Angle - Lookup Table

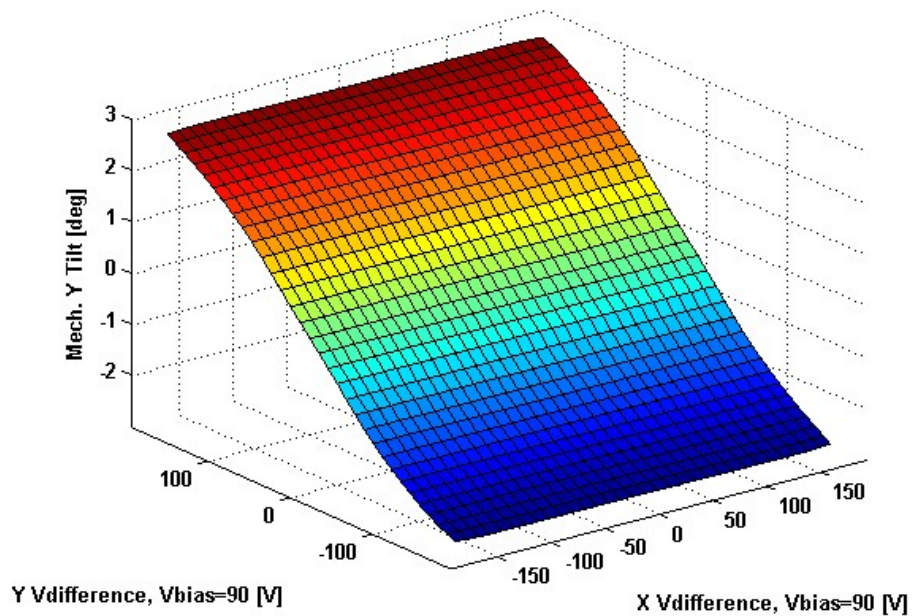

Y vs. X Tilt - Addressable Mech. Angles

