

OBI 1

© Silicon Labs, Inc.

License Statement

Copyright 2020 Silicon Labs Inc.

This document, all associated software, and derivatives thereof are licensed under the Solderpad License, Version 2.0 (the "License").

Use of this file means you agree to the terms and conditions of the License and are in full compliance with the License.

You may obtain a copy of the License at:

<https://solderpad.org/licenses/SHL-2.0/>

Unless required by applicable law or agreed to in writing, software and hardware implementations thereof distributed under the License is distributed on an **"AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, EITHER EXPRESSED OR IMPLIED.**

See the License for the specific language governing permissions and limitations under the License.

Revision History

Revision	Date	Author	Comment
v1.0_draft00	12/2/2019	A.Bink	<ul style="list-style-type: none"> Initial Revision
v1.0_draft01	1/31/2020	A.Bink	<ul style="list-style-type: none"> Renamed to OBI 1 (Open Bus Interface, version 1). Made all OBI signal names lower case and all parameter and property names upper case. Removed ERROR_SIGNALING, RREADY_SIGNALING, and USER_SIGNALING properties. Redefined DUSER to only be valid for read transactions and renamed to ruser. Added wuser signal. Added ADDR_WIDTH property. Introduced COMB_GNT property. Defined address and response phase more precisely. Defined address and response phase signal validity more precisely. Restricted DATA_WIDTH to 32 and 64. Defined byte lane enables and address LSBs more precisely. Introduced channel names (A, R). Removed definitions related to misaligned load/store and address/response phase forwarding (as they are not related to the OBI protocol itself). Added transaction IDs.
v1.0	3/5/2020	A.Bink	<ul style="list-style-type: none"> Clarified address/response phase definition (Figure 4). Added comments on unpredictable subordinate behavior in case of invalid <i>be</i>, <i>addr</i> signaling. Added explanation on required consistency between <i>be</i> and <i>addr</i> values. Added note that OBI is (only) defined for little-endian systems. Redefined manner in which outstanding transactions are counted. Updated proposed CV32E40P subsystem.
v1.1_draft00	4/1/2020	A.Bink	<ul style="list-style-type: none"> Fixed requirement numbering.
v1.1	8/21/2020	A.Bink	<ul style="list-style-type: none"> Clarified that stability requirements do not apply to undefined signals (see comments below R-3.1.1: and R-4.1.1:).
v1.2	4/15/2021	A.Bink	<ul style="list-style-type: none"> Replaced RI5CY reference with CV32E40P reference. Added optional <i>prot</i> signal (Table 1, Table 6, 3.4.5). Added optional <i>memtype</i> signal (Table 1, Table 6, 3.4.6). Added optional <i>atop</i> signal (Table 1, Table 6, 3.4.7). Added optional <i>exokay</i> signal (Table 1, Table 6, 3.4.9). Added definition of 'atomic transaction' (3.3). Added definition of 'exclusive transaction' (3.3). Added optional <i>reqpar</i>, <i>gntpar</i>, <i>rvalidpar</i> and <i>rreadypar</i> parity signals (3.4.10) Added optional <i>achk</i> and <i>rchk</i> checksum signals (3.4.11)
v1.3	1/24/2022	A.Bink	<ul style="list-style-type: none"> Added optional <i>dbg</i> signal (Table 1, Table 6, 3.4.7).
v1.4	3/8/2022	A.Bink	<ul style="list-style-type: none"> Fixed typo in R-18: and R-19: . Relaxed <i>achk</i> related requirements for <i>wdata</i> and <i>wuser</i> for read transactions from manager's point of view (R-18.2:).

			<ul style="list-style-type: none"> Strengthened <i>achk</i> related requirements for <i>wdata</i> and <i>wuser</i> for read transactions from subordinate's point of view. Not backward compatible to v1.2, v1.3 (R-18.2:). Strengthened <i>rchk</i> related requirements for <i>rdata</i> and <i>ruser</i> for write transactions from manager's point of view. Not backward compatible to v1.2, v1.3 (R-19.2:). Relaxed <i>rchk</i> related requirements for <i>rdata</i> and <i>ruser</i> for write transactions from subordinate's point of view (R-19.2:).
v1.5.0	7/19/2022	A.Bink	<ul style="list-style-type: none"> Clarification on <i>be</i> signal semantics (R-7.1:). Clarification on integrity checking for atomic transactions (R-20:). Clarified alignment restriction for atomic memory transactions (R-11.4:). Clarified <i>be</i> restriction for atomic memory transactions (R-11.5:). Generalized R-12: to apply for all atomic transactions and restricted R-12: to take <i>aid</i> into account. Typo fix (Table 4). Rephrased R-18.2: and R-19.2: . Add INTEGRITY property (Table 2). Add FULL_BE property (Table 2, R-7: , R-8:).
v1.6.0	3/15/2023	A.Bink	<ul style="list-style-type: none"> Inclusive language updates. Added (optional) <i>mid</i> signal and MID_WIDTH parameter (Table 1, Table 2).

Table of contents

1	References	11
2	Introduction.....	12
2.1	General documentation notes.....	12
3	Functional description	13
3.1	Port list.....	14
3.2	Properties	15
3.3	Protocol adherence.....	15
3.3.1	Clock and reset	19
3.3.2	Handshake process.....	19
3.4	Signals.....	21
3.4.1	be	21
3.4.2	addr	22
3.4.3	aid, rid	22
3.4.4	prot	22
3.4.5	memtype	23
3.4.6	dbg	23
3.4.7	atop	23
3.4.8	exokay	24
3.4.9	reqpar, gntpar, rvalidpar, rreadypar.....	25
3.4.10	achk, rchk	25
3.5	Dependencies.....	26
3.6	Timing.....	27
3.7	Tie offs.....	27
3.8	Comparison with the RI5CY bus interface	27

List of figures

Figure 1 RISC-V subsystem (proposal for OpenHW BHAG).....	13
Figure 2 Basic OBI transfer (plus its mapping to AHB5)	16
Figure 3 Outstanding (accepted) transactions	18
Figure 4 Address phase and response phase example	21

List of tables

Table 1 OBI port list	14
Table 2 OBI properties	15
Table 3 prot signal.....	22
Table 4 memtype signal	23
Table 5 Relationship between <i>err</i> and <i>exokay</i>	24
Table 6 OBI default tie offs.....	27

List of requirements

R-1: OBI links shall rely on a single interface clock (<i>clk</i>) and reset (<i>reset_n</i>) that is common between the manager and subordinate.	19
R-1.1: Managers and subordinates shall only ever sample OBI signals on the positive edge of <i>clk</i>	19
R-1.2: Managers and subordinates shall never generate OBI signals on the negative edge of <i>clk</i>	19
R-1.3: OBI signals shall not be assumed to remain stable <i>between clk</i> edges (i.e. multi-cycle path exceptions shall never be used).	19
R-2: OBI protocol compliance requirements always apply except for during OBI reset assertion.	19
R-2.1: During reset assertion <i>req</i> shall be driven low.	19
R-2.2: During reset assertion <i>rvalid</i> shall be driven low.	19
R-3: The address channel A shall use a two-way control handshake (<i>req+gnt</i>) between manager and subordinate.	19
R-3.1: The manager shall assert <i>req</i> to indicate the validity of the address phase signals.	19
R-3.1.1: The manager shall keep its address phase signals stable during the address phase.	20
R-3.1.2: The manager shall not de-assert (retract) <i>req</i> until after the last cycle of the address phase.	20
R-3.2: The subordinate shall indicate its readiness to accept the address phase transfer by asserting <i>gnt</i>	20
R-3.2.1: The subordinate shall be allowed to assert <i>gnt</i> at any time (even before the corresponding <i>req</i>).	20
R-3.2.2: The subordinate shall be allowed to de-assert (retract) <i>gnt</i> at any time.	20
R-4: The response channel R shall use a two-way control (<i>rvalid+rready</i>) between subordinate and manager.	20
R-4.1: The subordinate shall assert <i>rvalid</i> to indicate the validity of the response phase signals.	20
R-4.1.1: The subordinate shall keep its response phase signals stable during the response phase.	20
R-4.1.2: The subordinate shall not de-assert (retract) <i>rvalid</i> until after the last cycle of the response phase.	20
R-4.1.3: Validity of <i>rdata</i> shall only be implied for read transactions.	20
R-4.2: The manager shall indicate its readiness to accept the response phase transfer by asserting <i>rready</i>	20
R-4.2.1: The manager shall be allowed to assert <i>rready</i> at any time (even before the corresponding <i>rvalid</i>).	20
R-4.2.2: The manager shall be allowed to de-assert (retract) <i>rready</i> at any time.	20
R-5: The response phase transfer for a transaction shall not start before the corresponding address phase transfer has finished (i.e. <i>req</i> and <i>gnt</i> need to have been sampled high before <i>rvalid=1</i> is allowed).	20
R-6: Response phase transfers shall be sent in the same order as their corresponding address phase transfers.	21
R-7: (BE_FULL = 0) The <i>be</i> values during the address phase of a transaction shall be as follows:	21
R-7.1: <i>be[N]</i> shall be the byte enable signal for <i>(r/w)data[(N*8)+7 : (N*8)+0]</i>	21
R-8: (BE_FULL = 1) The <i>be</i> values during the address phase of a transaction shall not have any value restrictions.	22
R-8.1: <i>be[N]</i> shall be the byte enable signal for <i>(r/w)data[(N*8)+7 : (N*8)+0]</i>	22
R-9: The least significant <i>addr</i> bits (i.e. <i>addr[1:0]</i> in case DATA_WIDTH = 32, <i>addr[2:0]</i> in case DATA_WIDTH = 64) shall be consistent with the <i>be</i> value during the address phase of a transaction, i.e.:	22
R-10: For each OBI transaction an OBI subordinate shall 'mirror back' the value received on <i>aid</i> via <i>rid</i> (i.e. the <i>rid</i> for the response phase transfer shall be equal to the <i>aid</i> of the corresponding address phase transfer).	22
R-11: The <i>atop</i> values during the address phase of a transaction shall be as follows:	23

R-11.1:	<i>atop[5]</i> shall be 1 for a transaction related to any atomic memory transaction (LR.W/D, SC.W/D, AMOSWAP.W/D, AMOADD.W/D, AMOXOR.W/D, AMOAND.W/D, AMOOR.W/D, AMOMIN.W/D, AMOMAX.W/D, AMOMINU.W/D, AMOMAXU.W/D as specified in [RISC-V-UNPRIV]) and 0 otherwise.	23
R-11.2:	<i>atop[4:0]</i> shall be equal to bits [31:27] of the instruction as specified in [RISC-V-UNPRIV] if the transaction is due to the execution of an Atomic instruction and 0 otherwise:	23
R-11.3:	The transaction associated with a LR.W shall have <i>we</i> = 0; the other atomic memory transactions (i.e. SC.W, AMO*) shall use <i>we</i> = 1.	24
R-11.4:	The address <i>addr</i> used in an atomic memory transaction shall be naturally aligned.....	24
R-11.5:	The byte enables <i>be</i> used in an atomic memory transaction shall indicate a word or double-word transfer as implied by the related *.W or *.D instruction.....	24
R-11.6:	The required initiator ID for atomic transactions shall be <i>aid</i>	24
R-12:	An OBI manager shall prevent initiating a transaction if it would lead to multiple outstanding transactions with the same <i>aid</i> of which at least one transaction is an atomic transaction.	24
R-13:	<i>exokay</i> shall indicate the success (<i>exokay</i> = 1) or failure (<i>exokay</i> = 0) for exclusive transactions.	24
R-13.1:	For a LR.W/D related transaction (i.e. <i>atop[5]</i> = 1'b1, <i>atop[4:0]</i> = 5'h2) success shall be signaled via <i>exokay</i> (only) if the target sending the response supports exclusive accesses.	24
R-13.2:	For a SC.W/D related transaction (i.e. <i>atop[5]</i> = 1'b1, <i>atop[4:0]</i> = 5'h3) success shall be signaled via <i>exokay</i> (only) if the target sending the response supports exclusive accesses and the related reservation is still valid and the reservation set contains the bytes being written.	24
R-13.3:	Other transactions (i.e. with <i>atop[5]</i> != 1'b1 or <i>atop[4:0]</i> not in {5'h2, 5'h3}) shall signal <i>exokay</i> = 0.	24
R-13.4:	The <i>exokay</i> and <i>err</i> signals shall adhere to Table 5.	24
R-14:	The <i>reqpar</i> signal shall be the inverse of <i>req</i> at each rising <i>clk</i> edge (when not in reset).	25
R-15:	The <i>gntpar</i> signal shall be the inverse of <i>gnt</i> at each rising <i>clk</i> edge (when not in reset).	25
R-16:	The <i>rvalidpar</i> signal shall be the inverse of <i>rvalid</i> at each rising <i>clk</i> edge (when not in reset).	25
R-17:	The <i>rreadypar</i> signal shall be the inverse of <i>rready</i> at each rising <i>clk</i> edge (when not in reset).	25
R-18:	The <i>achk</i> signal shall provide a checksum for the other (i.e. not <i>achk</i> itself) address phase signals in a platform defined manner.	25
R-18.1:	The <i>achk</i> only needs to provide a matching checksum for the other address phase signals at rising <i>clk</i> edges with <i>req</i> = 1.	25
R-18.2:	The <i>wdata</i> and <i>wuser</i> are allowed to be excluded from the integrity scheme for read transactions in one of the following manners:.....	25
R-18.2.1:	The <i>achk</i> signal bit(s) can be specified to not depend on <i>wdata</i> or <i>wuser</i> for read transactions, or	25
R-18.2.2:	The <i>achk</i> signal bit(s) that do depend on <i>wdata</i> or <i>wuser</i> for read transactions shall be clearly documented and shall not be required to be checked for read transactions.	25
R-19:	The <i>rchk</i> signal shall provide a checksum for the other (i.e. not <i>rchk</i> itself) response phase signals in a platform defined manner.	25
R-19.1:	The <i>rchk</i> only needs to provide a matching checksum for the other response phase signals at rising <i>clk</i> edges with <i>rvalid</i> = 1.	25
R-19.2:	The <i>rdata</i> and <i>ruser</i> signals are allowed to be excluded from the integrity scheme for write transactions in one of the following manners:	25
R-19.2.1:	The <i>rchk</i> signal bit(s) can be specified to not depend on <i>rdata</i> or <i>ruser</i> for write transactions, or	25
R-19.2.2:	The <i>rchk</i> signal bit(s) that do depend on <i>rdata</i> or <i>ruser</i> for write transactions shall be clearly documented and shall not be required to be checked for write transactions.	26

- R-20:** Atomic transactions shall be treated as both a read and a write transaction with respect to *achk/rchk* usage. 26
- R-21:** OBI link outputs (excluding *gnt* and *gntpar*) shall not combinatorially depend on OBI link inputs, specifically (but not limited to):26
- R-21.1:** For a manager, *req* shall not combinatorially depend on *gnt* or *rvalid* (nor on *gntpar* or *rvalidpar*).26
- R-21.2:** For a manager, *rready* shall not combinatorially depend on *gnt* or *rvalid* (nor on *gntpar* or *rvalidpar*). ..26
- R-21.3:** For a subordinate, *rvalid* shall not combinatorially depend on *req* or *rready* (nor on *reqpar* or *rreadypar*). 26
- R-22:** (COMB_GNT == False) *gnt* (and *gntpar*) shall not combinatorially depend on OBI link inputs (default COMB_GNT = false).26
- R-23:** (COMB_GNT == True) *gnt* (and *gntpar*) is allowed to combinatorially depend on OBI link inputs.....26
- Above constraints apply to single OBI links. If a module contains multiple OBI links additional requirements exist between these links.....26
- R-24:** OBI link outputs of any manager interface shall not combinatorially depend on OBI link inputs of any other manager interface.26
- R-25:** OBI link outputs of any subordinate interface shall not combinatorially depend on OBI link inputs of any other subordinate interface.26
- R-26:** A transaction's *req* shall not depend on the *gnt* (or *gntpar*) for that transaction.....26
- R-27:** A transaction's *rvalid* shall not depend on the *rready* (or *rreadypar*) for that transaction.....27
- R-28:** Incompletely connected OBI interfaces shall be tied off as shown in Table 6 unless specified otherwise. .27

1 References

Reference ID	Reference Title	Comment/Location
[ARM-AMBA5-AHB]	ARM AMBA 5 AHB Protocol Specification (ARM IHI 0033B.b (ID102715))	https://developer.arm.com/docs/ihi0033/bb/arm-amba-5-ahb-protocol-specification
[ARM-AMBA5-AXI]	AMBA AXI and ACE Protocol Specification (ARM IHI 0022G (ID073019))	https://static.docs.arm.com/ihi0022/g/IHI0022G_amba_axi_protocol_spec.pdf
[OPENHW-CV32E40P]	CV32E40P User Manual	https://cv32e40p.readthedocs.io/en/latest/
[LOWRISC-IBEX-UM]	lowRISC Ibex User Manual	https://ibex-core.readthedocs.io/en/latest/
[RISC-V-UNPRIV]	RISC-V Instruction Set Manual, Volume I: User-Level ISA, Document Version 20191213 (December 13, 2019)	https://github.com/riscv/riscv-isa-manual/releases/download/Ratified-IMAFDQC/riscv-spec-20191213.pdf
[RISC-V-PRIV]	RISC-V Instruction Set Manual, Volume II: Privileged Architecture, document version 20190608-Base-Ratified (June 8, 2019).	https://github.com/riscv/riscv-isa-manual/releases/download/Ratified-IMFDQC-and-Priv-v1.11/riscv-privileged-20190608.pdf

2 Introduction

This document is the Architecture Specification for the OBI (Open Bus Interface) standard. To enable future extensions this specific document relates to OBI 1 (the version number will be increased for major updates).

The RISC-V Foundation (only) specifies the RISC-V ISA, not a specific implementation nor a related bus interface. OBI is the Open Bus Interface protocol used for point-to-point bus interface connections of CV32E40* CPUs ([OPENHW-CV32E40P]) and related bus infrastructure components. The protocol is a request-grant based protocol similar to the AMBA AXI protocol ([ARM-AMBA5-AXI]).

The starting point for the OBI definition is the custom bus interface as used on the RI5CY and Ibex ([LOWRISC-IBEX-UM]) RISC-V cores. The protocol is clarified, restricted, extended and generalized to ease design of bus infrastructure components, to ease interfacing to standard AMBA protocols ([ARM-AMBA5-AHB], [ARM-AMBA5-AXI]), and to ease system level timing.

Bus protocol compliance of bus managers (initiators) and subordinates (targets) is an essential requirement of chip platforms. These protocols allow modules to interface with each other in a known standard way. Potential bugs that can result from breaking protocol range from low-order issues like incorrect write/read data all the way to full system deadlock.

2.1 General documentation notes

This document contains some color-coded text, e.g.:

- Highlighted text in yellow are specifications that still have ongoing investigation or may be of particular interest to reviewers before ratification
- Red text is used for notes to the reader

Additionally, the documentation contains a commentary format:

The commentary format is intended to provide relevant background regarding a design decision. It should not be used to communicate key architectural elements and specifications. The reader should be able to extract all architectural requirements even with ignoring commentary sections

Some requirements only apply under certain conditions. Such conditions are included as (condition) at the start of a requirement.

3 Functional description

OBI is the bus interface protocol used for point-to-point bus interface connections on CV32E40* and related bus infrastructure components. All lines going in and out of the OBI crossbar (OBIXBAR) (and all lines inside the OBIXBAR) in Figure 1 are OBI links. Each OBI link consists of a so-called Address Channel (**A**) and a Response Channel (**R**).

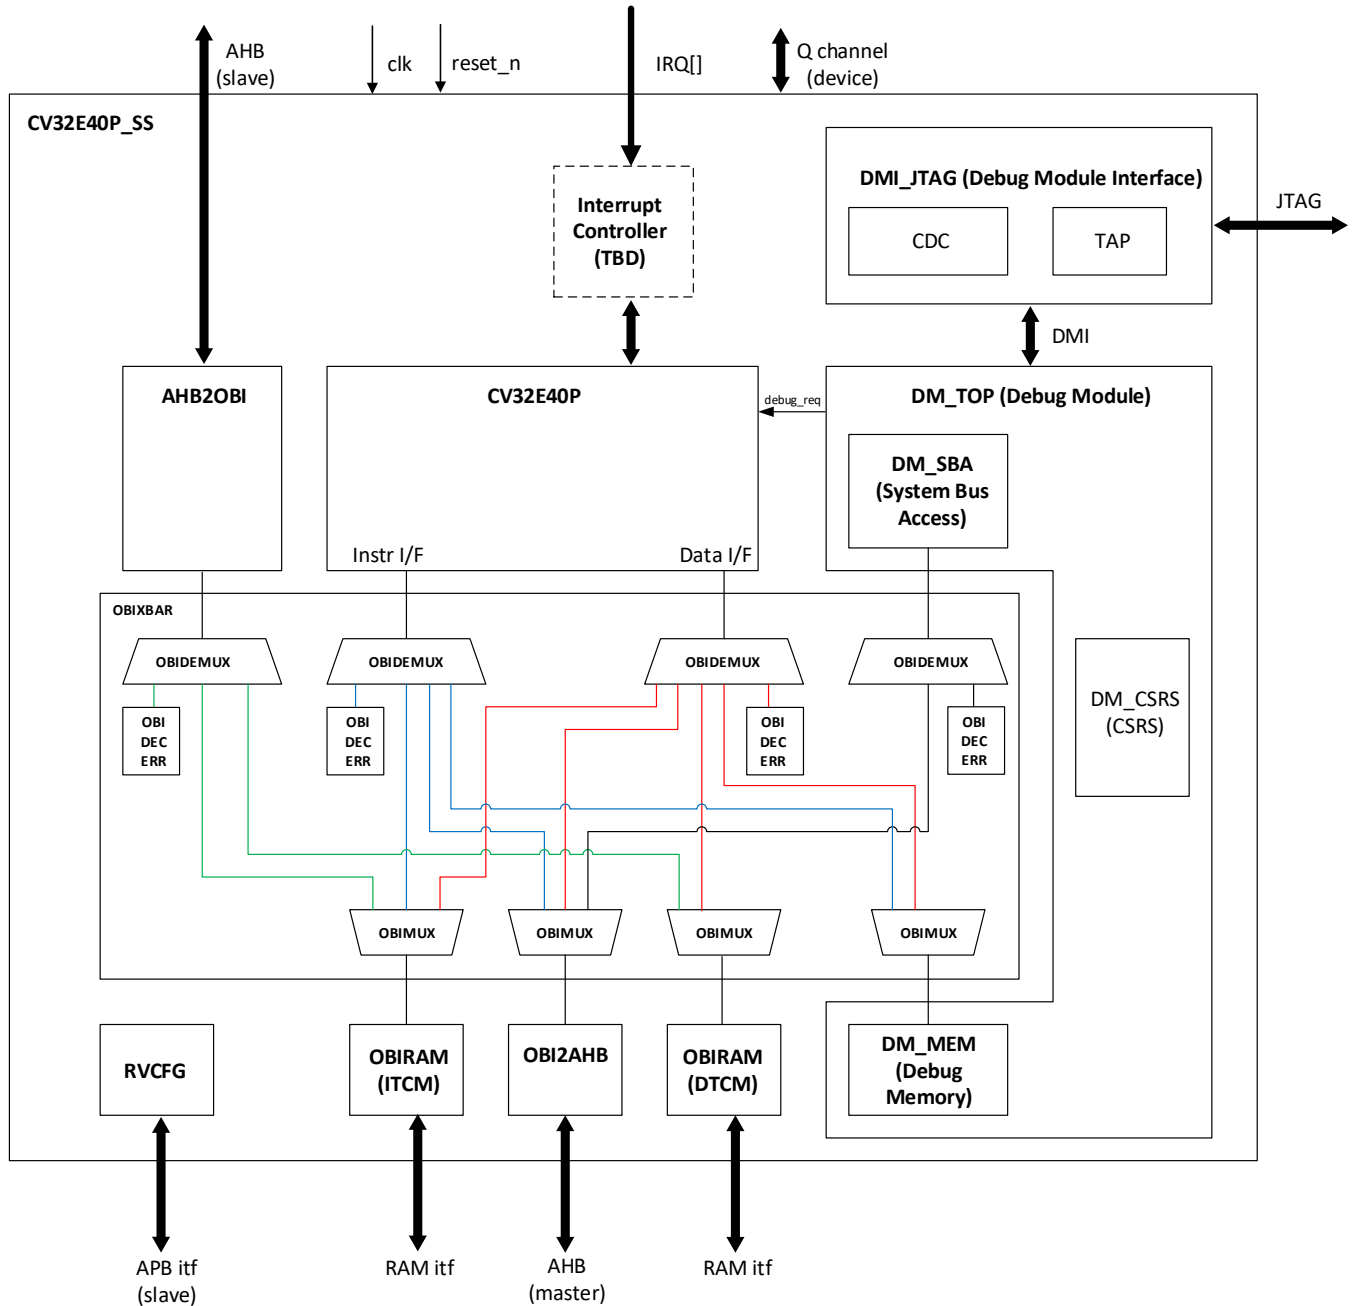


Figure 1 RISC-V subsystem (proposal for OpenHW BHAG)

3.1 Port list

Table 1 shows the pin names used in point-to-point OBI links. Note that this list differs slightly from the used OBI port names in RI5CY and CV32E40P (as in these CPUs the OBI port names are prefixed with *instr_* or *data_* (to differentiate the instruction and data side bus interfaces) and postfixed with *_i* or *_o* (to indicate the port direction)). Furthermore, RI5CY and CV32E40P do not support the *err*, *auserr*, *wuser*, *atop*, *memtype*, *prot*, *dbg*, *ruser*, *aid*, *mid*, *rid*, *reqpar*, *gntpar*, *rvalidpar*, *rreadypar*, *achk*, *rchk* extensions nor the *rready* handshake signal. Additions to the RI5CY bus interface are highlighted in green. Furthermore, non-used signals are omitted from these RISC-V cores (e.g. *we*, *be*, and *wdata* on the instruction interface).

Table 1 OBI port list

Name	Source	Destination	Description
Global signals			
clk	Clock source	All	The bus clock times all bus transfers. All signal timings are related to the rising edge of <i>clk</i> .
reset_n	Reset controller	All	The bus reset signal is active LOW and resets the system and the bus. This is the only active LOW signal.
A Channel signals			
req	Manager	Subordinate	Address transfer request. <i>req</i> =1 signals the availability of valid address phase signals.
gnt	Subordinate	Manager	Grant. Ready to accept address transfer. Address transfer is accepted on rising <i>clk</i> with <i>req</i> =1 and <i>gnt</i> =1.
addr[] ^{1, 5}	Manager	Subordinate	Address
we	Manager	Subordinate	Write Enable, high for writes, low for reads.
be[] ^{2, 5}	Manager	Subordinate	Byte Enable. Is set for the bytes to write/read.
wdata[] ^{2, 5}	Manager	Subordinate	Write data. Only valid for write transactions. Undefined for read transactions.
auserr[] ^{3, 4}	Manager	Subordinate	Address Phase User signals. Valid for both read and write transactions.
wuser[] ^{3, 4}	Manager	Subordinate	Additional Address Phase User signals. Only valid for write transactions. Undefined for read transactions.
aid[] ⁴	Manager	Subordinate	Address Phase transaction identifier.
atop[5:0] ^{4, 6}	Manager	Subordinate	Atomic Operation.
memtype[1:0] ⁴	Manager	Subordinate	Memory type attributes.
mid[] ^{4, 8}	Manager	Subordinate	Manager ID.
prot[2:0] ⁴	Manager	Subordinate	Protection attributes.
dbg	Manager	Subordinate	Debug access.
reqpar ^{4, 7}	Manager	Subordinate	Parity bit for <i>req</i> signal (odd parity).
gntpar ^{4, 7}	Subordinate	Manager	Parity bit for <i>gnt</i> signal (odd parity).
achk[] ^{4, 7}	Manager	Subordinate	Checksum for address phase signals (except <i>achk</i> itself).
R Channel signals			
rvalid	Subordinate	Manager	Response transfer request. <i>rvalid</i> =1 signals the availability of valid response phase signals. Used for both reads and writes.
rready ⁴	Manager	Subordinate	Ready to accept response transfer. Response transfer is accepted on rising <i>clk</i> with <i>rvalid</i> =1 and <i>rready</i> =1.
rdata[] ^{2, 5}	Subordinate	Manager	Read data. Only valid for read transactions. Undefined for write transactions.
err ⁴	Subordinate	Manager	Error.
ruser[] ^{3, 4}	Subordinate	Manager	Response phase User signals. Only valid for read transactions. Undefined for write transactions.
rid[] ⁴	Subordinate	Manager	Response Phase transaction identifier.
exokay ^{4, 6}	Subordinate	Manager	Exclusive transaction okay.
rvalidpar ^{4, 7}	Subordinate	Manager	Parity bit for <i>rvalid</i> signal (odd parity).

rradypar ^{4,7}	Manager	Subordinate	Parity bit for <i>rready</i> signal (odd parity).
rchk ^{4,7}	Subordinate	Manager	Checksum for address phase signals (except <i>rchk</i> itself).

¹ Default address width is 32-bit. Address width is controlled by the ADDR_WIDTH property.
² Default data width is 32-bit (so 32-bit rdata and wdata, 4-bit be). Data width is controlled by the DATA_WIDTH property.
³ Default *auser*, *wuser* and *ruser* are not present (0 width). Their widths are controlled by the AUSER_WIDTH, WUSER_WIDTH and RUSER_WIDTH properties respectively. The semantics of these signals is implementation defined.
⁴ New signals not present on RI5CY, Ibex, or CV32E40P. The tie-off values as specified in section 3.7 shall be assumed if signals are not present.
⁵ The OBI protocol is defined only for little-endian systems.
⁶ Only present on cores that (optionally) support the A extension.
⁷ Only present on cores that (optionally) support interface integrity. *rradypar* can be omitted if *rready* is omitted.
⁸ Default *mid* is not present (0 width). Its width is controlled by the MID_WIDTH property. The semantics of this signals is implementation defined.

3.2 Properties

Table 2 OBI properties

Property	Default Value	Comment
COMB_GNT	False	Defines whether <i>gnt</i> is allowed to combinatorially depend on OBI inputs.
AUSER_WIDTH	0	Width of the <i>auser</i> signal. RI5CY, Ibex, CV32E40P do not have the <i>auser</i> signal.
WUSER_WIDTH	0	Width of the <i>wuser</i> signal. RI5CY, Ibex, CV32E40P do not have the <i>wuser</i> signal.
RUSER_WIDTH	0	Width of the <i>ruser</i> signal. RI5CY, Ibex, CV32E40P do not have the <i>ruser</i> signal.
ADDR_WIDTH	32	Width of the <i>addr</i> signal.
DATA_WIDTH	32	Width of the <i>rdata</i> and <i>wdata</i> signals. <i>be</i> width is DATA_WIDTH / 8. Valid DATA_WIDTH settings are 32 and 64.
ID_WIDTH	0	Width of the <i>aid</i> and <i>rid</i> signals.
MID_WIDTH	0	Width of the <i>mid</i> signal.
ACHK_WIDTH	0	Width of the <i>achk</i> signal.
RCHK_WIDTH	0	Width of the <i>rchk</i> signal.
INTEGRITY	0	Defines whether interface integrity signals are present.
BE_FULL	0	Defines whether full <i>be</i> flexibility is allowed.

3.3 Protocol adherence

OBI is a point-to-point protocol (between manager and subordinate), similar to a much simplified AXI protocol. The protocol works as follows (simplified, details omitted in this initial description).

An OBI link consists of two channels (plus a global *clk* and *reset_n*):

- The address channel, called the **A** channel.
- The response channel, called the **R** channel.

An OBI transaction consists of two transfers:

- An address phase transfer over the A channel.
- A response phase transfer over the R channel.

The address phase transfer is as follows:

- The manager indicates the validity of its address phase signals (i.e. *addr*, *wdata*, *we*, *be*, *auser*, *aid*, *mid*, *wuser*, *prot*, *memtype*, *dbg*, *atop*, *achk*) by settings its request (*req*) high.
- The subordinate indicates its readiness to accept the address phase signals by setting grant (*gnt*) high.
- The address phase of a transaction starts in the cycle in which *req* goes high and completes on the rising *clk* edge when both *req* and *gnt* are high.

Note that the write data (wdata) is also part of the address phase signals in the A channel.

The response phase transfer is as follows:

- After a granted request (in the A channel), the subordinate indicates the validity of its response phase signals (i.e. *rdata*, *err*, *ruser*, *rid*, *exokay*, *rchk*) by setting *rvalid* high.
- The manager indicates its readiness to accept the response phase signals by setting *rready* high.
- The response phase of a transaction starts in the cycle in which *rvalid* goes high and completes on the rising *clk* edge when both *rvalid* and *rready* are high.

*Note that the response phase of a transaction per definition has no overlap with the address phase of that same transaction. However, the response phase does not necessarily immediately follow the address phase as wait states can be inserted in between these two phases by keeping *rvalid* low (and this is not considered part of the response phase).*

Figure 2 show a basic (fastest possible) OBI transaction plus its translation to AHB5.

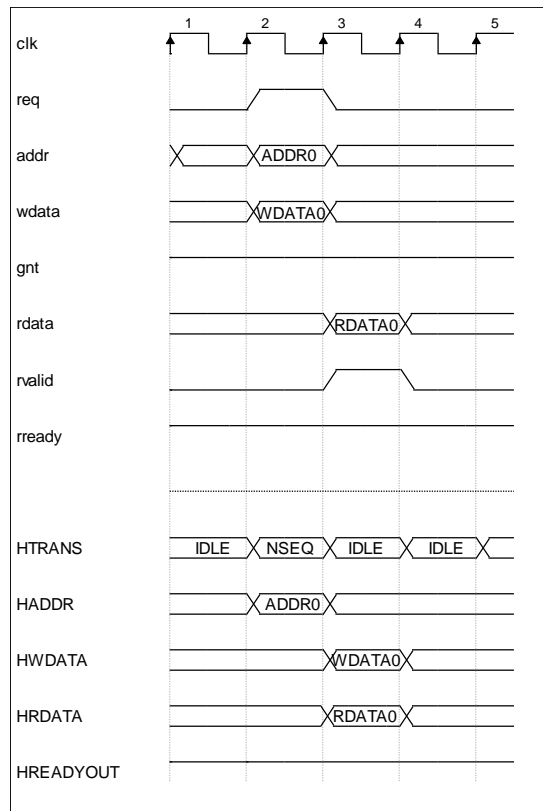


Figure 2 Basic OBI transfer (plus its mapping to AHB5)

The following definitions will be used in the remainder of this document:

- *Address phase signals*

The signals from manager to subordinate of which the validity is controlled by *req* (and *gnt*): *addr*, *wdata*, *we*, *be*, *auser*, *wuser*, *aid*, *mid*, *prot*, *memtype*, *dbg*, *atop*, *achk*.

The value of the address phase signals is undefined outside the address phase.

*In figures **addr** is often used as a representative of the address phase signals. Timing and validity of **addr**, **wdata**, **we**, **be**, **auser**, **wuser**, **aid**, **mid**, **prot**, **memtype**, **dbg**, **atop**, **achk** are equal.*

- *Response phase signals*

The signals from subordinate to manager of which the validity is controlled by *rvalid* (and *rready*): *rdata*, *err*, *ruser*, *rid*, *exokay*.

The value of the response phase signals is undefined outside the response phase. Note that this also implies that the value of *err* is undefined when *rvalid* is low.

*In figures **rdata** is often used as a representative of the response phase signals. Timing and validity of **rdata**, **err**, **ruser**, **rid**, **exokay**, **rchk** are equal (although **rdata** and **ruser** are undefined for write transactions).*

- *Address channel (**A**)*

The address channel (**A**) is the combination of *req*, *gnt*, and the address phase signals. An address channel is similar to AXI's write address channel, read address channel, and write data channel (although in OBI these channels are basically all mapped onto one channel).

- *Response channel (**R**)*

The response channel (**R**) is the combination of *rvalid*, *rready*, and the response phase signals. A response channel is similar to AXI's write response channel and read data channel (although in OBI these channels are basically all mapped onto one channel).

- *OBI link*

An OBI link is the combination of an address channel (**A**) with its associated response channel (**R**). An OBI link relies on the presence of a global *clk* and *reset_n* as well.

- *Address phase*

The first cycle of the address phase is the cycle in which *req*=1; the last cycle of the address phase is the cycle in which both *req*=1 and *gnt*=1.

- *Address phase transfer*

The transfer of address phase signals over the A channel from manager to subordinate that takes place during the address phase.

- *Response phase*

The first cycle of the response phase is the cycle in which *rvalid*=1; the last cycle of the response phase is the cycle in which both *rvalid*=1 and *rready*=1.

- *Response phase transfer*

The transfer of response phase signals over the R channel from subordinate to manager that takes place during the response phase.

- *In order*

OBI links are in order, i.e. the response phase transfers are sent in the same order as their corresponding address phase transfers were issued.

- *Transaction*

An OBI (read or write) transaction consists of an address phase transfer which is (not necessarily immediately) followed by an associated response phase transfer. A transaction starts when its address phase transfer starts. A transaction ends when its response phase transfer ends.

- *Exclusive transaction*

An exclusive OBI transaction is an OBI transaction with $atop[5] = 1$ and $atop[4:0] = 5'h2$ (LR.W/D) or $atop[4:0] = 5'h3$ (SC.W/D).

A RISC-V core with support for the A extension and an OBI interface would use such transactions on its data interface for load-reserved and store-conditional instructions.

- *Atomic transaction*

An atomic OBI transaction is an OBI transaction with $atop[5] = 1$.

A RISC-V core with support for the A extension and an OBI interface would use such transactions on its data interface for LR.W/D, SC.W/D, AMOSWAP.W/D, AMOADD.W/D, AMOXOR.W/D, AMOAND.W/D, AMOOR.W/D, AMOMIN.W/D, AMOMAX.W/D, AMOMINU.W/D, AMOMAXU.W/D

- *Outstanding (accepted) transaction*

A transaction that has been accepted, but has not ended yet is called an outstanding transaction (or equivalently, an outstanding accepted transaction). Multiple outstanding transactions can be present at the same time as new address phase transfers can be issued by the manager before the subordinate has issued all corresponding response transfers.

Figure 3 gives an example of how the number of outstanding (granted) transactions is counted (assuming 0 transaction requests in the not-shown preceding cycles):

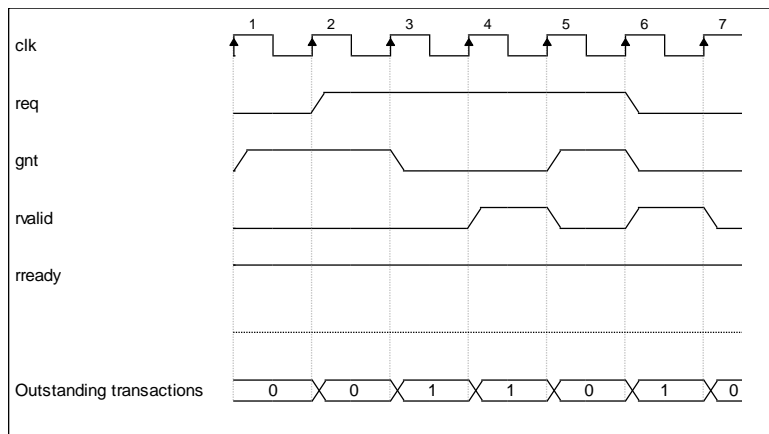


Figure 3 Outstanding (accepted) transactions

- clk cycle 1: A (default) *gnt* is present, but *req* is still 0 and no transactions have been accepted yet, so the number of outstanding (accepted) transactions is 0.

- clk cycle 2: *req* becomes 1 and this request will be accepted on the next rising *clk* edge. During this cycle the number of outstanding (accepted) transactions remains 0.
- clk cycle 3: The address phase of the first transaction has now been accepted and the corresponding response transfer has not started nor finished yet. The number of outstanding transactions therefore increases to 1.
- clk cycle 4: Nothing changes. *rvalid*=1 and *rready*=1, but this will only affect the count in the next cycle.
- clk cycle 5: The response phase of the first transaction finished and therefore the number of outstanding transactions decreases to 0. *req*=1 and *gnt*=1, but this only affects the count in the next cycle.
- clk cycle 6: The address phase of the second transaction has now finished, and therefore the outstanding (granted) transaction count increases to 1. *rvalid*=1 and *rready*=1, but this will only affect the count in the next cycle.
- clk cycle 7: The response phase of the second transaction finished and therefore the outstanding transaction count decreases to 0.

3.3.1 Clock and reset

R-1: OBI links shall rely on a single interface clock (*clk*) and reset (*reset_n*) that is common between the manager and subordinate.

R-1.1: Managers and subordinates shall only ever sample OBI signals on the positive edge of *clk*.

Any other sampled address or response channel signals shall be considered unstable and ignored, including data sampled on faster clock edges or negative clock edges.

R-1.2: Managers and subordinates shall never generate OBI signals on the negative edge of *clk*.

R-1.3: OBI signals shall not be assumed to remain stable *between clk* edges (i.e. multi-cycle path exceptions shall never be used).

R-2: OBI protocol compliance requirements always apply except for during OBI reset assertion.

R-2.1: During reset assertion *req* shall be driven low.

R-2.2: During reset assertion *rvalid* shall be driven low.

OBI manager or subordinate reconfiguration, software-based resets, clock disabling, etc. are no valid reasons to break OBI protocol compliance.

3.3.2 Handshake process

The OBI address channel uses a handshake process to transfer address phase info. The protocol is similar to AXI's VALID/READY handshake process (with OBI's *req* signal acting as AXI's VALID signal, and OBI's *gnt* signal acting as AXI's READY signal).

R-3: The address channel A shall use a two-way control handshake (*req+gnt*) between manager and subordinate.

R-3.1: The manager shall assert *req* to indicate the validity of the address phase signals.

R-3.1.1: The manager shall keep its address phase signals stable during the address phase.

This requirement does not apply to undefined signals, i.e. the values of `wdata` and `wuser` are not required to be kept stable during the address phase of a read transaction.

The value of the Byte Enable (`be`) signal does not affect the stability requirement of any signal.

R-3.1.2: The manager shall not de-assert (retract) `req` until after the last cycle of the address phase.

Request retraction is allowed during reset activation when both manager and subordinate are being reset.

R-3.2: The subordinate shall indicate its readiness to accept the address phase transfer by asserting `gnt`.

R-3.2.1: The subordinate shall be allowed to assert `gnt` at any time (even before the corresponding `req`).

R-3.2.2: The subordinate shall be allowed to de-assert (retract) `gnt` at any time.

The OBI response channel uses a handshake process to transfer response phase info. The protocol is similar to AXI's VALID/READY handshake process (with OBI's `rvalid` signal acting as AXI's VALID signal, and OBI's `rready` signal acting as AXI's READY signal).

Certain managers (e.g. `R15CY`) do not implement the `rready` signal. Such managers are always ready to accept the response transfer of any transaction they initiated. These managers can be thought of as having `rready` tied high.

R-4: The response channel R shall use a two-way control (`rvalid+rready`) between subordinate and manager.

R-4.1: The subordinate shall assert `rvalid` to indicate the validity of the response phase signals.

R-4.1.1: The subordinate shall keep its response phase signals stable during the response phase.

This requirement does not apply to undefined signals, i.e. the values of `rdata` and `ruser` are not required to be kept stable during the response phase of a write transaction.

The value of the Byte Enable (`be`) signal does not affect the stability requirement of any signal.

R-4.1.2: The subordinate shall not de-assert (retract) `rvalid` until after the last cycle of the response phase.

R-4.1.3: Validity of `rdata` shall only be implied for read transactions.

R-4.2: The manager shall indicate its readiness to accept the response phase transfer by asserting `rready`.

R-4.2.1: The manager shall be allowed to assert `rready` at any time (even before the corresponding `rvalid`).

R-4.2.2: The manager shall be allowed to de-assert (retract) `rready` at any time.

In addition to the above requirements for A and R channels separately, some requirements exist on the interaction between the A and R channels.

R-5: The response phase transfer for a transaction shall not start before the corresponding address phase transfer has finished (i.e. `req` and `gnt` need to have been sampled high before `rvalid=1` is allowed).

So, for a single transaction the earliest that `rvalid=1` can happen is in the `clk` cycle after both `req` and `gnt` have been sampled high. A subordinate can postpone its response by keeping `rvalid=0` the initial cycles after both `req` and `gnt` have been sampled high.

Figure 4 shows an example of two OBI transactions with their address and response phases marked:

- The first transaction has a one cycle long address phase (marked AP0); the corresponding response phase (marked RP0) is delayed by the subordinate keeping *rvalid* = 0 during cycle 3. In this case the response phase only starts in cycle 4 and is one cycle long (as both *rvalid* and *rready* are 1 in that cycle).
- The second transaction has a three cycle long address phase (marked AP1); the corresponding response phase (marked RP1) is not delayed by the subordinate (as it starts the cycle after both *req* and *gnt* have been sampled high), but in this case the manager stretches the response phase by keeping *rready* low during cycle 6 and 7.

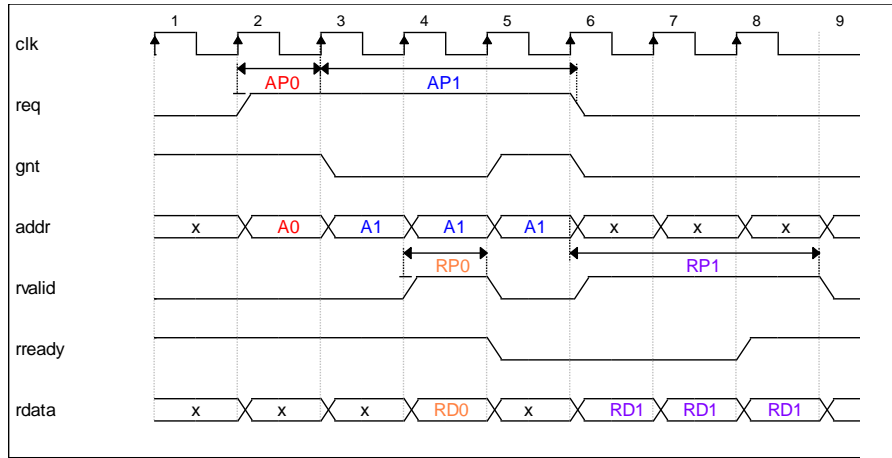


Figure 4 Address phase and response phase example

R-6: Response phase transfers shall be sent in the same order as their corresponding address phase transfers.

3.4 Signals

3.4.1 be

Not all *be* signal values are considered valid. The only valid *be* signals values are the ones needed to support transfers resulting from (possibly mis-aligned) byte, halfword, word, or double-word (for DATA_WIDTH=64) loads/stores.

A misaligned load/store is a load/store in which the address is not aligned to the related data, i.e. a load/store of a halfword with a non-halfword-aligned address or a load/store of a word with a non-word-aligned address. Managers that perform misaligned load/stores might have to issue multiple OBI transactions for each such load/store.

R-7: (BE_FULL = 0) The *be* values during the address phase of a transaction shall be as follows:

- At least one of the *be* bits shall be set to 1.
- The 1's in *be* shall be contiguous.

So (for DATA_WIDTH=32) be = 4'b1000, be = 4'b0110, be = 4'b1110 are valid values whereas for example be = 4'b0000 and be = 4'b1010 are not valid values during the address phase of a transaction. Outside of the address phase of a transfer the be signal is not constrained and e.g. be = 4'b0000 is allowed.

R-7.1: *be*[N] shall be the byte enable signal for (r/w)data[(N*8)+7 : (N*8)+0].

The subordinate behavior in case of invalid *be* signaling is **unpredictable**. There is no requirement for subordinates to signal an OBI error in case of invalid *be* signaling.

R-8: (BE_FULL = 1) The *be* values during the address phase of a transaction shall not have any value restrictions.

*All bits in *be* are allowed to be set to 0. The 1's in *be* do not need to be contiguous.*

R-8.1: *be*[*N*] shall be the byte enable signal for (*r/w*)*data*[(*N**8)+7 : (*N**8)+0].

3.4.2 addr

R-9: The least significant *addr* bits (i.e. *addr*[1:0] in case DATA_WIDTH = 32, *addr*[2:0] in case DATA_WIDTH = 64) shall be consistent with the *be* value during the address phase of a transaction, i.e.:

- If *i* is the index of the least signification bit in *be* that is 1, then the least significant *addr* bits shall be <= *i*.

*For example for DATA_WIDTH = 32: If *be*[] = 4'b0001, then as *be*[0] is the least significant set bit in *be*[], *addr*[1:0] shall be <= 0; if *be*[] = 4'b0100, then as *be*[2] is the least significant set bit in *be*[], *addr*[1:0] shall be <= 2; if *be*[] = 4'b0110, then as *be*[1] is the least significant set bit in *be*[], *addr*[1:0] shall be <= 1; reversely, *addr*[1:0] = 2'b00 is consistent with all *be*[] values that are allowed according to R-7: , and *addr*[1:0] = 2'b11 is consistent only with *be*[] = 4'b1000.*

The subordinate behavior in case of invalid *addr* signaling is **unpredictable**. There is no requirement for subordinates to signal an OBI error in case of invalid *addr-be* combinations.

3.4.3 aid, rid

The transaction identifiers (*aid*, *rid*) are intended to be used by interconnect infrastructure to route back the response transfers to the manager from which the corresponding address phase transfer originated. For this purpose the interconnect will add bits to *aid* when routing a transfer towards a subordinate. A subordinate will mirror back the received *aid* via the *rid* of the same transaction, after which the interconnect will use (and strip) the added bits from *rid* to route back the response transfer to the correct manager.

OBI links are always in-order (no matter *aid* or *rid*); the ordering model is not in any way related to the transaction identifiers.

R-10: For each OBI transaction an OBI subordinate shall 'mirror back' the value received on *aid* via *rid* (i.e. the *rid* for the response phase transfer shall be equal to the *aid* of the corresponding address phase transfer).

3.4.4 mid

The manager identifier (*mid*) is intended to be used by subordinates to identify the manager that initiated the transaction. There is no requirement that all transactions from the same manager use the same identifier (although this would be the typical behavior) nor that manager identifiers used by different managers are unique (although typically they would be unique). The semantics of this signal is implementation defined.

3.4.5 prot

The *prot* signal is used to specify additional protection attributes for a transaction. The *prot* signal is an optional signal. If it is not used, then it is recommended to tie it off as specified in Table 6.

Table 3 prot signal

prot bit(s)	Usage	Comment
prot[0]	Instruction access (1'b0) vs. Data access (1'b1)	
prot[2:1]	User/Application (2'b00), Supervisor (2'b01), Reserved (2'b10), Machine (2'b11)	This matches the privilege levels from [RISC-V-PRIV].

The prot signal is expected to be extended with the following information in the future:

- Trust status of the requesting instruction.
- Trust status of the memory access.
- Trusted domain identification.

3.4.6 memtype

The *memtype* signal is used to specify additional memory attributes for a transaction. The *memtype* signal is an optional signal. If it is not used, then it is recommended to tie it off as specified in Table 6.

Table 4 memtype signal

memtype bit(s)	Usage	Comment
memtype[0]	Non-bufferable (0) or Bufferable (1)	A manager can drive this signal based on its Physical Memory Attribution (PMA) definition.
memtype[1]	Non-cacheable (0) or Cacheable (1)	A manager can drive this signal based on its Physical Memory Attribution (PMA) definition.

3.4.7 dbg

The *dbg* signal is used to specify whether the transaction is initiated (directly or indirectly) by a debugger (*dbg* = 1'b1) or not (*dbg* = 1'b0). The *dbg* signal is an optional signal. If it is not used, then it is recommended to tie it off as specified in Table 6.

3.4.8 atop

The *atop* signal is used to signal the type of atomic memory transaction (from the RISC-V A extension ([RISC-V-UNPRIV])) that needs to be performed. The *atop* signal is an optional signal. If it is not used, then it is recommended to tie it off as specified in Table 6.

R-11: The *atop* values during the address phase of a transaction shall be as follows:

R-11.1: *atop*[5] shall be 1 for a transaction related to any atomic memory transaction (LR.W/D, SC.W/D, AMOSWAP.W/D, AMOADD.W/D, AMOXOR.W/D, AMOAND.W/D, AMOOR.W/D, AMOMIN.W/D, AMOMAX.W/D, AMOMINU.W/D, AMOMAXU.W/D as specified in [RISC-V-UNPRIV]) and 0 otherwise.

R-11.2: *atop*[4:0] shall be equal to bits [31:27] of the instruction as specified in [RISC-V-UNPRIV] if the transaction is due to the execution of an Atomic instruction and 0 otherwise:

- 5'h2 : LR.W/D
- 5'h3 : SC.W/D
- 5'h1 : AMOSWAP.W/D
- 5'h0 : AMOADD.W/D
- 5'h4 : AMOXOR.W/D
- 5'hC : AMOAND.W/D
- 5'h8 : AMOOR.W/D
- 5'h10 : AMOMIN.W/D
- 5'h14 : AMOMAX.W/D
- 5'h18 : AMOMINU.W/D
- 5'h1C : AMOMAXU.W/D

The atomic memory operation (AMO) transactions perform read-modify-write operations as defined in [RISC-V-UNPRIV] at the target. For address *addr* and write data *wdata*, the AMO* transactions atomically return the original content from address *addr* via *rdata*, apply the associated operator (e.g. ADD, XOR) to this *rdata* and *wdata*, and store the resulting data at address *addr*.*

R-11.3: The transaction associated with a LR.W shall have $we = 0$; the other atomic memory transactions (i.e. SC.W, AMO*) shall use $we = 1$.

R-11.4: The address *addr* used in an atomic memory transaction shall be naturally aligned.

*Naturally aligned means eight-byte aligned for 64-bit words (i.e. when related to *.D instructions) and four-byte aligned for 32-bit words (i.e. when related to *.W instructions).*

R-11.5: The byte enables *be* used in an atomic memory transaction shall indicate a word or double-word transfer as implied by the related *.W or *.D instruction.

R-11.6: The required initiator ID for atomic transactions shall be *aid*.

The aid identifier can be used by the circuit managing the reservation set for a LR.W.

R-12: An OBI manager shall prevent initiating a transaction if it would lead to multiple outstanding transactions with the same *aid* of which at least one transaction is an atomic transaction.

3.4.9 exokay

The *exokay* signal is used to signal success or failure for exclusive transactions (i.e. those transactions resulting from RISC-V load-reserved (LR.W/D) and store-conditional instructions (SC.W) ([RISC-V-UNPRIV])). The *exokay* signal is an optional signal. If it is not used, then it is recommended to tie it off as specified in Table 6.

R-13: *exokay* shall indicate the success ($exokay = 1$) or failure ($exokay = 0$) for exclusive transactions.

R-13.1: For a LR.W/D related transaction (i.e. $atop[5] = 1'b1$, $atop[4:0] = 5'h2$) success shall be signaled via *exokay* (only) if the target sending the response supports exclusive accesses.

Success indicates that the reservation set has been updated according to the LR.W related transaction.

R-13.2: For a SC.W/D related transaction (i.e. $atop[5] = 1'b1$, $atop[4:0] = 5'h3$) success shall be signaled via *exokay* (only) if the target sending the response supports exclusive accesses and the related reservation is still valid and the reservation set contains the bytes being written.

See [RISC-V-UNPRIV] for more information about LR.W/D and SC.W/D.

R-13.3: Other transactions (i.e. with $atop[5] \neq 1'b1$ or $atop[4:0]$ not in {5'h2, 5'h3}) shall signal $exokay = 0$.

R-13.4: The *exokay* and *err* signals shall adhere to Table 5.

Table 5 Relationship between *err* and *exokay*

{err, exokay}	Usage	Comment
2'b00	Success of non-exclusive transaction Failure of exclusive transaction	Possible for any transaction type.
2'b01	Success of exclusive transaction	Only possible for LR.W/D or SC.W/D.
2'b10	Bus error	E.g. not supported data width, write to read-only location, etc.
2'b11	Reserved	Target shall not issue this.

The exact definition of success for a LR.W/D – SC.W/D transaction pair is platform specific (e.g. the platform needs to define the reservation set and potential requirements on other OBI signals as e.g. addr, be, prot).

3.4.10 reqpar, gntpar, rvalidpar, rreadypar

The *reqpar*, *gntpar*, *rvalidpar* and *rreadypar* signals are optional OBI interface integrity related signals. The *reqpar*, *gntpar*, *rvalidpar* and *rreadypar* signals are the (odd) parity signals for *req*, *gnt*, *rvalid* and *rready* respectively. These signals can be used to increase robustness of the implementation (e.g. against transient errors). The *reqpar*, *gntpar*, *rvalidpar* and *rreadypar* are neither address phase signals nor response phase signals (they are required to be valid always except for during reset).

R-14: The *reqpar* signal shall be the inverse of *req* at each rising *clk* edge (when not in reset).

R-15: The *gntpar* signal shall be the inverse of *gnt* at each rising *clk* edge (when not in reset).

R-16: The *rvalidpar* signal shall be the inverse of *rvalid* at each rising *clk* edge (when not in reset).

R-17: The *rreadypar* signal shall be the inverse of *rready* at each rising *clk* edge (when not in reset).

3.4.11 achk, rchk

The *achk* and *rchk* signal are optional OBI interface integrity related signals. The *achk* signal provides a checksum for the other (i.e. not *achk* itself) address phase signals. The actual checksum format (e.g. odd parity or SECDED) as well as which exact address phase signals are covered is left open and only specified at the platform level. Similarly, *rchk* provides a checksum for the other (i.e. not *rchk* itself) response phase signals.

The actual checksum formats could get specified (or recommended) in a later version of this specification.

R-18: The *achk* signal shall provide a checksum for the other (i.e. not *achk* itself) address phase signals in a platform defined manner.

R-18.1: The *achk* only needs to provide a matching checksum for the other address phase signals at rising *clk* edges with *req* = 1.

R-18.2: The *wdata* and *wuser* are allowed to be excluded from the integrity scheme for read transactions in one of the following manners:

R-18.2.1: The *achk* signal bit(s) can be specified to not depend on *wdata* or *wuser* for read transactions, or

R-18.2.2: The *achk* signal bit(s) that do depend on *wdata* or *wuser* for read transactions shall be clearly documented and shall not be required to be checked for read transactions.

In contrast to version v1.2 and v1.3 of this specification on some platforms it can therefore now be the case that certain achk bits shall not be checked for read transactions at the subordinate.

R-19: The *rchk* signal shall provide a checksum for the other (i.e. not *rchk* itself) response phase signals in a platform defined manner.

R-19.1: The *rchk* only needs to provide a matching checksum for the other response phase signals at rising *clk* edges with *rvalid* = 1.

R-19.2: The *rdata* and *ruser* signals are allowed to be excluded from the integrity scheme for write transactions in one of the following manners:

R-19.2.1: The *rchk* signal bit(s) can be specified to not depend on *rdata* or *ruser* for write transactions, or

R-19.2.2: The *rchk* signal bit(s) that do depend on *rdata* or *ruser* for write transactions shall be clearly documented and shall not be required to be checked for write transactions.

*In contrast to version v1.2 and v1.3 of this specification on some platforms it can therefore now be the case that certain *rchk* bits shall not be checked for write transactions at the manager.*

R-20: Atomic transactions shall be treated as both a read and a write transaction with respect to *achk/rchk* usage.

3.5 Dependencies

In order to ease system level integration and system level timing additional requirements are imposed on the OBI signals. These requirements are aimed at preventing deadlock, combinatorial loops, and unnecessarily long paths at the system level.

R-21: OBI link outputs (excluding *gnt* and *gntpar*) shall not combinatorially depend on OBI link inputs, specifically (but not limited to):

R-21.1: For a manager, *req* shall not combinatorially depend on *gnt* or *rvalid* (nor on *gntpar* or *rvalidpar*).

R-21.2: For a manager, *rready* shall not combinatorially depend on *gnt* or *rvalid* (nor on *gntpar* or *rvalidpar*).

R-21.3: For a subordinate, *rvalid* shall not combinatorially depend on *req* or *rready* (nor on *reqpar* or *rreadypar*).

R-22: (**COMB_GNT == False**) *gnt* (and *gntpar*) shall not combinatorially depend on OBI link inputs (default COMB_GNT = false).

R-23: (**COMB_GNT == True**) *gnt* (and *gntpar*) is allowed to combinatorially depend on OBI link inputs.

*Requirement R-21: would have been quite restrictive if it would apply to *gnt/gntpar* as well. For OBI implementations with relaxed frequency requirements or for OBI links which are internal to a module, the requirements on *gnt/gntpar* generation can sometimes be relaxed. An OBI link in which the *gnt/gntpar* output is allowed to combinatorially depend on OBI link inputs is called a combinatorial *gnt* OBI link. Such an OBI link (i.e. with COMB_GNT = True) might limit achievable performance and is therefore discouraged; functional behavior is however not compromised.*

Above constraints apply to single OBI links. If a module contains multiple OBI links additional requirements exist between these links.

R-24: OBI link outputs of any manager interface shall not combinatorially depend on OBI link inputs of any other manager interface.

*For example, a module's manager port 0 *req* output shall not depend on that module's manager port 1 *gnt* input.*

R-25: OBI link outputs of any subordinate interface shall not combinatorially depend on OBI link inputs of any other subordinate interface.

*For example, a module's subordinate port 0 *rvalid* output shall not depend on that module's subordinate port 1 *rready* input.*

Above constraints are all timing related. The following requirements relate to deadlock prevention.

R-26: A transaction's *req* shall not depend on the *gnt* (or *gntpar*) for that transaction.

*Note that the above requirement is wider than only disallowing **combinatorial** paths. The reverse dependency is allowed (i.e. `gnt` is allowed to depend on `req` (as long as it does not introduce a combinatorial path)).*

R-27: A transaction's `rvalid` shall not depend on the `rready` (or `rreadypar`) for that transaction.

Note that the above requirement is wider than only disallowing combinatorial paths. The reverse dependency is allowed (i.e. `rready` is allowed to depend on `rvalid` (as long as it does not introduce a combinatorial path)).

3.6 Timing

OBI signals will have specific timing budgets allocated for manager, subordinate, and interconnect modules. These budgets are considered vendor specific (and are not part of this public specification).

3.7 Tie offs

Some modules do not use all the OBI signals shown in Table 1 (e.g. the instruction OBI interface of RI5CY). In case such incomplete OBI interfaces need to be converted to a complete OBI interface, the following applies.

R-28: Incompletely connected OBI interfaces shall be tied off as shown in Table 6 unless specified otherwise.

Table 6 OBI default tie offs

Name	Default tie off	Description
<code>rready</code>	<code>1'b1</code>	RI5CY, Ibex, and CV32E40P do not have an <code>rready</code> signal. They are always ready to accept the response transfer for any granted transaction they issued.
<code>we</code>	<code>1'b0</code>	Read-only
<code>be[3:0]</code> ¹	<code>4'b1111</code>	All byte lanes enabled
<code>rdata[31:0]</code> ¹	<code>32'b0</code>	All bits 0 (this tie off is for write-only OBI ports)
<code>wdata[31:0]</code> ¹	<code>32'b0</code>	Write data ignored
<code>auser[]</code>	<code>'b0</code>	All bits 0
<code>aid[]</code>	<code>'b0</code>	All bits 0
<code>mid[]</code>	<code>'b0</code>	All bits 0
<code>wuser[]</code>	<code>'b0</code>	All bits 0
<code>prot[2:0]</code>	<code>3'b111</code>	Data access, Machine mode
<code>memtype[1:0]</code>	<code>2'b0</code>	Non-bufferable, non-cacheable
<code>dbg</code>	<code>1'b0</code>	Non debug access
<code>atop[5:0]</code>	<code>'b0</code>	All bits 0 (no atomic/exclusive transaction)
<code>err</code>	<code>1'b0</code>	No error
<code>ruser[]</code>	<code>'b0</code>	All bits 0
<code>exokay</code>	<code>1'b0</code>	Cause exclusive transaction failure
¹ Default data width is 32-bit. Tie offs show the value for the default width only.		

No default tie offs are defined for the `reqpar`, `gntpar`, `rvalidpar`, `rreadypar`, `achk`, `rchk` signals (as they are based on other dynamically changing signals).

3.8 Comparison with the RI5CY bus interface

The major differences between OBI and the bus interface as used in RI5CY are as follows:

- RI5CY does not use a `rready` signal (it can be thought of as having this signal tied to 1).
- RI5CY does not use an `err` signal (it can be thought of as ignoring this signal).
- RI5CY does not use an `aid` signal (it can be thought of as having this signal tied to 0).
- RI5CY does not necessarily keep its address phase signals stable during the address phase (see <https://github.com/pulp-platform/riscv/issues/128>).

- RI5CY has combinatorial paths from *rvalid* to *req* (see <https://github.com/pulp-platform/riscv/issues/126>)
- RI5CY does not allow for *gnt* to be asserted before *req* (<https://github.com/pulp-platform/riscv/issues/127>) and assumes that subordinates will combinatorially generate a *gnt* based on *req*.