



Poročilo 05/2025

Lokacija	DAFRA D.O.O.
Datum testiranja	15.05.2025

Elektro-mehanske komponente:

Egasi - servo aktuator #1	Translacijski aktuator
Egasi - servo aktuator #2	Translacijski aktuator
Egasi - servo aktuator #3	Translacijski aktuator
Egasi - servo aktuator #4	Translacijski aktuator
Egasi - servo aktuator #5	Translacijski aktuator

Oprema:

Stiskalnica	RVD-32-720HS
Orodje	89990-11
Izdelek (Vtiskovanje v trak)	39900-51 (#40461 – DC01 0,50x30) Pomik 16mm Hod: 20mm Hitrost: 250min-1


Programske nastavitve:

Siemens – Aktivacijski kot preše	270° - 90°
Ciklični čas	5ms



Sestavni deli krmilja

Elektro omara

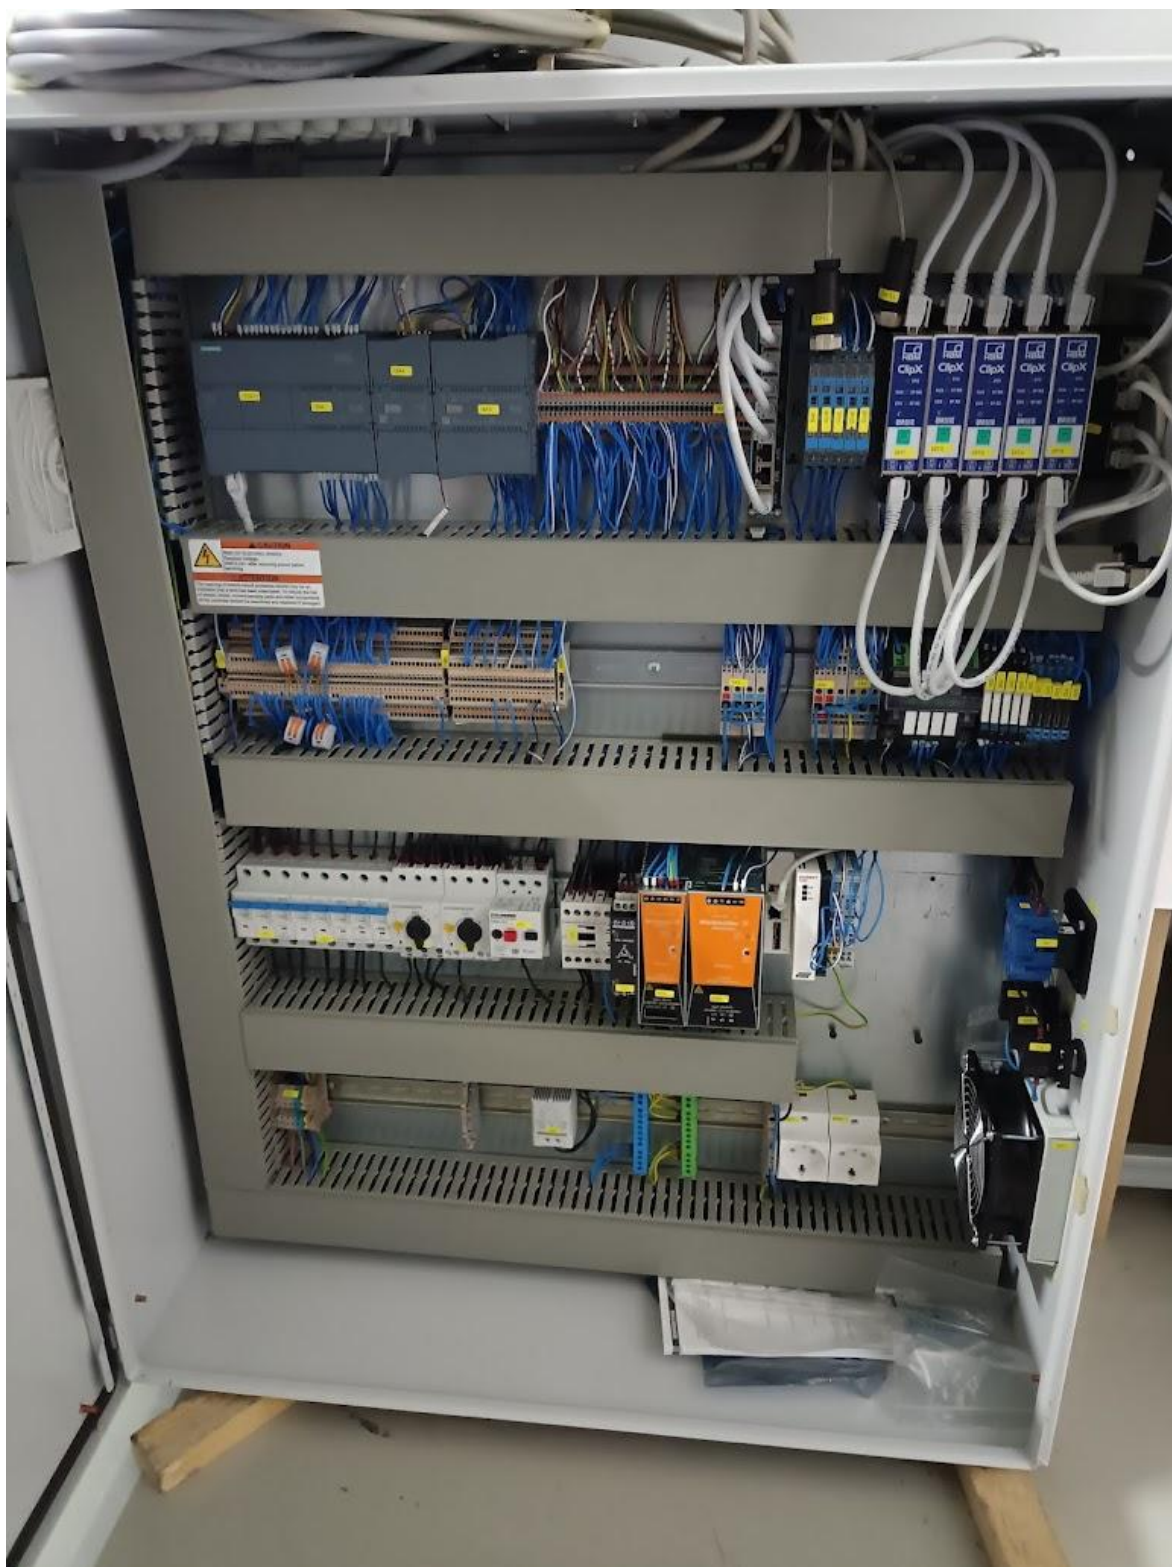

Integracija sistema na Haulick Roos RVD-32-720HS



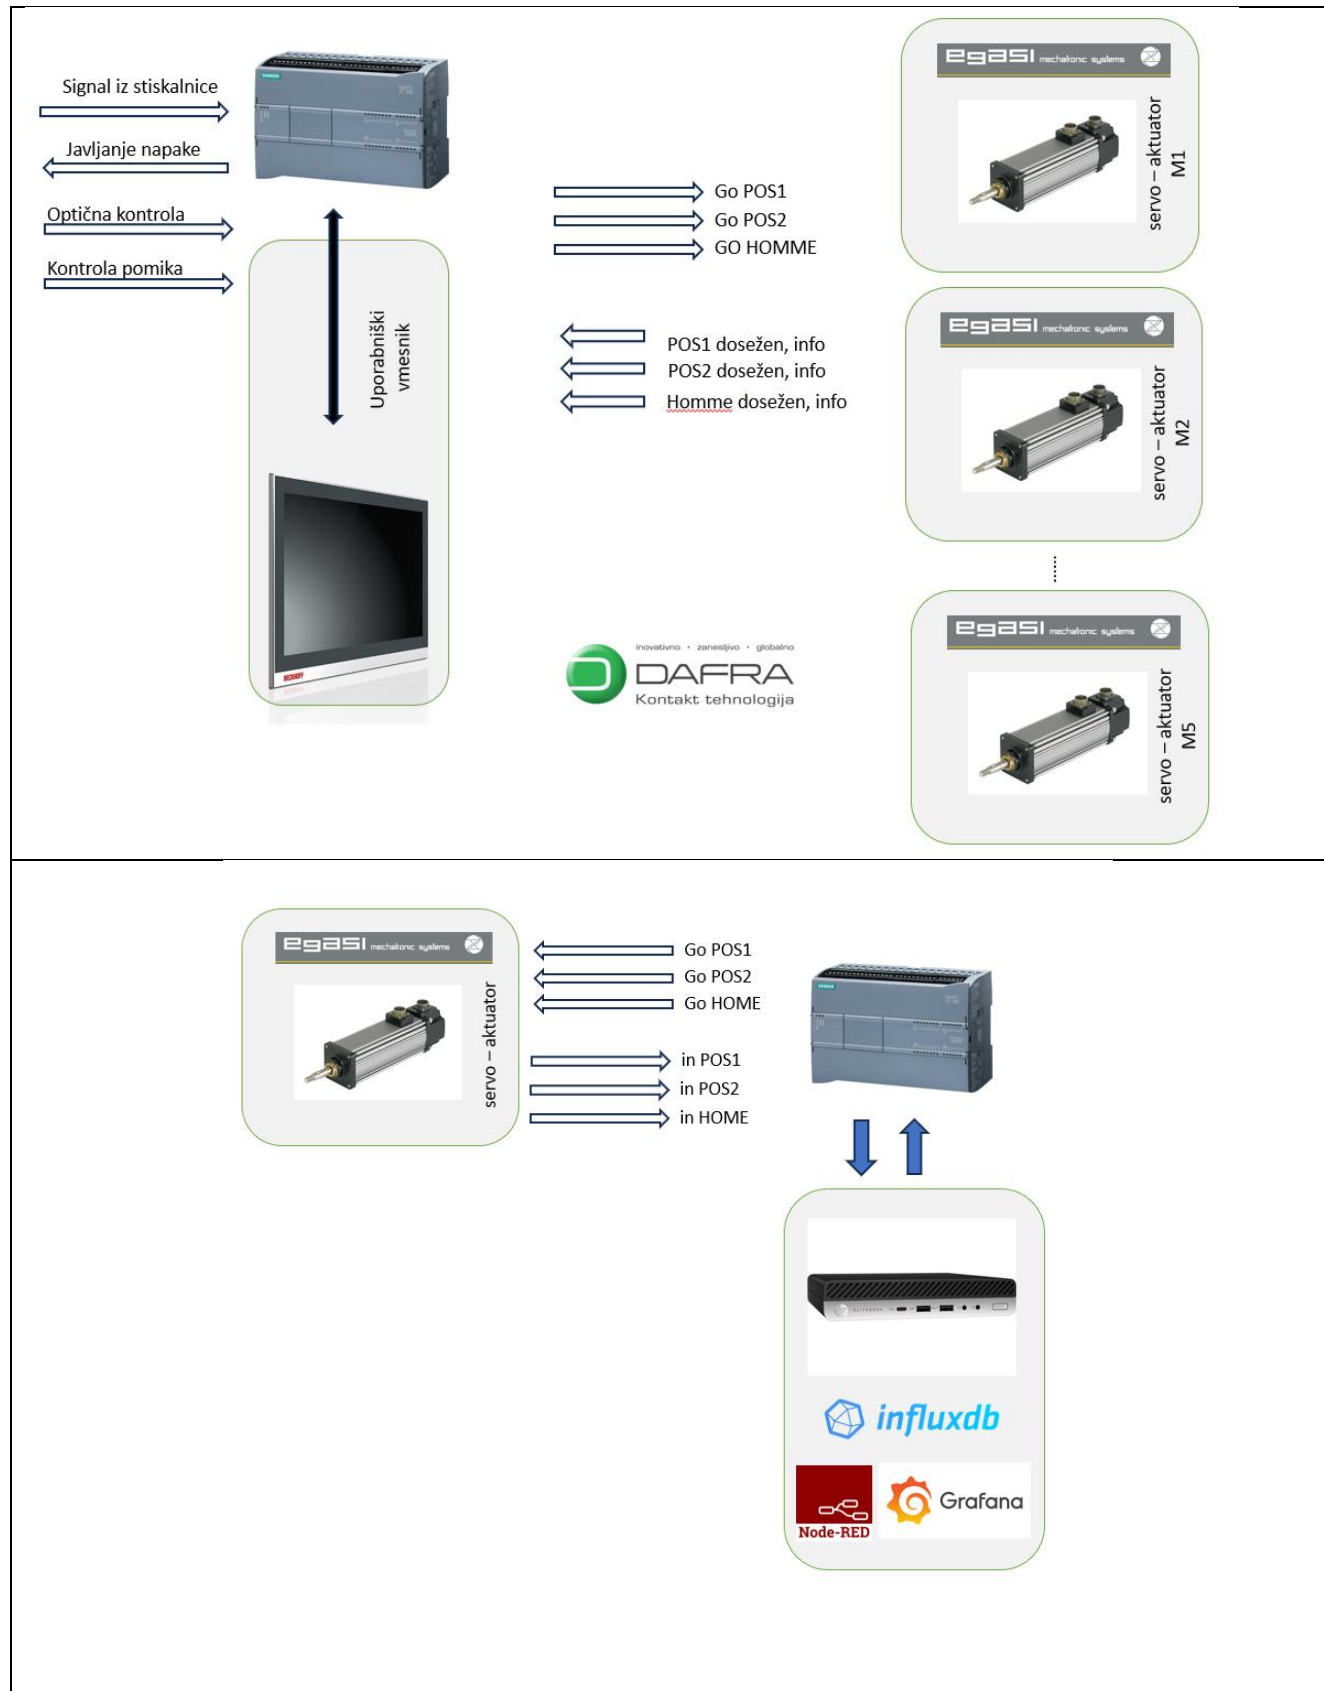




Diagram poteka – vodenje aktuatorja preko preše

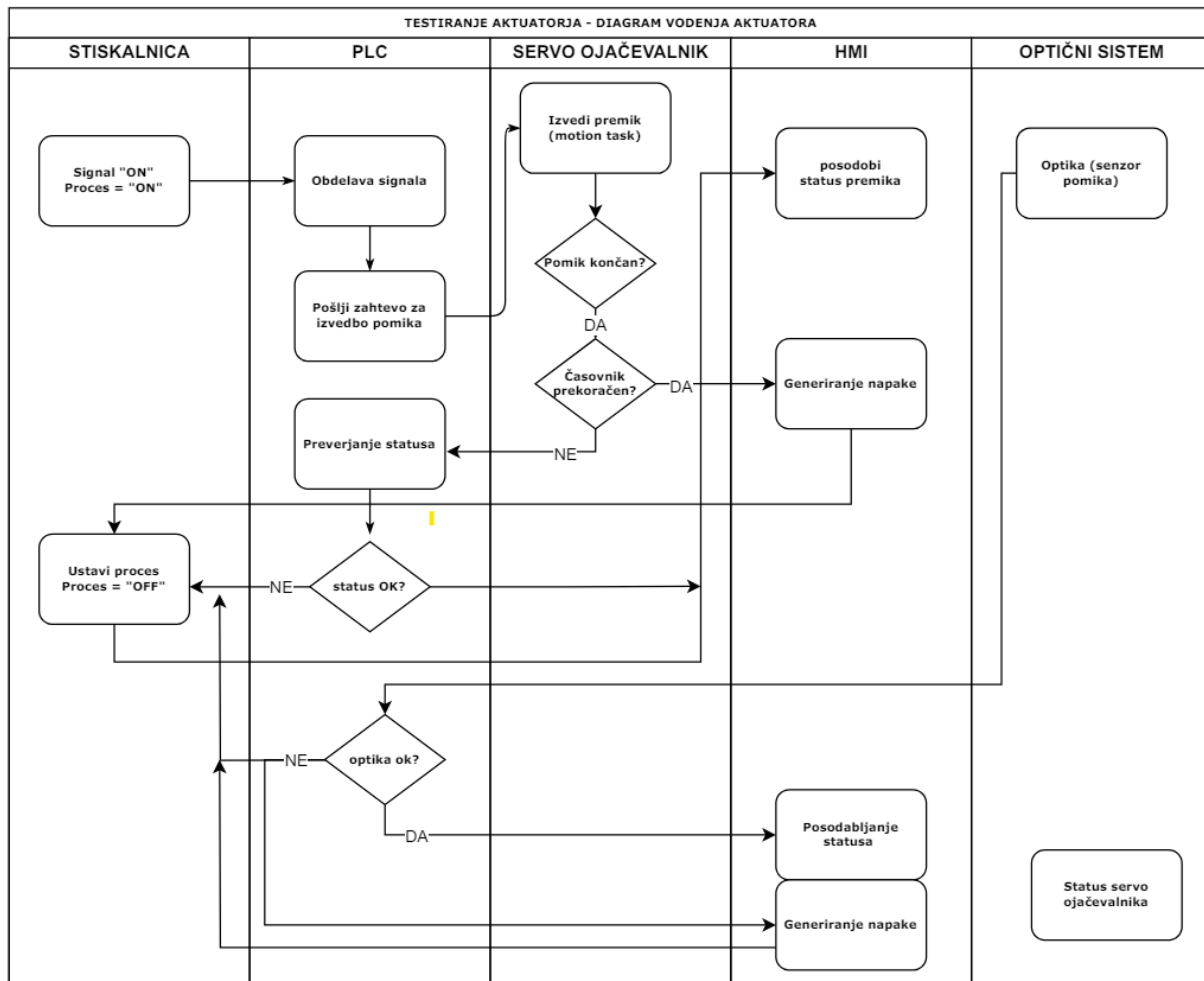

Izbira kabla (izolacije) med motorjem in krmilno omaro

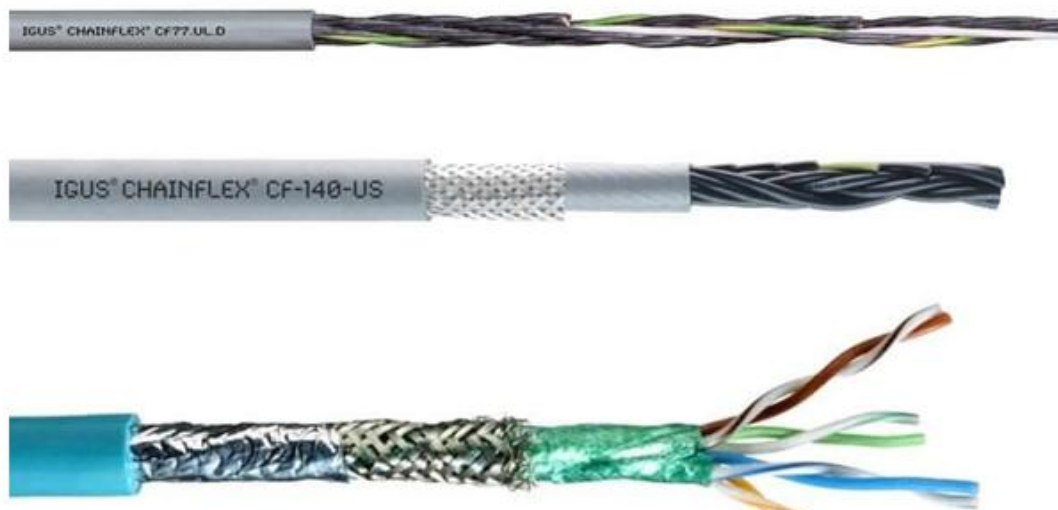

*pred optimizacijo


Lastnost	PVC	PUR	TPE
Odpornost proti oksidaciji	Odlična	Odlična	Izjemna
Odpornost na vročino	Dobra - Odlična	Odlična	Izjemna
Odpornost na olje	Srednja	Izjemna	Izjemna
Prožnost pri nizkih temperaturah	Slaba - Dobra	Odlična	Izjemna
Odpornost na vremenske vplive	Dobra - Odlična	Odlična	Izjemna
Odpornost na ozon	Odlična	Odlična	Odlična
Odpornost proti obrabi	Srednja - Dobra	Odlična	Izjemna
Električne lastnosti	Srednje - Dobra	Odlična	Odlična
Odpornost na ogenj	Odlična	Odlična	Izjemna
Odpornost na jedrsko sevanje	Srednja	Odlična	Slaba
Vodoodpornost	Dobra - Odlična	Dobra - Odlična	Izjemna
Odpornost na kisline	Dobra - Odlična	Odlična	Odlična
Odpornost na alkalije	Dobra - Odlična	Odlična	Odlična
Odpornost na bencin	Slaba	Odlična	Odlična
Odpornost na benzen	Srednja - Slaba	Odlična	Odlična
Odpornost na topila za razmaščevanje	Srednja - Slaba	Odlična	Odlična
Odpornost na alkohol	Dobra - Odlična	Odlična	Odlična
Odpornost na olja, kisline	Srednja	Izjemna	Izjemna

*po optimizaciji

Zaradi vpliva okolice (olja in maziva) med samim procesom, je priporočilo, da uporabljamo PUR kabel, zaradi odpornosti na olja in kisline.



Integracije programske oprema

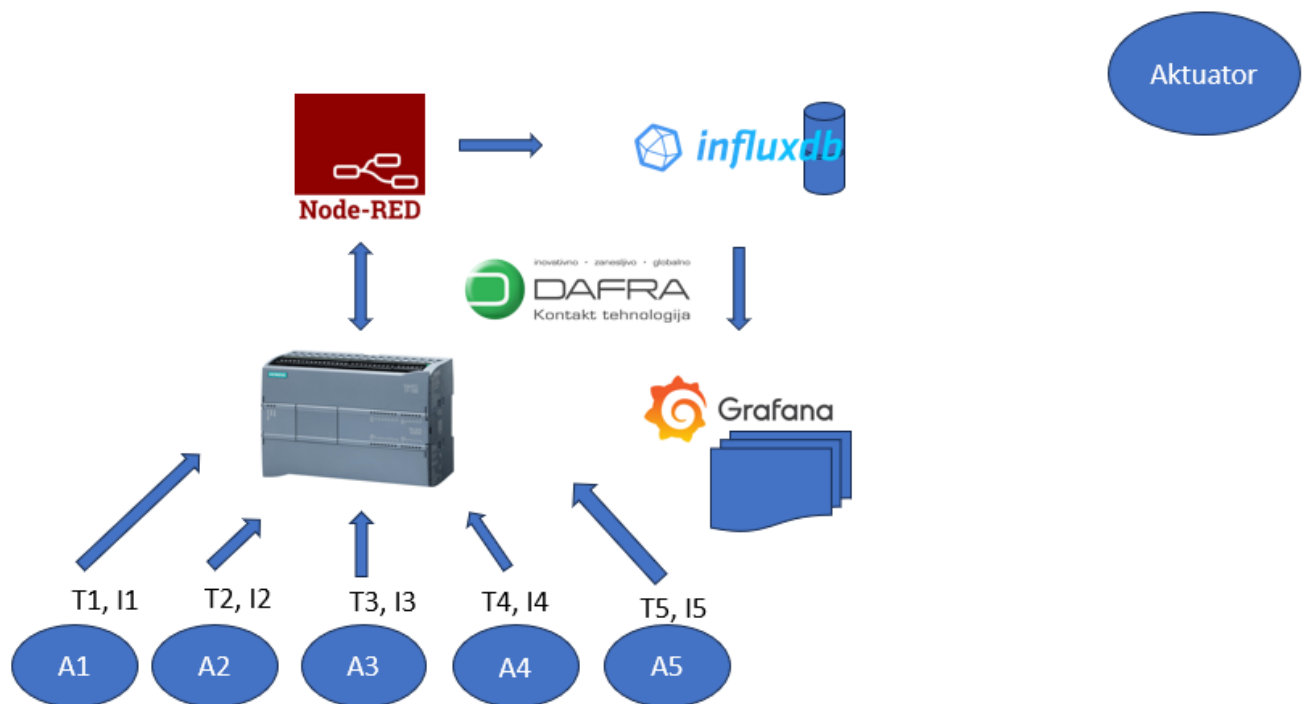

Blok shema uporabljene odprtokodne programske opreme za spremljanje in prikaz podatkov iz DD

Razvoj DD

Tehnologija uporabljena za osnovno verzijo DD:

1. **PT100 senzorji:** Uporabljeni za natančno merjenje temperature v štančnem orodju. PT100 senzorji omogočajo visoko natančnost zaradi njihove stabilnosti in linearnega odziva pri spremembah temperature.
2. **Linearni aktuator z gonilnikom Kollmorgen:** Omogoča precizno krmiljenje pestiča. Servo motorni sistem zagotavlja natančno gibanje in regulacijo sile, kar je ključno za zanesljivo delovanje orodja.
3. **Siemens S7-1200 PLC:** PLC skrbi za pridobivanje podatkov iz PT100 senzorjev in aktuatorja ter krmiljenje procesov v realnem času. Zajema 4 temperature in tok aktuatorja, podatke pa shrani v podatkovne bloke (DB).
4. **InfluxDB:** Časovno orientirana podatkovna baza, uporabljena za shranjevanje podatkov meritev (temperatura in tok) z visoko natančnostjo in omogoča učinkovito analizo zgodovinskih podatkov.
5. **Grafana:** Vizualizacijsko orodje za prikazovanje podatkov iz InfluxDB. Omogoča interaktivno spremljanje meritev in analizo trendov preko prilagodljivih grafov.
6. **Node-RED:** Platforma za vizualno programiranje, ki omogoča integracijo PLC-ja z InfluxDB. Podatke zajema vsakih 1s in jih posreduje v podatkovno bazo.
7. **Docker:** Platforma za virtualizacijo, ki omogoča učinkovito namestitev in upravljanje aplikacij, kot so InfluxDB, Grafana in Node-RED, na enem strežniku z minimalnimi stroški virov.

Opis osnovne konfiguracije sistema – kasneje nadgrajen na večje število senzorjev in večji prikaz spremenljivk

- **Operacijski sistem:** Ubuntu nameščen na PC-ju, ki deluje kot centralni strežnik za obdelavo podatkov.
- **Docker okolje:**
 - **InfluxDB:** Shranjuje podatke o temperaturah in tokovih aktuatorja.
 - **Grafana:** Dostopna preko spletnega vmesnika za vizualizacijo podatkov. Prikazuje grafične prikaze štirih temperatur in toka v realnem času.
- **Node-RED:**
 - Nameščen na Dockerju.
 - Vsako sekundo prebere podatke iz Siemens S7-1200 PLC-ja, kjer so shranjeni v DB.
 - Podatke obdeluje in posreduje v InfluxDB.
- **PLC Siemens S7-1200:**
 - Izvaja merjenje s PT100 senzorji (4 temperature).
 - Spremlja tok aktuatorja za spremljanje sile.
 - Podatke periodično zapisuje v podatkovne bloke, ki so dostopni za nadaljnjo obdelavo.
- **Vizualizacija podatkov:**
 - Grafana omogoča pregled realno-časovnih in zgodovinskih podatkov o temperaturah in silah.
 - Prilagodljivi grafi omogočajo enostavno diagnostiko in analizo delovanja sistema.

Sistem omogoča integracijo meritev in krmiljenja ter zagotavlja preglednost in natančnost pri upravljanju štančnega orodja.

Strojni vid

Optična meritev

Pri optični meritvi smo se odločali med kamero in senzorjem. Ker je dostopnost senzorja boljša (imamo interno zalogo) smo se odločili da uporabimo senzor, ki ga že uporabljamo za kontrolo pomika pri progresivnem štancanju.


PG-S2 serija optični laserski senzor

Senzor se uporablja v različnih aplikacijah, tipične aplikacije so:

- Kontrola pomika
- Kontrola pozicije
- Štetje kosov

Uporabljali ga bomo za optično kontrolo končnega kosa

Kistler PG-S2 laserski optični senzor

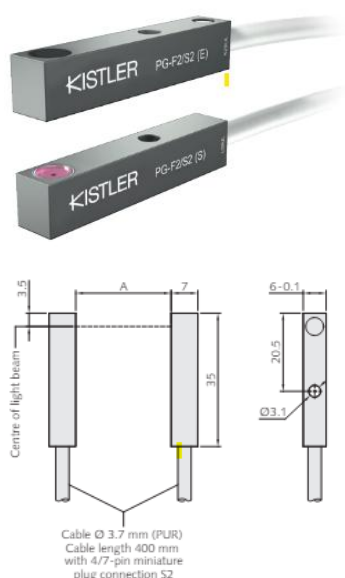

Specifikacije:

Ponovljivost : < 0.02mm

Temperaturno območje : 0°-60°C

EMC specifikacije po 2014/30/EU – EN 61000

Sistemska zaščita : IP64

Tolerance ohišja: DIN ISO 2768-m

Resolution

Distance A [mm]:	25	90	180
Part diameter [mm]:			
with chopped light amplifier, amplifier level I	> 1.0	> 0.5	–
with chopped light amplifier, amplifier level II	> 1.2	> 0.8	> 0.5
with pulse amplifier	0.1	0.1	0.5

Recommendations/instructions for the use of the dual-level chopped light amplifier:

Amplifier level I → High resolution:


Default setting for all split-type versions with small distances between transmitter and receiver, i.e. for $A_{max} < 50\%$!

Amplifier level II → High operational reliability:

Default setting for all split-type versions when used in oil mist surroundings or with large distances between transmitter and receiver ($A_{max} > 50\%$).

The operational reliability is twice the level of amplifier level I.

S2-D-5-P – ojačevalnik laserskega senzorja

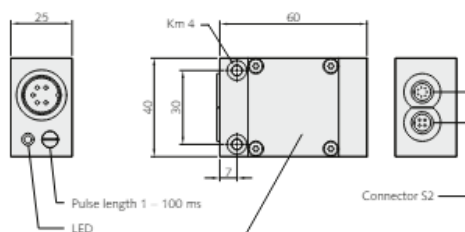


Za napajanje laserskega senzorja potrebujemo ojačevalnik namenjen za laserske senzorje.

Specifications

Circuit	Constant light pulse amplifier
Operating voltage	12 – 24 VDC
Current consumption	90 mA
Mode of operation	dynamic
Pulse extension	1 – 100 ms
Output with LED	PNP ¹⁾
Function	normally open/closed
Load current	200 mA short-circuit proof
Repeating accuracy	see sensor type
Frequency	max. 1 KHz
Temperature range	0°C – 60°C
EMC according to 2014/30/EU	EN 61000... C€
System of protection	IP 64

PG-S2 series

Split infrared light barriers – flat housing F2 with separate amplifier S2



Application

Feed control
Position control
Counting parts

Specifications

Repeating accuracy	< 0.02 mm
Temperature range	0°C – 60°C
EMC according to 2014/30/EU	EN 61000... C
System of protection (for plug-in amplifier types S2-...)	IP 64
General tolerance of the housing	DIN ISO 2768-m

Resolution

Distance A [mm]:	25	90	180
Part diameter [mm]:			
with chopped light amplifier, amplifier level I	> 1.0	> 0.5	–
with chopped light amplifier, amplifier level II	> 1.2	> 0.8	> 0.5
with pulse amplifier	0.1	0.1	0.5

Article

Order No.

Split light barrier, separate transmitter and receiver (without amplifier):

PG-F2-S2	6434-00000-0000
PG-F2-S2 (S)	6434-40000-0000
PG-F2-S2 (E)	6434-50000-0000

Recommendations/instructions for the use of the dual-level chopped light amplifier:

Amplifier level I → High resolution:

Default setting for all split-type versions with small distances between transmitter and receiver, i.e. for $A_{max} < 50\%$!

Amplifier level II → High operational reliability:

Default setting for all split-type versions when used in oil mist surroundings or with large distances between transmitter and receiver ($A_{max} > 50\%$).

The operational reliability is twice the level of amplifier level I.


Accessories (more accessories, see last pages)

Article

Order No.

Amplifier 4-pin M12:	
S2-W-4-P2	2000-00008-4064
S2-D-4-P	2000-00008-4024
Amplifier 5-pin M16:	
S2-W-5-P2	2000-00008-0064
S2-D-5-P	2000-00008-0024
Mounting block:	
AS2	2300-00000-0002
Extension cable:	
VK-S2/7 (1 m)	2115-00001-0707
VK-S2/4 (1 m)	2115-00001-0404

Zaradi dodatne kontrole, je v prihodnosti želja, da se v orodje vgradi dodatna vizualna kontrola z kamero Keyence IV3, ki ima vgrajeno umetno inteligenco.

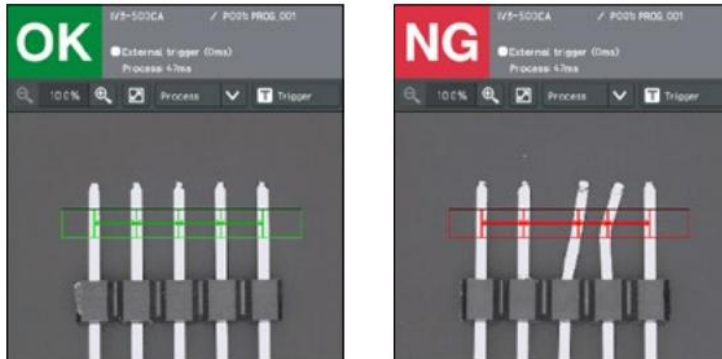

Keyence IV3: kontrola kosov – »pitch«



Dimenzije merilne glave

Flow



Mark the detection area.

Register OK products
and NG products.

The AI identifies the characteristics
of OK and NG products for
automatic generation of the best
settings in about 3 seconds.


Detekcija kosov z umetno inteligenco

4

Standard type
(colour)



Colour AF type
IV3-G500CA

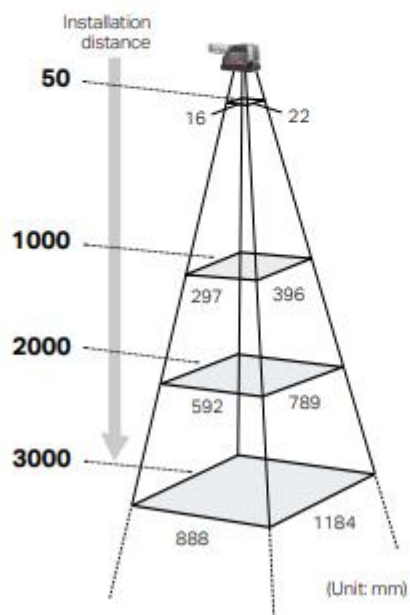

Merilno območje senzorske glave


LED lights in ultra-compact model



With illumination unit
attached

16



Možnost uporabe dodatne osvetlitve

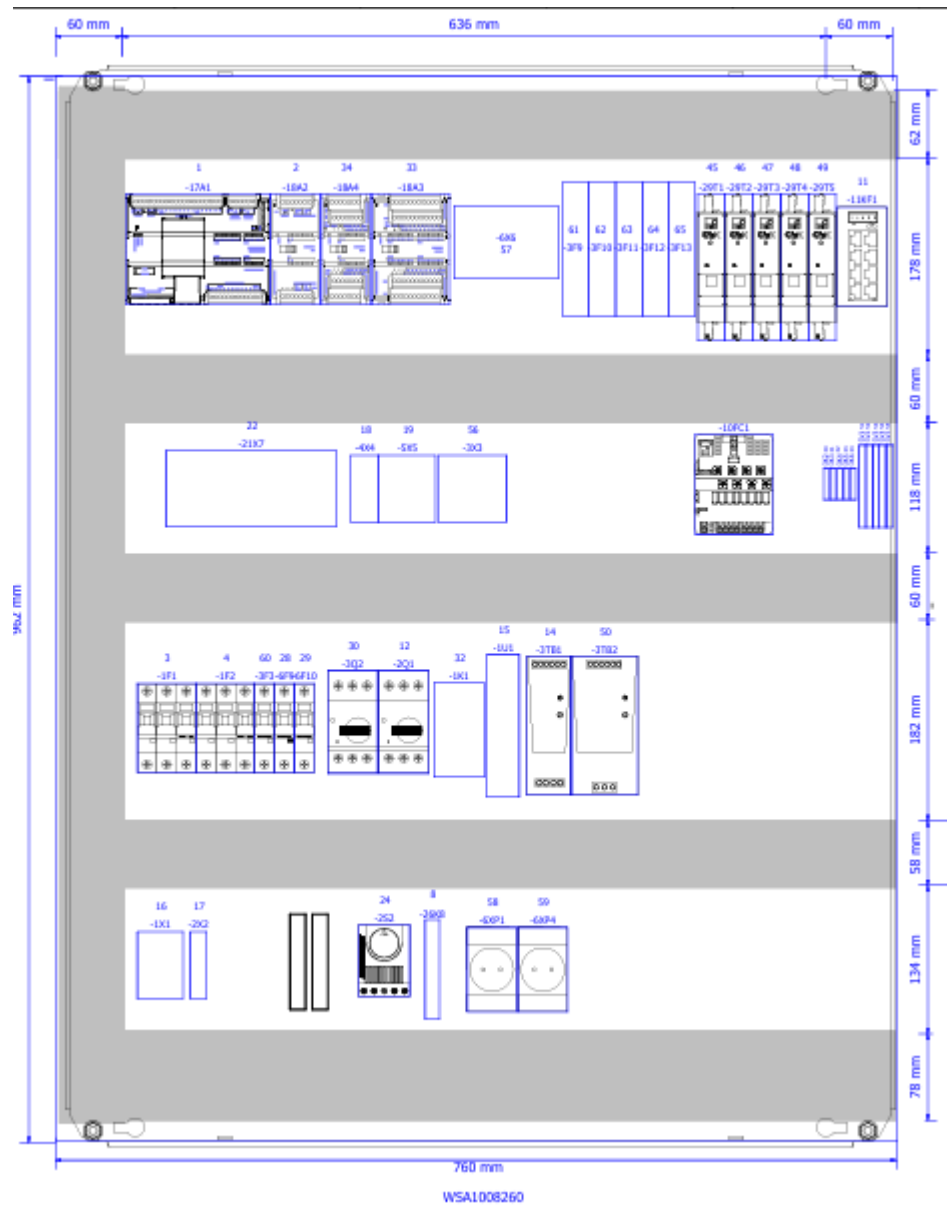

Pregled montažne plošče – elektro sheme

Enclosure legend

= LIN1+OMA1-32M2		
Item number	Device tag	Type number
1	LS1	P3-63/EA/SVB-SW/N
4	1H1	XB4BVM4
5	1H2	XB4BVM4
6	1H3	XB4BVM4
7	2M1	ILKNF1523A
8	11XF1	4000-73000-0010000
9	11XF2	4000-73000-0010000
10	31U3	

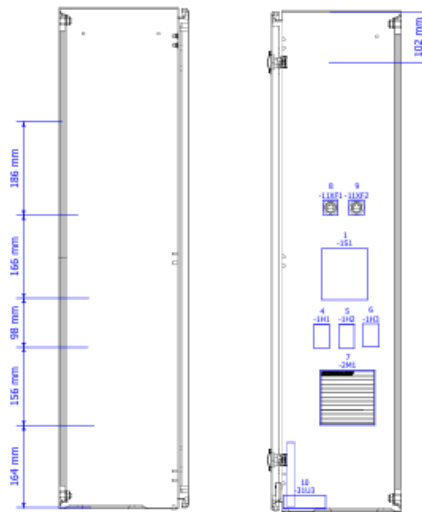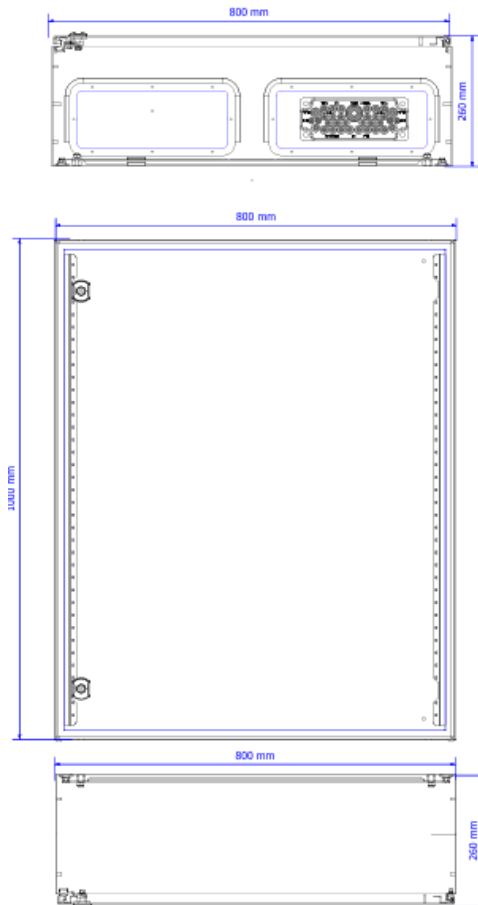

Pregled montažne plošče – elektro sheme

Izbira konektorja za aktuator:

GRAFIČNI PRIKAZ										
Proizvajalec in tip	Harting	09 33 024 2601	Lapp:	75009702	Lapp:	44420088	Hummel:	7.001.916.103 M23	Hummel:	7.084.909.101
Kataloški naziv	Han E 24 Pos. M Insert Screw		EPIC® SIGNAL M23 Kits 12pole		EPIC® POWER LS1 D6 3+PE+4 14-17 (20)		M23 Signal inserts – 16-pole		M23 Power inserts – 9-pole	
Število kontaktov	24		12		3+PE+4		16		5 + 3 + PE	
Max. presek vodnika	0.75mm² - 2.5mm²		0.08mm² - 1mm²		0.5mm² - 4mm²		0.5mm² - 4mm²		0,75mm² – 4 mm²	
Velikost (šxvxg)	100mm x32,5mm x 27mm		26mm x 58mm		26mm x 85mm		26mm x 85mm		26mm x 85mm	
Max. dopusten tok	16A		7A		26 A		8A		28 A	
Max. dopustna napetost	600V		100V		630 V AC rms		100V Ac rms		600 V AC rms	
Temp. območje delovanja	-40 - 125		-40 - 125		-40 - 125		-40 - 125		-40 - 125	
IP zaščita	IP 64		IP 68 - 1m (10h)		IP 68 - 1m (10h)		30		30	
Št priklopov/odklopov	500		100		500		500		500	
Površina kontakta	Ag		Au		Au		Au		Au	
Uporabljen standard	IEC 61984		IEC 61984		IEC 61984		IEC 61984		IEC 61984	


V prvem delu bomo uporabili aktuator z kablskim izhodom, zato kablskega konektorja ne bomo potrebovali. Panelnih konektorjev ne bomo potrebovali saj bodo signalni in napajalni kabli priključeni direktno na vhode/izhode servo ojačevalnika.

Krmilna omara za DD



Priključitev pt100 sond

Komponente krmilne omare DD

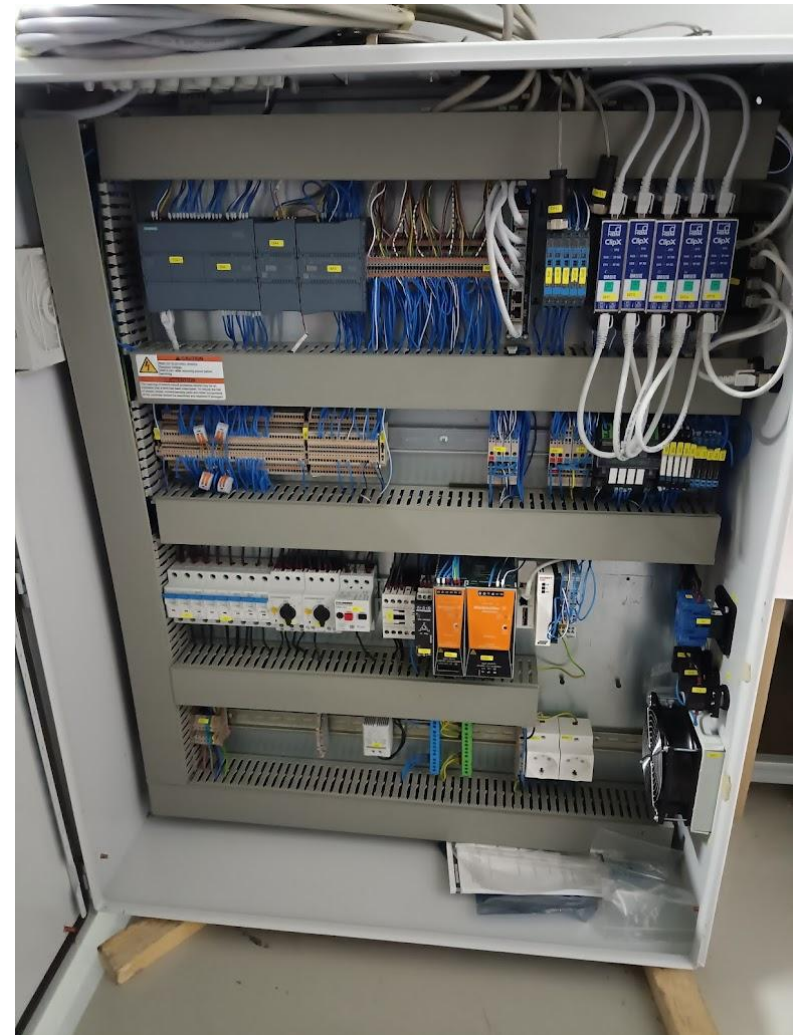



DAFRA D.O.O,
Cesta ob železnici 3, 3310 Žalec

Phone. 386 713 32 30

Company / customer	RRI	
Project description	08/2024 RRI	
Job number	/	
Commission	DAFRA D.O.O., Egasi d.o.o.	
Project name	RRI	
Responsible for project	Dejan Rožič	
Last EPLAN version used	2024.0.3	
Manufacturing date	08.2024	
Type	Machine board	
Place of installation	DAFRA	
Power supply	5G2.5, 3G2.5	
Input lead	3x230/1x230	
Control voltage	24V DC	
Special customer regulations		
Created on	30. 05. 2024	
Edit date	12. 12. 2025	
by (short name) DEJAN		Number of pages 117

SAFETY REGULATIONS

DAFRA D.O.O,
Cesta ob železnici 3, 3310 Žalec



GENERAL SAFETY REGULATIONS



DANGER !

During plant operation certain items are under dangerous voltage!
Non-observance of safety instructions can result in death, serious injuries or material damage.

Only specialist personnel may carry out transport, installation and commissioning work.

The applicable valid standards as well as the national and / or company-specific accident prevention regulations are to be observed.

The following safety instructions are to be observed:

The erection, commissioning, troubleshooting as well as repair of the plant may only be carried out by qualified personnel that is familiar with the corresponding operating instructions.

Mounting of the devices has to be effected in accordance with the valid standards, state and local regulations.
Proper grounding and conductor dimensioning as well as proper short-circuit proofing have to be ensured.
These measures serve to ensure the safety of the plant and of the operating personnel.

Before carrying out safety checks, maintenance work and repair measures ensure that all the power supplies are switched off, are secured against being switched on unintentionally and are marked correspondingly.

Only test devices that are in a technically perfect condition and are suitable for the respective measurement may be used to carry out measurements!

The instructions specified in the respective operating instructions are to be followed strictly!
It is mandatory that hazard, warning and safety instructions be observed!

All doors and covers are to be kept closed during the plant operation.
If cooling devices are installed in the plant, ensure that these systems operate trouble-free.
These include the regular cleaning of the filters, in as far as they exist.

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

Parts list

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=L1+MP-?X1	0					
=L1+MP-?X2	0					
=L1+MP-?X3	0					
=LIN1+OMA1-23B2 =LIN1+OMA1/27.8	0				i_xSmallFeed	
=LIN1+OMA1-23B3 =LIN1+OMA1/27.5	0				i_xDoubleFeed	
=LIN1+OMA1-24B1 =LIN1+OMA1/28.1	0				i_xShapeSensor_1	
=LIN1+OMA1-24B2 =LIN1+OMA1/28.3	0				i_xShapeSensor_2	
=LIN1+OMA1-3F9 =LIN1+OMA1/6.0	1				LUETZE.716406	
=LIN1+OMA1-3F10 =LIN1+OMA1/6.2	1				LUETZE.716406	
=LIN1+OMA1-3F11 =LIN1+OMA1/6.4	1				LUETZE.716406	
=LIN1+OMA1-3F12 =LIN1+OMA1/6.5	1				LUETZE.716406	
=LIN1+OMA1-3F13 =LIN1+OMA1/6.7	1				LUETZE.716406	
=LIN1+OMA1-32M2 =LIN1+OMA1/51	0					
=LIN1+OMA1-33M3 =LIN1+OMA1/52.0	0					
=LIN1+OMA1-24R1 =LIN1+OMA1/30.1	0					
=LIN1+OMA1-24R2 =LIN1+OMA1/30.4	0					
=LIN1+OMA1-24R3 =LIN1+OMA1/30.6	0					
=LIN1+OMA1-24R4 =LIN1+OMA1/30.8	0					

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=LIN1+OMA1-24R5 =LIN1+OMA1/31.1	0					
=LIN1+OMA1-24R6 =LIN1+OMA1/31.4	0					
=LIN1+OMA1-24R7 =LIN1+OMA1/31.6	0					
=LIN1+OMA1-24R8 =LIN1+OMA1/31.8	0					
=LIN1+OMA1-24R9 =LIN1+OMA1/32.1	0					
=LIN1+OMA1-24R10 =LIN1+OMA1/32.4	0					
=LIN1+OMA1-24R11 =LIN1+OMA1/32.6	0					
=LIN1+OMA1-24R12 =LIN1+OMA1/32.8	0					
=LIN1+OMA1-24R13 =LIN1+OMA1/33.1	0					
=LIN1+OMA1-24R14 =LIN1+OMA1/33.4	0					
=LIN1+OMA1-24R15 =LIN1+OMA1/33.6	0					
=LIN1+OMA1-29U2 =LIN1+OMA1/45.8	1				HBM.ClipX	
=LIN1+OMA1-31U3 =LIN1+OMA1/50.2	1				Teltonika.RUT241 router	
=LIN1+OMA1-3V1 =LIN1+OMA1/4.2	1				WEI.8950930000	
=LIN1+OMA1-3V2 =LIN1+OMA1/4.2	1				WEI.8950930000	
=LIN1+OMA1-3V3 =LIN1+OMA1/4.2	1				WEI.8950930000	
=LIN1+OMA1-3V4 =LIN1+OMA1/4.3	1				WEI.8950930000	
=LIN1+OMA1-3V5 =LIN1+OMA1/4.3	1				WEI.8950930000	

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=LIN1+OMA1-1X1 =LIN1+OMA1/52.0	0					
=LIN1+OMA1-2X2 =LIN1+OMA1/2.0;=LIN1+OMA1/52.1	0				Hlajenje ele. omare	
=LIN1+OMA1-3X3 =LIN1+OMA1/4.6;=LIN1+OMA1/52.2	0				48VDC	
=LIN1+OMA1-4X4 =LIN1+OMA1/7.0;=LIN1+OMA1/52.1	0				24V DC	
=LIN1+OMA1-5X5 =LIN1+OMA1/8.0;=LIN1+OMA1/52.2	0				0V DC	
=LIN1+OMA1-6X6 =LIN1+OMA1/52.2	0					
=LIN1+OMA1-21X7 =LIN1+OMA1/25.0;=LIN1+OMA1/52.0	0				PLC sponke	
=LIN1+OMA1-6XP2 =LIN1+OMA1/9.1	0					
=LIN1+OMA1-6XP3 =LIN1+OMA1/9.1	0					
=LIN1+OMA1-6XP5 =LIN1+OMA1/9.2	0					
=LIN1+OMA1-6XP6 =LIN1+OMA1/9.2	0					
=LIN1+FIELD-6M1 =LIN1+OMA1/10.1	0				Actuator	
=LIN1+FIELD-6M2 =LIN1+OMA1/10.4	0				=	
=LIN1+FIELD-6M3 =LIN1+OMA1/11.1	0				=	
=LIN1+FIELD-6M4 =LIN1+OMA1/11.4	0				=	
=LIN1+FIELD-6M5 =LIN1+OMA1/12.1	0				=	
=LIN1+FIELD-30R1 =LIN1+OMA1/49.1	0				RTD1	
=LIN1+FIELD-30R2 =LIN1+OMA1/49.3	0				RTD2	

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=LIN1+FIELD-30R3 =LIN1+OMA1/49.6	0				RTD3	
=LIN1+FIELD-30R4 =LIN1+OMA1/49.8	0				RTD4	
=LIN1+FIELD-21U1 =LIN1+OMA1/25.3	0					
=LIN1+FIELD-31U2 =LIN1+OMA1/50.0	1				Lenovo.PC PC - lenovo	
=LIN1+OMA1-1S1 =LIN1+OMA1/1.1	1	Main switch, 3 pole + N, 63 A, STOP function, Lockable in the 0 (Off) position, flush mounting	P3-63/EA/SVB-SW/N 012771	ETN ETN	ETN.P3-63/EA/SVB-SW/N Glavno stikalo 63A Main Switch 63A	
=LIN1+OMA1-29T1 =LIN1+OMA1/45.2	1 Piece	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP	BM40IE 1-BM40IE	HBM HBM	HBM.BM40IE	
=LIN1+OMA1-29T2 =LIN1+OMA1/45.2	1 Piece	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP	BM40IE 1-BM40IE	HBM HBM	HBM.BM40IE	
=LIN1+OMA1-29T3 =LIN1+OMA1/46.2	1 Piece	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP	BM40IE 1-BM40IE	HBM HBM	HBM.BM40IE	
=LIN1+OMA1-29T4 =LIN1+OMA1/46.2	1 Piece	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP	BM40IE 1-BM40IE	HBM HBM	HBM.BM40IE	
=LIN1+OMA1-29T5 =LIN1+OMA1/47.2	1 Piece	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP	BM40IE 1-BM40IE	HBM HBM	HBM.BM40IE	
=LIN1+OMA1-10FC1 =LIN1+OMA1/13.1	1 piece	Current monitoring equipment MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT, 8 CHANNELS (IN: 24VDC OUT: 5x24V/2ADC 3x24V/6ADC)	9000-41068-0200600 9000-41068-0200600	MURR	MURR.9000-41068-0200600	
=LIN1+OMA1-11KF1 =LIN1+OMA1/14.0	1 Piece	TREE 8TX METALL - UNMANAGED SWITCH - 8 PORTS	8 port unmanaged switch 58171	MURR	MURR.58171	
=LIN1+OMA1-11XF1 =LIN1+OMA1/14.6	1 Piece	Connector (special) MSDD INSTALLATION SOCKET RJ45 CAT5e BU/BU	4000-73000-0010000 4000-73000-0010000	MURR	MURR.4000-73000-0010000	
=LIN1+OMA1-11XF2 =LIN1+OMA1/14.7	1 Piece	Connector (special) MSDD INSTALLATION SOCKET RJ45 CAT5e BU/BU	4000-73000-0010000 4000-73000-0010000	MURR	MURR.4000-73000-0010000	
=LIN1+OMA1-1F1 =LIN1+OMA1/1.1	1 KOS piece	Inštalacijski odklopnik, karak. C, 10A, 10kA, 3-polni Miniature Circuit Breaker (MCB) C10/3, 10kA	BM017310-- BM017310--	SCHR SCHR	SCHR.BM017310--	
=LIN1+OMA1-1F2 =LIN1+OMA1/1.3	1 KOS piece	Inštalacijski odklopnik, karak. C, 2A, 3-polni, 10kA Miniature Circuit Breaker (MCB) C2/3, 10kA	BM017302-- BM017302--	SCHR SCHR	SCHR.BM017302--	
=LIN1+OMA1-3F3 =LIN1+OMA1/4.1	1 KOS piece	Inštalacijski odklopnik, karak. B, 4A, 1-polni, 10kA Miniature Circuit Breaker (MCB) B 4/1, 10kA	BM018104-- BM018104--	SCHR SCHR	SCHR.BM018104--	
=LIN1+OMA1-6F9 =LIN1+OMA1/9.1	1 kos piece	Inštalacijski odklopnik, karak. C, 6A, 1-polni, 10kA Miniature Circuit Breaker (MCB) C6/1, 10kA	BM017106-- BM017106--	SCHR	SCHR.BM017106--	

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=LIN1+OMA1-6F10 =LIN1+OMA1/9.2	1 kos piece	Inštalacijski odklopnik, karak. C, 6A, 1-polni, 10kA Miniature Circuit Breaker (MCB) C6/1, 10kA	BM017106-- BM017106--	SCHR	SCHR.BM017106--	
=LIN1+OMA1-2M1 =LIN1+OMA1/2.1	1 KOS piece	Ventilator s filtrom 230V, 11W, 109x109x62mm, IP54, 16m3/h Filter Ventilator 109x109x62mm (25m³/h), IP54	IUKNF1523A IUKNF1523A	SCHR SCHR	SCHR.IUKNF1523A Hlajenje ele. omare Cooling Cabinet	
=LIN1+OMA1-N =LIN1+OMA1/1.1	0 KOS piece	N-sponka za 15 odvodov, montaža na DIN letev, izolirana Insulated neutral terminal, 15 outgoing terminals	IK021038I- IK021038I-	SCHR SCHR	SCHR.IK021038I- N BusBar	
=LIN1+OMA1-PE =LIN1+OMA1/1.2	0 KOS piece	PE-sponka za 15 odvodov, montaža na DIN letev, izolirana Insulated PE terminal, 15 outgoing terminals	IK021039I- IK021039I-	SCHR SCHR	SCHR.IK021039I- PE BusBar	
=LIN1+OMA1-2Q1 =LIN1+OMA1/2.1	1 KOS piece	Motorsko zaščitno stikalo BE5 0,63-1,0A / 3P Motor Protection Circuit Breaker, 3-pole, 0.63-1.0A	BE501000-- BE501000--	SCHR SCHR	SCHR.BE501000--	
=LIN1+OMA1-2Q1 =LIN1+OMA1/2.1	1 KOS piece	Pomožni kontakt MZS BE5, 1Z in 1O, čelna vgradnja Auxiliary contact front, 1NO+1NC	BE082882-- BE082882--	SCHR SCHR	SCHR.BE082882--	
=LIN1+OMA1-3Q2 =LIN1+OMA1/3.1	1 KOS piece	Motorsko zaščitno stikalo BE5 0,63-1,0A / 3P Motor Protection Circuit Breaker, 3-pole, 0.63-1.0A	BE501000-- BE501000--	SCHR SCHR	SCHR.BE501000--	
=LIN1+OMA1-3Q2 =LIN1+OMA1/3.1	1 KOS piece	Pomožni kontakt MZS BE5, 1Z in 1O, čelna vgradnja Auxiliary contact front, 1NO+1NC	BE082882-- BE082882--	SCHR SCHR	SCHR.BE082882--	
=LIN1+OMA1-2S2 =LIN1+OMA1/2.1	1 KOS piece	Termostat za ventilator, 0 - 60° C, 1 delovni kontakt Ventilation thermostat 1 NO switch, blue, 0°-60°C	IUK08566-- IUK08566--	SCHR SCHR	SCHR.IUK08566-- Termostat 0-60	
=LIN1+OMA1-1U1 =LIN1+OMA1/1.3	1	UR6P3052 Rele, nadzor zaporedja faz, 3-fazni, 2 preklopna kontakta	UR6P3052 UR6P3052	SCHR SCHR	SCH.UR6P3052	
=LIN1+OMA1-24VDC =LIN1+OMA1/30.1	0 KOS piece	PE-sponka za 15 odvodov, montaža na DIN letev, izolirana Insulated PE terminal, 15 outgoing terminals	IK021039I- IK021039I-	SCHR SCHR	SCHR.IK021039I- 24V BusBar	
=LIN1+OMA1-6XP1 =LIN1+OMA1/9.1	1 KOS piece	Vtičnica za montažo na letev s LED signalizacijo Rail mountable socket, with LED and screw connection	BZ325003-- BZ325003--	SCHR SCHR	SCHR.BZ325003--	
=LIN1+OMA1-6XP4 =LIN1+OMA1/9.2	1 KOS piece	Vtičnica za montažo na letev s LED signalizacijo Rail mountable socket, with LED and screw connection	BZ325003-- BZ325003--	SCHR SCHR	SCHR.BZ325003--	
=LIN1+OMA1-1H1 =LIN1+OMA1/1.2	1 Piece	Red complete pilot light Ø22 plain lens with integral LED 230...240V	XB4BVM4 XB4BVM4	SE SE	SE.XB4BVM4	
=LIN1+OMA1-1H2 =LIN1+OMA1/1.2	1 Piece	Red complete pilot light Ø22 plain lens with integral LED 230...240V	XB4BVM4 XB4BVM4	SE SE	SE.XB4BVM4	
=LIN1+OMA1-1H3 =LIN1+OMA1/1.3	1 Piece	Red complete pilot light Ø22 plain lens with integral LED 230...240V	XB4BVM4 XB4BVM4	SE SE	SE.XB4BVM4	
=LIN1+OMA1-1K1 =LIN1+OMA1/1.7	1	Contactor TeSys LC1-D - 3P - AC-3 440V 38 A, Coil 230 V AC Coil 230 V AC	LC1-D 3P 38A LC1D38P7	SE SE	SE.LC1D38P7	
=LIN1+OMA1-3K2 =LIN1+OMA1/5.4	1	Slim interface plug-in relay - Zelio RSL - 1 C/O standard - 24 V DC - 6 A	RSL1AB4BD RSL1AB4BD	SE SE	SE.RSL1AB4BD POWER ENABLE M1	

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=LIN1+OMA1-3K2 =LIN1+OMA1/5.4	1	Screw socket equipped with LED and protection circuit, 12-24 V	RSLZVA1 RSLZVA1	SE SE	SE.RSLZVA1 POWER ENABLE M1	
=LIN1+OMA1-3K3 =LIN1+OMA1/5.5	1	Slim interface plug-in relay - Zelio RSL - 1 C/O standard - 24 V DC - 6 A	RSL1AB4BD RSL1AB4BD	SE SE	SE.RSL1AB4BD POWER ENABLE M2	
=LIN1+OMA1-3K3 =LIN1+OMA1/5.5	1	Screw socket equipped with LED and protection circuit, 12-24 V	RSLZVA1 RSLZVA1	SE SE	SE.RSLZVA1 =	
=LIN1+OMA1-3K4 =LIN1+OMA1/5.6	1	Slim interface plug-in relay - Zelio RSL - 1 C/O standard - 24 V DC - 6 A	RSL1AB4BD RSL1AB4BD	SE SE	SE.RSL1AB4BD POWER ENABLE M3	
=LIN1+OMA1-3K4 =LIN1+OMA1/5.6	1	Screw socket equipped with LED and protection circuit, 12-24 V	RSLZVA1 RSLZVA1	SE SE	SE.RSLZVA1 =	
=LIN1+OMA1-3K5 =LIN1+OMA1/5.7	1	Slim interface plug-in relay - Zelio RSL - 1 C/O standard - 24 V DC - 6 A	RSL1AB4BD RSL1AB4BD	SE SE	SE.RSL1AB4BD POWER ENABLE M4	
=LIN1+OMA1-3K5 =LIN1+OMA1/5.7	1	Screw socket equipped with LED and protection circuit, 12-24 V	RSLZVA1 RSLZVA1	SE SE	SE.RSLZVA1 =	
=LIN1+OMA1-3K6 =LIN1+OMA1/5.8	1	Slim interface plug-in relay - Zelio RSL - 1 C/O standard - 24 V DC - 6 A	RSL1AB4BD RSL1AB4BD	SE SE	SE.RSL1AB4BD POWER ENABLE M5	
=LIN1+OMA1-3K6 =LIN1+OMA1/5.8	1	Screw socket equipped with LED and protection circuit, 12-24 V	RSLZVA1 RSLZVA1	SE SE	SE.RSLZVA1 =	
=LIN1+OMA1-17A1 =LIN1+OMA1/19.4	1	CPU 1215C, DC/DC/DC, 14DI/10DO/2AI/2AO SIMATIC, S7-1200	6ES7215-1AG40-0XB0 6ES7215-1AG40-0XB0	SIE SIE	SIE.6ES7215-1AG40-0XB0	
=LIN1+OMA1-18A2 =LIN1+OMA1/20.0	1 piece	S7-1200, ANALOG INPUT SM 1231 TC, 4 AI SIMATIC, S7-1200	6ES7231-5QD32-0XB0 6ES7231-5QD32-0XB0	SIE	SIE.6ES7231-5QD32-0XB0	
=LIN1+OMA1-18A3 =LIN1+OMA1/21.3	1	DIGITAL I/O SM 1223, 16DI/16DO SIMATIC, S7-1200	6ES7223-1BL32-0XB0 6ES7223-1BL32-0XB0	SIE SIE	SIE.6ES7223-1BL32-0XB0	
=LIN1+OMA1-18A4 =LIN1+OMA1/22.1	1	S7-1200, ANALOG INPUT SM 1231 RTD, 4 AI SIMATIC, S7-1200	6ES7231-5PD32-0XB0 6ES7231-5PD32-0XB0	SIE SIE	SIE.6ES7231-5PD32-0XB0	
=LIN1+OMA1-15K7 =LIN1+OMA1/17.2	1	SIMATIC HMI KTP700 BASIC SIMATIC, HMI	6AV2123-2GB03-0AX0 6AV2123-2GB03-0AX0	SIE SIE	SIE.6AV2123-2GB03-0AX0	
=LIN1+FIELD-20A1 =LIN1+OMA1/24.2	1	SIMATIC HMI KTP700 BASIC SIMATIC, HMI	6AV2123-2GB03-0AX0 6AV2123-2GB03-0AX0	SIE SIE	SIE.6AV2123-2GB03-0AX0	
=LIN1+OMA1-26K8 =LIN1+OMA1/36.1	1 Piece	Relay module Relay module, 24 V DC +/-20 %, Green LED, Free-wheeling diode, Reverse polarity protection, 12-24 V DC (AgNi) , 250 V AC, 8 A, Screw connection	TRS 24VDC 2CO 123490000	WEI	WEI.1123490000	
=LIN1+OMA1-3TB1 =LIN1+OMA1/3.0	1 piece	Continuous current supply Power supply, 120 W, 5 A at 55 °C	PRO ECO3 120W 24V 5A 1469530000	WEI	WEI.1469530000	
=LIN1+OMA1-3TB2 =LIN1+OMA1/4.1	1 piece	Continuous current supply Power supply, 240 W, 5 A at 55 °C	PRO ECO 240W 48V 5A 1469590000	WEI	WEI.1469590000	

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=LIN1+OMA1-3V1 =LIN1+OMA1/52.4	1 Piece	Solid-state relais Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-HE75100000	TOS 24VDC/24VDC 4A HE75100000V DC, 4 A, Screw connection	WEI	WEI.1275100000	
=LIN1+OMA1-3V2 =LIN1+OMA1/52.4	1 Piece	Solid-state relais Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-HE75100000	TOS 24VDC/24VDC 4A HE75100000V DC, 4 A, Screw connection	WEI	WEI.1275100000	
=LIN1+OMA1-3V3 =LIN1+OMA1/52.4	1 Piece	Solid-state relais Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-HE75100000	TOS 24VDC/24VDC 4A HE75100000V DC, 4 A, Screw connection	WEI	WEI.1275100000	
=LIN1+OMA1-3V4 =LIN1+OMA1/52.4	1 Piece	Solid-state relais Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-HE75100000	TOS 24VDC/24VDC 4A HE75100000V DC, 4 A, Screw connection	WEI	WEI.1275100000	
=LIN1+OMA1-3V5 =LIN1+OMA1/52.4	1 Piece	Solid-state relais Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-HE75100000	TOS 24VDC/24VDC 4A HE75100000V DC, 4 A, Screw connection	WEI	WEI.1275100000	
=LIN1+OMA1-1X1 =LIN1+OMA1/1.0	2 Piece	End bracket End bracket, Wemid, dark beige, Rail: TS 35, when screwed in	WEW 35/2 1061200000	WEI	WEI.1061200000 Dovodne sponke	

Summarized parts list

F02_002

+Part_List/1.f

2.a

 inovativno · zanesljivo · globalno DAFRA Kontakt tehnologija	Odgovoren	Dejan Rožič	12. 12. 2025	DAFRA D.O.O., Egasi d.o.o.	Sumarna kosovnica			= Dokumentacija	
	Preveril	Vodja projektive						+ Summarized_partList	
	Mail	dejan.rozic@dafra-kt.si	08/2024 RRI				/	Page 2	
	Verzija eplan	2024.0.3						Page 10 / 117	

Summarized parts list

F02_002

Order number	Quantity	Designation	Type number	Supplier	Unit price	Total price
UR6P3052	1	UR6P3052 Rele, nadzor zaporedja faz, 3-fazni, 2 preklopna kontakta	UR6P3052	SCHR	0,00	0,00
	1				0,00	0,00
	1				0,00	0,00
	5					0,00
1275100000	5	Solid-state relais	TOS 24VDC/24VDC 4A		0,00	0,00
1061200000	2	End bracket	WEW 35/2		0,00	0,00
4000-73000-0010000	2	Connector (special)	4000-73000-0010000		0,00	0,00
BZ325003--	2	Vtičnica za montažo na letev s LED signalizacijo Rail mountable socket, with LED and screw connection	BZ325003--	SCHR	0,00	0,00
	1				0,00	0,00

0

1

2

3

4

5

6

7

8

9

Cable name

W2

Cable type

PUR 4x0.34 mm²

Free conductors

Location designation

Source

Function text source

Stopper

L1
[mm]

Part number

=LIN1+OMA1-210X7:7:

i_xSmallFeed

=LIN1+OMA1-210X7:8:2

i_xSmallFeed

=LIN1+OMA1-210X7:5:

=

5 m

-W2

L1

BN

WH

BU

BK

L2

BN

WH

BU

BK

Cable parts

TUR.6625504

Order number

6625504

Part number

L2
[mm]

Stopper

Function text target

Target

Location designation

i_xSmallFeed

=LIN1+OMA1-23B2:1

i_xSmallFeed

=LIN1+OMA1-23B2:2

=

=LIN1+OMA1-23B2:3

+Summarized_partList/2.a

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projektive

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

5

Page

12 / 117

6

0

1

2

3

4

5

6

7

8

9

Cable name

W3

Cable type

PUR 4x0.34 mm²

Free conductors

Location designation

Source

Function text source

Stopper

L1
[mm]

Part number

=LIN1+OMA1-210X7:11

i_xShapeSensor_1

=LIN1+OMA1-210X7:12

i_xShapeSensor_1

=LIN1+OMA1-210X7:9

=

5 m

-W3

L1

BN

WH

BU

BK

L2

BN

WH

BU

BK

Cable parts

TUR.6625504

Order number

6625504

Part number

L2
[mm]

Stopper

Function text target

Target

Location designation

i_xShapeSensor_1

=LIN1+OMA1-24B1:1

i_xShapeSensor_1

=LIN1+OMA1-24B1:2

=

=LIN1+OMA1-24B1:3

5

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projektive

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page 6

Page 13 / 117

7

0

1

2

3

4

5

6

7

8

9

Cable name

W4

Cable type

PUR 4x0.34 mm²

Free conductors

Location designation

Source

Function text source

Stopper

L1
[mm]

Part number

=LIN1+OMA1-210X7:15

i_xShapeSensor_2

=LIN1+OMA1-210X7:16

i_xShapeSensor_2

=LIN1+OMA1-210X7:13

5 m

-W4

L1

BN

WH

BU

BK

L2

BN

WH

BU

BK

Cable parts

TUR.6625504

Order number

6625504

Part number

L2
[mm]

Stopper

Function text target

Target

Location designation

i_xShapeSensor_2

=LIN1+OMA1-24B2:1

i_xShapeSensor_2

=LIN1+OMA1-24B2:2

=

=LIN1+OMA1-24B2:3

6

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projekte

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page 7

Page 14 / 117

8

Cable name

W5

Cable type

PUR 4x0.34 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-210X7:3:	i_xDoubleFeed			
	=LIN1+OMA1-210X7:4:2	i_xDoubleFeed			
	=LIN1+OMA1-210X7:1:	=			

5 m

-W5

L1

BN

WH

BU

BK

L2

BN

WH

BU

BK

Cable parts

TUR.6625504

Order number

6625504

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
			i_xDoubleFeed	=LIN1+OMA1-23B3:1	
			i_xDoubleFeed	=LIN1+OMA1-23B3:2	
			=	=LIN1+OMA1-23B3:3	

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren	Dejan Rožič	12. 12. 2025
Preveril	Vodja projektive	
Mail	dejan.rozic@dafra-kt.si	
Verzija eplan	2024.0.3	

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page 8

Page 15 / 117

Cable name6W1

Cable typeUNITRONIC® LiYCY 15x0,34 mm²

Free conductors25

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-6X6:2:2				
	=LIN1+OMA1-6X6:8:4				
	=LIN1+OMA1-6X6:14:4				
	=LIN1+OMA1-6X6:12:4				
	=LIN1+OMA1-6X6:10:4				
	=LIN1+OMA1-6X6:15:2				
	=LIN1+OMA1-6X6:13:2				
	=LIN1+OMA1-6X6:11:2				
	=LIN1+OMA1-6X6:6:1				
	=LIN1+OMA1-6X6:4:1				
	=LIN1+OMA1-6X6:1:4				
	=LIN1+OMA1-6X6:3:3				
	=LIN1+OMA1-6X6:9:2				
	=LIN1+OMA1-6X6:7:3				
	=LIN1+OMA1-6X6:5:3				

5 m

-6W1

L1

L2

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

Cable parts

Order number

LAPP.0034515

0034515

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+FIELD-6M1:1	FIELD
				=LIN1+FIELD-6M1:2	FIELD
				=LIN1+FIELD-6M1:3	FIELD
				=LIN1+FIELD-6M1:4	FIELD
				=LIN1+FIELD-6M1:5	FIELD
				=LIN1+FIELD-6M1:6	FIELD
				=LIN1+FIELD-6M1:7	FIELD
				=LIN1+FIELD-6M1:8	FIELD
				=LIN1+FIELD-6M1:9	FIELD
				=LIN1+FIELD-6M1:10	FIELD
				=LIN1+FIELD-6M1:11	FIELD
				=LIN1+FIELD-6M1:12	FIELD
				=LIN1+FIELD-6M1:15	FIELD
				=LIN1+FIELD-6M1:14	FIELD
				=LIN1+FIELD-6M1:13	FIELD

8

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projekte

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page9

Page16 / 117

10

Cable name6W2

Cable typeUNITRONIC® LiYCY 15x0,34 mm²

Free conductors25

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-6X6:17:2				
	=LIN1+OMA1-6X6:24:4				
	=LIN1+OMA1-6X6:30:4				
	=LIN1+OMA1-6X6:28:4				
	=LIN1+OMA1-6X6:26:4				
	=LIN1+OMA1-6X6:31:2				
	=LIN1+OMA1-6X6:29:2				
	=LIN1+OMA1-6X6:27:2				
	=LIN1+OMA1-6X6:21:2				
	=LIN1+OMA1-6X6:19:2				
	=LIN1+OMA1-6X6:16:4				
	=LIN1+OMA1-6X6:18:4				
	=LIN1+OMA1-6X6:25:2				
	=LIN1+OMA1-6X6:22:4				
	=LIN1+OMA1-6X6:20:4				

5 m

-6W2

L1

L2

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

Cable parts

Order number

LAPP.0034515

0034515

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+FIELD-6M2:1	FIELD
				=LIN1+FIELD-6M2:2	FIELD
				=LIN1+FIELD-6M2:3	FIELD
				=LIN1+FIELD-6M2:4	FIELD
				=LIN1+FIELD-6M2:5	FIELD
				=LIN1+FIELD-6M2:6	FIELD
				=LIN1+FIELD-6M2:7	FIELD
				=LIN1+FIELD-6M2:8	FIELD
				=LIN1+FIELD-6M2:9	FIELD
				=LIN1+FIELD-6M2:10	FIELD
				=LIN1+FIELD-6M2:11	FIELD
				=LIN1+FIELD-6M2:12	FIELD
				=LIN1+FIELD-6M2:15	FIELD
				=LIN1+FIELD-6M2:14	FIELD
				=LIN1+FIELD-6M2:13	FIELD

9

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projektive

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

10

Page

17 / 117

11

Cable name6W3

Cable typeUNITRONIC® LiYCY 15x0,34 mm²

Free conductors25

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-6X6:33:2				
	=LIN1+OMA1-6X6:40:4				
	=LIN1+OMA1-6X6:46:4				
	=LIN1+OMA1-6X6:44:4				
	=LIN1+OMA1-6X6:42:4				
	=LIN1+OMA1-6X6:47:2				
	=LIN1+OMA1-6X6:45:2				
	=LIN1+OMA1-6X6:43:2				
	=LIN1+OMA1-6X6:37:2				
	=LIN1+OMA1-6X6:35:2				
	=LIN1+OMA1-6X6:32:4				
	=LIN1+OMA1-6X6:34:4				
	=LIN1+OMA1-6X6:41:2				
	=LIN1+OMA1-6X6:38:4				
	=LIN1+OMA1-6X6:36:4				

5 m

-6W3

L1

L2

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

Cable parts

Order number

LAPP.0034515

0034515

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+FIELD-6M3:1	FIELD
				=LIN1+FIELD-6M3:2	FIELD
				=LIN1+FIELD-6M3:3	FIELD
				=LIN1+FIELD-6M3:4	FIELD
				=LIN1+FIELD-6M3:5	FIELD
				=LIN1+FIELD-6M3:6	FIELD
				=LIN1+FIELD-6M3:7	FIELD
				=LIN1+FIELD-6M3:8	FIELD
				=LIN1+FIELD-6M3:9	FIELD
				=LIN1+FIELD-6M3:10	FIELD
				=LIN1+FIELD-6M3:11	FIELD
				=LIN1+FIELD-6M3:12	FIELD
				=LIN1+FIELD-6M3:15	FIELD
				=LIN1+FIELD-6M3:14	FIELD
				=LIN1+FIELD-6M3:13	FIELD

10

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren

Preveril

Mail

Verzija eplan

Dejan Rožič

Vodja projekte

dejan.rozic@dafra-kt.si

2024.0.3

12. 12. 2025

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

11

Page

18 / 117

12

Cable name6W4

Cable typeUNITRONIC® LiYCY 15x0,34 mm²

Free conductors25

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-6X6:49:2				
	=LIN1+OMA1-6X6:56:4				
	=LIN1+OMA1-6X6:62:4				
	=LIN1+OMA1-6X6:60:4				
	=LIN1+OMA1-6X6:58:4				
	=LIN1+OMA1-6X6:63:2				
	=LIN1+OMA1-6X6:61:2				
	=LIN1+OMA1-6X6:59:2				
	=LIN1+OMA1-6X6:53:2				
	=LIN1+OMA1-6X6:51:2				
	=LIN1+OMA1-6X6:48:4				
	=LIN1+OMA1-6X6:50:4				
	=LIN1+OMA1-6X6:57:2				
	=LIN1+OMA1-6X6:54:4				
	=LIN1+OMA1-6X6:52:4				

5 m

-6W4

L1

L2

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

Cable parts

Order number

LAPP.0034515

0034515

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+FIELD-6M4:1	FIELD
				=LIN1+FIELD-6M4:2	FIELD
				=LIN1+FIELD-6M4:3	FIELD
				=LIN1+FIELD-6M4:4	FIELD
				=LIN1+FIELD-6M4:5	FIELD
				=LIN1+FIELD-6M4:6	FIELD
				=LIN1+FIELD-6M4:7	FIELD
				=LIN1+FIELD-6M4:8	FIELD
				=LIN1+FIELD-6M4:9	FIELD
				=LIN1+FIELD-6M4:10	FIELD
				=LIN1+FIELD-6M4:11	FIELD
				=LIN1+FIELD-6M4:12	FIELD
				=LIN1+FIELD-6M4:15	FIELD
				=LIN1+FIELD-6M4:14	FIELD
				=LIN1+FIELD-6M4:13	FIELD

Cable name6W5

Cable typeUNITRONIC® LiYCY 15x0,34 mm²

Free conductors25

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-6X6:65:2				
	=LIN1+OMA1-6X6:72:4				
	=LIN1+OMA1-6X6:78:4				
	=LIN1+OMA1-6X6:76:4				
	=LIN1+OMA1-6X6:74:4				
	=LIN1+OMA1-6X6:79:2				
	=LIN1+OMA1-6X6:77:2				
	=LIN1+OMA1-6X6:75:2				
	=LIN1+OMA1-6X6:69:2				
	=LIN1+OMA1-6X6:67:2				
	=LIN1+OMA1-6X6:64:4				
	=LIN1+OMA1-6X6:66:4				
	=LIN1+OMA1-6X6:73:2				
	=LIN1+OMA1-6X6:70:4				
	=LIN1+OMA1-6X6:68:4				

5 m

-6W5

L1

L2

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

WH

BN

GN

YE

GY

PK

BU

RD

BK

VT

GYPK

RDBU

WHGN

BNGN

WHYE

SH

BNGN

WHGN

Cable parts

Order number

LAPP.0034515

0034515

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+FIELD-6M5:1	FIELD
				=LIN1+FIELD-6M5:2	FIELD
				=LIN1+FIELD-6M5:3	FIELD
				=LIN1+FIELD-6M5:4	FIELD
				=LIN1+FIELD-6M5:5	FIELD
				=LIN1+FIELD-6M5:6	FIELD
				=LIN1+FIELD-6M5:7	FIELD
				=LIN1+FIELD-6M5:8	FIELD
				=LIN1+FIELD-6M5:9	FIELD
				=LIN1+FIELD-6M5:10	FIELD
				=LIN1+FIELD-6M5:11	FIELD
				=LIN1+FIELD-6M5:12	FIELD
				=LIN1+FIELD-6M5:15	FIELD
				=LIN1+FIELD-6M5:14	FIELD
				=LIN1+FIELD-6M5:13	FIELD

12

inovativno · zanesljivo · globalno

DAFRA

Kontakt tehnologija

Odgovoren

Preveril

Mail

Verzija eplan

Dejan Rožič

Vodja projektive

dejan.rozic@dafra-kt.si

2024.0.3

12. 12. 2025

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

13

Page

20 / 117

14

Cable name11W6

Cable typeETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-11KF1:X1	PLC KOMUNIKACIJA			

L1

WH

YE

BU

OG

SH

-11W6

L2

WH

YE

BU

OG

SH

Cable parts

Order number

LAPP.2170891

2170891

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+OMA1-17A1:X1P1 R	

Cable name11W7

Cable typeETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number

WH

YE

BU

OG

SH

-11W7

WH

YE

BU

OG

SH

L1

L2

Cable parts

Order number

LAPP.2170891

2170891

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				NG-LIN1+OMA1-11KF1:X2:1	

Cable name11W8

Cable typeETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number

WH

YE

BU

OG

SH

WH

YE

BU

OG

SH

-11W8

L2

L1

Cable parts

Order number

LAPP.2170891

2170891

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation

15

DAFRA

Kontakt tehnologija

inovativno · zanesljivo · globalno

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projekte

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

16

Page

23 / 117

17

Cable name11W9

Cable typeETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number

WH

YE

BU

OG

SH

-11W9

WH

YE

BU

OG

SH

L1

L2

Cable parts

Order number

LAPP.2170891

2170891

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation

16

DAFRA

Kontakt tehnologija

inovativno · zanesljivo · globalno

Odgovoren

Preveril

Mail

Verzija eplan

Dejan Rožič

Vodja projektive

dejan.rozic@dafra-kt.si

2024.0.3

12. 12. 2025

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

17

Page

24 / 117

18

Cable name


11W10

Cable type

ETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-11KF1:X5:NC				

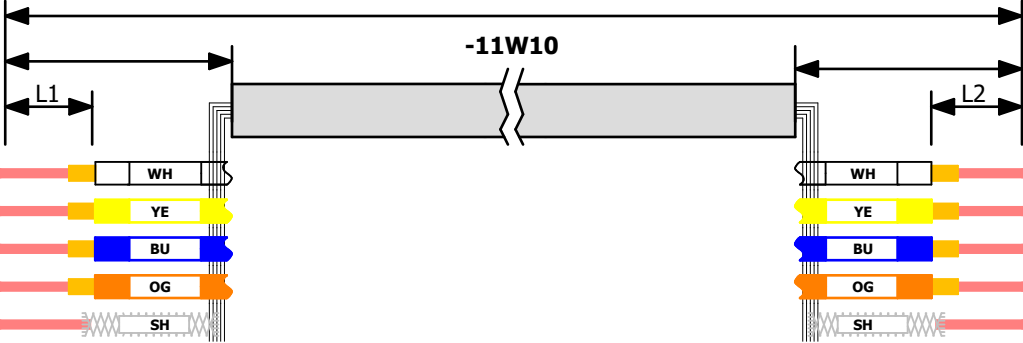

Cable parts

LAPP.2170891

Order number

2170891

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+OMA1-29T1:X6:1-8	

17



inovativno · zanesljivo · globalno

DAFRA

Kontakt tehnologija

Odgovoren	Dejan Rožič	12. 12. 2025
Preveril	Vodja projektive	
Mail	dejan.rozic@dafra-kt.si	
Verzija eplan	2024.0.3	

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija	
+ Cable_Diagram	
/	
Page	18
Page	25 / 117

19

0

1

2

3

4

5

6

7

8

9

Cable name11W11

Cable typeETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-11KF1:XG:1				

WH

YE

BU

OG

SH

-11W11

WH

YE

BU

OG

SH

Part number

L2 [mm]

Stopper

Function text target

Target

Location designation

				=LIN1+OMA1-11XF1:X1:IN:1-8	

Cable parts

Order number

LAPP.2170891

2170891

18

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projekte

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

19

Page

26 / 117

20

Cable name


11W12

Cable type

ETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-11KF1:X7:NC				

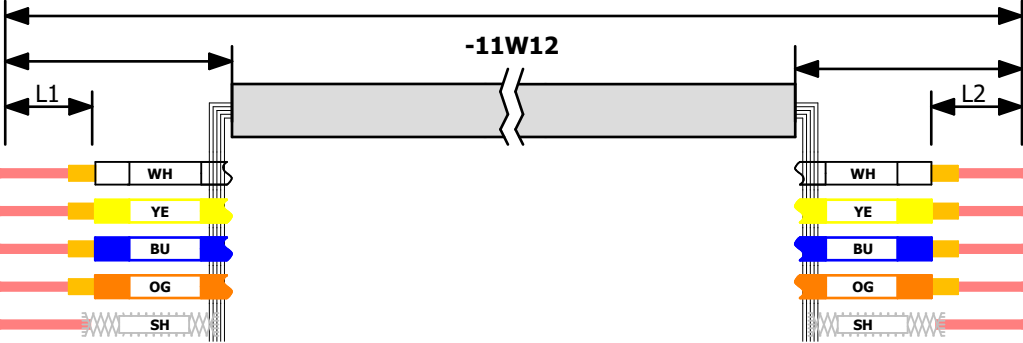

Cable parts

LAPP.2170891

Order number

2170891

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
			=LIN1+OMA1-11XF2:X1:IN:1-8		

19

inovativno • zanesljivo • globalno

DAFRA

Kontakt tehnologija

Odgovoren	Dejan Rožič	12. 12. 2025
Preveril	Vodja projektive	
Mail	dejan.rozic@dafra-kt.si	
Verzija eplan	2024.0.3	

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page20

Page27 / 117

21

Cable name11W13

Cable typeETHERLINE® PN Cat.5e Y 4x22 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-11KF1:X8:NC				

0

1

2

3

4

5

6

7

8

9

Cable name12W14

Cable type

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-21X7:1:2				
	=LIN1+OMA1-21X7:2:4				
	=LIN1+OMA1-21X7:3:2				

5 m

-12W14

L1

BK

BN

GY

L2

BK

BN

GY

Cable parts

Order number

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+PLC-32X1:1	
				=LIN1+PLC-32X1:3	
				=LIN1+PLC-32X1:4	

21

23

DAFRA

Kontakt tehnologija

inovativno · zanesljivo · globalno

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projektive

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page22

Page29 / 117

0

1

2

3

4

5

6

7

8

9

Cable name12W15

Cable type

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-21X7:4:4				
	=LIN1+OMA1-21X7:5:2				
	=LIN1+OMA1-21X7:6:4				

5 m

-12W15


L1

L2

BK

BN

BU

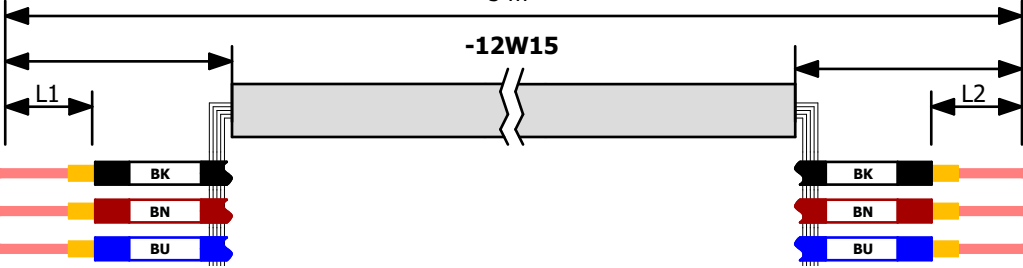

Cable parts

Order number

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+PLC-32X2:1	
				=LIN1+PLC-32X2:3	
				=LIN1+PLC-32X2:4	

F05_004

0

1

2

3

4

5

6

7

8

9

Cable name12W16

Cable typePUR 4x0.34 mm²

Free conducto

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-21X7:7:2				
	=LIN1+OMA1-21X7:8:4				
	=LIN1+OMA1-21X7:9:2				

5 m

-12W16

L1

BN

WH

BU

BK

L2

BN

WH

BU

BK

Cable parts

Order number

TUR.6625504

6625504

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+PLC-32X3:1	
				=LIN1+PLC-32X3:2	
				=LIN1+PLC-32X3:3	

23

inovativno · zanesljivo · globalno

DAFRA

Kontakt tehnologija

Odgovoren

Preveril

Mail

Verzija eplan

Dejan Rožič

Vodja projektive

dejan.rozic@dafra-kt.si

2024.0.3

12. 12. 2025

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page24

Page31 / 117

0

1

2

3

4

5

6

7

8

9

Cable name12W17

Cable typePUR 4x0.34 mm²

Free conducto

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-21X7:10:4				
	=LIN1+OMA1-21X7:11:2				
	=LIN1+OMA1-21X7:12:4				

5 m

-12W17

L1

L2

BN

WH

BU

BK

BN

WH

BU

BK

Cable parts

Order number

TUR.6625504

6625504

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+PLC-32X3:4	
				=LIN1+PLC-32X3:5	
				=LIN1+PLC-32X3:6	

24

inovativno · zanesljivo · globalno

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projektive

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page25

Page32 / 117

Cable name20W18

Cable type7G0,5 mm²

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
	=LIN1+OMA1-21X7:13:1				
	=LIN1+OMA1-21X7:14:3				
	=LIN1+OMA1-21X7:15:1				

1

2

3

4

5

6

PE

-20W18

1

2

3

4

5

6

PE

L1

L2

Cable parts

Order number

7G075

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
				=LIN1+FIELD-20A1:-X80:1	FIELD
				=LIN1+FIELD-20A1:-X80:2	FIELD
				=LIN1+FIELD-20A1:FE	FIELD

0

1

2

3

4

5

6

7

8

9

Cable name30W23

Cable typeSAC-5P- 5,0-PUR/M12FS

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
FIELD	=LIN1+FIELD-30XC1:1	RTD1			
FIELD	=LIN1+FIELD-30XC1:3	=			
FIELD	=LIN1+FIELD-30XC1:2	=			
FIELD	=LIN1+FIELD-30XC1:4	=			

BN

BU

WH

BK

BN

BU

WH

BK

Cable partsPXC.1669848

Order number1669848

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
			RTD1	IN1+OMA1-18A4:-X10:5	
				IN1+OMA1-18A4:-X10:7	
				IN1+OMA1-18A4:-X10:6	
				IN1+OMA1-18A4:-X10:4	

0

1

2

3

4

5

6

7

8

9

Cable name30W24

Cable typeSAC-5P- 5,0-PUR/M12FS

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
FIELD	=LIN1+FIELD-30XC2:1	RTD2			
FIELD	=LIN1+FIELD-30XC2:3	=			
FIELD	=LIN1+FIELD-30XC2:2	=			
FIELD	=LIN1+FIELD-30XC2:4	=			

BN

BU

WH

BK

BN

BU

WH

BK

Cable partsPXC.1669848

Order number1669848

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
			RTD2	IN1+OMA1-18A4:-X11:5	
				IN1+OMA1-18A4:-X11:7	
				IN1+OMA1-18A4:-X11:6	
				IN1+OMA1-18A4:-X11:4	

BN

BU

WH

BK

BN

BU

WH

BK

BN

BU

WH

BK

0

1

2

3

4

5

6

7

8

9

Cable name30W25

Cable typeSAC-5P- 5,0-PUR/M12FS

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
FIELD	=LIN1+FIELD-30XC3:1	RTD3			
FIELD	=LIN1+FIELD-30XC3:3	=			
FIELD	=LIN1+FIELD-30XC3:2	=			
FIELD	=LIN1+FIELD-30XC3:4	=			

BN

BU

WH

BK

L1

BN

BU

WH

BK

L2

-30W25

Cable partsPXC.1669848

Order number1669848

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
			RTD3	LIN1+OMA1-18A4:-X12:5	
				=LIN1+OMA1-18A4:-X12:7	
				=LIN1+OMA1-18A4:-X12:6	
				=LIN1+OMA1-18A4:-X12:4	

28

inovativno · zanesljivo · globalno

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projekte

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

= Dokumentacija

+ Cable_Diagram

/

Page

29

Page

36 / 117

30

0

1

2

3

4

5

6

7

8

9

Cable name30W26

Cable typeSAC-5P- 5,0-PUR/M12FS

Free conductors

Location designation	Source	Function text source	Stopper	L1 [mm]	Part number
FIELD	=LIN1+FIELD-30XC4:1	RTD4			
FIELD	=LIN1+FIELD-30XC4:3	=			
FIELD	=LIN1+FIELD-30XC4:2	=			
FIELD	=LIN1+FIELD-30XC4:4	=			

BN

BU

WH

BK

-30W26

BN

BU

WH

BK

Cable partsPXC.1669848

Order number1669848

Part number	L2 [mm]	Stopper	Function text target	Target	Location designation
			RTD4	IN1+OMA1-18A4:-X13:5	
				=IN1+OMA1-18A4:-X13:7	
				=IN1+OMA1-18A4:-X13:6	
				=IN1+OMA1-18A4:-X13:4	

29

DAFRA

Kontakt tehnologija

Odgovoren

Dejan Rožič

12. 12. 2025

Preveril

Vodja projektive

Mail

dejan.rozic@dafra-kt.si

Verzija eplan

2024.0.3

DAFRA D.O.O., Egasi d.o.o.

08/2024| RRI

Diagram kablov

/

+Cable_Overview/9

= Dokumentacija

+ Cable_Diagram

Page30

Page37 / 117

Cable overview

F10_002

Cable type	Cable description	Device tag	Conductors	Cross-section	Length	Function text
PUR		W2	4	0.34	5	i_xSmallFeed
		W3	4	0.34	5	i_xShapeSensor_1
		W4	4	0.34	5	i_xShapeSensor_2
		W5	4	0.34	5	i_xDoubleFeed
UNITRONIC® LiYCY	UNITRONIC LiYCY 15x0,34	6W1	15	0,34	5	Actuator cable M1
	UNITRONIC LiYCY 15x0,34	6W2	15	0,34	5	Actuator cable M2
	UNITRONIC LiYCY 15x0,34	6W3	15	0,34	5	Actuator cable M3
	UNITRONIC LiYCY 15x0,34	6W4	15	0,34	5	Actuator cable M4
	UNITRONIC LiYCY 15x0,34	6W5	15	0,34	5	Actuator cable M1
ETHERLINE® PN Cat.5e Y		11W6	4	22		PLC KOMUNIKACIJA
		11W7	4	22		NC
		11W8	4	22		HMI KOMUNIKACIJA
		11W9	4	22		NC
		11W10	4	22		=
		11W11	4	22		FREKVENČNIK
		11W12	4	22		NC
		11W13	4	22		=
		12W14			5	Triger from PLC
		12W15			5	Feedback to Machine
PUR		12W16	4	0.34	5	Reserve
		12W17	4	0.34	5	=
		20W18	7G	0,5		
SAC-5P- 5,0-PUR/M12FS		30W23				RTD1
		30W24				RTD2
		30W25				RTD3
		30W26				RTD4

Terminal diagram										F13_005									

0	1	2	3	4	5	6	7	8	9
Page	Strip =LIN1+OMA1-3X3_1		Internal targets	Function text	External targets	Potential	Function text	Internal targets	Function text
	/6.1	Wiring 1 2 3 4 5 BU BU BU BU BU Wiring 1 2 3 4 5 BU BU BU BU BU -3F9 -3F10 -3F11 -3F12 -3F13 -3TB2							
	/6.2								
	/6.4								
	/6.6								
	/6.7								
Page	Strip =LIN1+OMA1-4X4		Internal targets	Function text	External targets	Potential	Function text	Internal targets	Function text
	/7.1	Wiring 1 2 3 4 5 BU BU BU BU BU Wiring 1 2 3 4 5 BU BU BU BU BU -10FC1 -210X7 -29T2 -11KF1 -3V1 -3TB2							
	/7.1								
	/7.1								
	/7.2	i_xDoubleFeed							
	/7.2								
Page	Strip =LIN1+OMA1-5X5		Internal targets	Function text	External targets	Potential	Function text	Internal targets	Function text
	/8.1	Wiring 1 2 3 4 5 6 7 8 9 10 BUWH BUWH BUWH BUWH BUWH BUWH BUWH BUWH BUWH BUWH Wiring 1 2 3 4 5 6 7 8 9 10 BUWH BUWH BUWH BUWH BUWH BUWH BUWH BUWH BUWH BUWH -3TB1 -10FC1 -21X7 -21X7 -17A1 -17A1 -17A1 -18A2 -18A3 -21X7 -11KF1 -26K8 -6X6 -6X6							
	/8.1								
	/8.1								
	/8.1								
	/8.2								
	/8.2								
	/8.2								
	/8.2								
	/8.2								
	/8.3	POWER ENABLE M1							
	/8.3								

Terminal diagram

F13_005

Terminal diagram

F13_005

Page	Function text	Potential	External targets	Internal targets	Function text
Strip					
=LIN1+OMA1-5X5					
0V DC					
/8.3	i_xDoubleFeed	L-	-210X7	Wiring BUWH BUWH 11 -6X6 -6X6	
Strip					
=LIN1+OMA1-6X6					
Wiring					
/10.1			+FIELD-6M1	Wiring 1 -3K2	
/10.1			-29T1	Wiring 2 6W1	
/10.1			+FIELD-6M1	Wiring 3 6W1	
/10.1				Wiring 4 6W1	
/10.2		PE	+FIELD-6M1	Wiring 5 6W1	
/10.2		L-	-5X5	Wiring 6 6W1	
/10.2		PE	+FIELD-6M1	Wiring 7 6W1	
/10.3		L-	+FIELD-6M1	Wiring 8 6W1	
/10.3		L-	-5X5	Wiring 9 6W1	
/10.3		L	+FIELD-6M1	Wiring 10 6W1	
/10.3	M1 IN POS1	L	-21X7	Wiring 11 6W1	M1 GO POS1
/10.3		L	+FIELD-6M1	Wiring 12 6W1	
/10.3	M1 IN POS2	L	-21X7	Wiring 13 6W1	M1 GO POS2
/10.3		L	+FIELD-6M1	Wiring 14 6W1	
/10.3		L	-21X7	Wiring 15 6W1	M1 HOMMING
/10.5	M1 HOMMED		+FIELD-6M2	Wiring 16 6W1	
/10.5			+FIELD-6M2	Wiring 17 6W2	
/10.5			+FIELD-6M2	Wiring 18 6W2	
/10.5			+FIELD-6M2	Wiring 19 6W2	
/10.5		PE	+FIELD-6M2	Wiring 20 6W2	
/10.5		L-	-5X5	Wiring 21 6W2	
/10.5		PE	+FIELD-6M2	Wiring 22 6W2	
/10.5				Wiring 23	
/10.6		L-	+FIELD-6M2	Wiring 24 6W2	
/10.6		L-	-5X5	Wiring 25 6W2	

Terminal diagram

F13_005

Strip
=LIN1+OMA1-6X6

Page	Function text	Potential	External targets	Wiring	Wiring	Internal targets	Function text
/10.6		L	+FIELD-6M2	6W2	GY	26	M2 GO POS1
/10.6	M2 IN POS1	L	-21X7	BU		27	
/10.6		L	+FIELD-6M2	6W2	YE	28	M2 GO POS2
/10.6	M2 IN POS2	L	-21X7	BU		29	
/10.7		L	+FIELD-6M2	6W2	GN	30	M2 HOMMING
/10.7	M2 HOMMED	L	-21X7	BU		31	
/11.1			+FIELD-6M3	6W3	GYPK	32	
/11.1						33	
/11.1			+FIELD-6M3	6W3	ROBU	34	
/11.1						35	
/11.2		PE	+FIELD-6M3	6W3	WHGN	36	
/11.2		L-	-5X5	BUWH		37	
/11.2		PE	+FIELD-6M3	6W3	BNGN	38	
/11.2						39	
/11.3		L-	+FIELD-6M3	6W3	BN	40	
/11.3		L-	-5X5	BUWH		41	
/11.3	M3 IN POS1	L	+FIELD-6M3	6W3	GY	42	M3 GO POS1
/11.3		L	-21X7	BU		43	
/11.3	M3 IN POS2	L	+FIELD-6M3	6W3	YE	44	M3 GO POS2
/11.3		L	-21X7	BU		45	
/11.3		L	+FIELD-6M3	6W3	GN	46	M3 HOMMING
/11.3		L	-21X7	BU		47	
/11.5			+FIELD-6M4	6W4	GYPK	48	
/11.5			+FIELD-6M4	6W4	ROBU	49	
/11.5						50	
/11.5		PE	+FIELD-6M4	6W4	WHGN	51	
/11.5		L-	-5X5	BUWH		52	
/11.5		PE	+FIELD-6M4	6W4	BNGN	53	
/11.5						54	
/11.5			+FIELD-6M4	6W4	BN	55	
/11.5						56	
/11.6		L-	+FIELD-6M4	6W4	BUWH	57	
/11.6		L	+FIELD-6M4	6W4	GY	58	M4 GO POS1
/11.6	M4 IN POS1	L	-21X7	BU		59	
/11.6		L	+FIELD-6M4	6W4	YE	60	M4 GO POS2

Strip
=LIN1+OMA1-6X6

Page	Function text	Potential	External targets	Wiring	Internal targets	Function text
/11.6	M4 IN POS2	L	-21X7	BU	6W4 +FIELD-6M4	
/11.7		L	+FIELD-6M4	6W4 GN	-21X7	M4 HOMMING
/11.7	M4 HOMMED	L	-21X7	BU	6W4 +FIELD-6M4	
/12.1			+FIELD-6M5	6W5 GYPK	-3K6	
/12.1					6W5 +FIELD-6M5	
/12.1			+FIELD-6M5	6W5 RDBU		
/12.1					6W5 +FIELD-6M5	
/12.2		PE	+FIELD-6M5	6W5 WHGN	-3X3	
/12.2		L-	-5X5	BUWH	+FIELD-6M5	
/12.2		PE	+FIELD-6M5	6W5 BNGN		
/12.2		L-	+FIELD-6M5	6W5 BN		
/12.3		L-	-5X5	BUWH	+FIELD-6M5	
/12.3		L	+FIELD-6M5	6W5 GY	-21X7	M5 GO POS1
/12.3	M5 IN POS1	L	-21X7	BU	+FIELD-6M5	
/12.3		L	+FIELD-6M5	6W5 YE	-21X7	M5 GO POS2
/12.3	M5 IN POS2	L	-21X7	BU	+FIELD-6M5	
/12.3		L	+FIELD-6M5	6W5 GN	-21X7	M5 HOMMING
/12.3	M5 HOMMED	L	-21X7	BU	+FIELD-6M5	

Strip
=LIN1+OMA1-21X7

Page	Function text	Potential	External targets	Wiring	Internal targets	Function text
/15.0			+PLC-32X1	12W14 BK		
/15.1		L-	+PLC-32X1	12W14 BN	-5X5	
/15.1			+PLC-32X1	12W14 GY		
/15.1			+PLC-32X2	12W15 BK		
/15.2		L-	+PLC-32X2	12W15 BN	-5X5	
/15.2		L	+PLC-32X2	12W15 BU		
/15.2			+PLC-32X3	12W16 BN		

Page	Function text	Potential	External targets	Wiring	PLC sponke	Wiring	Internal targets	Function text
/15.3			+PLC-32X3	12W16	WH	8		
/15.3			+PLC-32X3	12W16	BU	9		
/15.3			+PLC-32X3	12W17	BN	10		
/15.4			+PLC-32X3	12W17	WH	11		
/15.4			+PLC-32X3	12W17	BU	12		
/24.6		L+	-10FC1		BU	13	1 20W18	+FIELD-20A1
/24.6		L-	-5X5		BUWH	14	2 20W18	+FIELD-20A1
/24.6		PE	-PE		GNVE	15	PE 20W18	+FIELD-20A1
/25.1	Trigger		-17A1			16		
/25.3			-17A1			17		+FIELD-21X1
/25.5			-17A1			18		+FIELD-21X1
/25.8			-17A1			19		+FIELD-21X1
/26.1	EGASI PWR M1	L	-17A1		BU	20	BU	-3V1
/26.3	EGASI PWR M2	L	-17A1		BU	21	BU	-3V2
/26.5	EGASI PWR M3	L	-17A1		BU	22	BU	-3V3
/26.8	EGASI PWR M4	L	-17A1		BU	23	BU	-3V4
/27.1	EGASI PWR M5	L	-17A1		BU	24	BU	-3V5
/27.3			-17A1			25		
/27.5	i_xDoubleFeed	L+	-17A1		BU	26	BU	-210X7
/27.8	i_xSmallFeed	L+	-17A1		BU	27	BU	-210X7
/28.1	i_xShapeSensor_1	L+	-17A1		BU	28	BU	-210X7
/28.3	i_xShapeSensor_2	L+	-17A1		BU	29	BU	-210X7
/28.5						30		
/28.8						31		
/30.1	M1 IN POS1	L	-18A3		BU	32	BU	-24R1
/30.3	M1 IN POS2	L	-18A3		BU	33	BU	-6X6
/30.5	M1 HOMMED	L	-18A3		BU	34	BU	-24R2
/30.8	M2 IN POS1	L	-18A3		BU	35	BU	-24R3
/31.1	M2 IN POS2	L	-18A3		BU	36	BU	-6X6
/31.3		L	-18A3		BU	37	BU	-24R4
/31.5	M3 IN POS1	L	-18A3		BU	38	BU	-6X6

Terminal diagram


F13_005

Page	Function text	Potential	External targets	PLC sponke	Internal targets	Function text
/31.8	M3 IN POS2	L	-18A3		-24R8	
	M3 HOMMED	L	-18A3		-6X6	
	M4 IN POS1	L	-18A3		-24R9	
/32.1					-6X6	
/32.3					-24R10	
/32.5	M4 IN POS2	L	-18A3		-24R11	
	M4 HOMMED	L	-18A3		-6X6	
	M5 IN POS1	L	-18A3		-24R12	
/32.8					-6X6	
/33.1					-24R13	
/33.3	M5 IN POS2	L	-18A3		-24R14	
	M5 HOMMED	L	-18A3		-6X6	
			-18A3		-24R15	
/33.8						
/35.1					-17A1	Sistem feedback OK
/35.3					-17A1	
/35.5					-17A1	
/35.8					-17A1	
/36.1		L	-26K8		-17A1	
/36.3	POWER ENABLE M1	L	-3K2		-17A1	POWER ENABLE M1
/36.5	POWER ENABLE M2	L	-3K3		-17A1	POWER ENABLE M2
/36.8	POWER ENABLE M3	L	-3K4		-17A1	POWER ENABLE M3
/37.1	POWER ENABLE M4	L	-3K5		-17A1	POWER ENABLE M4
/37.3	POWER ENABLE M5	L	-3K6		-17A1	POWER ENABLE M5
/38.1		L	-6X6		-18A3	M1 GO POS1
		L	-6X6		-18A3	M1 GO POS2
		L	-6X6		-18A3	M1 HOMMING
/38.8		L	-6X6		-18A3	M2 GO POS1
/39.1		L	-6X6		-18A3	M2 GO POS2
/39.3		L	-6X6		-18A3	M2 HOMMING
/39.6		L	-6X6		-18A3	M3 GO POS1
/39.8		L	-6X6		-18A3	M3 GO POS2
/40.1		L	-6X6		-18A3	M3 HOMMING
		L	-6X6		-18A3	M4 GO POS1
		L	-6X6		-18A3	M4 GO POS2

Strip
=LIN1+OMA1-21X7

Page	Function text	Potential	External targets	PLC sponke	Internal targets	Function text
/40.8		L	-6X6	Wiring	-18A3	M4 HOMMING
/41.1		L	-6X6	Wiring	-18A3	M5 GO POS1
/41.3		L	-6X6	Wiring	-18A3	M5 GO POS2
/41.6		L	-6X6	Wiring	-18A3	M5 HOMMING
/41.8				Wiring	-18A3	
/42.2			-17A1	Wiring		
/42.5			-17A1	Wiring		
/44.2			-17A1	Wiring		
/44.5			-17A1	Wiring		

Strip
=LIN1+OMA1-210X7

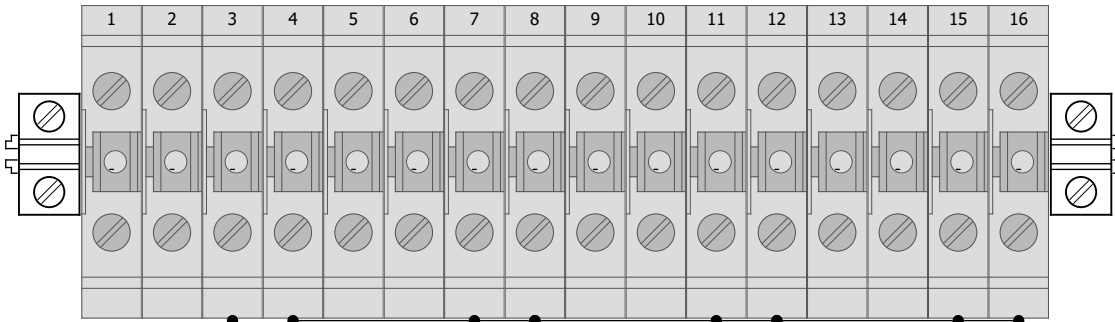Page	Function text	Potential	External targets	Wiring	Wiring	Internal targets	Function text	
/27.5	i_xDoubleFeed	L+	-21X7		BK	-23B3	i_xDoubleFeed	
/27.6					BN	-23B3	i_xDoubleFeed	
/27.6		L+	-4X4		BU	-23B3	=	
/27.6		L-	-5X5		BUWH	-23B3		
/27.8	i_xSmallFeed	L+	-21X7		BU	-23B2	i_xSmallFeed	
/27.8								
/27.8						W2	-23B2	i_xSmallFeed
/27.9						W2	-23B2	=
/28.1	i_xShapeSensor_1	L+	-21X7		BU	-24B1	i_xShapeSensor_1	
/28.1								
/28.1						W3	-24B1	i_xShapeSensor_1
/28.1						W3	-24B1	=
/28.3	i_xShapeSensor_2	L+	-21X7		BU	-24B2	i_xShapeSensor_2	
/28.3								
/28.4						W4	-24B2	i_xShapeSensor_2
/28.4						W4	-24B2	=

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

F22_001

Page / column

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

Plug diagram

F22_001

[illegible]

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

Plug overview

F23_002

Plug designation	Function text	Plug					Page of plug diagram
		first	last	Total PE	Total N	Total number	
=L1+MP-?X1				0	0	0	
=L1+MP-?X2				0	0	0	
=L1+MP-?X3				0	0	0	
=LIN1+OMA1-6XP1		1	1	0	0	1	=Dokumentacija+Plug_Diagram/104
=LIN1+OMA1-6XP2		2	2	0	0	1	=Dokumentacija+Plug_Diagram/105
=LIN1+OMA1-6XP3		3	3	0	0	1	=Dokumentacija+Plug_Diagram/106
=LIN1+OMA1-6XP4		1	1	0	0	1	=Dokumentacija+Plug_Diagram/107
=LIN1+OMA1-6XP5		2	2	0	0	1	=Dokumentacija+Plug_Diagram/108
=LIN1+OMA1-6XP6		3	3	0	0	1	=Dokumentacija+Plug_Diagram/109
=LIN1+FIELD-30XC1	RTD1	1	4	0	0	4	=Dokumentacija+Plug_Diagram/110
=LIN1+FIELD-30XC2	RTD2	1	4	0	0	4	=Dokumentacija+Plug_Diagram/111
=LIN1+FIELD-30XC3	RTD3	1	4	0	0	4	=Dokumentacija+Plug_Diagram/112
=LIN1+FIELD-30XC4	RTD4	1	4	0	0	4	=Dokumentacija+Plug_Diagram/113

Terminal-strip overview

F14_002

Terminal strip	Function text	Terminals					Terminal diagram page
		first	last	Total PE	Total N	Total number	
=LIN1+OMA1-1X1	Dovodne sponke	1	PE	1	0	5	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-2X2	Hlajenje ele. omare	1	PE	1	1	3	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-3X3	48VDC	1	12	0	0	8	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-3X3_1		1	5	0	0	5	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-4X4	24V DC	1	5	0	0	5	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-5X5	0V DC	1	11	0	0	11	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-6X6		1	79	0	0	81	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-21X7	PLC sponke	1	77	0	0	87	=Dokumentacija+Terminal_Diagram/3
=LIN1+OMA1-210X7		1	16	0	0	16	=Dokumentacija+Terminal_Diagram/3

Table of contents

F06_002

Function designation	Location designation	Page	Page description	supplementary page field	Date	Edited by
Dokumentacija	TitlePage	1	Naslovna stran		13. 08. 2024	DEJAN
	TitlePage	2	Title page / cover sheet		13. 08. 2024	DEJAN
	Part_List	1	naprava		12. 12. 2025	DEJAN
	Part_List	1.a	naprava		12. 12. 2025	DEJAN
	Part_List	1.b	naprava		12. 12. 2025	DEJAN
	Part_List	1.c	naprava		12. 12. 2025	DEJAN
	Part_List	1.d	naprava		12. 12. 2025	DEJAN
	Part_List	1.e	naprava		12. 12. 2025	DEJAN
	Part_List	1.f	naprava		12. 12. 2025	DEJAN
	Summarized_partList	2	Sumarna kosovnica		12. 12. 2025	DEJAN
	Summarized_partList	2.a	Sumarna kosovnica		12. 12. 2025	DEJAN
	Cable_Diagram	5	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	6	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	7	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	8	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	9	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	10	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	11	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	12	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	13	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	14	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	15	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	16	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	17	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	18	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	19	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	20	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	21	Diagram kablov		12. 12. 2025	DEJAN

Table of contents

F06_002

Function designation	Location designation	Page	Page description	supplementary page field	Date	Edited by
Dokumentacija	Cable_Diagram	22	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	23	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	24	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	25	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	26	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	27	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	28	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	29	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Diagram	30	Diagram kablov		12. 12. 2025	DEJAN
	Cable_Overview	9	Pregled kablov		12. 12. 2025	DEJAN
	Terminal_Diagram	3	Terminal diagram =LIN1+OMA1-1X1 =LIN1+OMA1-2X2 =LIN1+OMA1-3X3		12. 12. 2025	DEJAN
	Terminal_Diagram	3.a	Terminal diagram =LIN1+OMA1-3X3_1 =LIN1+OMA1-4X4 =LIN1+OMA1-5X5		12. 12. 2025	DEJAN
	Terminal_Diagram	3.b	Terminal diagram =LIN1+OMA1-5X5 =LIN1+OMA1-6X6		12. 12. 2025	DEJAN
	Terminal_Diagram	3.c	Terminal diagram =LIN1+OMA1-6X6		12. 12. 2025	DEJAN
	Terminal_Diagram	3.d	Terminal diagram =LIN1+OMA1-6X6 =LIN1+OMA1-21X7		12. 12. 2025	DEJAN
	Terminal_Diagram	3.e	Terminal diagram =LIN1+OMA1-21X7		12. 12. 2025	DEJAN
	Terminal_Diagram	3.f	Terminal diagram =LIN1+OMA1-21X7		12. 12. 2025	DEJAN
	Terminal_Diagram	3.g	Terminal diagram =LIN1+OMA1-21X7 =LIN1+OMA1-210X7		12. 12. 2025	DEJAN
	Plug_Diagram	104	Plug diagram =LIN1+OMA1-6XP1		12. 12. 2025	DEJAN
	Plug_Diagram	105	Plug diagram =LIN1+OMA1-6XP2		12. 12. 2025	DEJAN
	Plug_Diagram	106	Plug diagram =LIN1+OMA1-6XP3		12. 12. 2025	DEJAN
	Plug_Diagram	107	Plug diagram =LIN1+OMA1-6XP4		12. 12. 2025	DEJAN
	Plug_Diagram	108	Plug diagram =LIN1+OMA1-6XP5		12. 12. 2025	DEJAN
	Plug_Diagram	109	Plug diagram =LIN1+OMA1-6XP6		12. 12. 2025	DEJAN
	Plug_Diagram	110	Plug diagram =LIN1+FIELD-30XC1		12. 12. 2025	DEJAN
	Plug_Diagram	111	Plug diagram =LIN1+FIELD-30XC2		12. 12. 2025	DEJAN
	Plug_Diagram	112	Plug diagram =LIN1+FIELD-30XC3		12. 12. 2025	DEJAN
	Plug_Diagram	113	Plug diagram =LIN1+FIELD-30XC4		12. 12. 2025	DEJAN

Table of contents

F06_002

Function designation	Location designation	Page	Page description	supplementary page field	Date	Edited by
Dokumentacija	Plug_Overview	1	Plug overview : =L1+MP-?X1 - =LIN1+FIELD-30XC4		12. 12. 2025	DEJAN
	Terminal_strip_OverView	4	Pregled spončnih letev		12. 12. 2025	DEJAN
	TOC	1	Kazalo vsebine		12. 12. 2025	DEJAN
	TOC	1.a	Kazalo vsebine		12. 12. 2025	DEJAN
	TOC	1.b	Kazalo vsebine		12. 12. 2025	DEJAN
	TOC	1.c	Kazalo vsebine		12. 12. 2025	DEJAN
	TOC	1.d	Kazalo vsebine		12. 12. 2025	DEJAN
LIN1	OMA1	1	Dovod		6. 10. 2025	DEJAN
	OMA1	2	HLAJENJE ELE. OMARE		6. 10. 2025	DEJAN
	OMA1	3	220V AC / 24V DC		6. 10. 2025	DEJAN
	OMA1	4	220V AC / 48V DC		6. 10. 2025	DEJAN
	OMA1	5	EGASI actuator POWER enable		6. 10. 2025	DEJAN
	OMA1	6	48V FUSE Motors		6. 10. 2025	DEJAN
	OMA1	7	24V periferija		6. 10. 2025	DEJAN
	OMA1	8	DISTRIBUCIJA 0V		6. 10. 2025	DEJAN
	OMA1	9	230V Vtičnice		6. 10. 2025	DEJAN
	OMA1	10	EGASI M1, M2		6. 10. 2025	DEJAN
	OMA1	11	EGASI M3, M4		6. 10. 2025	DEJAN
	OMA1	12	EGASI M5		6. 10. 2025	DEJAN
	OMA1	13	24V - VAROVALKE		6. 10. 2025	DEJAN
	OMA1	14	MREŽA		30. 10. 2025	DEJAN
	OMA1	15	IO		6. 10. 2025	DEJAN
	OMA1	16	Profinet mreža		6. 10. 2025	DEJAN
	OMA1	17	HMI		6. 10. 2025	DEJAN
	OMA1	18	PLC PREGLEJ		6. 10. 2025	DEJAN
	OMA1	19	PLC		6. 10. 2025	DEJAN
	OMA1	20	AI		6. 10. 2025	DEJAN
	OMA1	21	di		6. 10. 2025	DEJAN

Table of contents

F06_002

Function designation	Location designation	Page	Page description	supplementary page field	Date	Edited by
LIN1	OMA1	22	AI RTD		6. 10. 2025	DEJAN
	OMA1	23	PLC napajanje		6. 10. 2025	DEJAN
	OMA1	24	HMI napajanje		6. 10. 2025	DEJAN
	OMA1	25	DI		6. 10. 2025	DEJAN
	OMA1	26	DI		6. 10. 2025	DEJAN
	OMA1	27	DI		6. 10. 2025	DEJAN
	OMA1	28	DI		6. 10. 2025	DEJAN
	OMA1	29	empty		6. 10. 2025	DEJAN
	OMA1	30	DI / M1/M2		6. 10. 2025	DEJAN
	OMA1	31	DI M3/M3		6. 10. 2025	DEJAN
	OMA1	32	DI M3/M4		6. 10. 2025	DEJAN
	OMA1	33	DI M5		6. 10. 2025	DEJAN
	OMA1	34	Outputs		6. 10. 2025	DEJAN
	OMA1	35	DQ		6. 10. 2025	DEJAN
	OMA1	36	DQ		6. 10. 2025	DEJAN
	OMA1	37	DQ		6. 10. 2025	DEJAN
	OMA1	38	DQ		6. 10. 2025	DEJAN
	OMA1	39	DQ		6. 10. 2025	DEJAN
	OMA1	40	DQ		6. 10. 2025	DEJAN
	OMA1	41	DQ		6. 10. 2025	DEJAN
	OMA1	42	AQ		6. 10. 2025	DEJAN
	OMA1	43	AQ		6. 10. 2025	DEJAN
	OMA1	44	AI		6. 10. 2025	DEJAN
	OMA1	45	hbm		30. 10. 2025	DEJAN
	OMA1	46	hbm		6. 10. 2025	DEJAN
	OMA1	47	hbm		6. 10. 2025	DEJAN
	OMA1	48	TC		6. 10. 2025	DEJAN
	OMA1	49	RTD		6. 10. 2025	DEJAN


1.b

1.d


Table of contents



F06_002


Function designation	Location designation	Page	Page description	supplementary page field	Date	Edited by
LIN1	OMA1	50	PC & Router komunikacija		6. 10. 2025	DEJAN
	OMA1	51	OMARA1 - dimenzije ele. omare - WSA1008260		6. 10. 2025	DEJAN
	OMA1	52	OMARA1 - montažna plošča - WSA1008260		6. 10. 2025	DEJAN
	OMA1	53	OMARA1 - montažna plošča - WSA1008260		12. 12. 2025	DEJAN
	OMA1	54	Komponente		12. 12. 2025	DEJAN

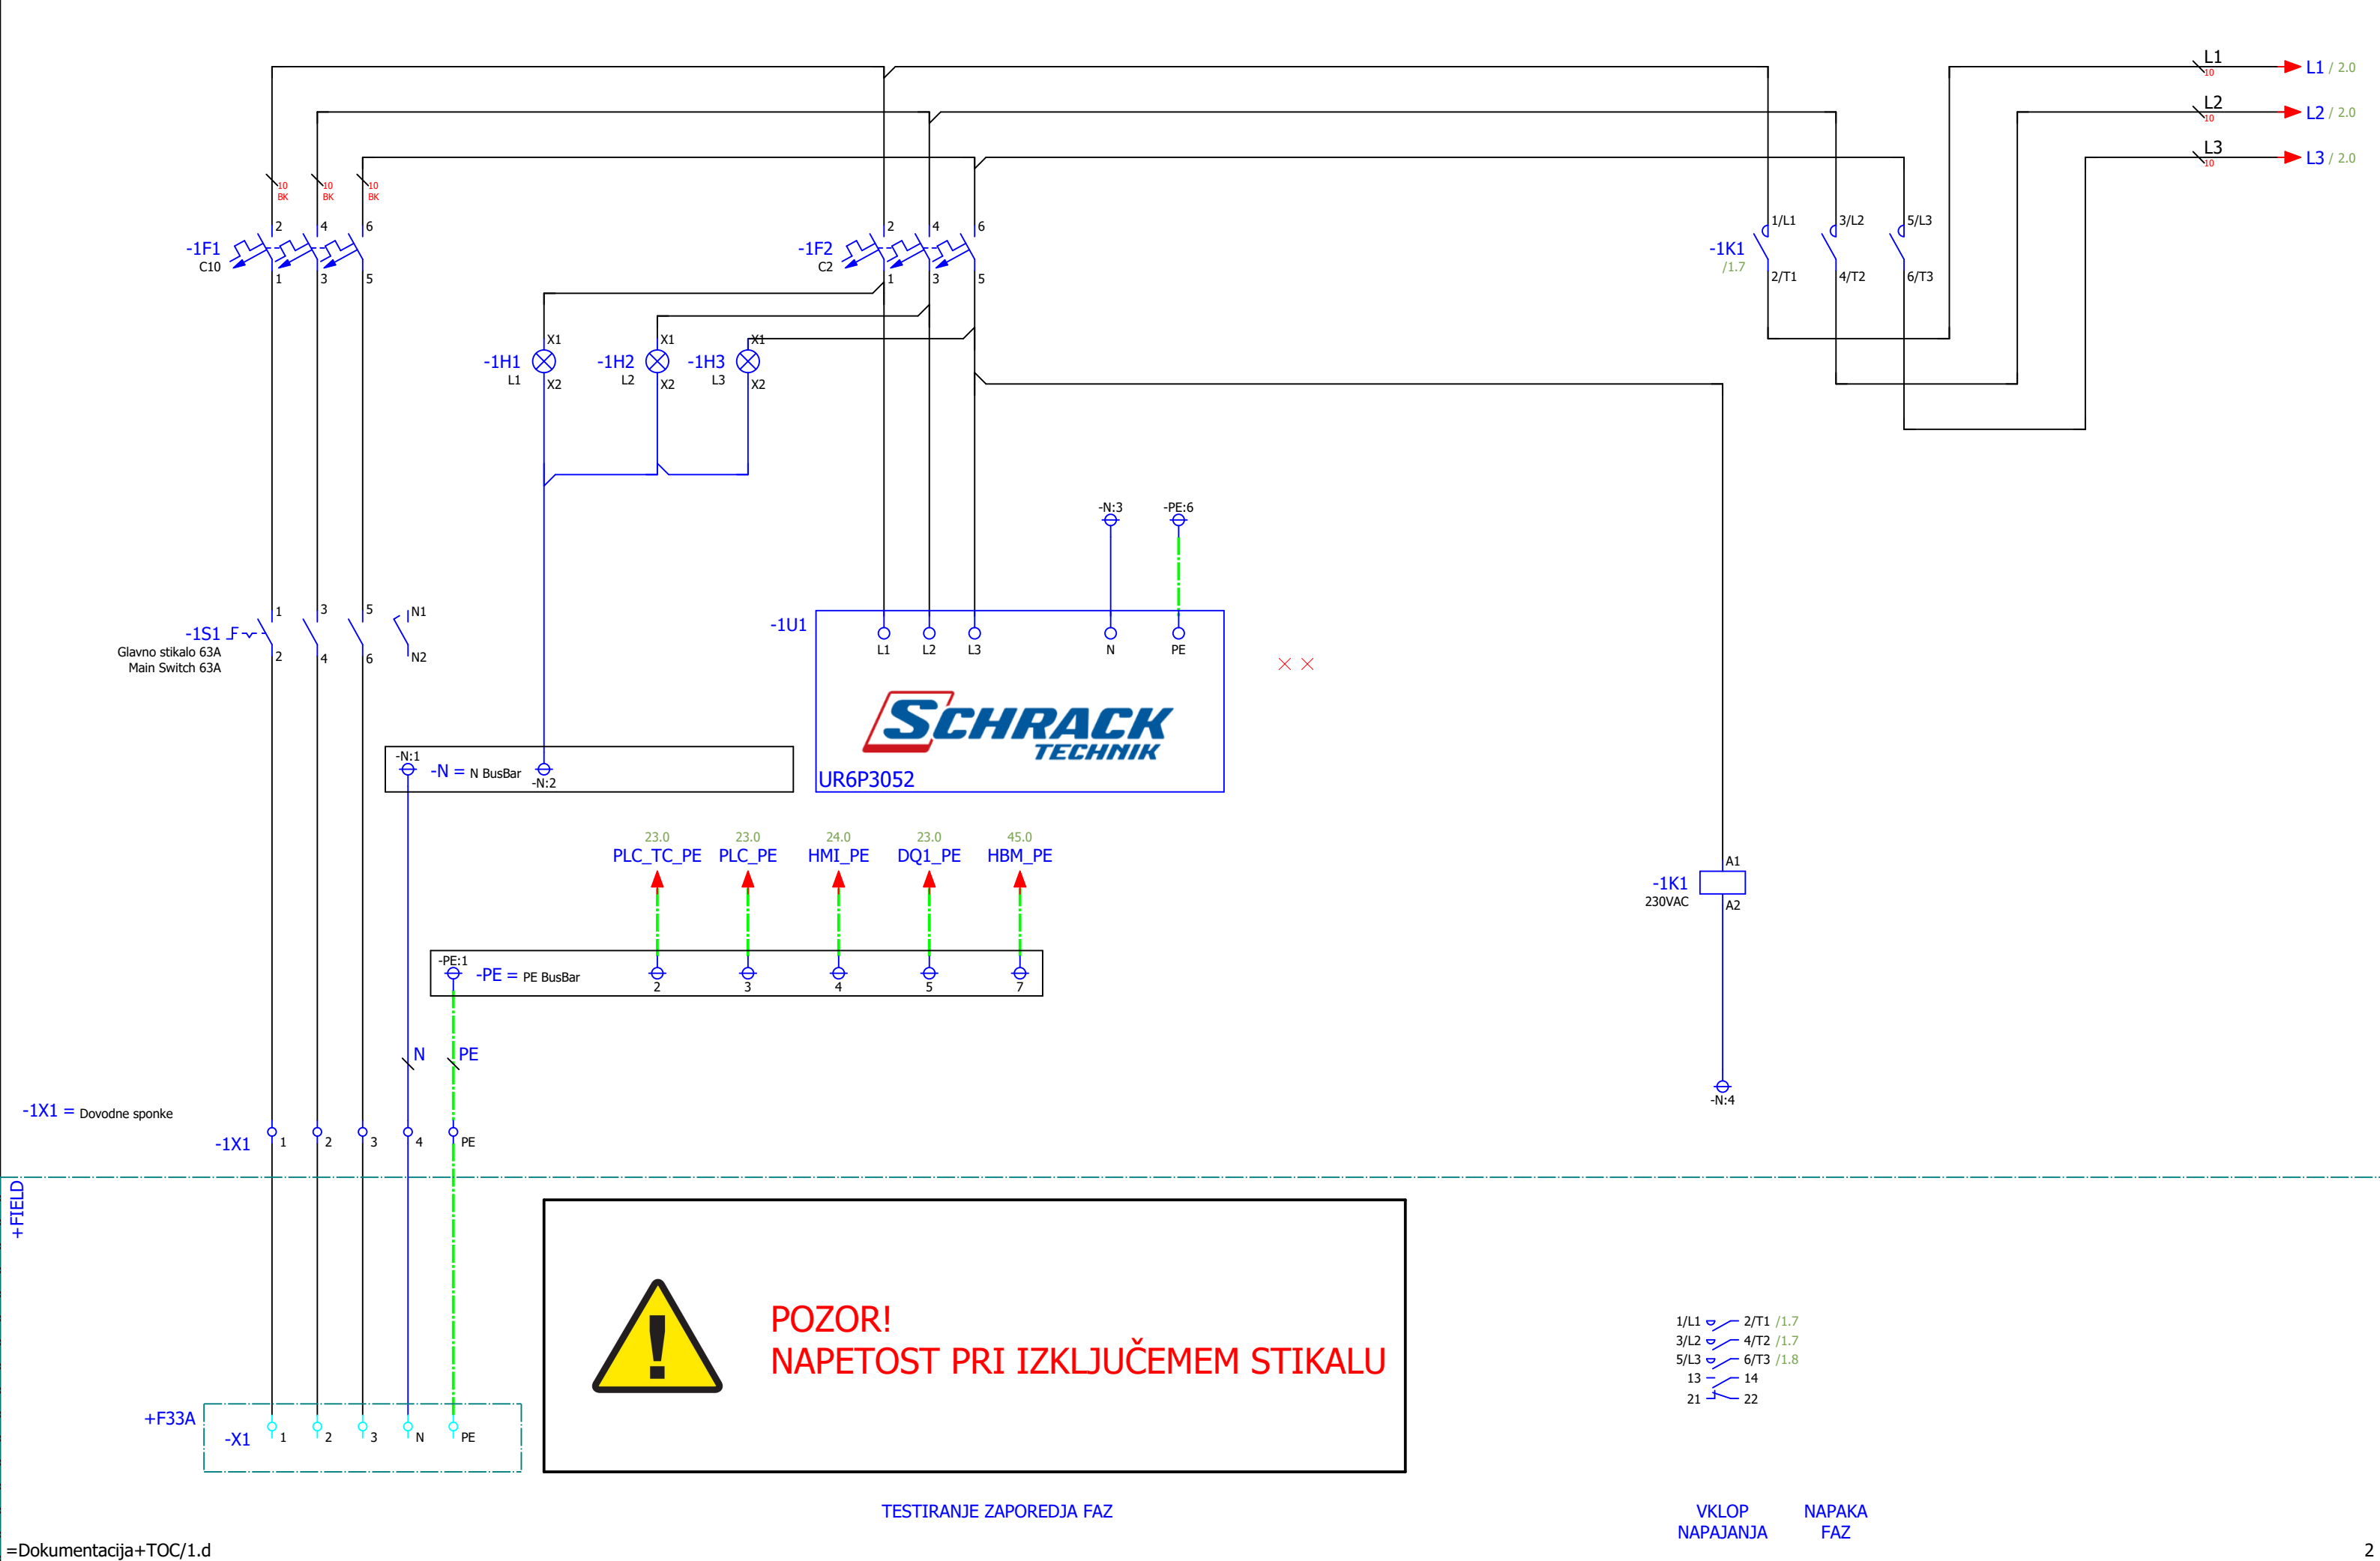





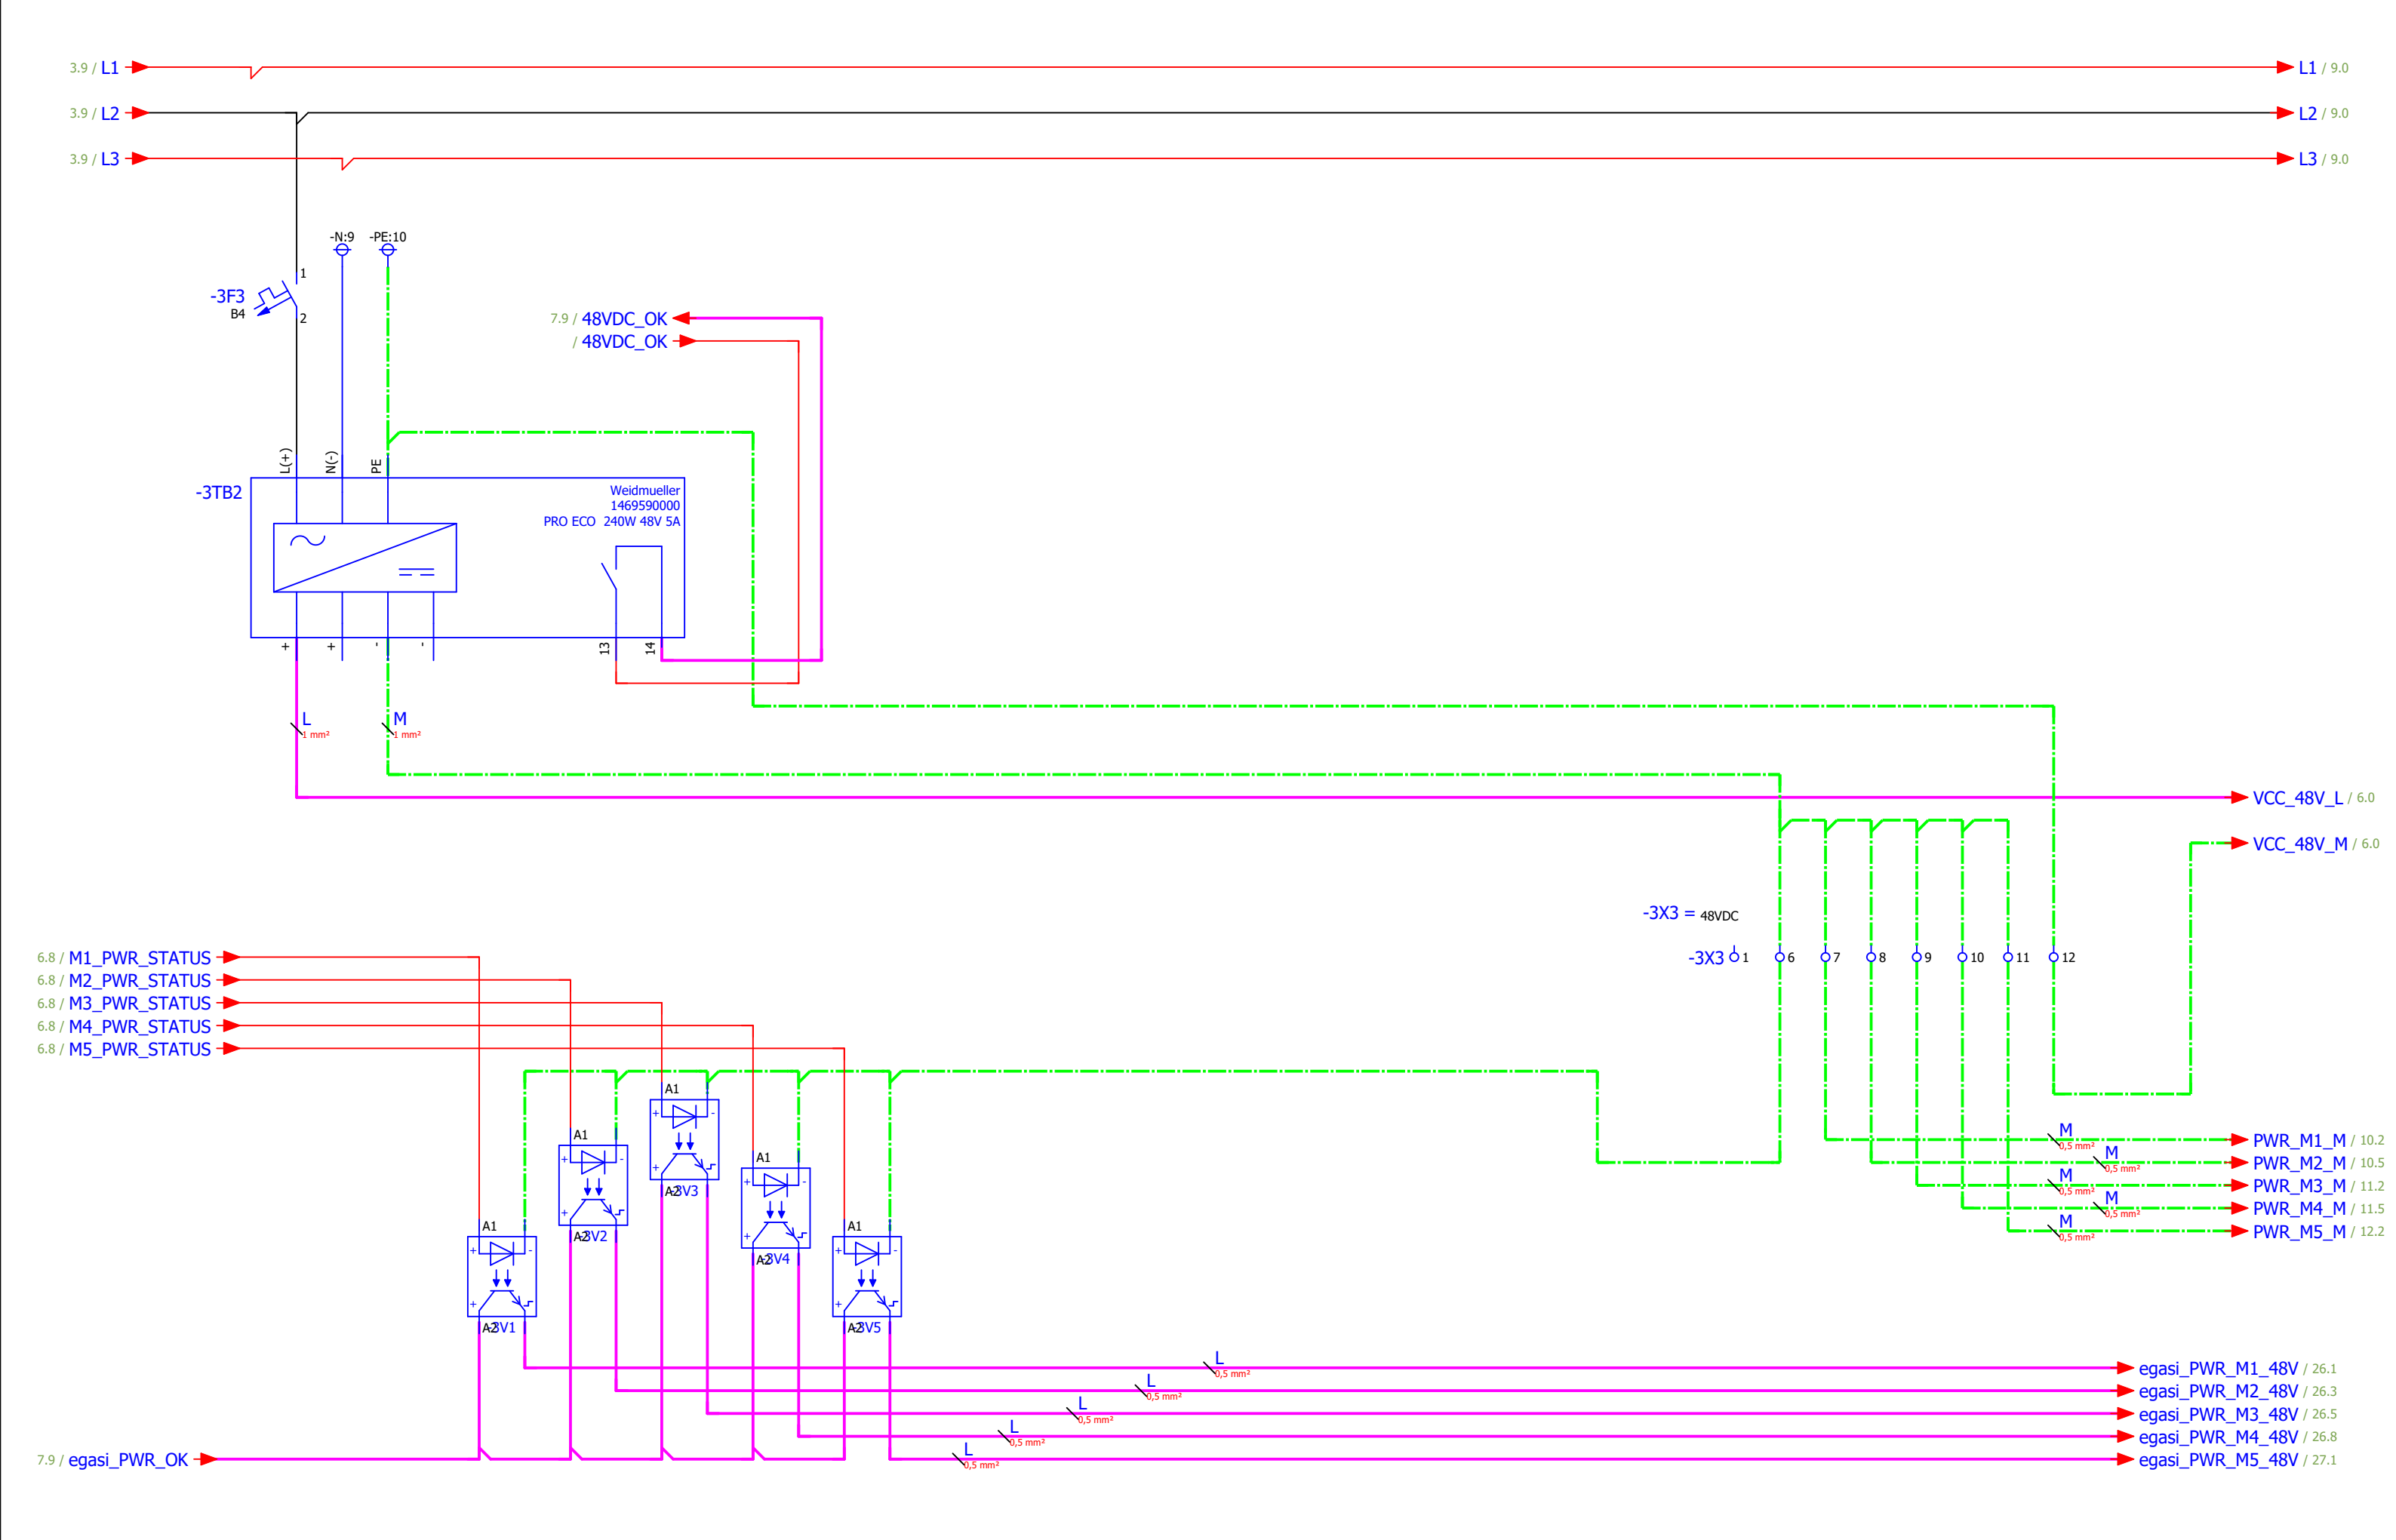


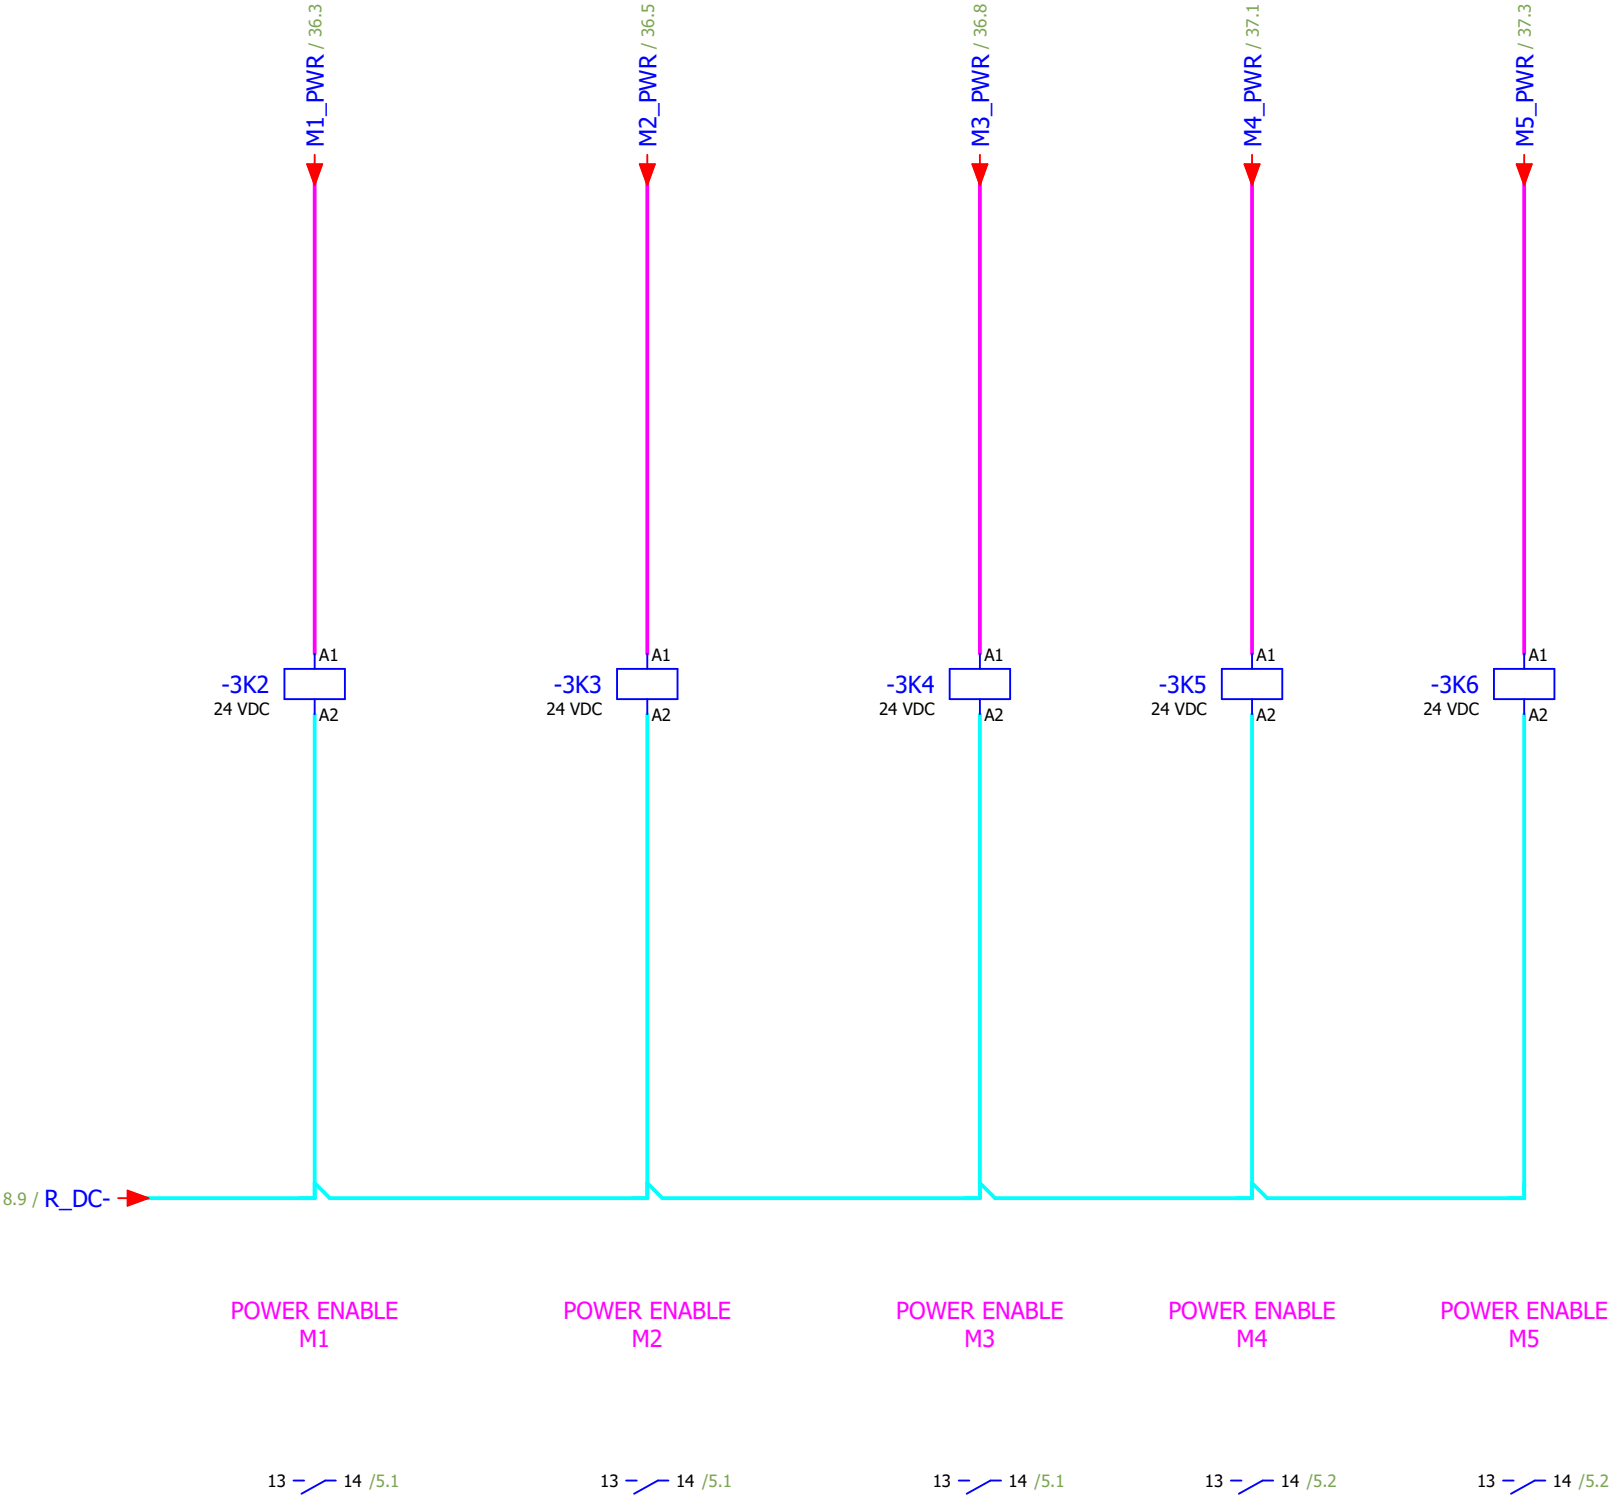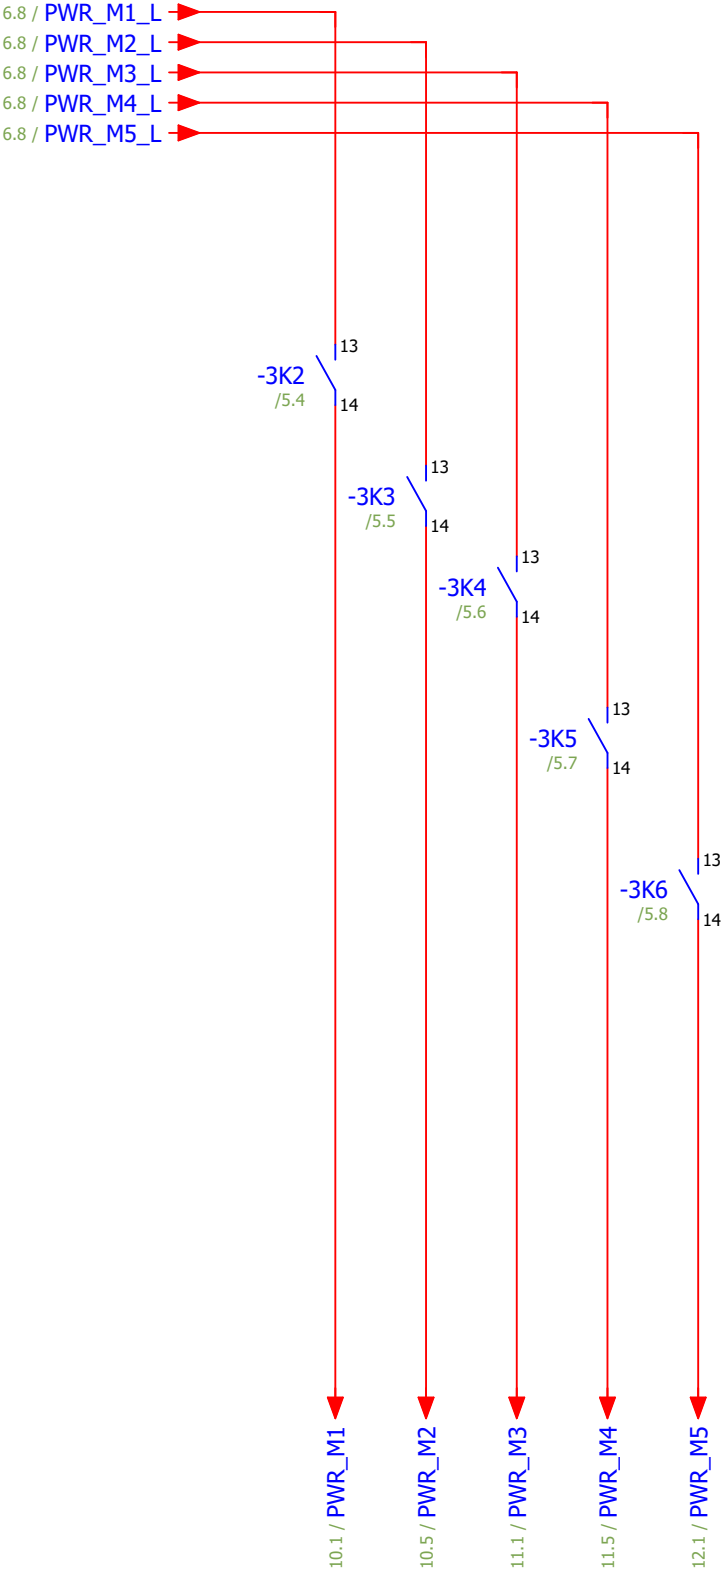


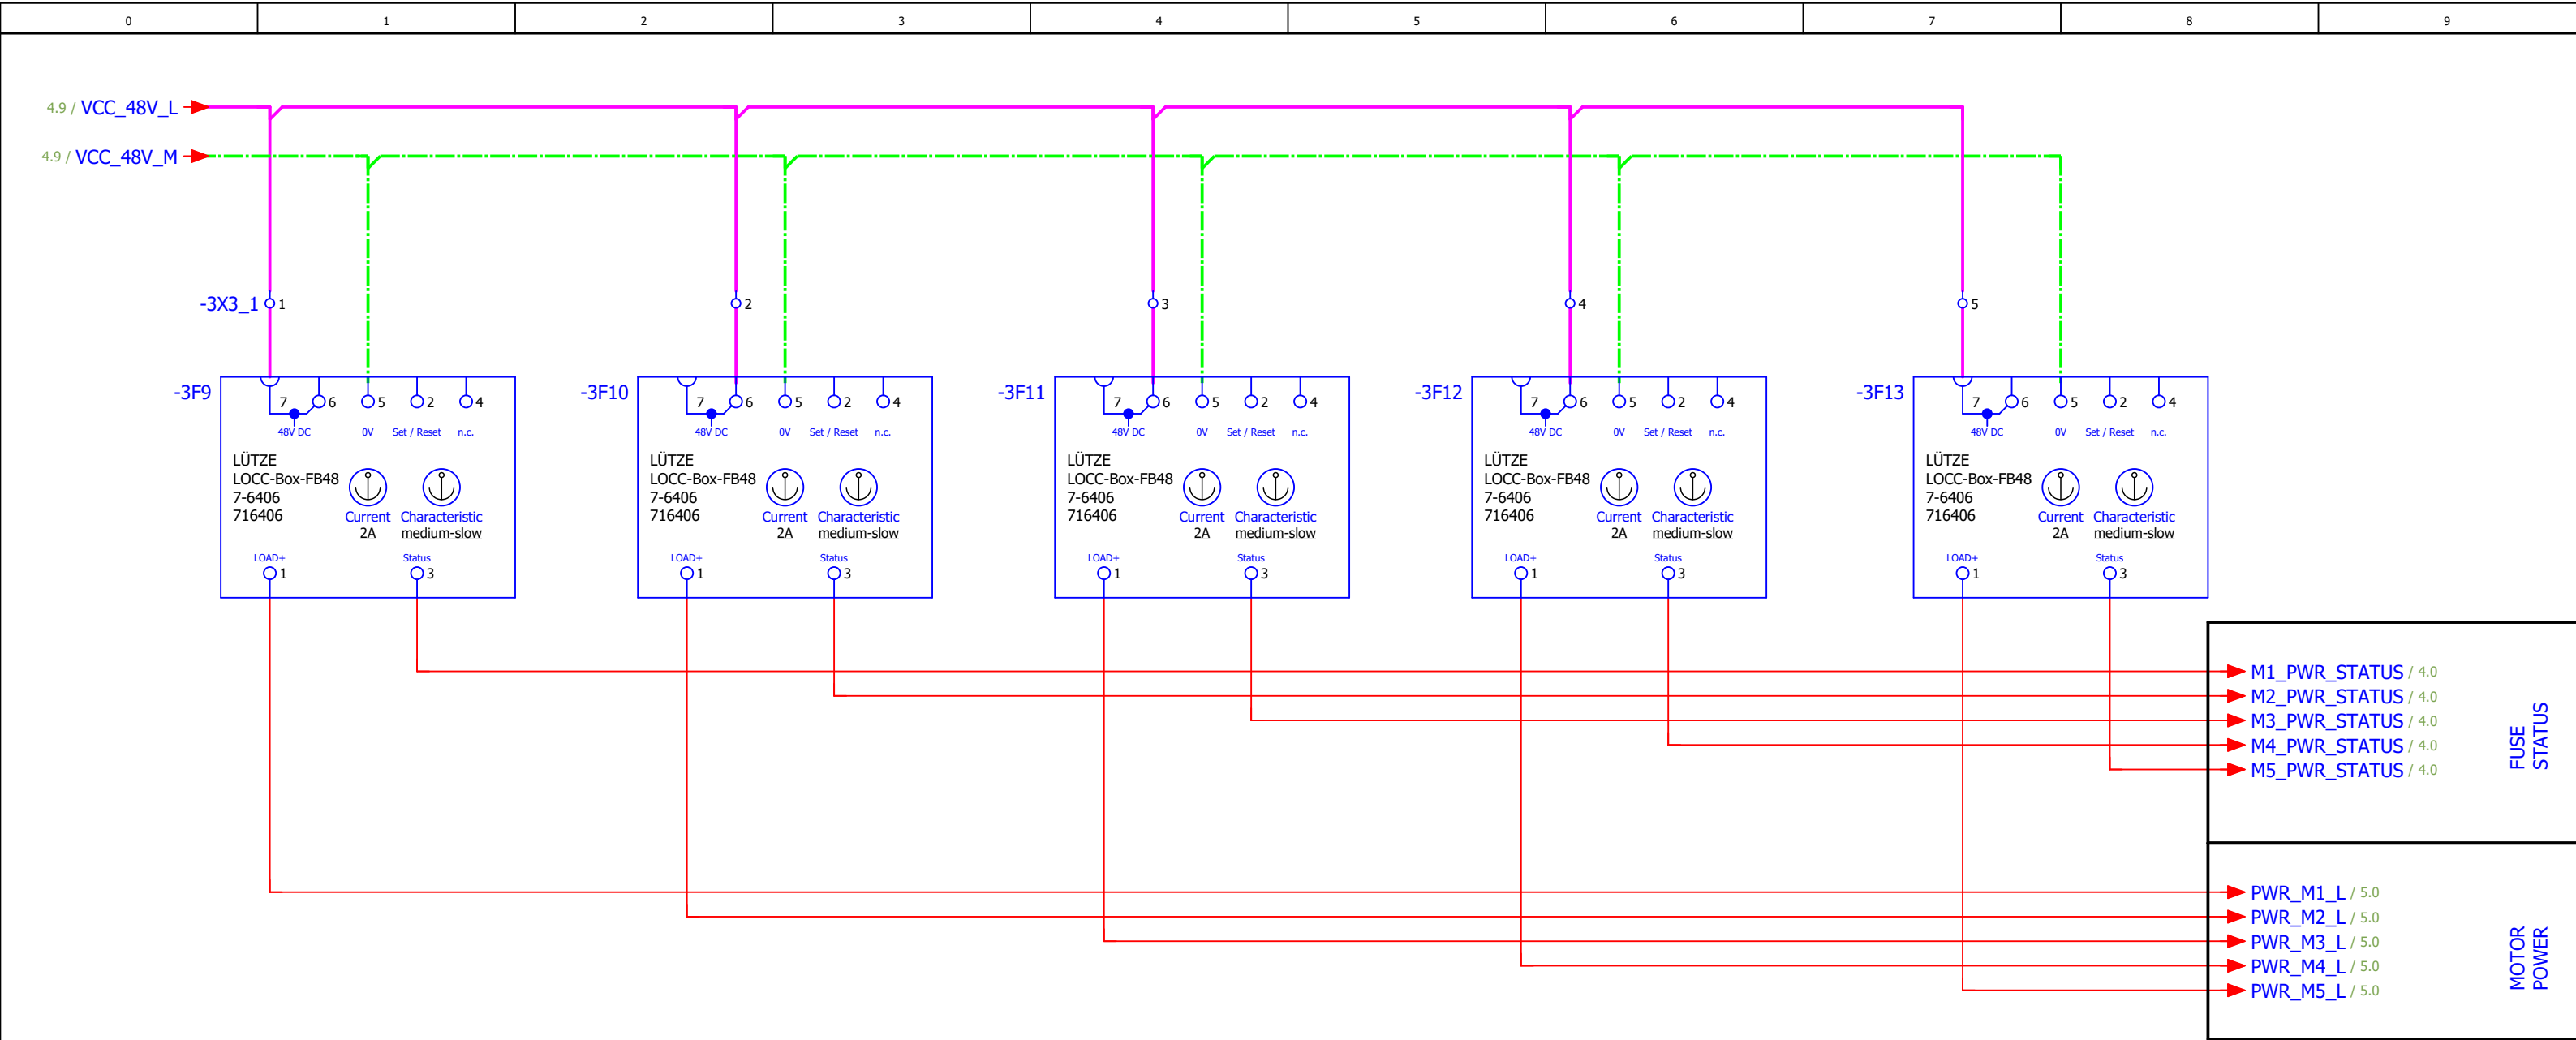


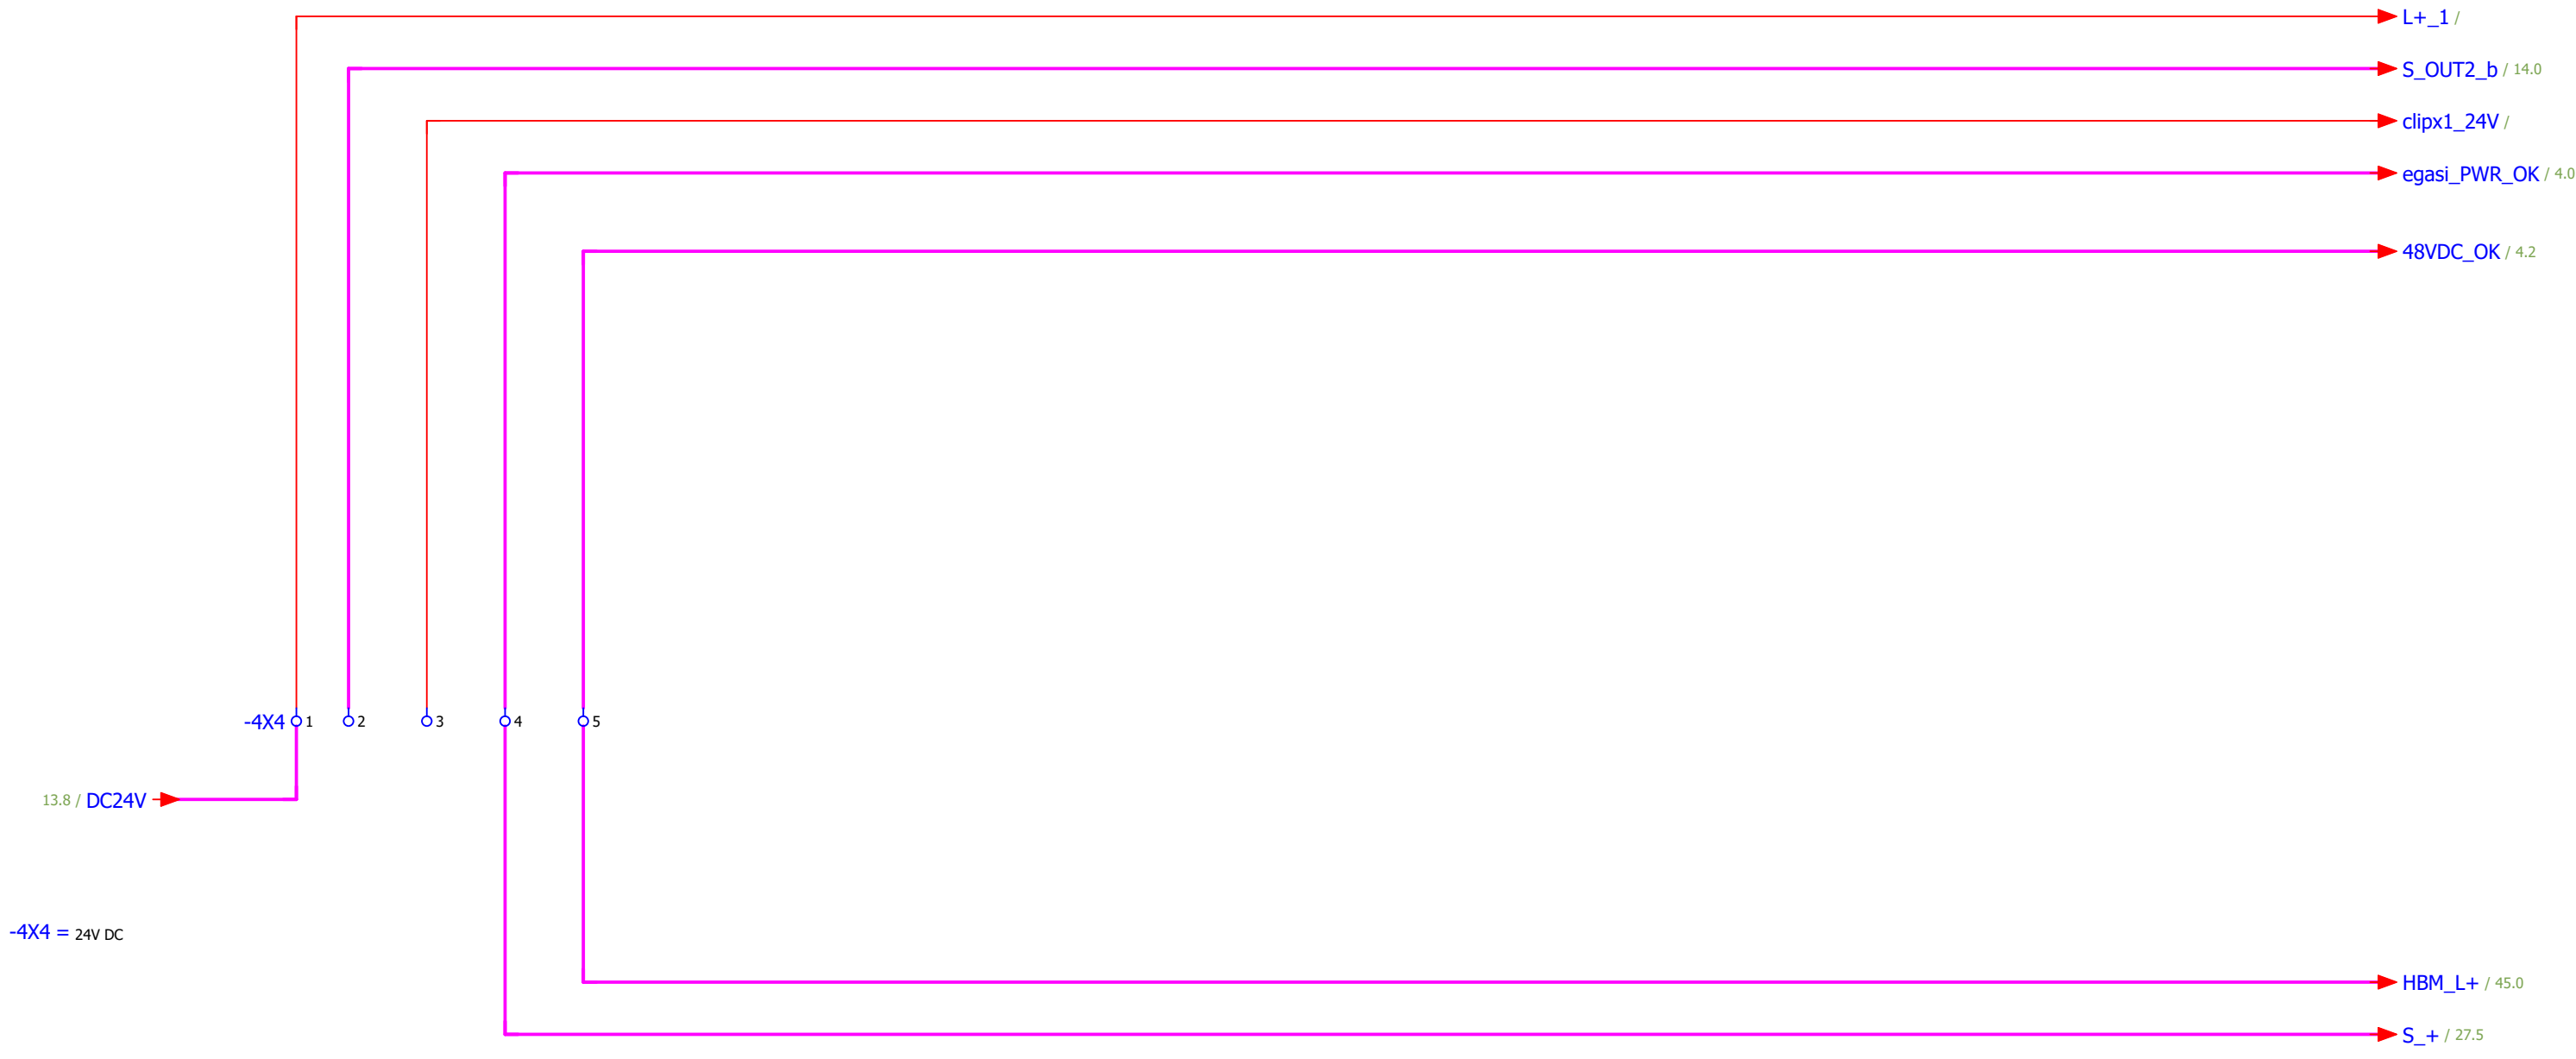


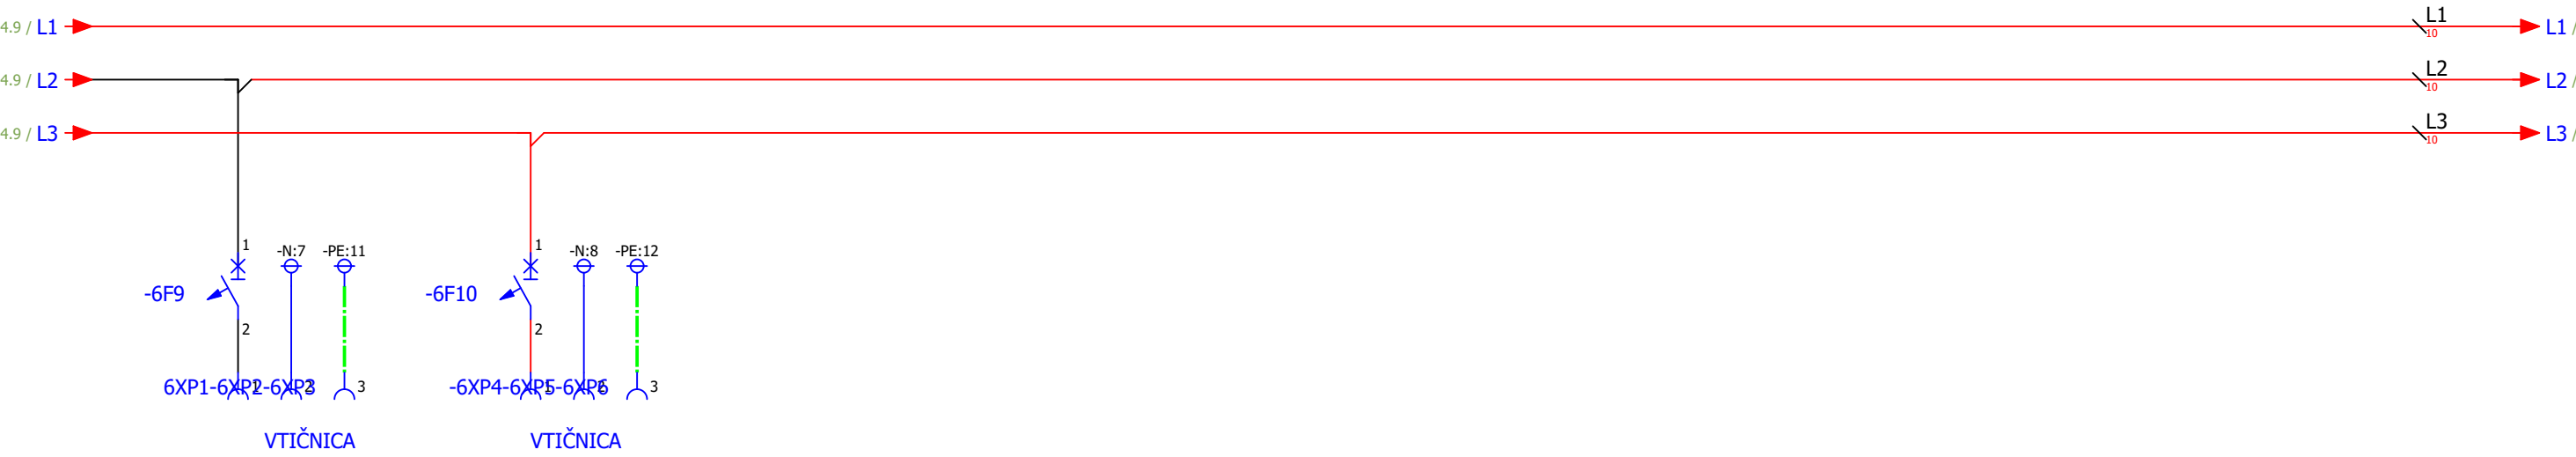

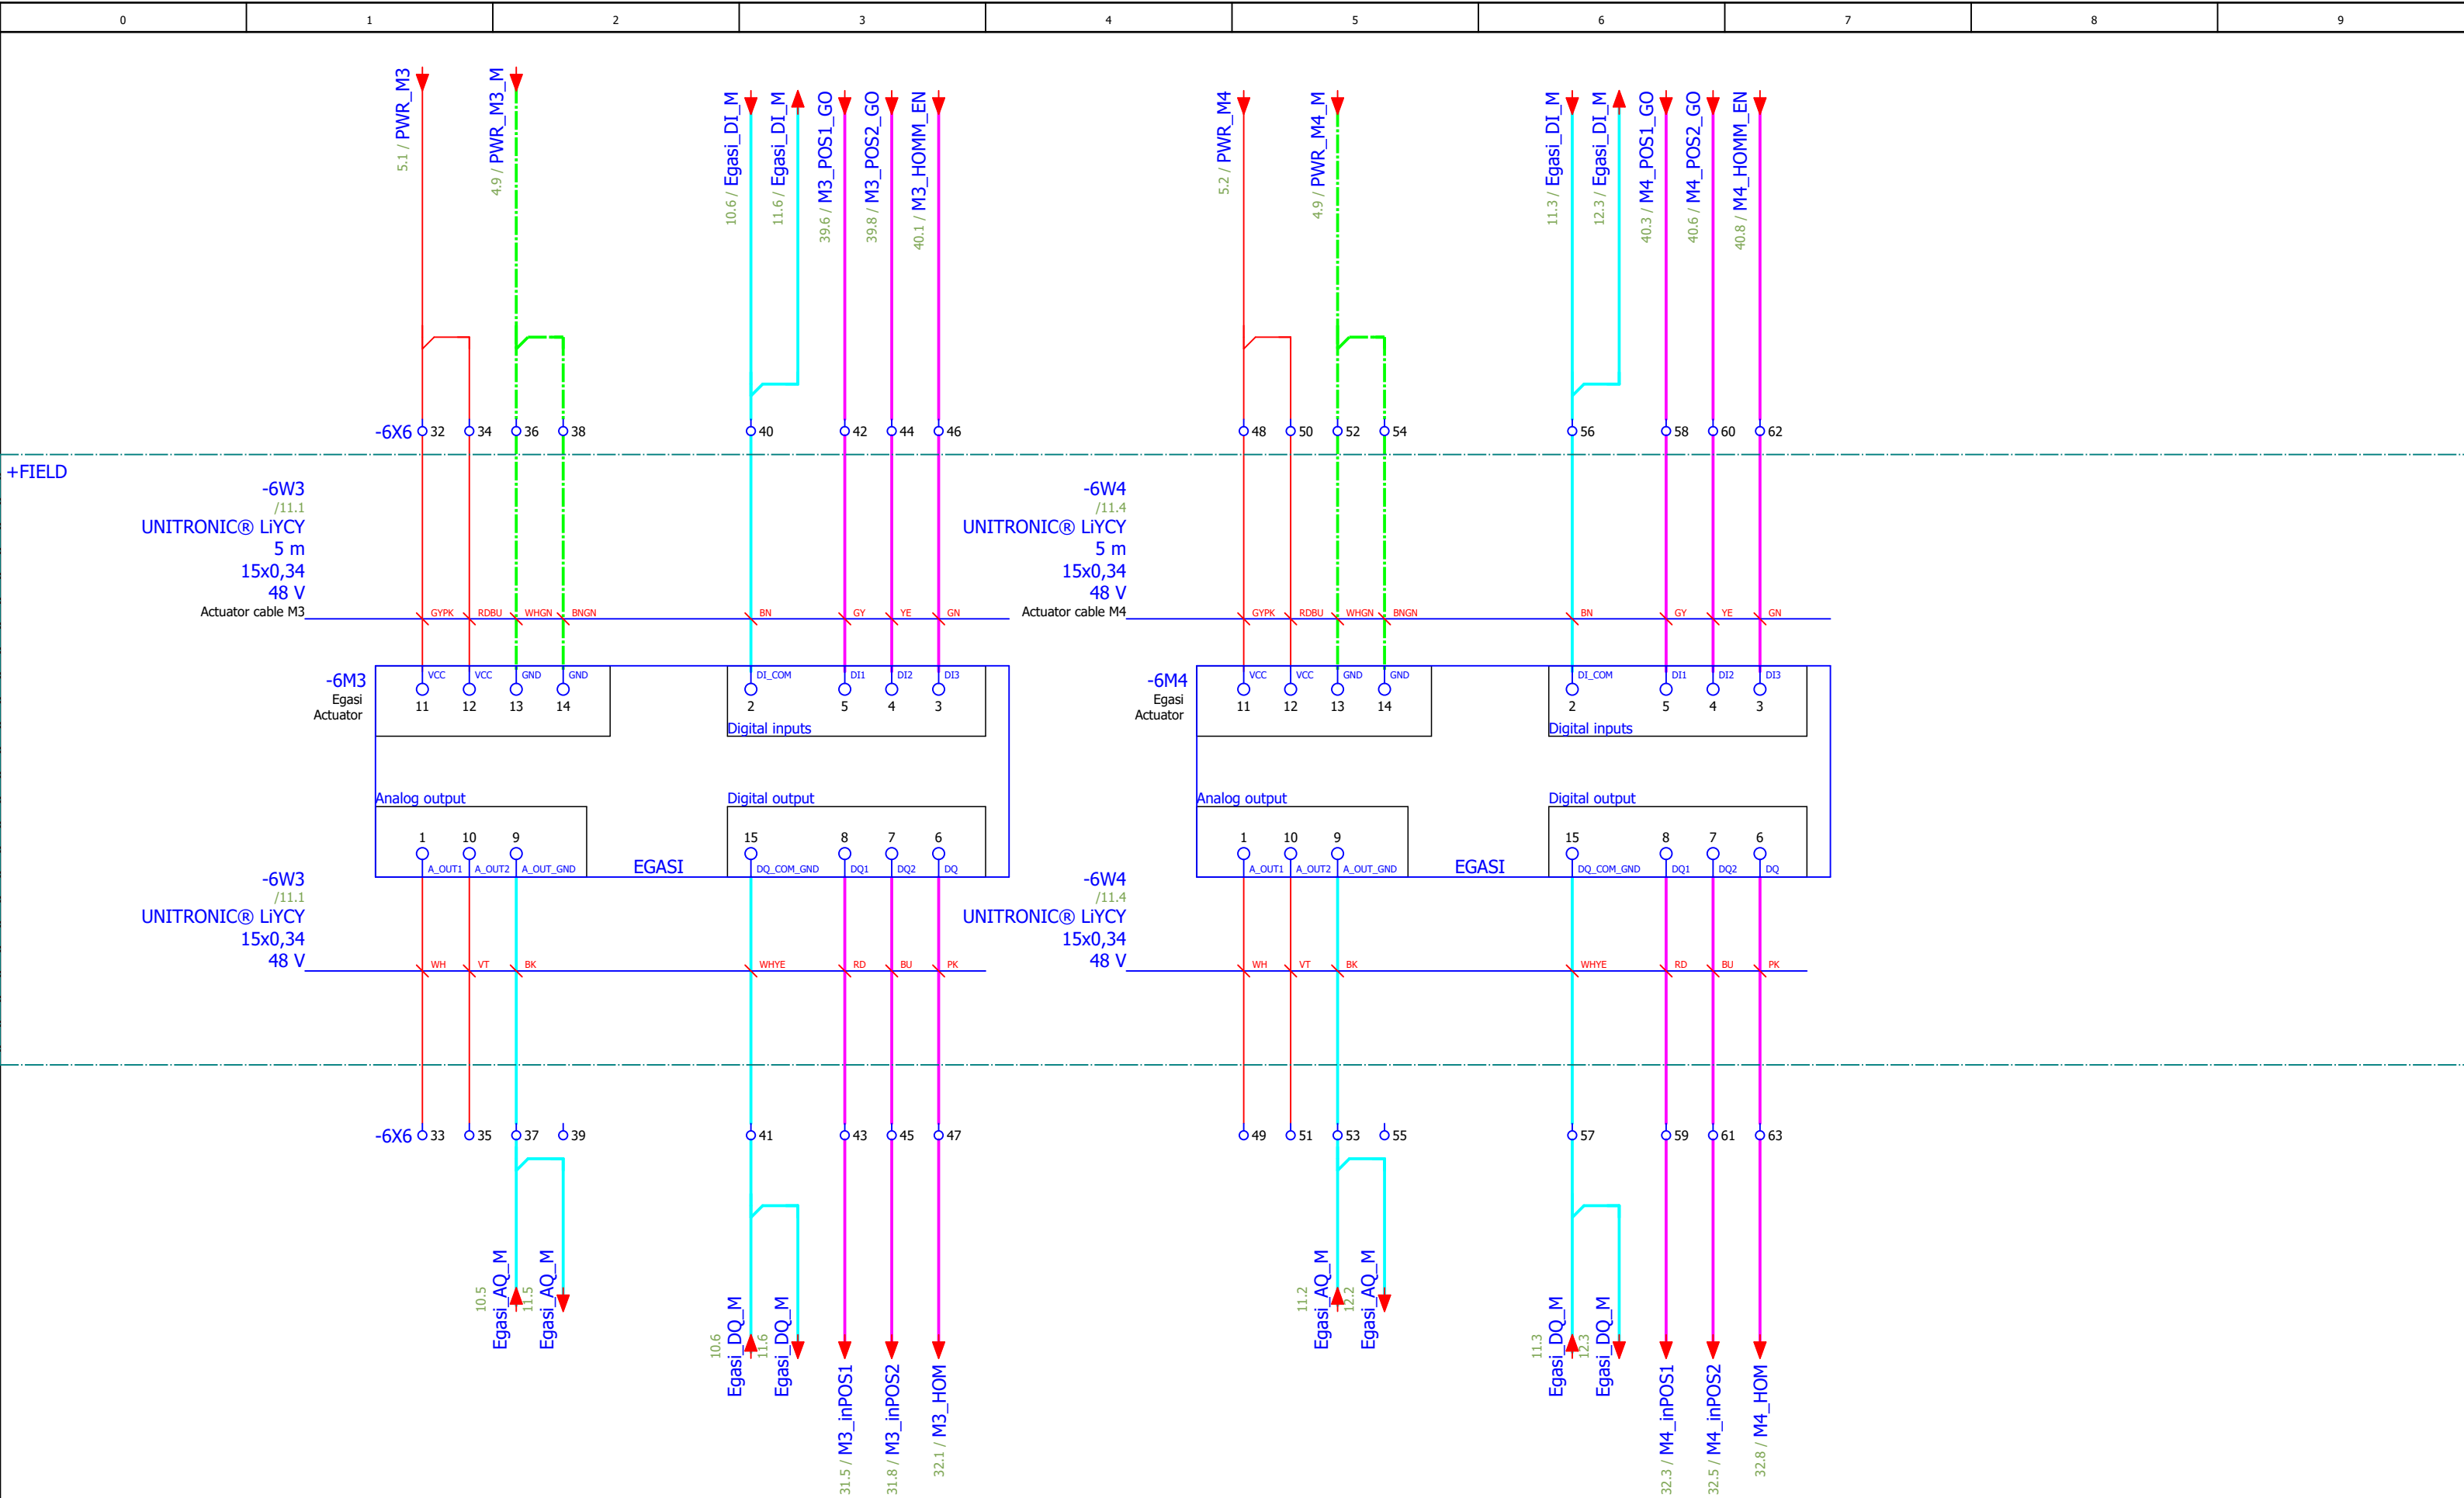


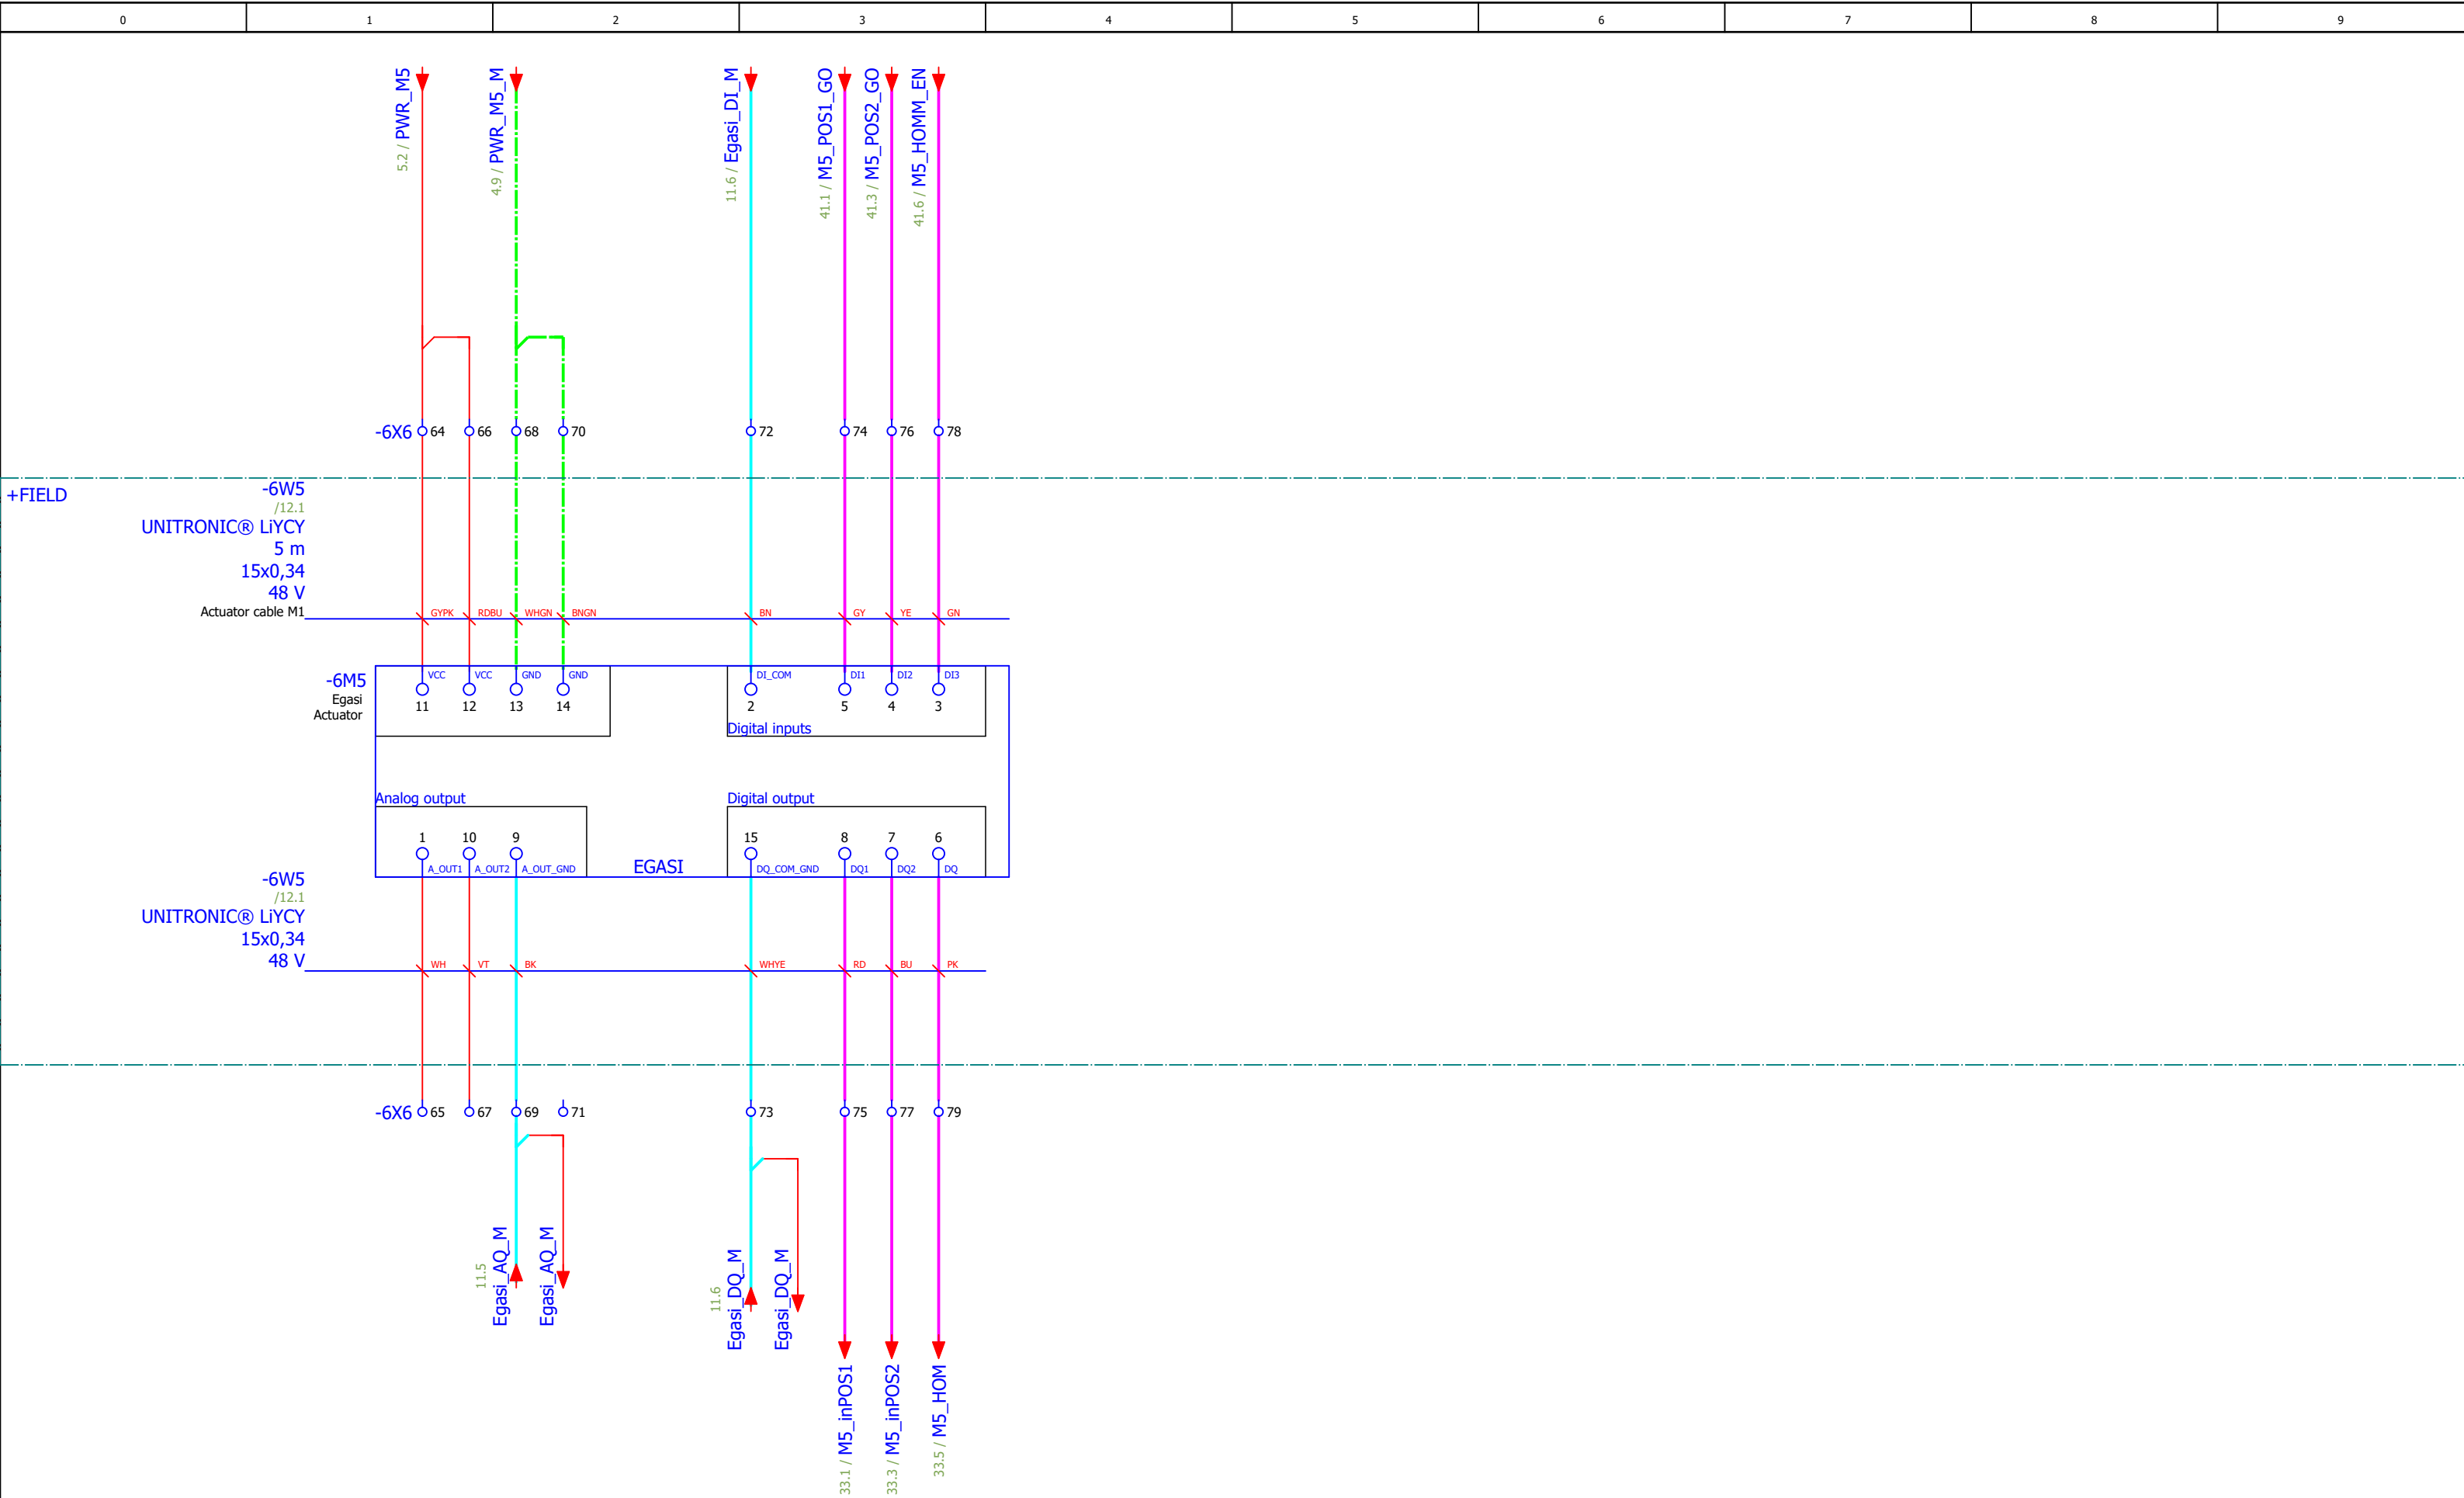

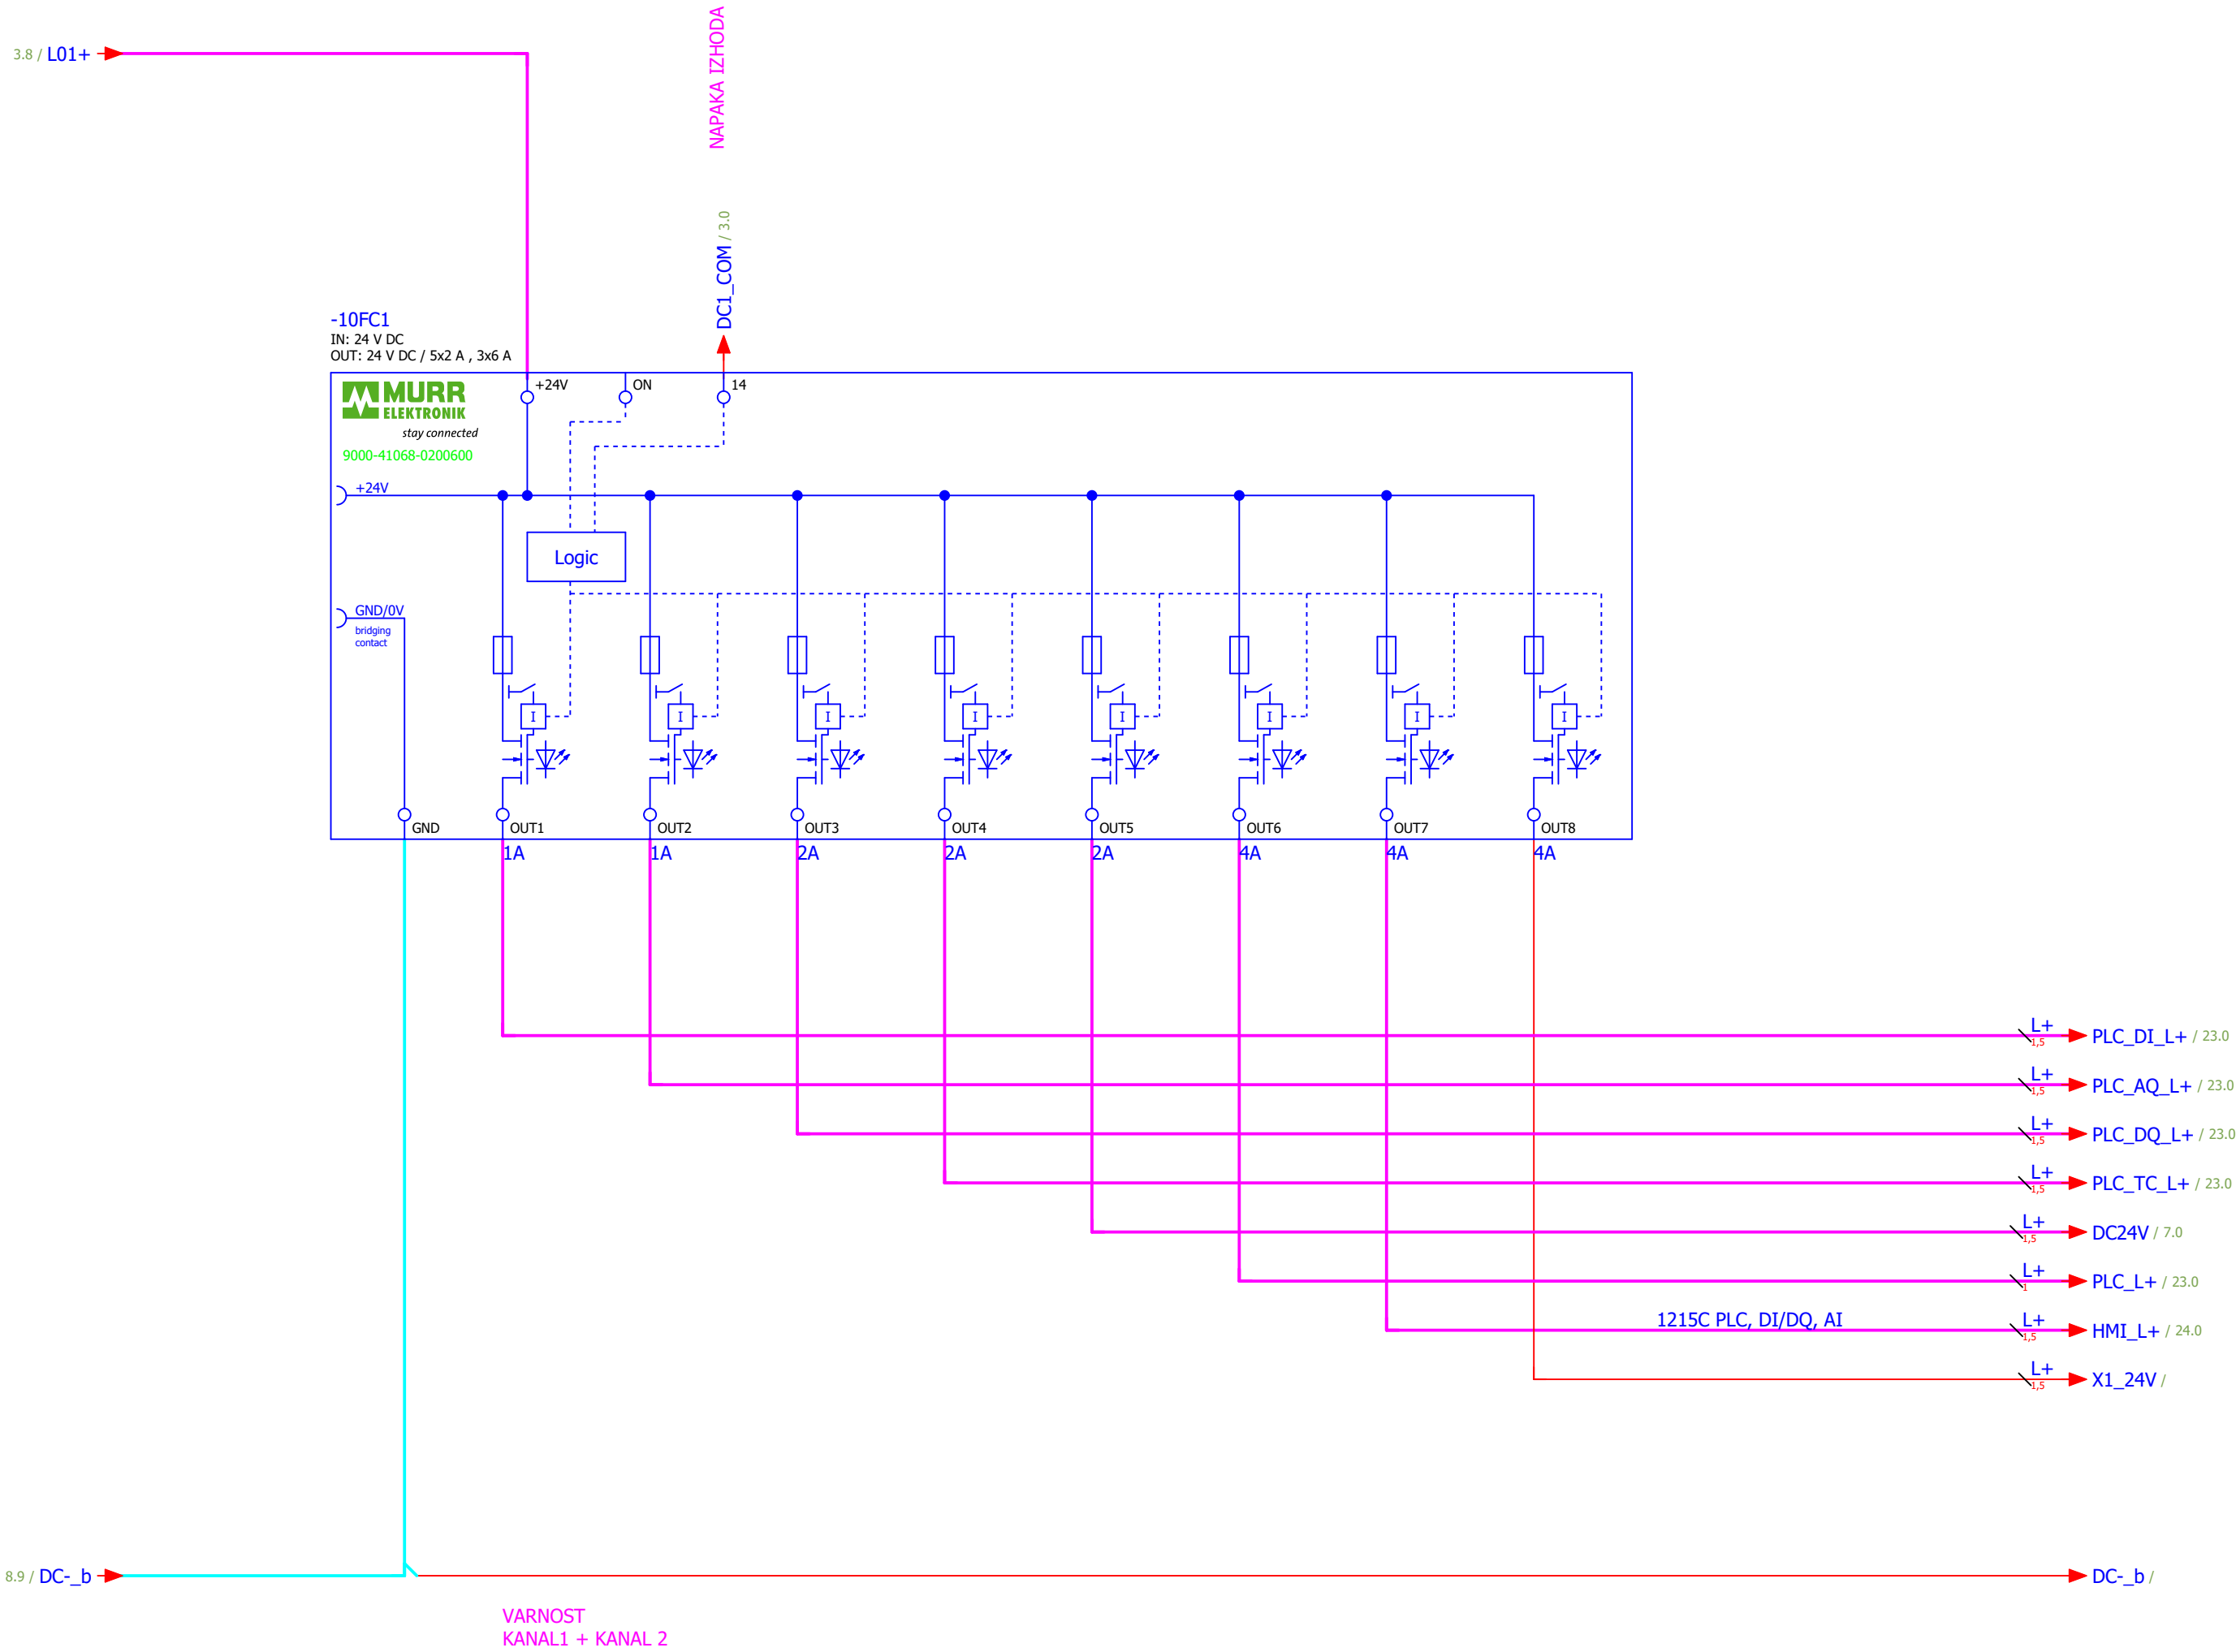

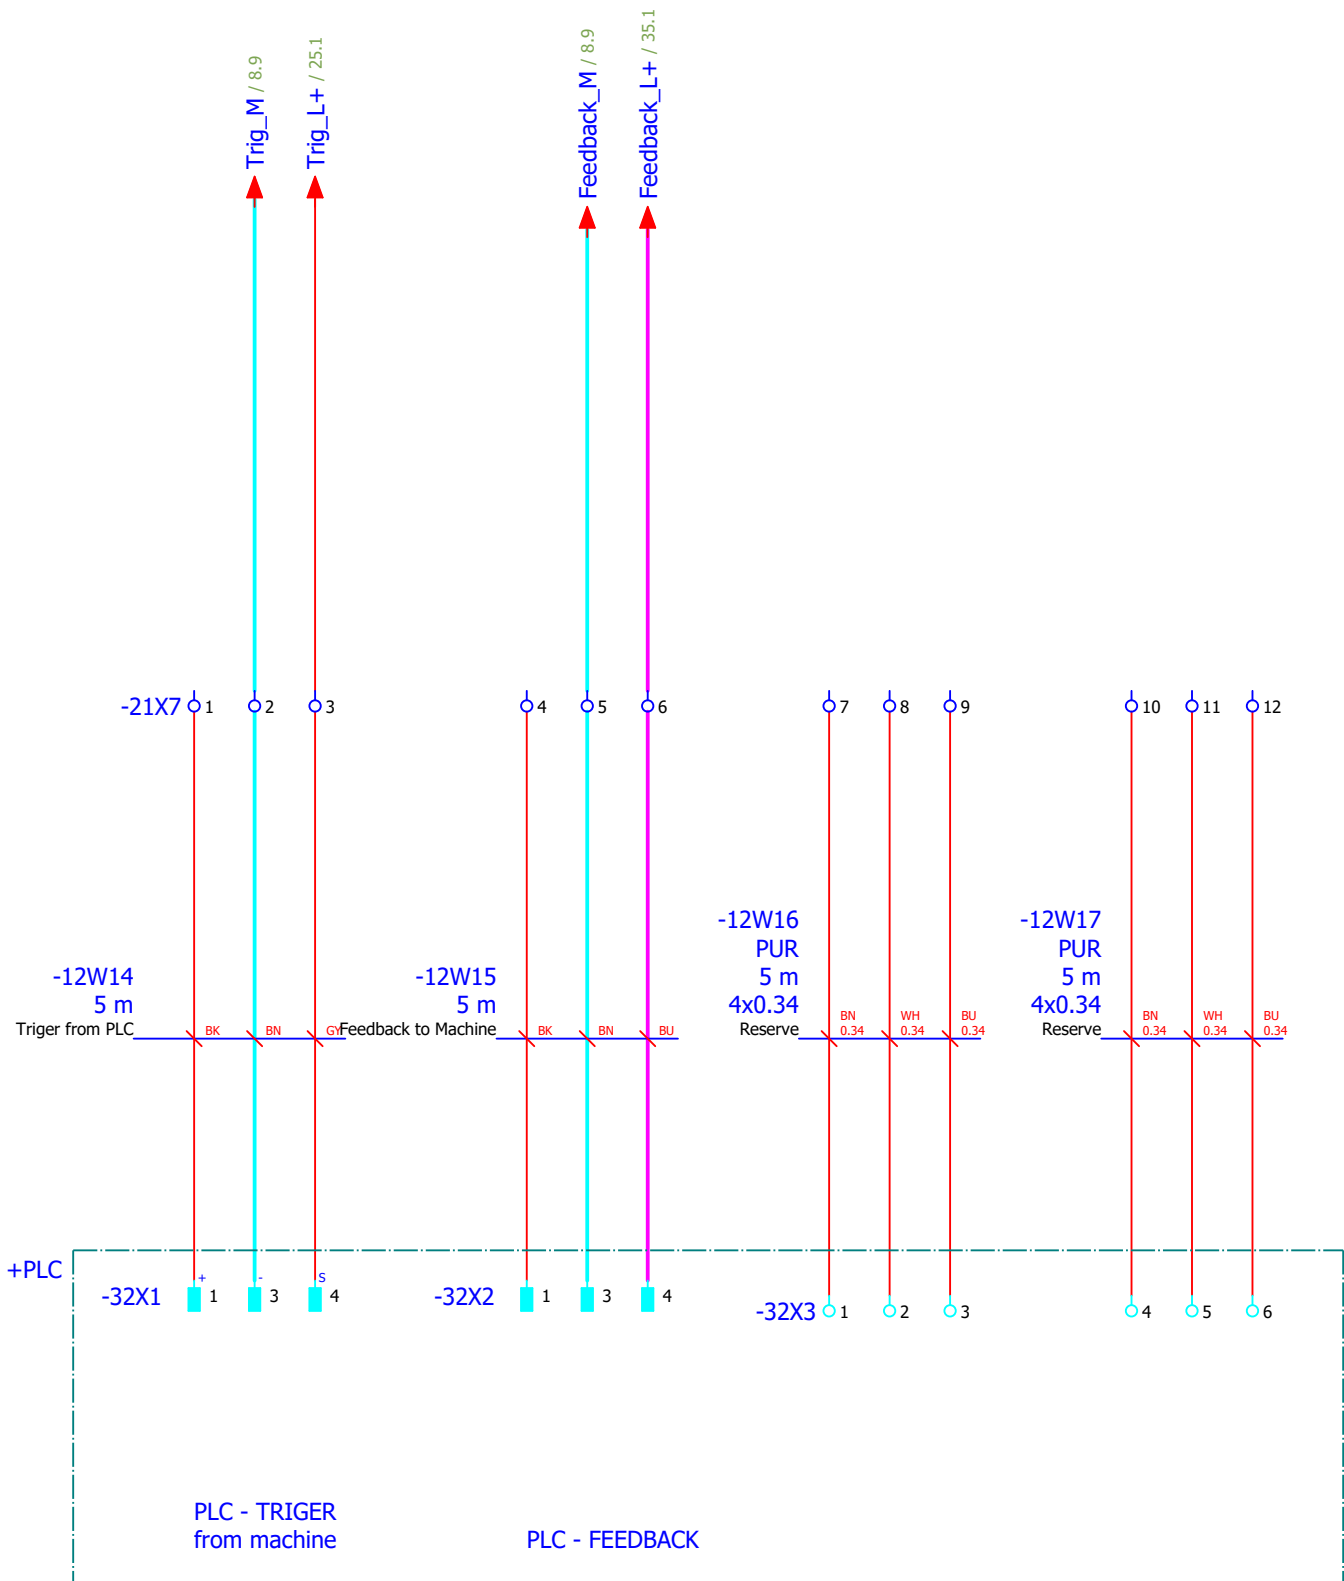


-15K7

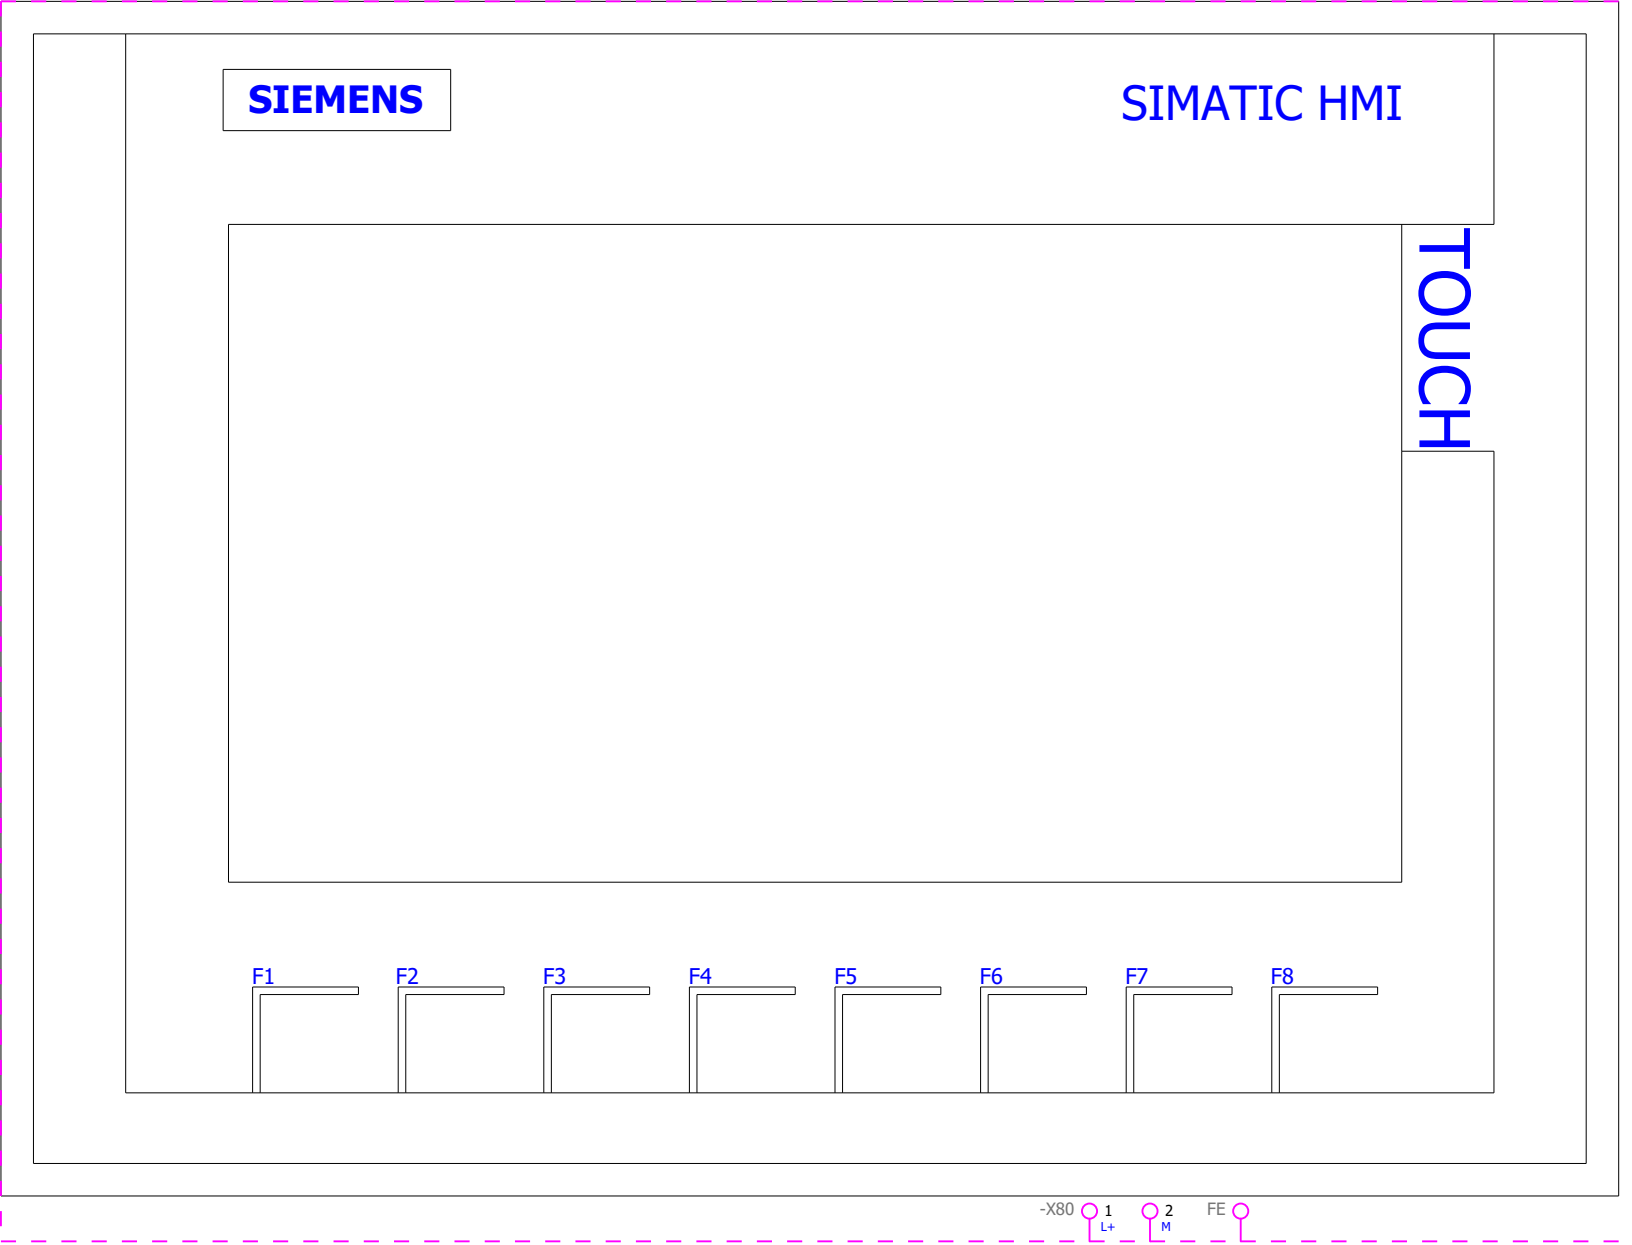


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

--	--	--	--	--	--	--	--	--	--


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

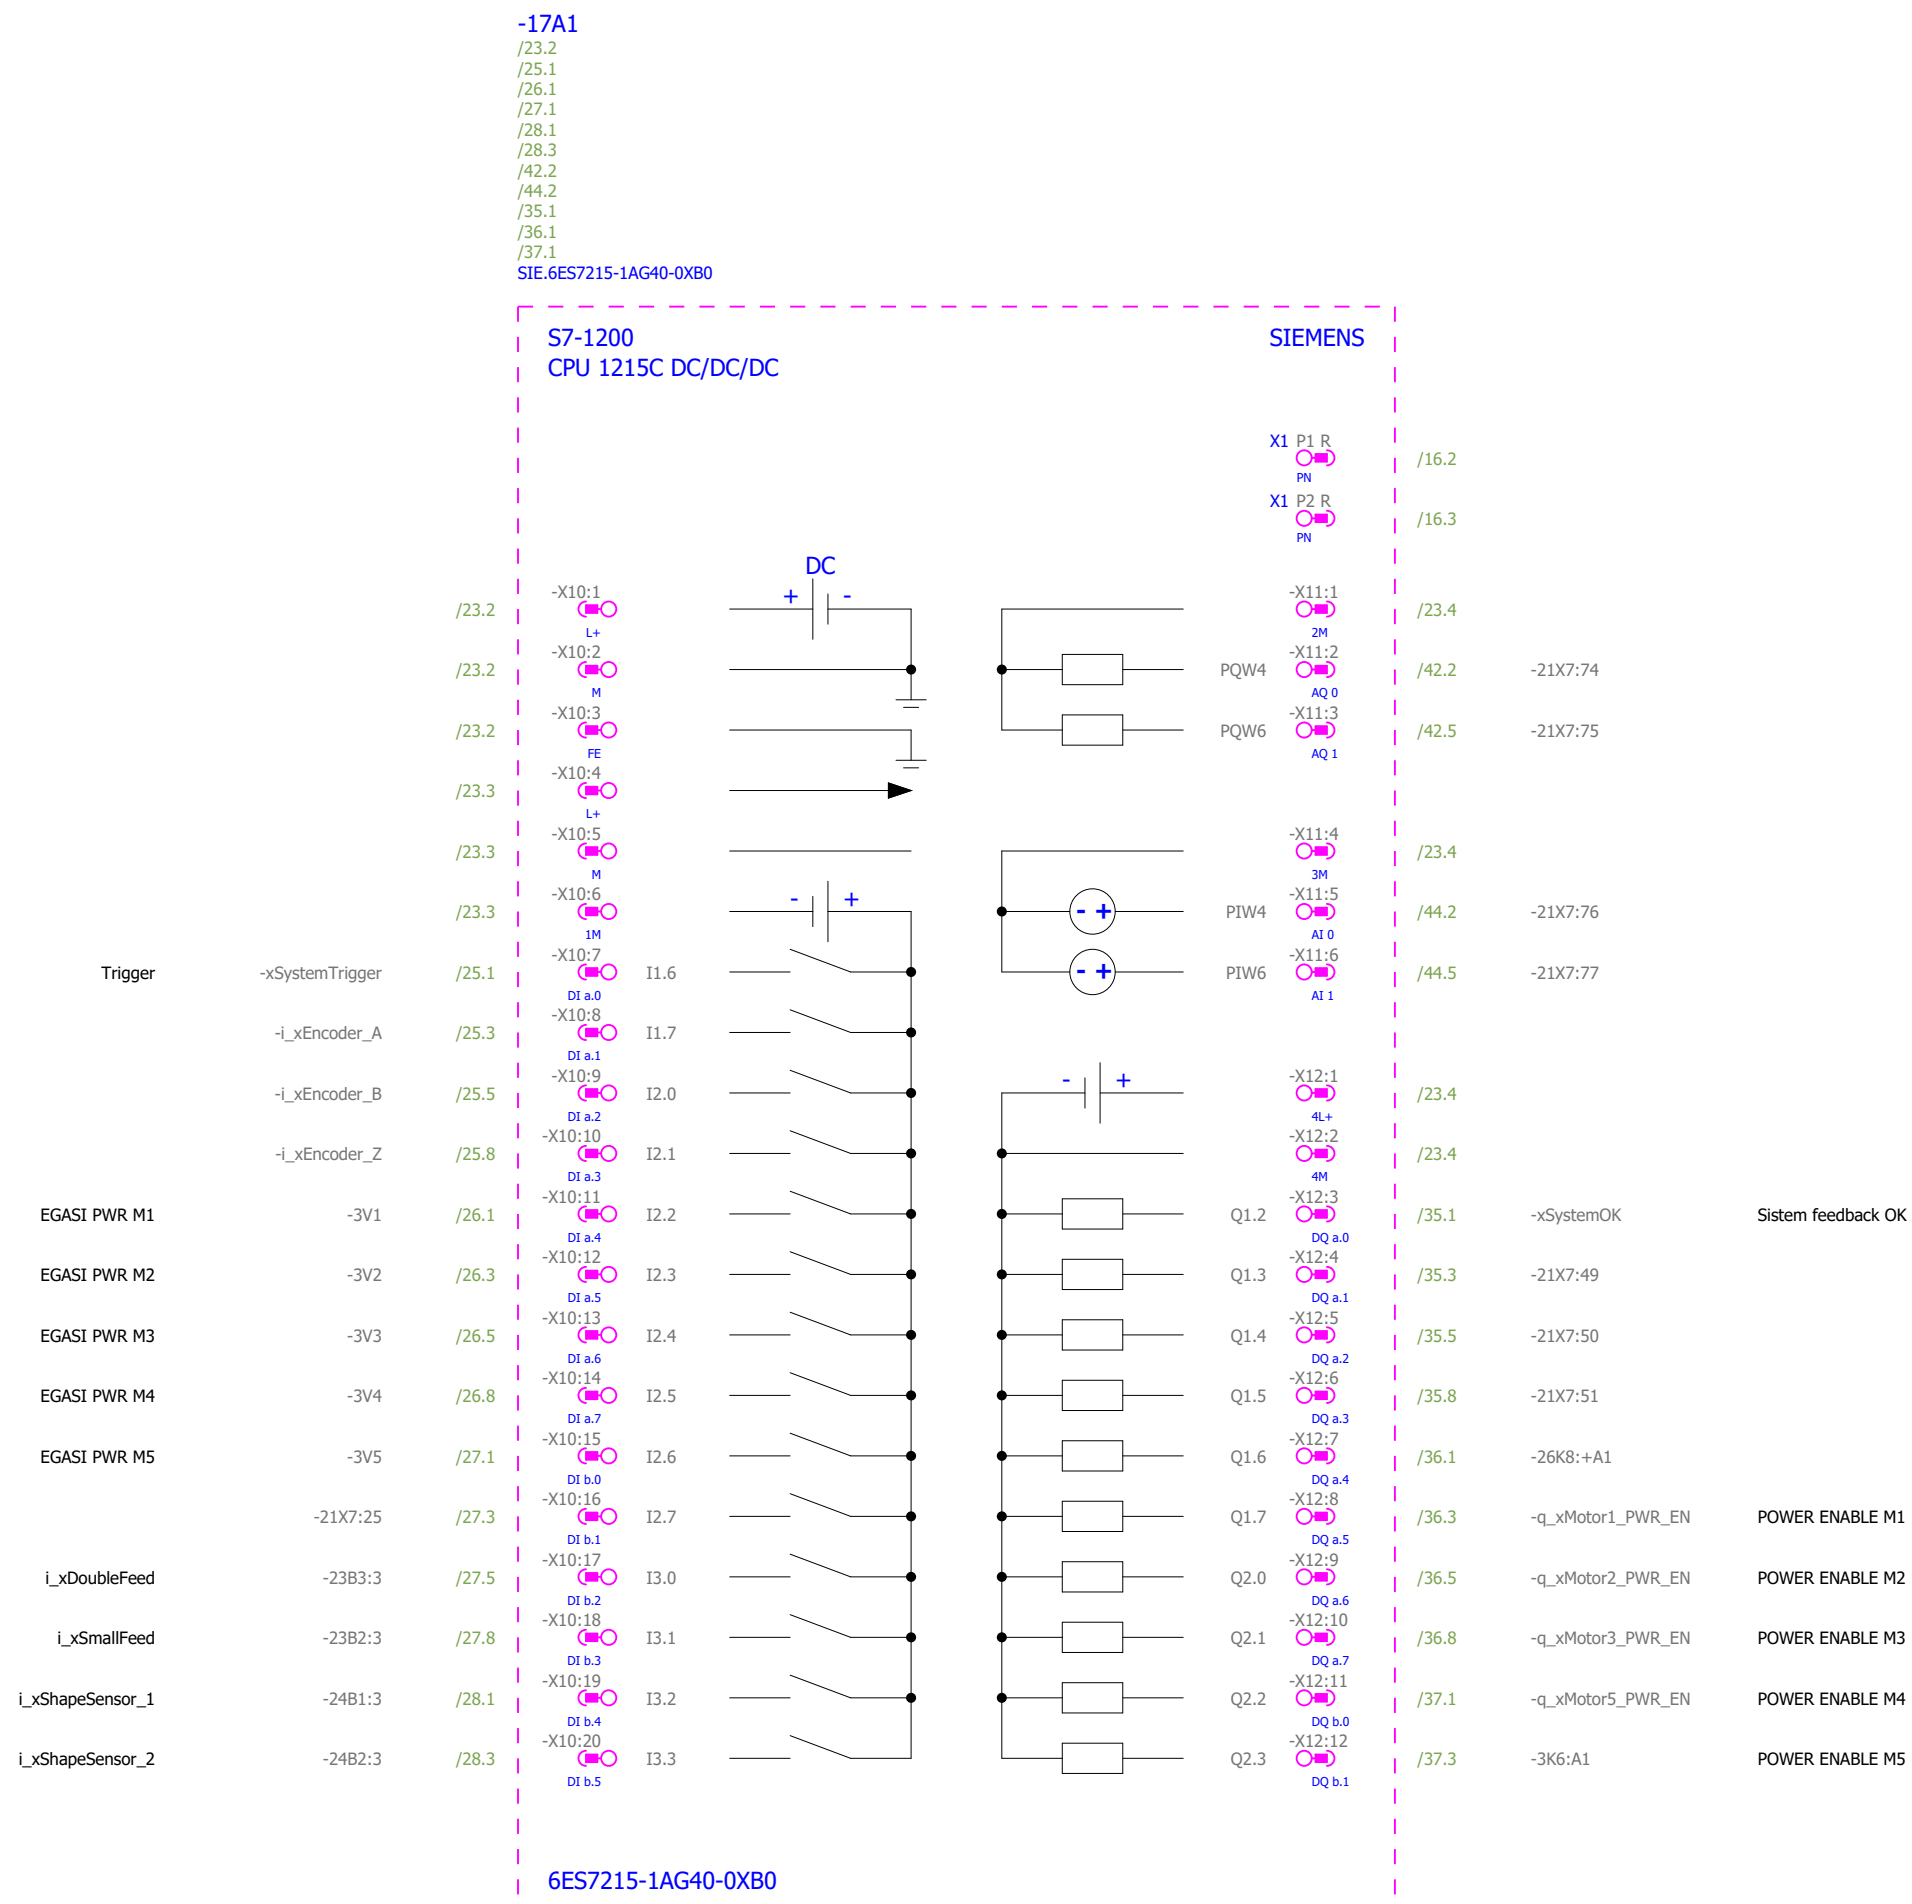


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

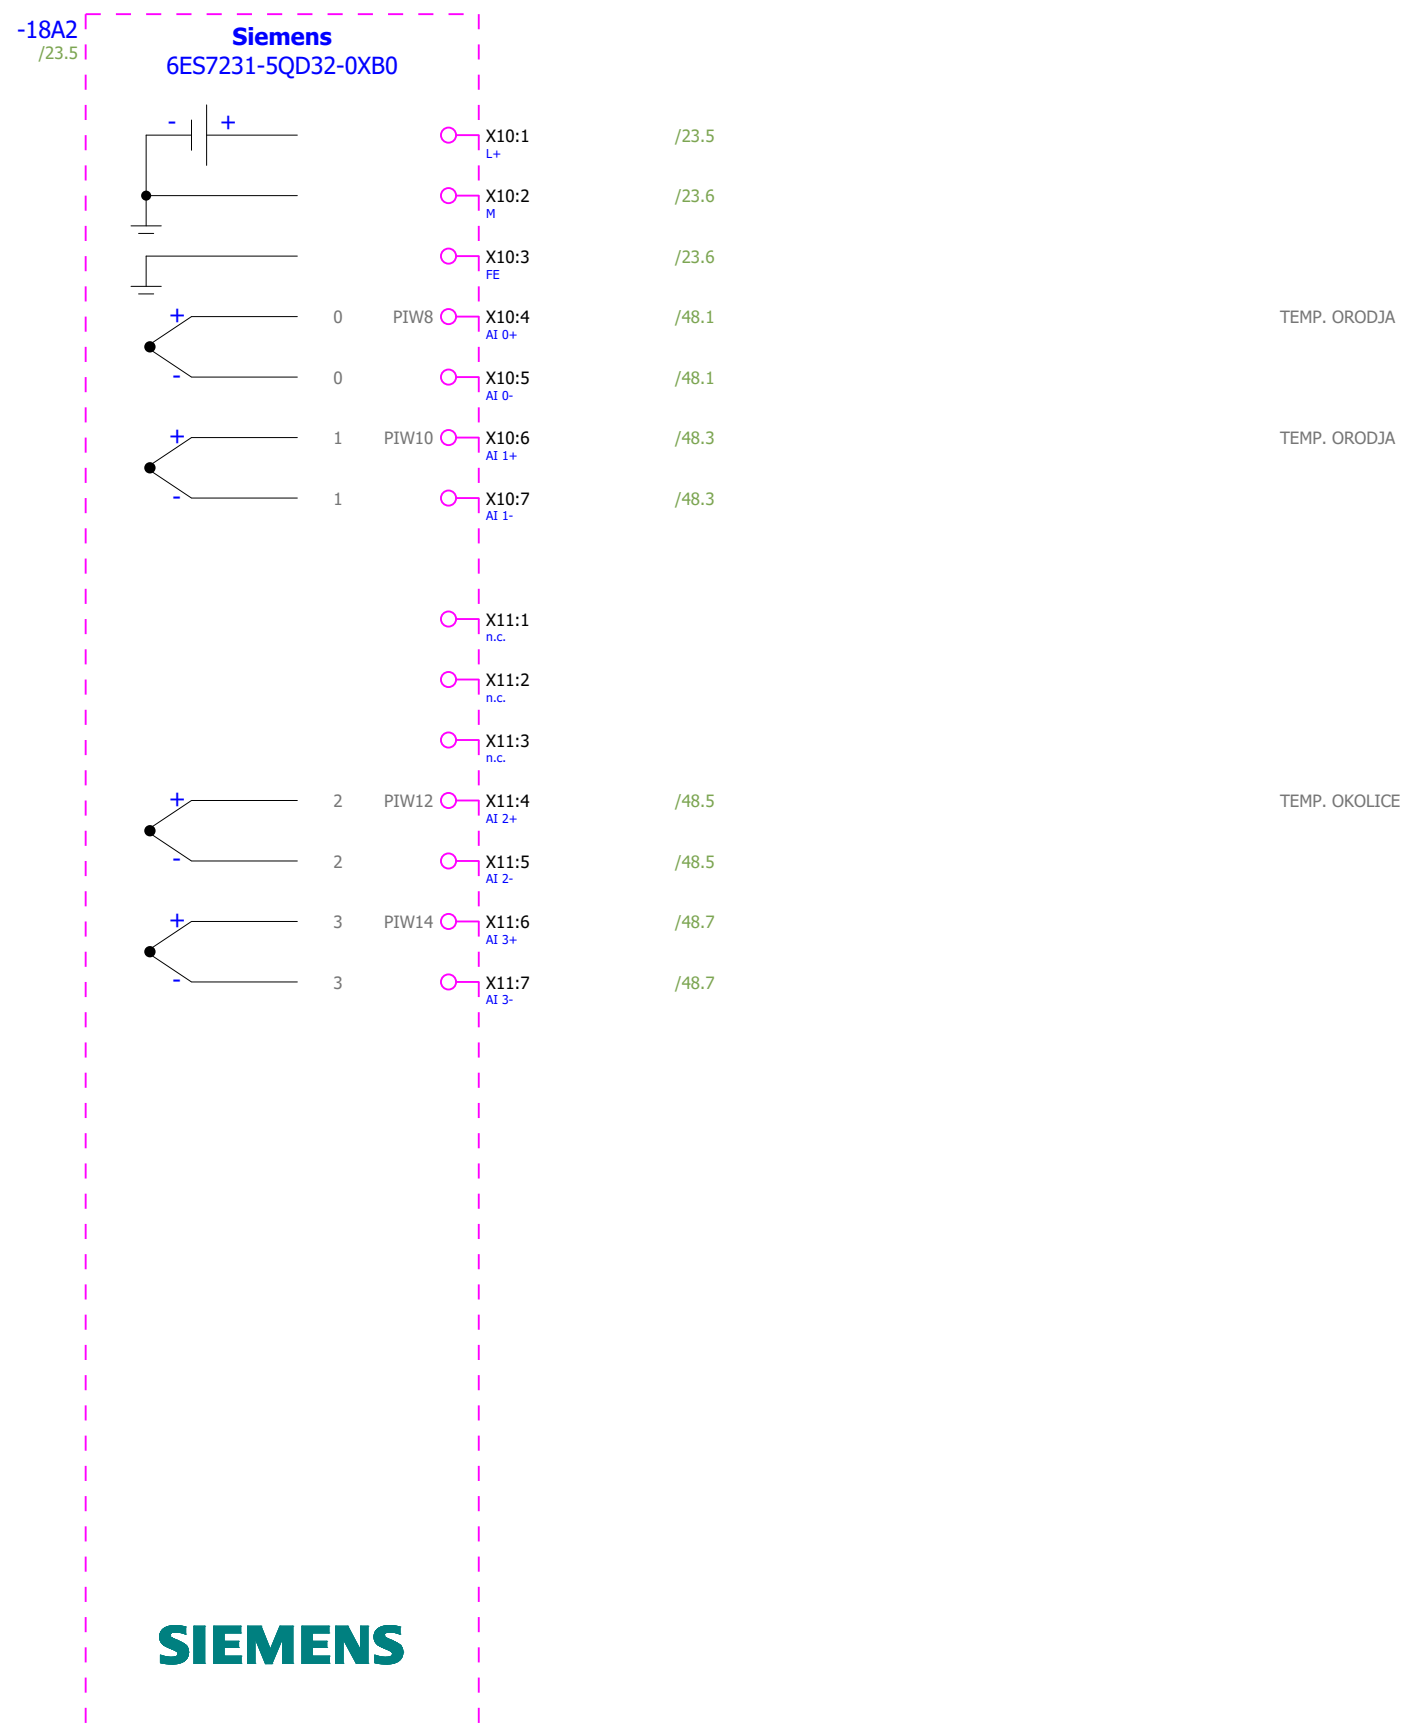


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

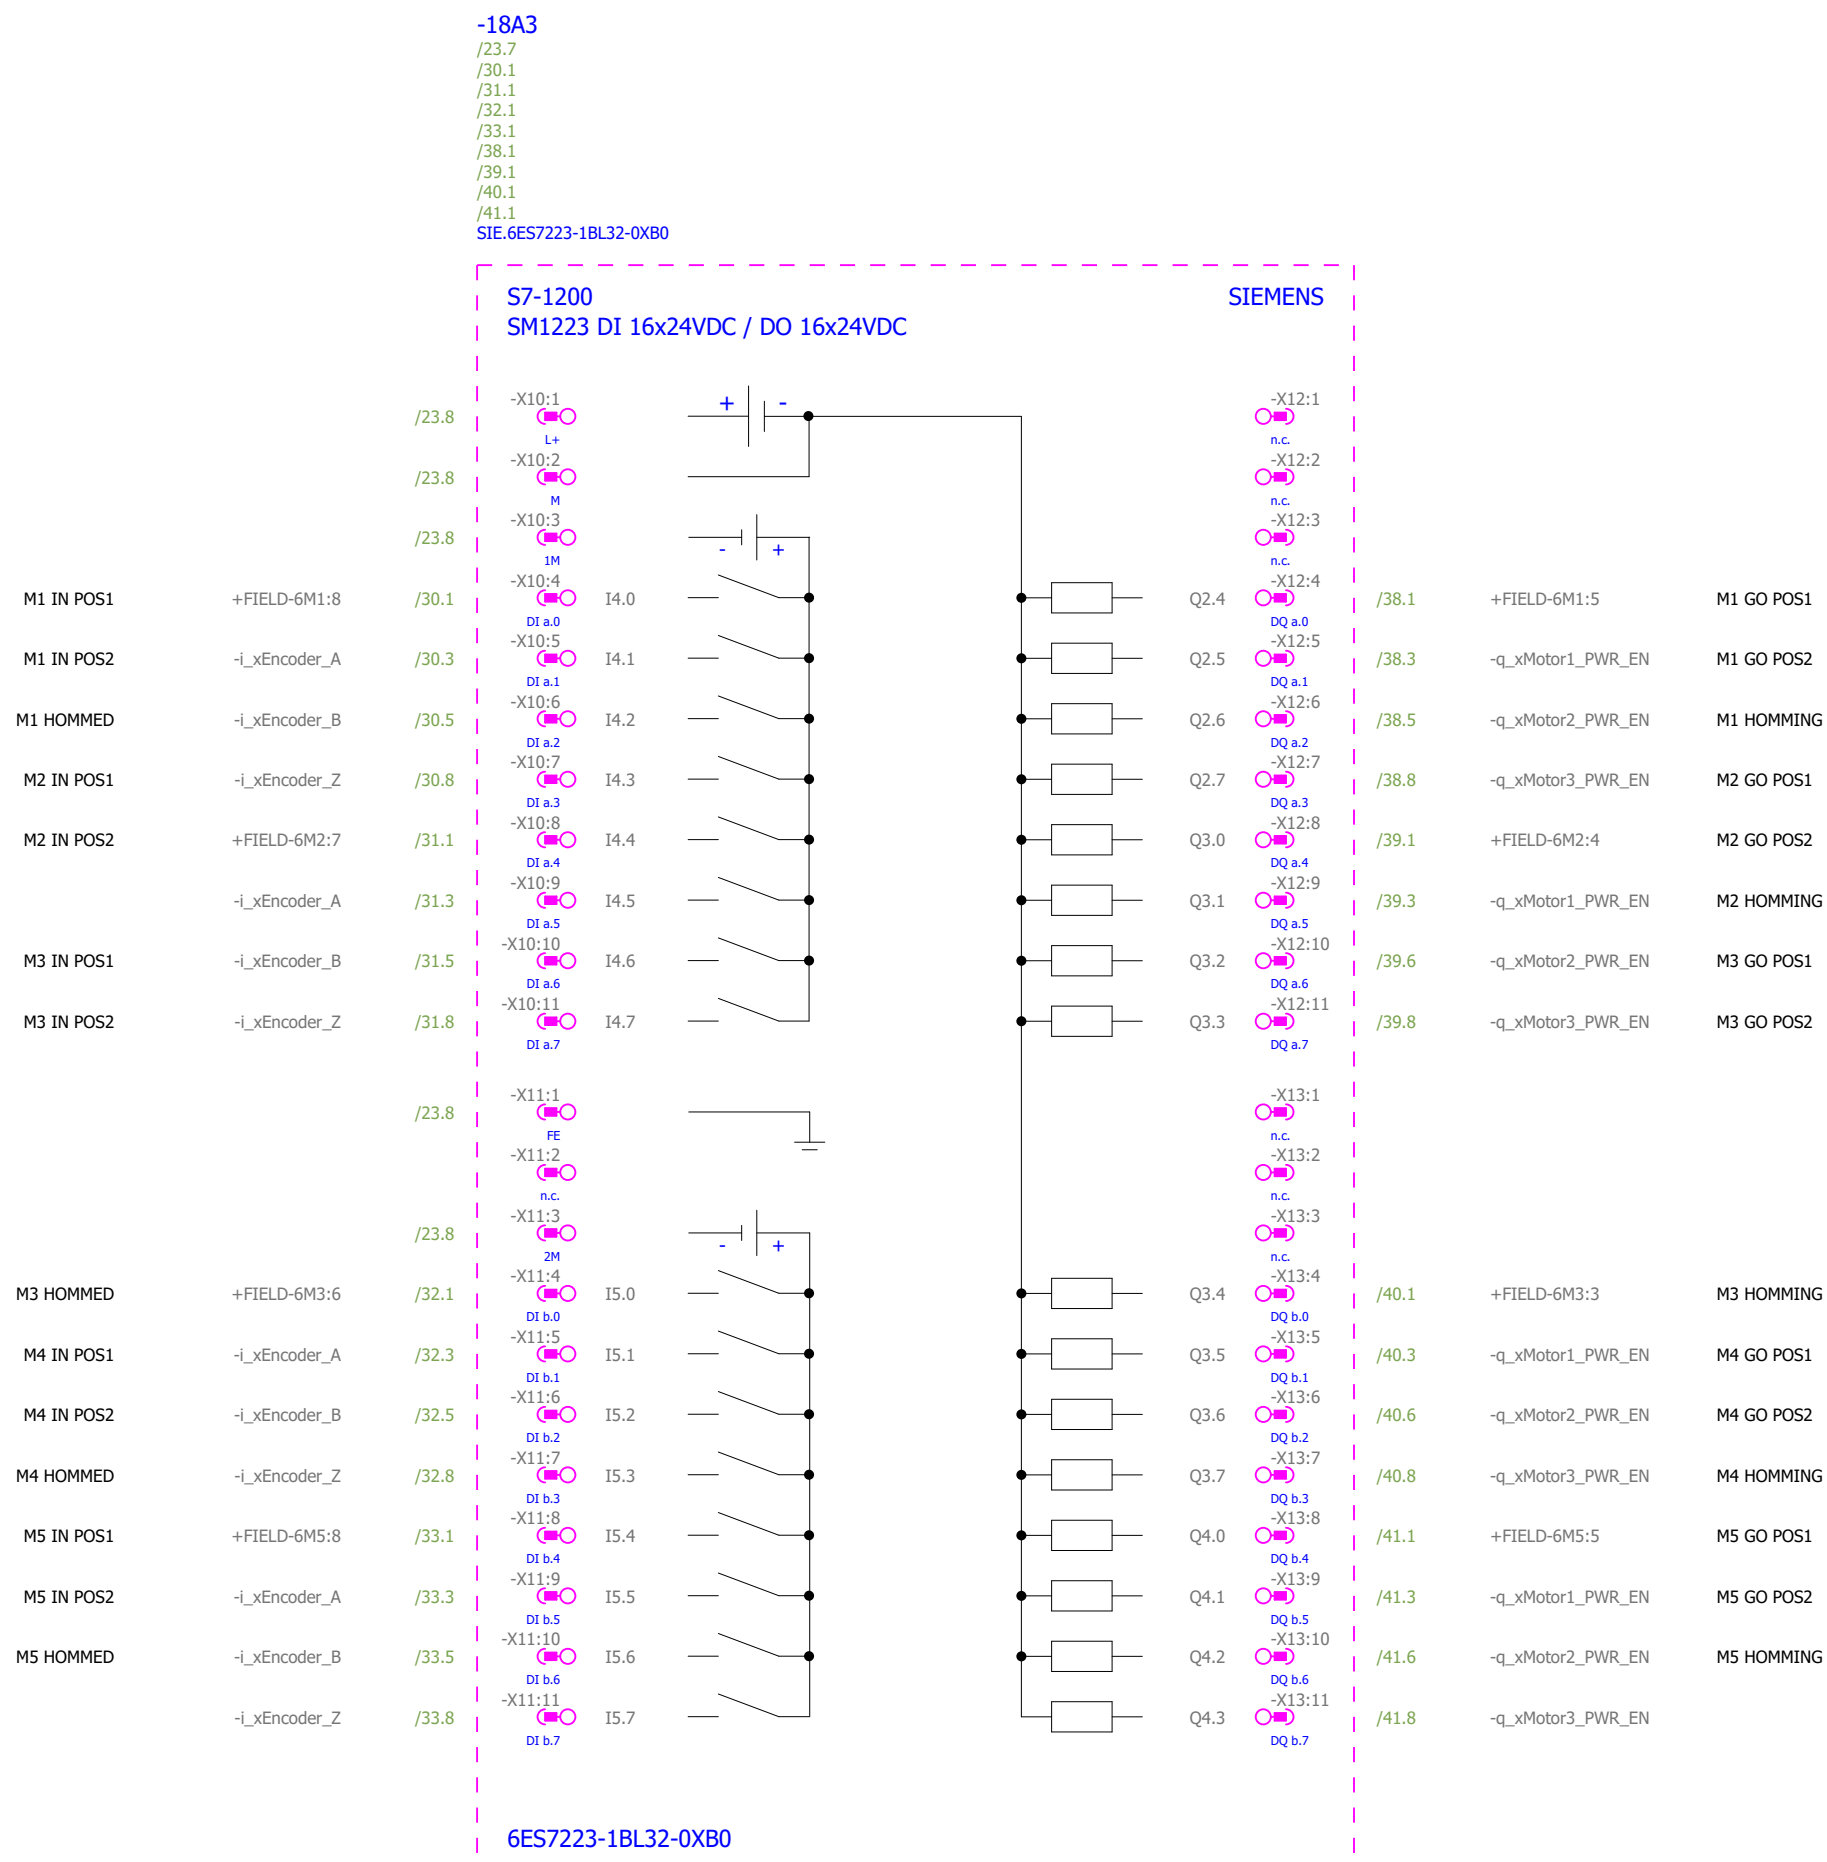


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

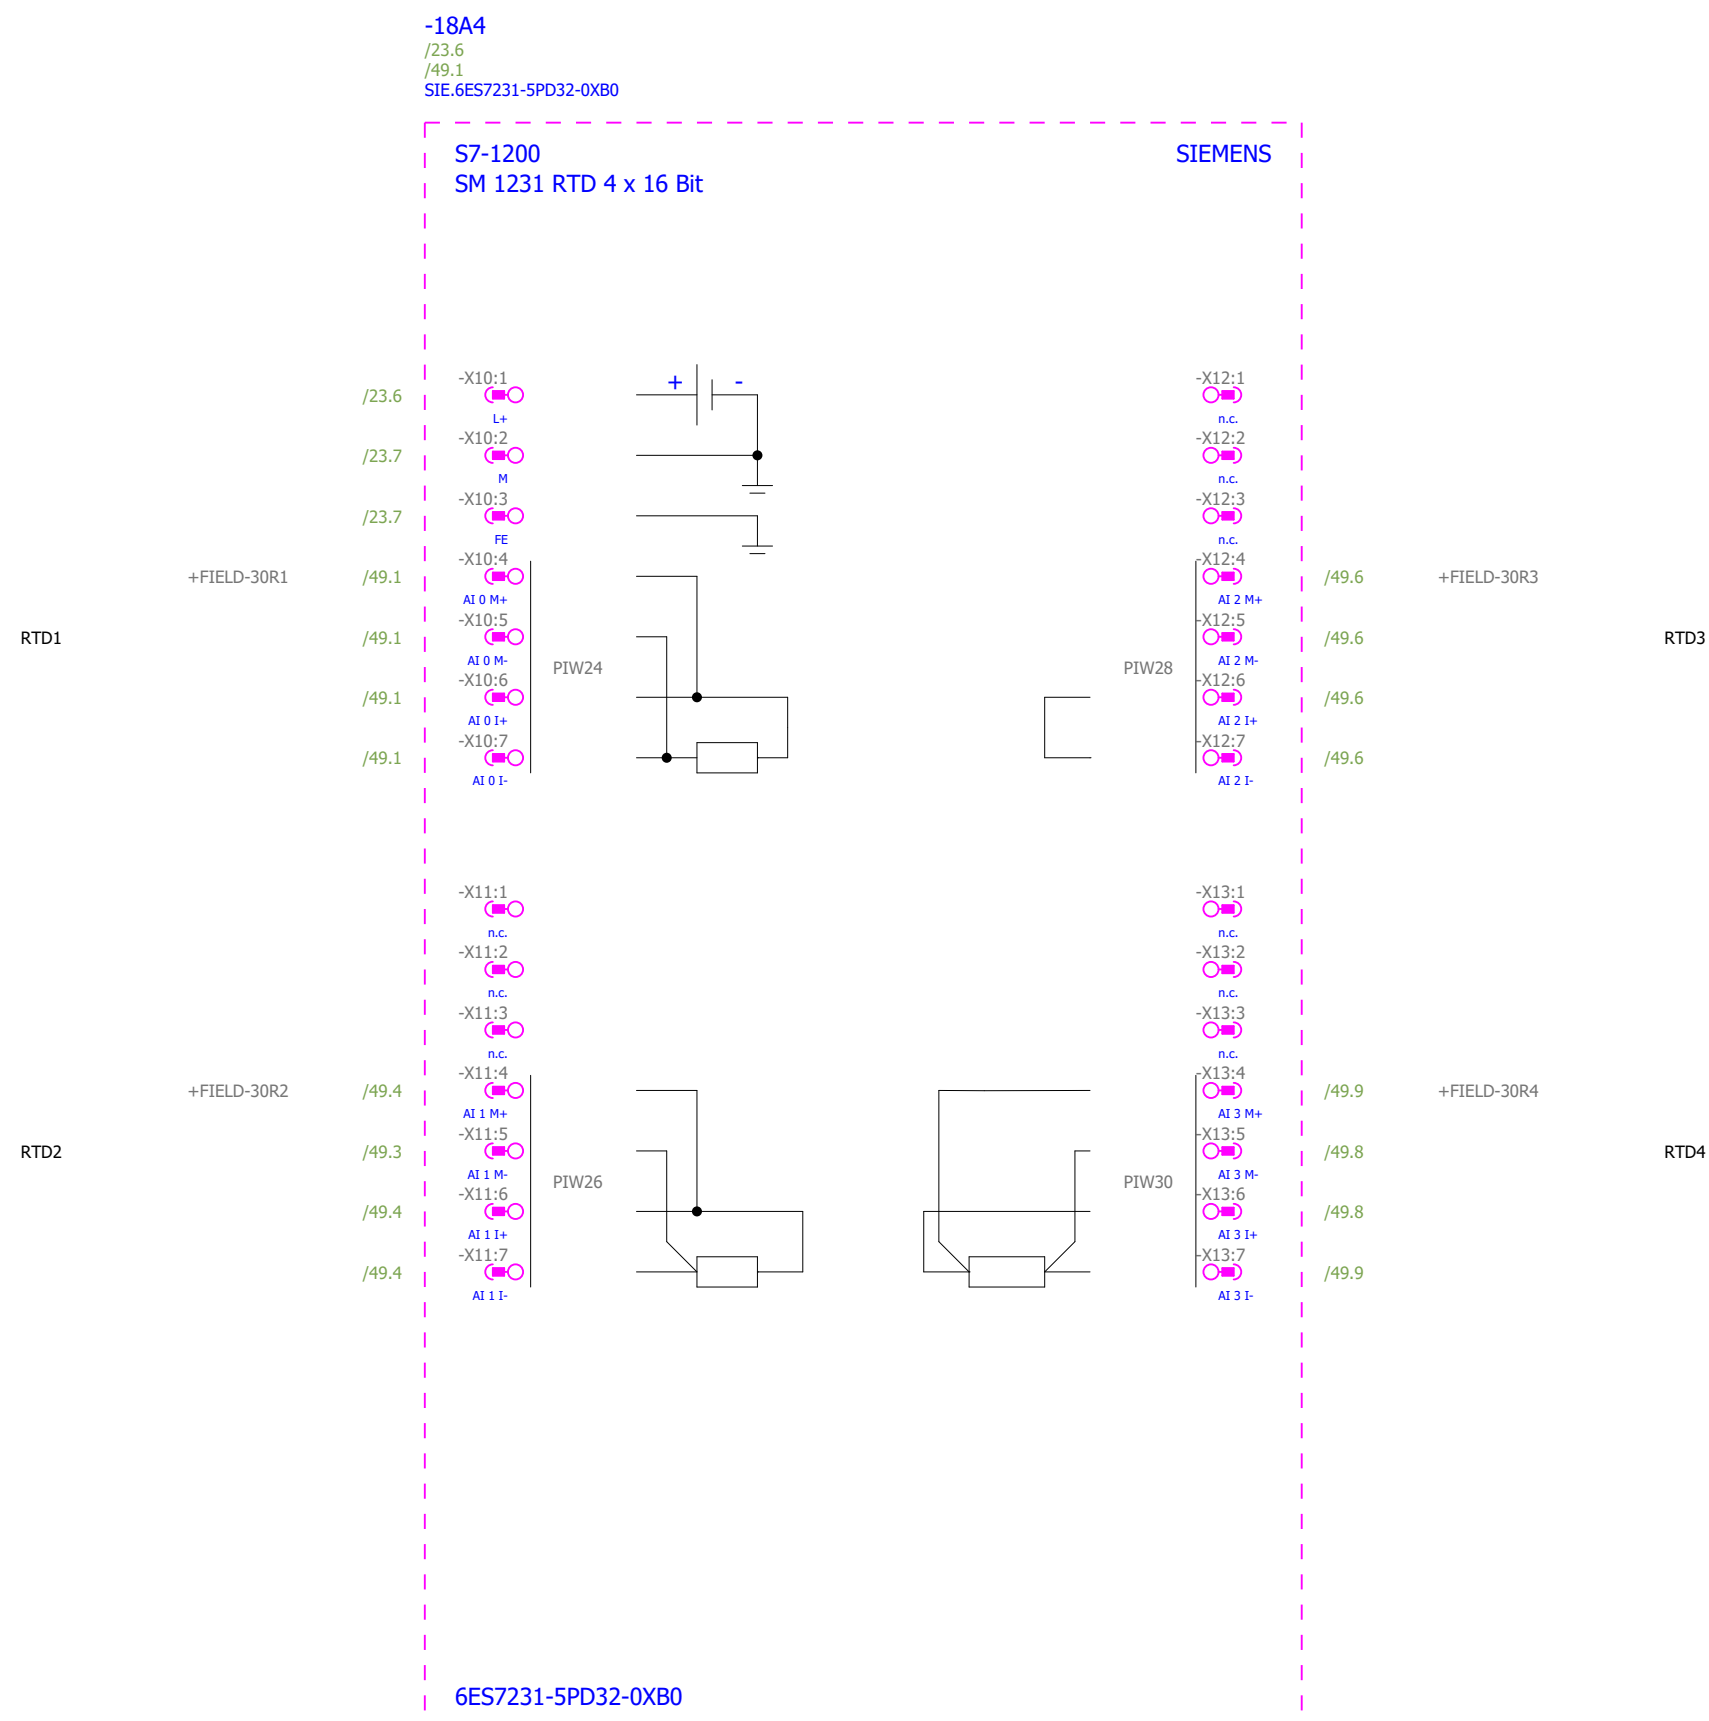

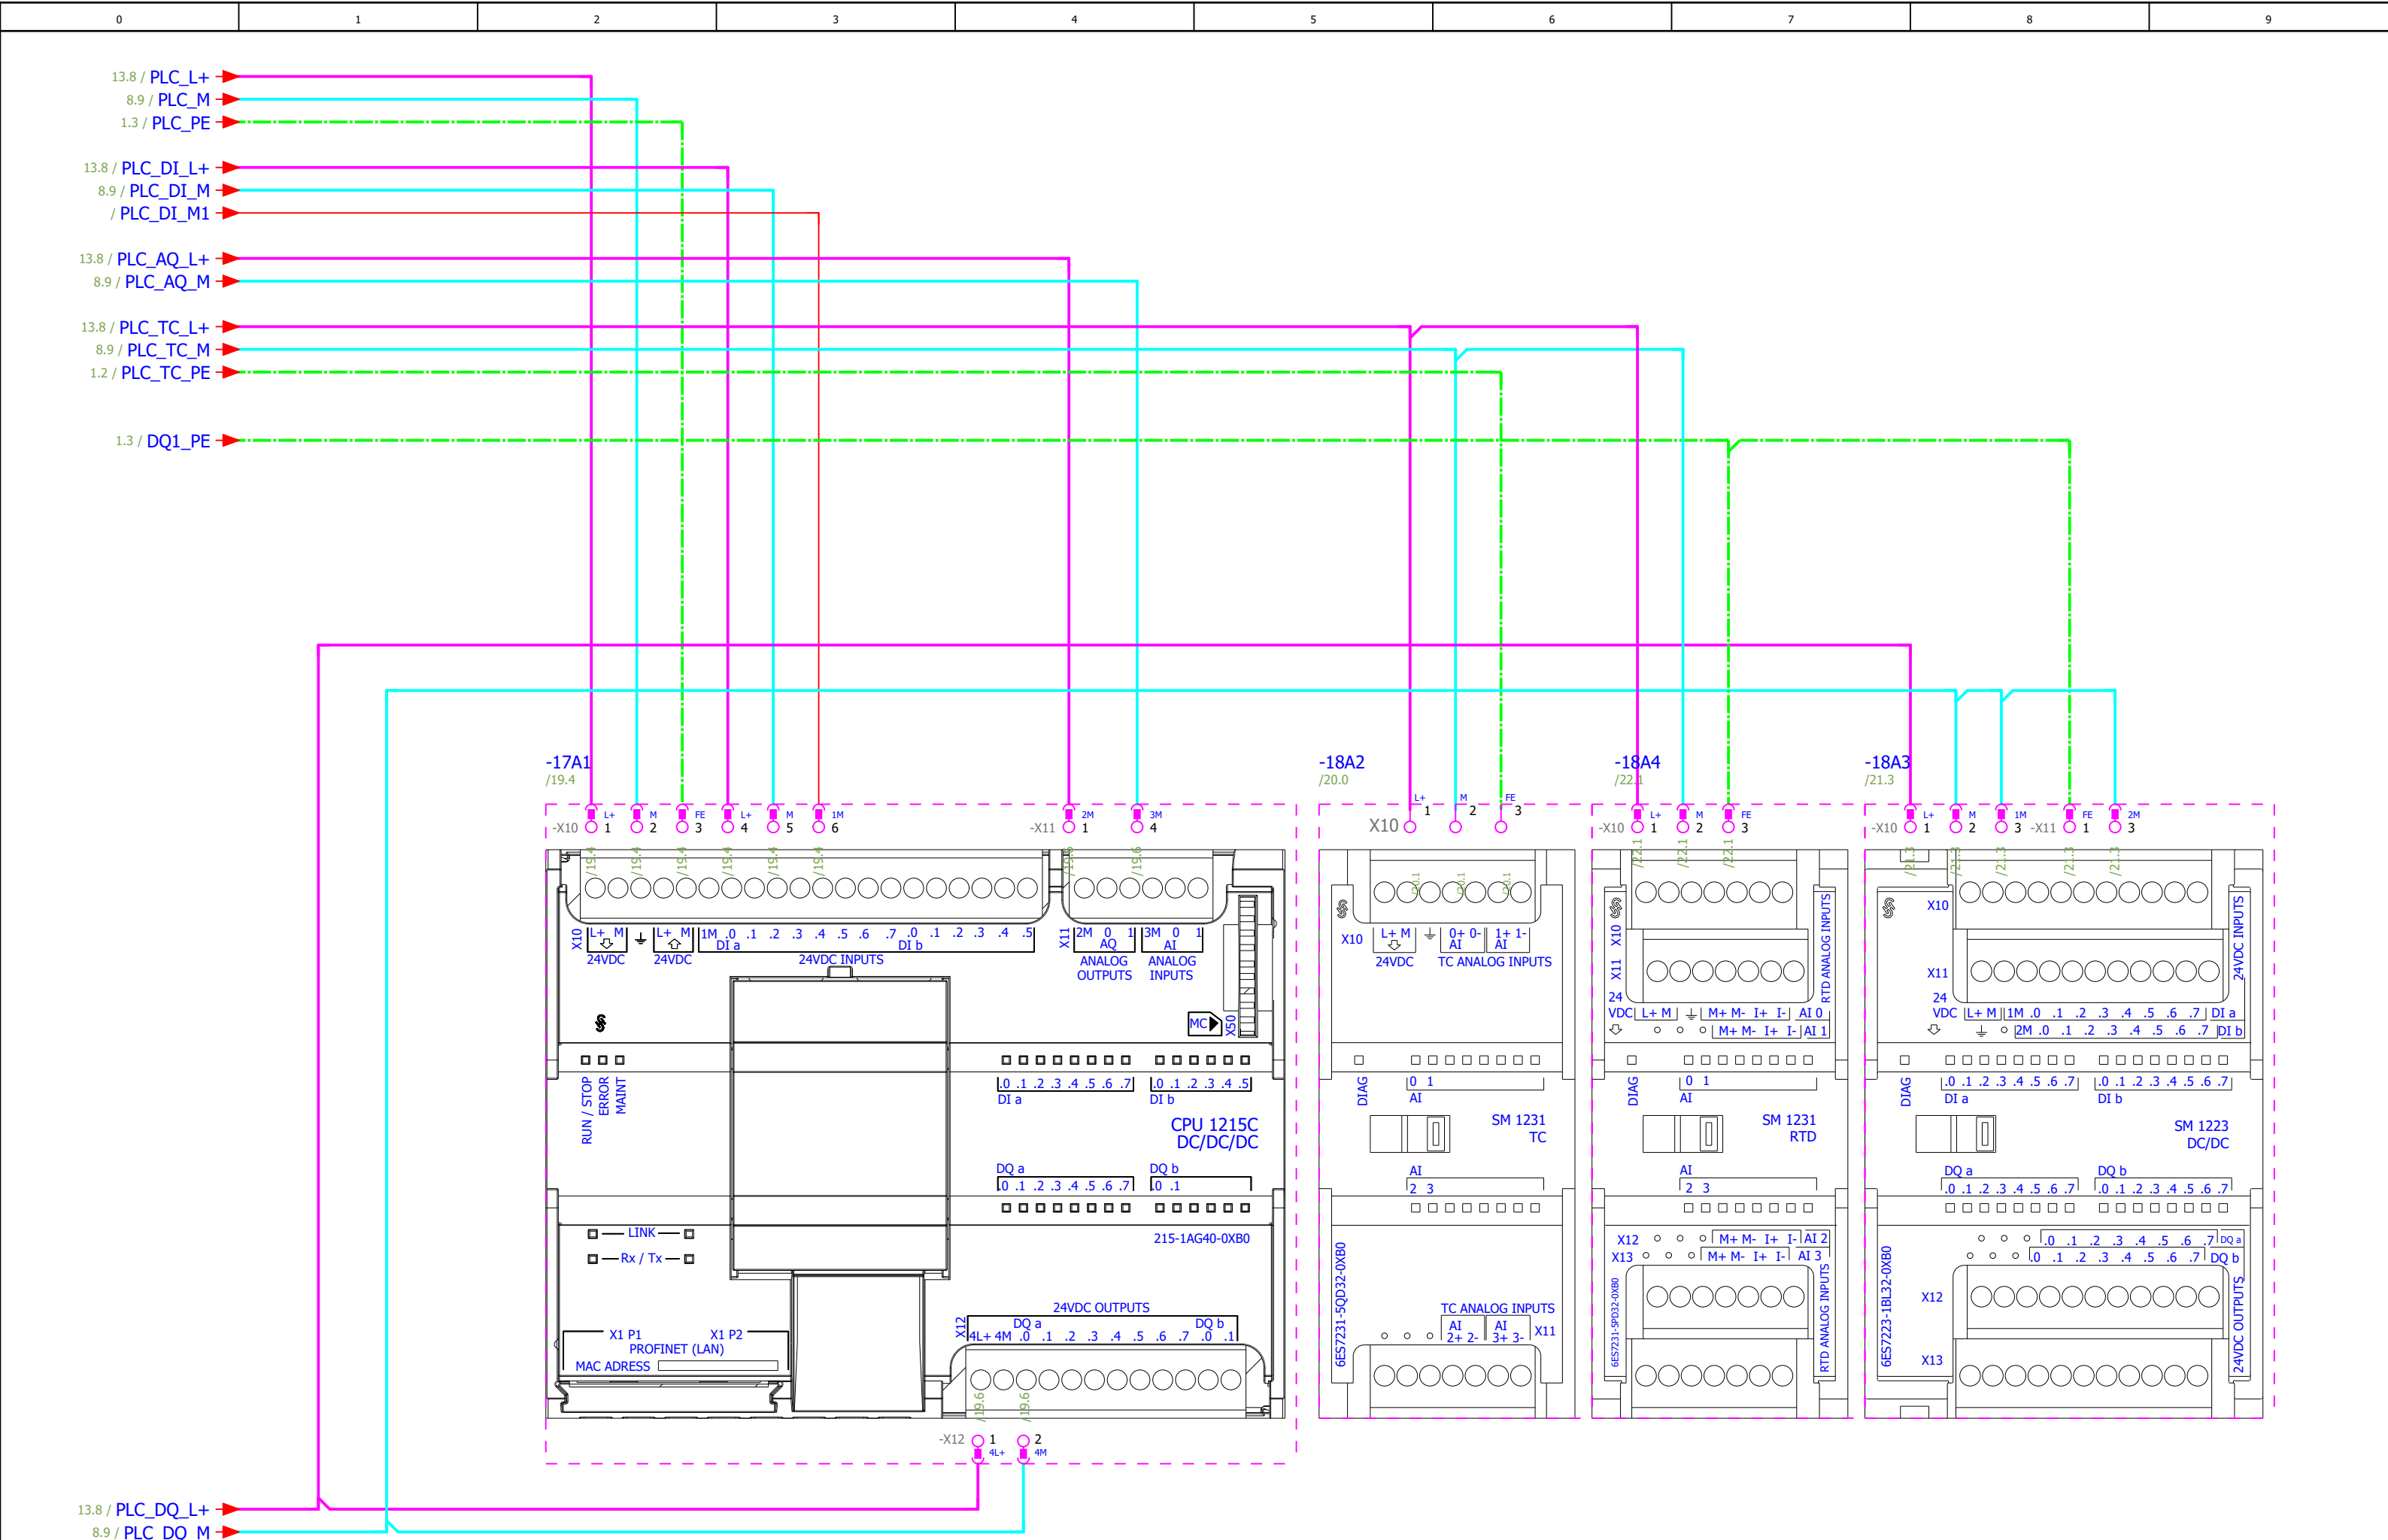

+FIELD


-20A1

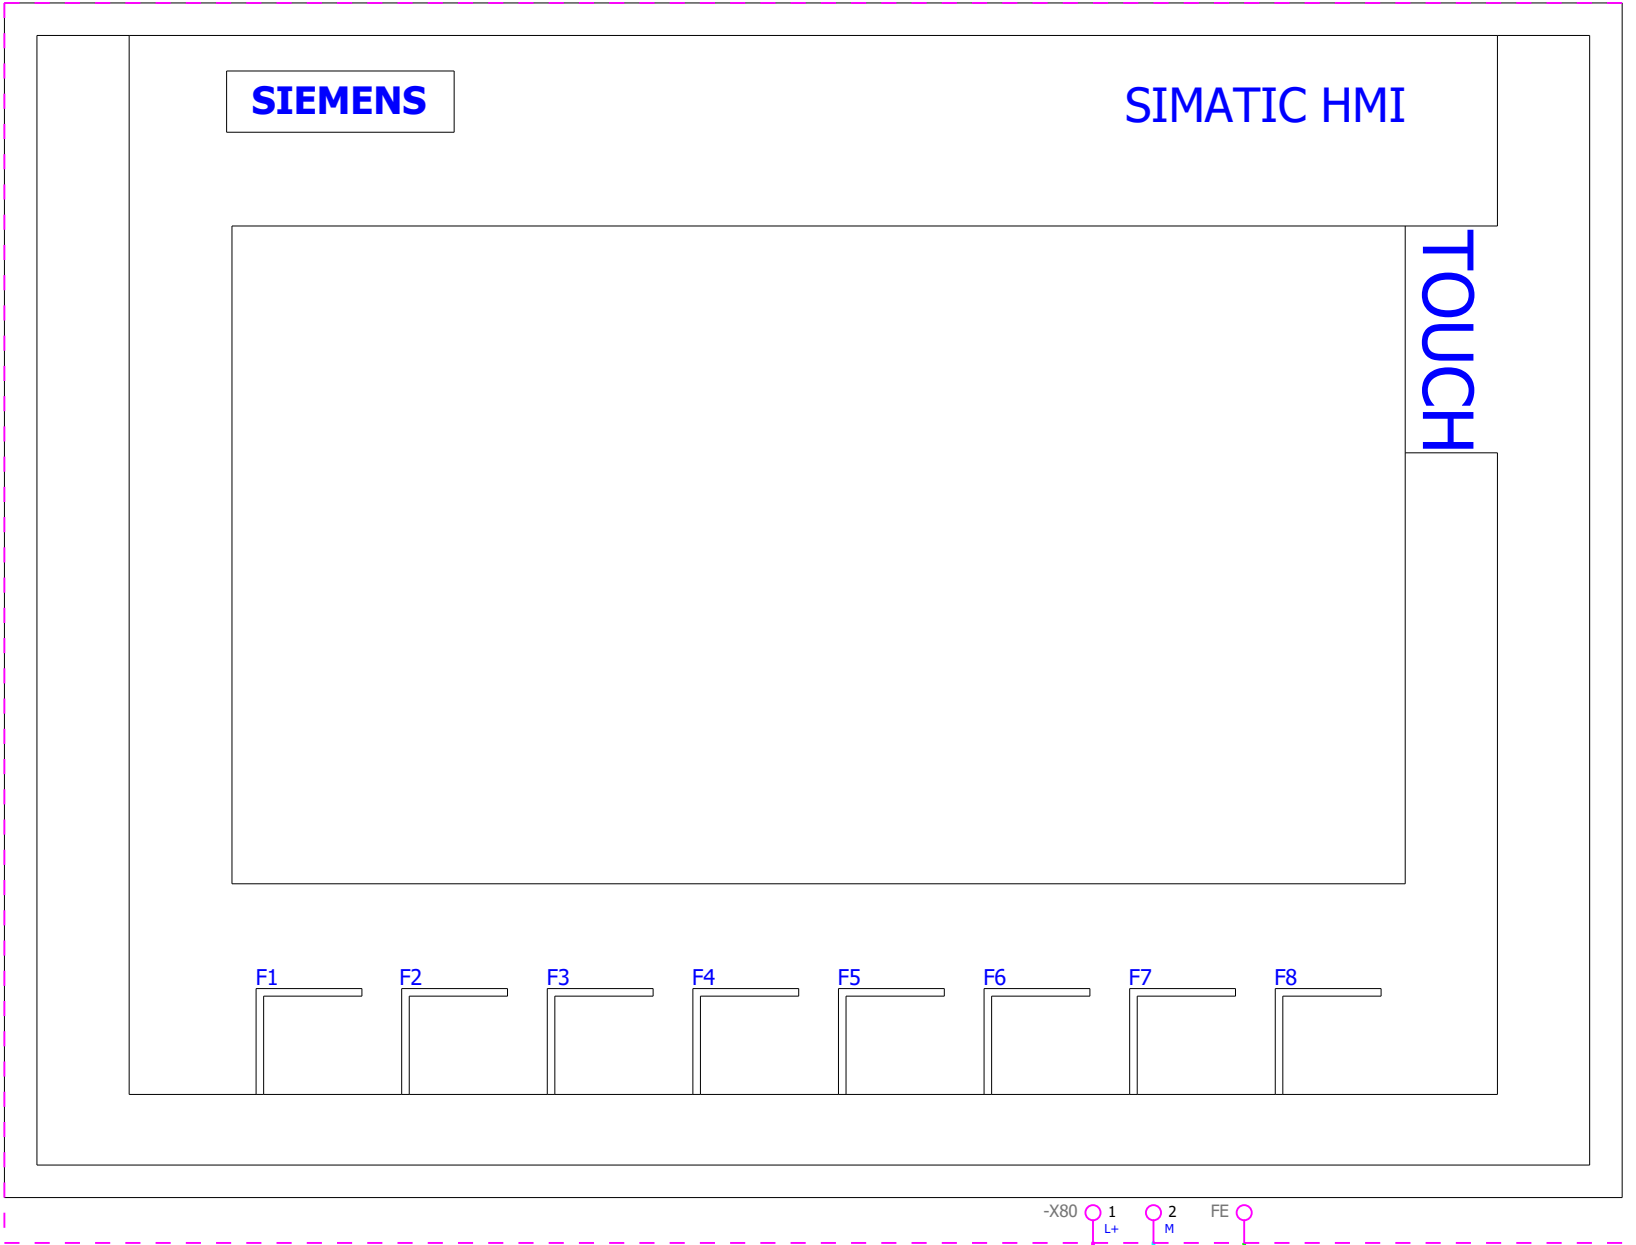

13.8 / HMI_L+ →
8.9 / HMI_M →
1.3 / HMI_PE →

+FIELD

-21U1
Enkoder 1000PPR

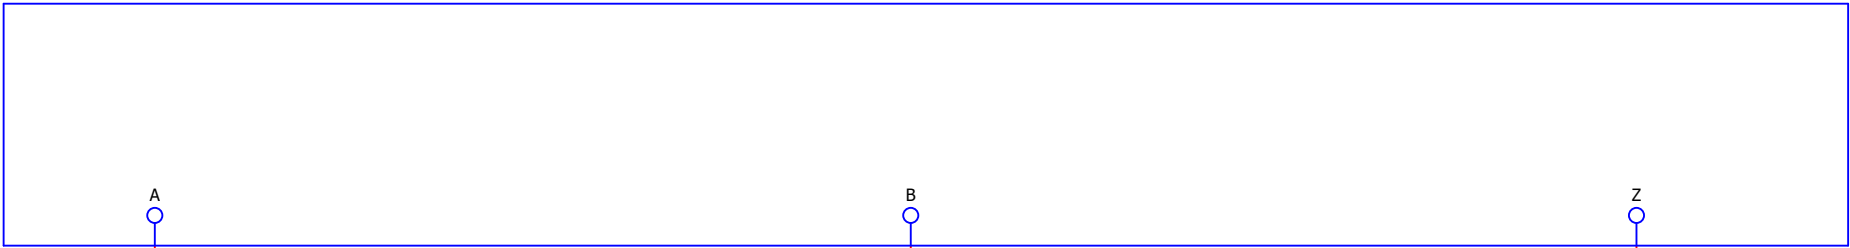

-21X1

1

2

3

-21X7

16

17

18

19

-X10 7
DI a.0
-17A1
/19.4
I1.6
-xSystemTrigger
Trigger

8
DI a.1
/19.4
I1.7
-i_xEncoder_A

9
DI a.2
/19.4
I2.0
-i_xEncoder_B


10
DI a.3
/19.4
I2.1
-i_xEncoder_Z


Trig_L+ / 15.1




-21X7 = PLC sponke

Trigger




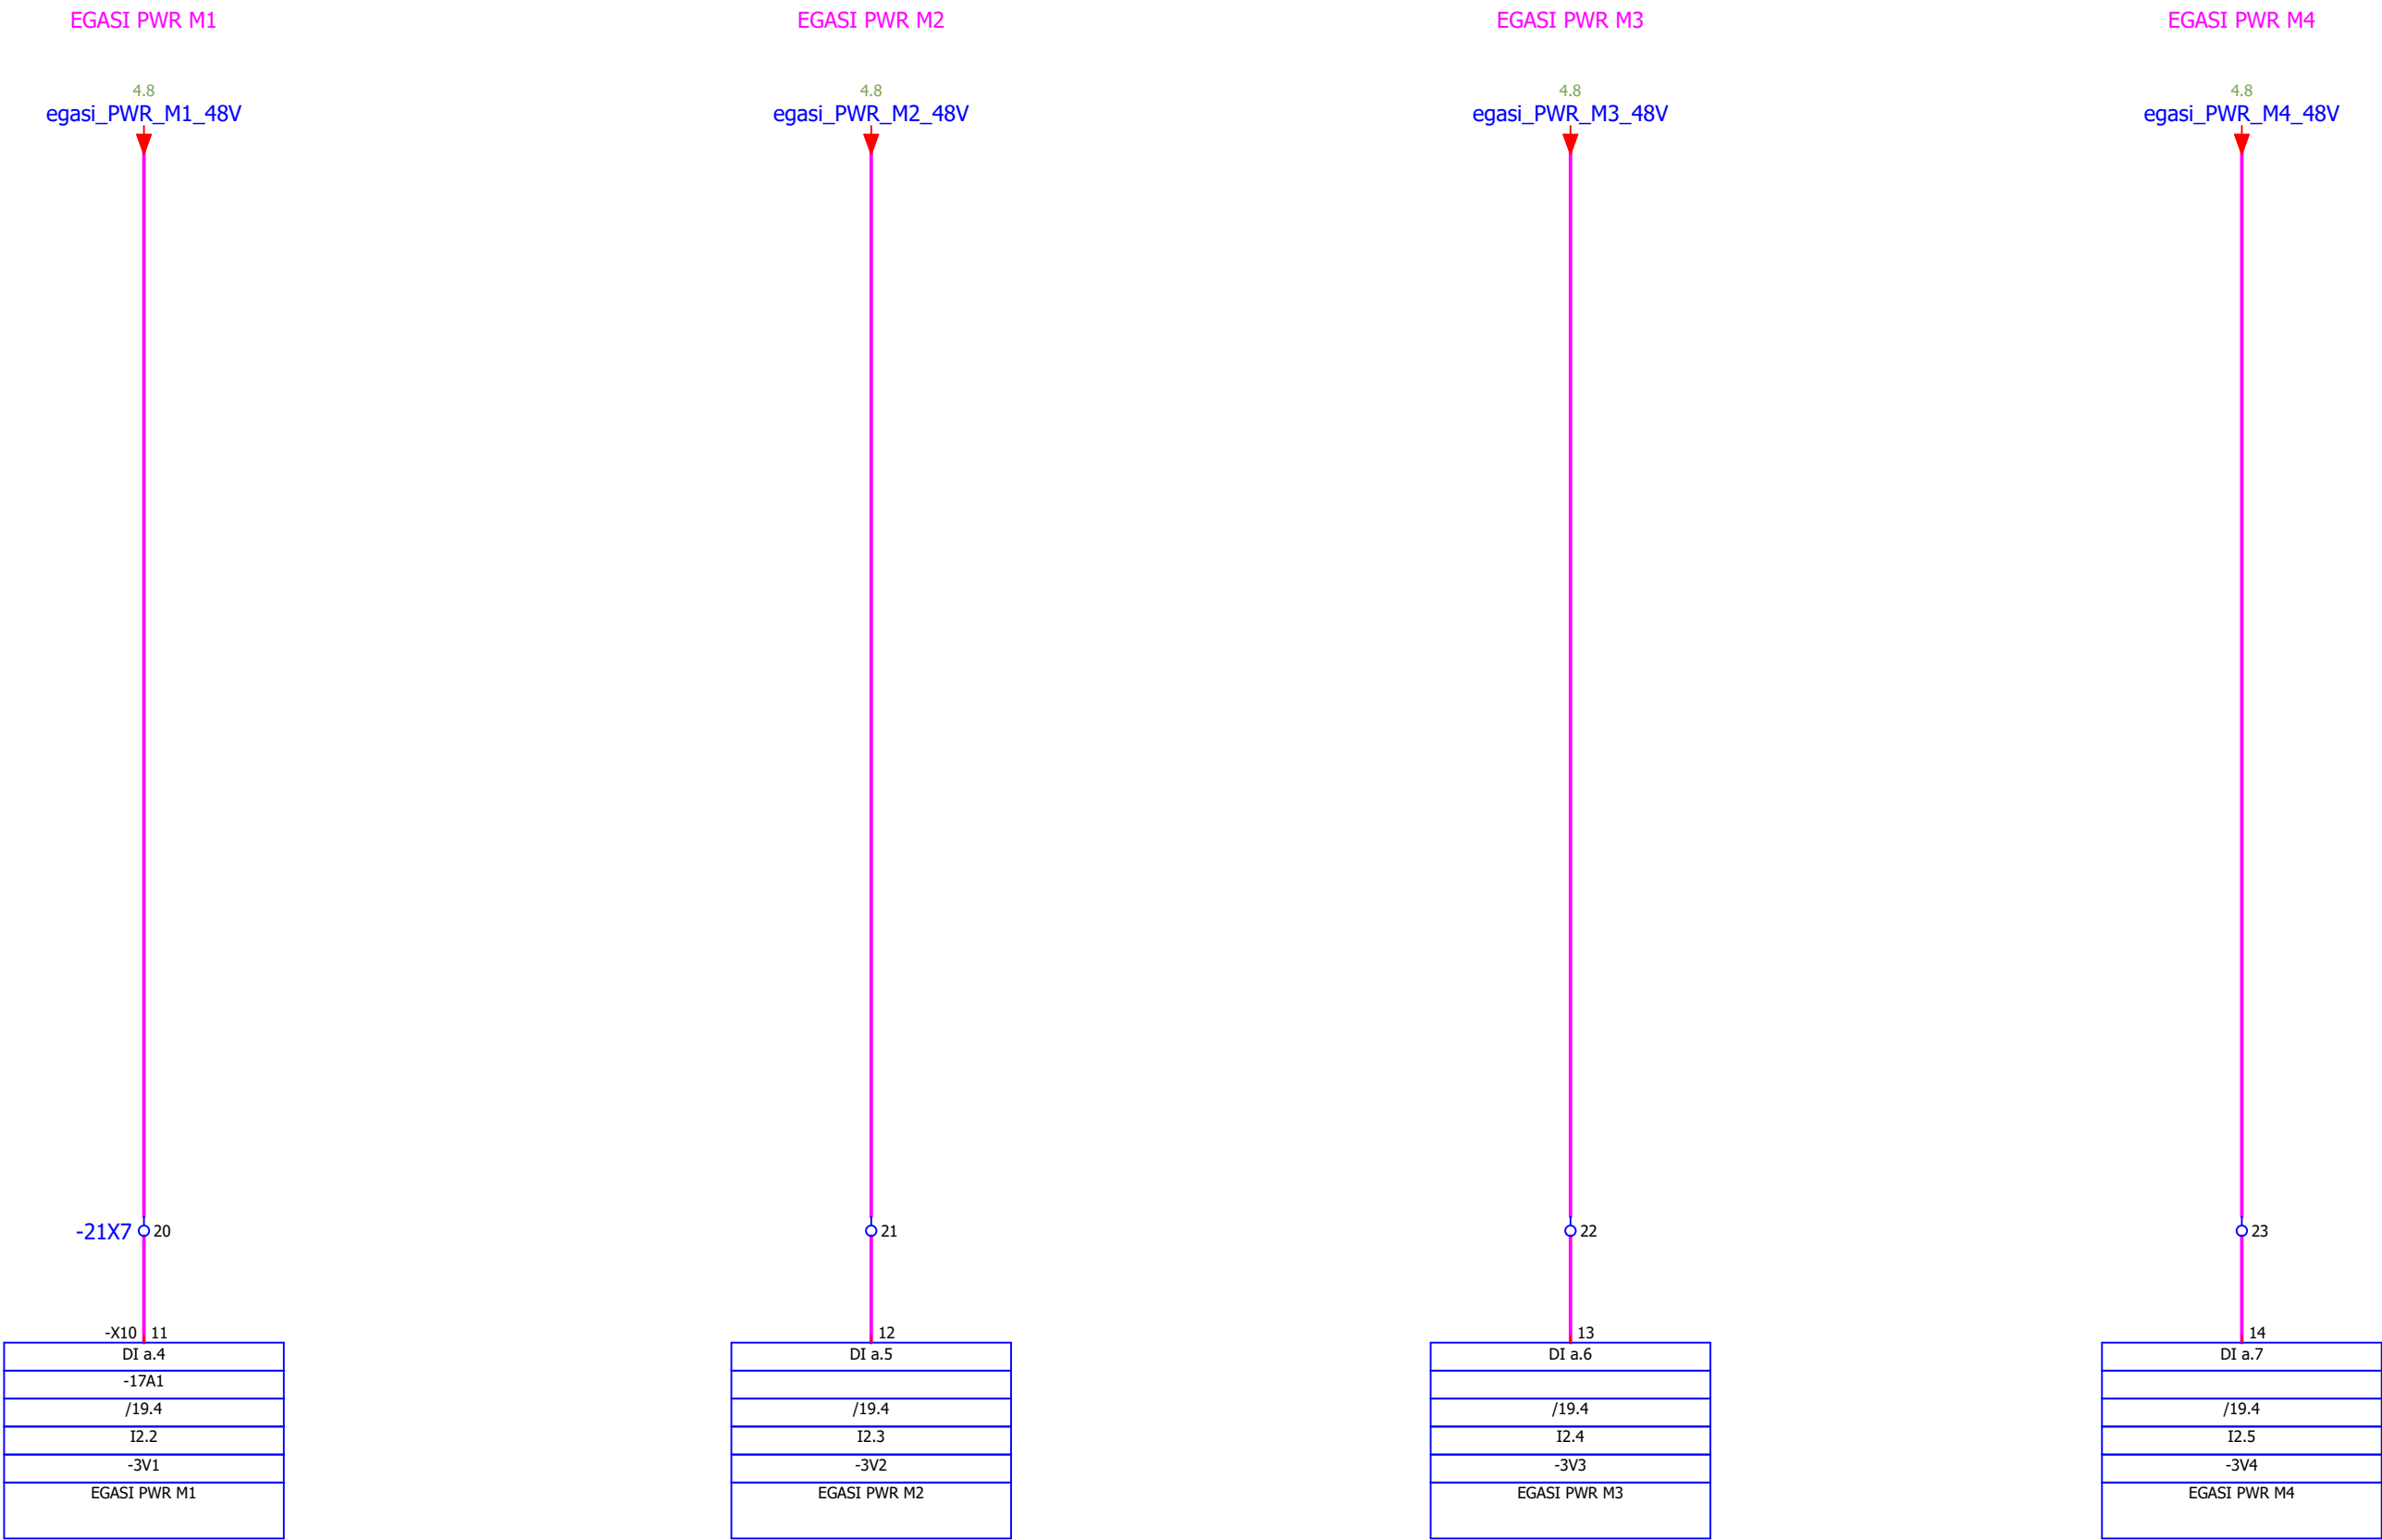


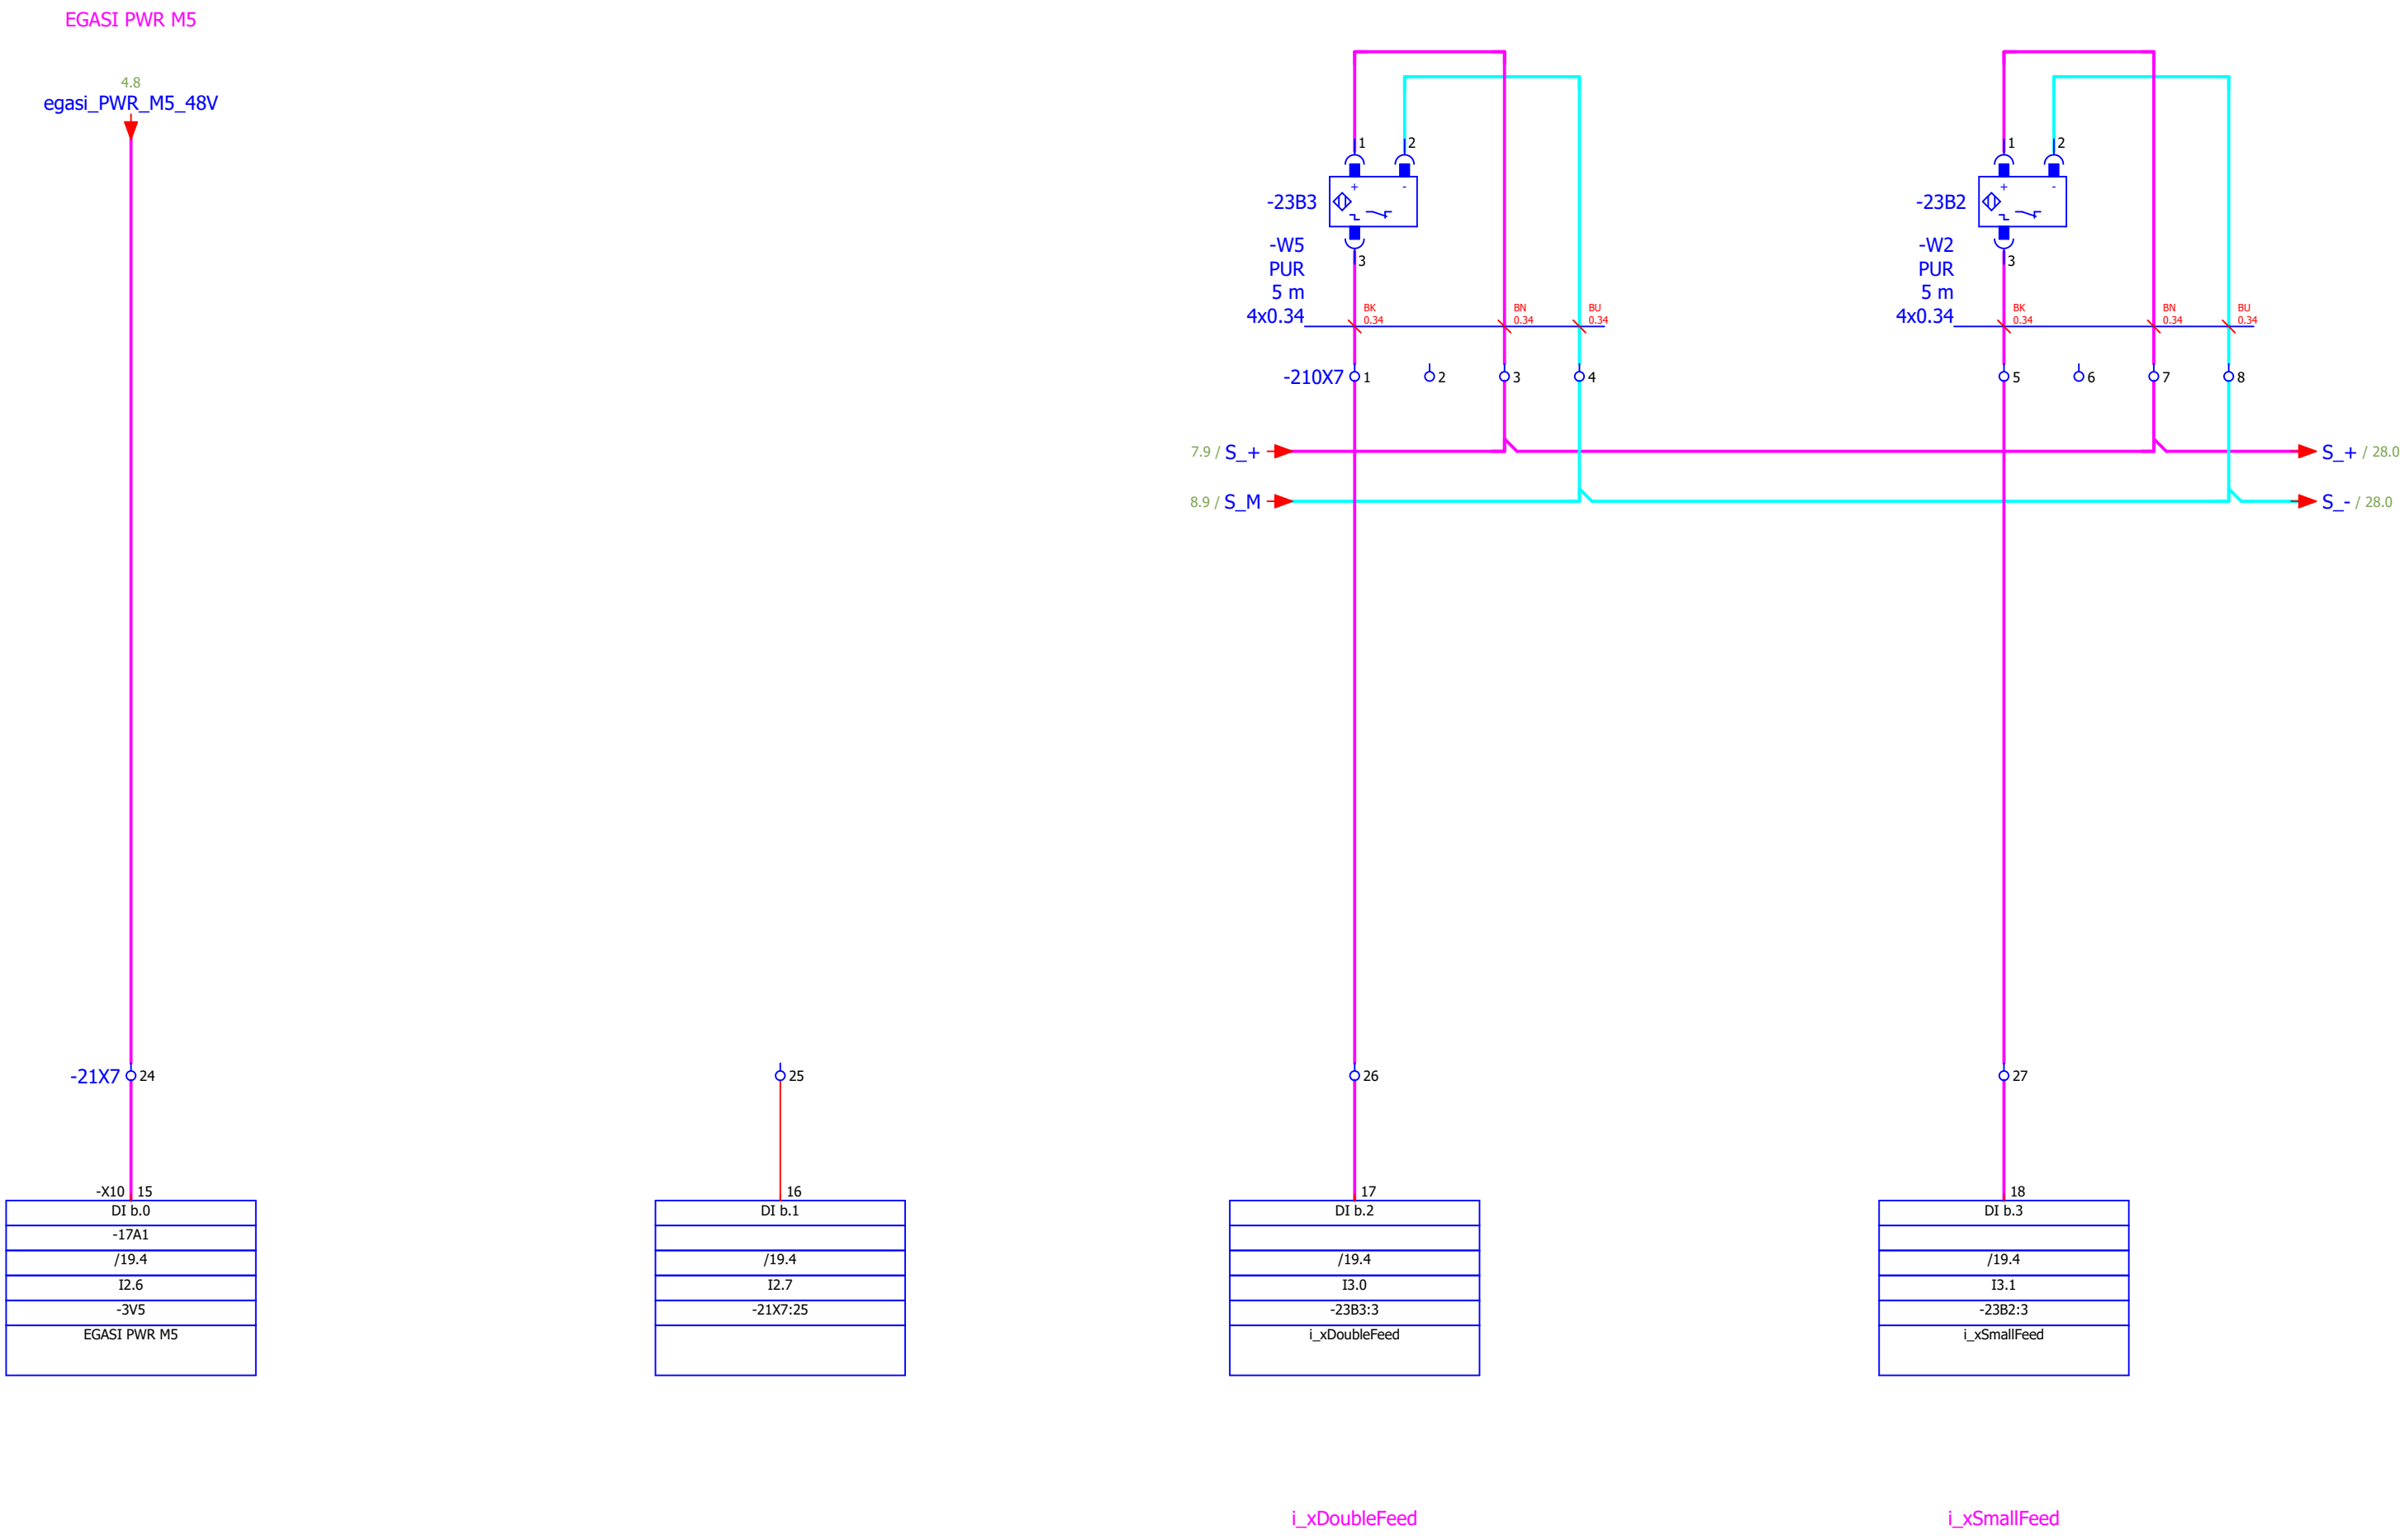




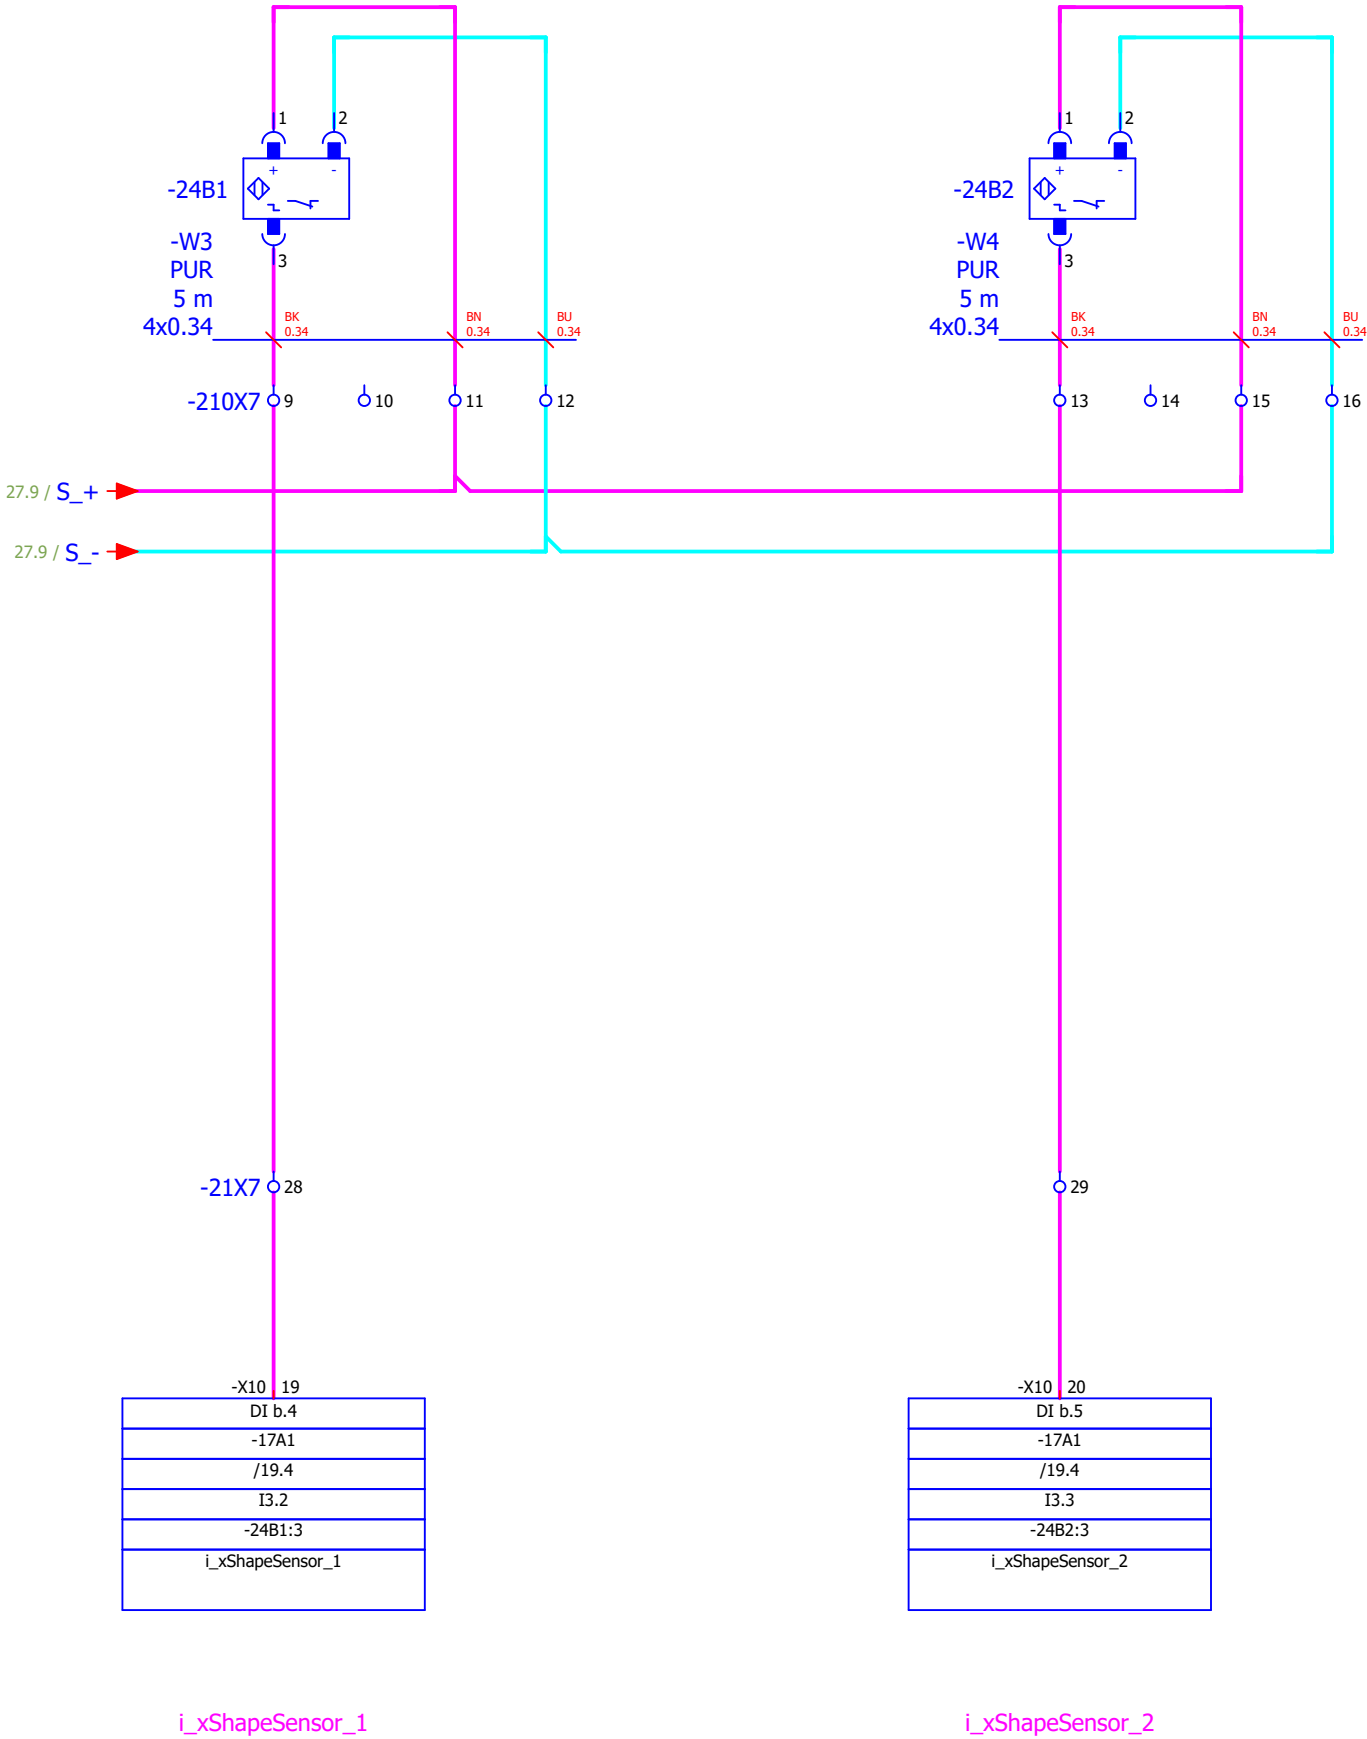



0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

--	--	--	--	--	--	--	--	--	--

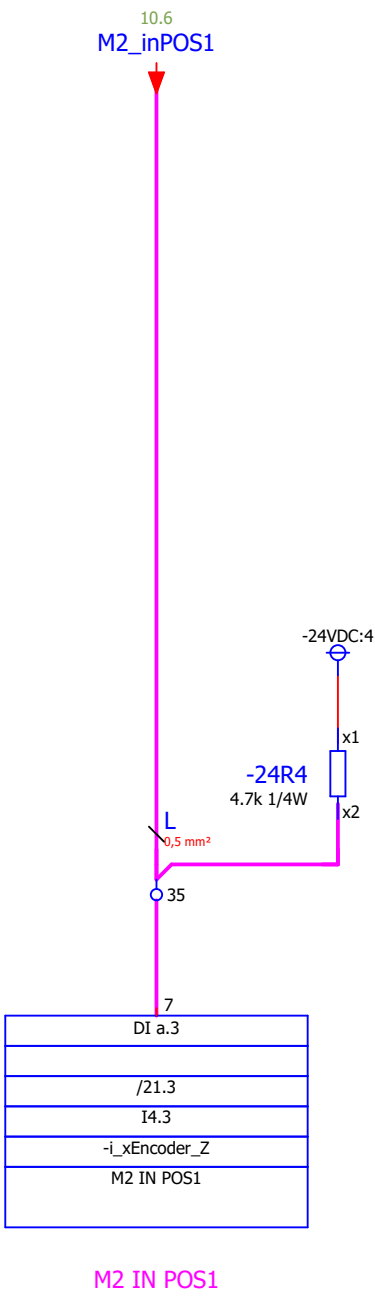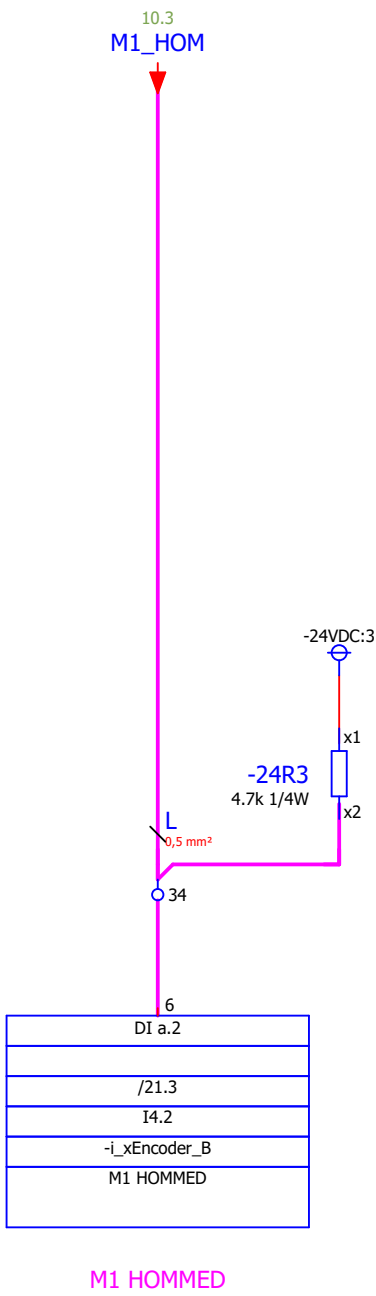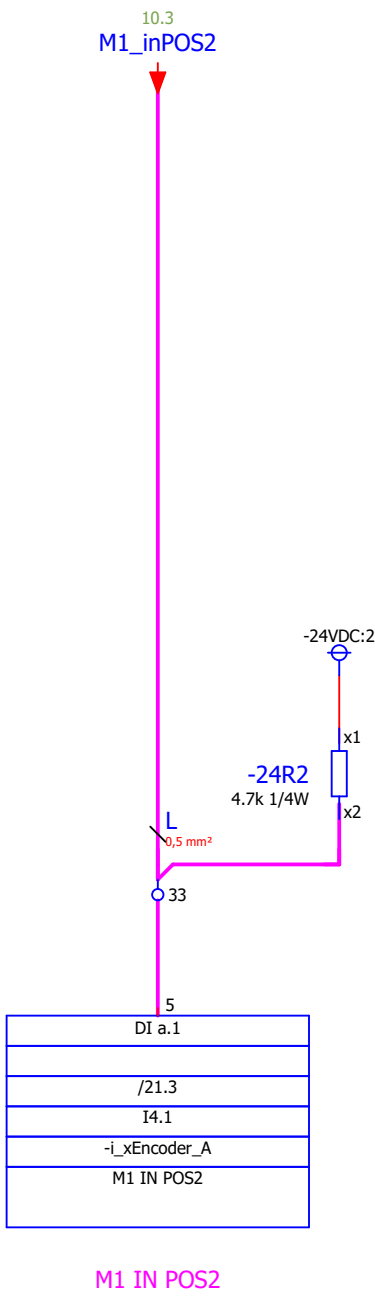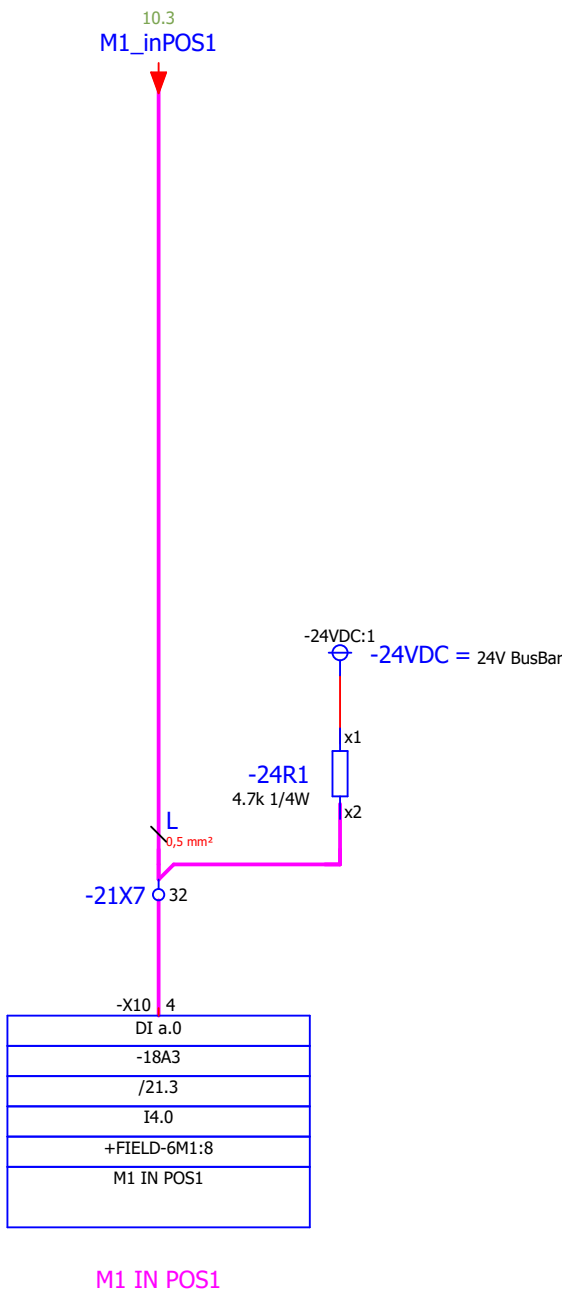


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

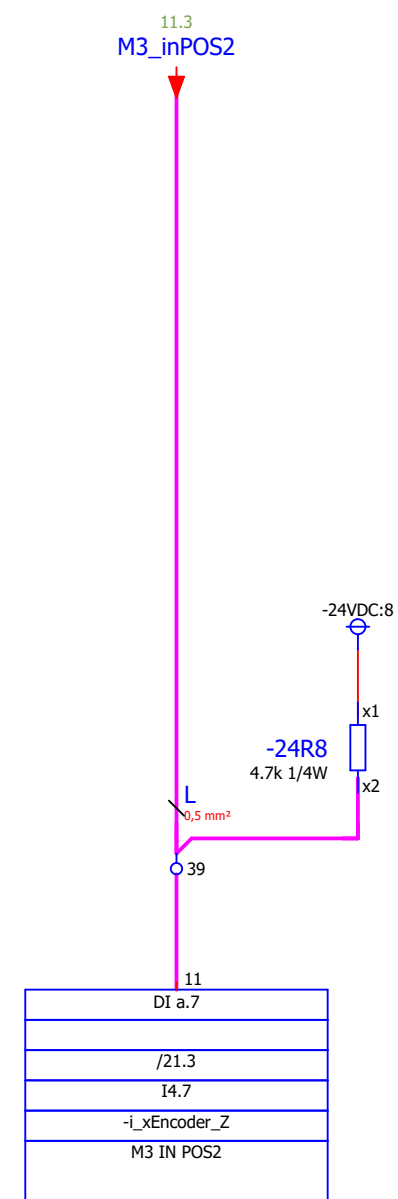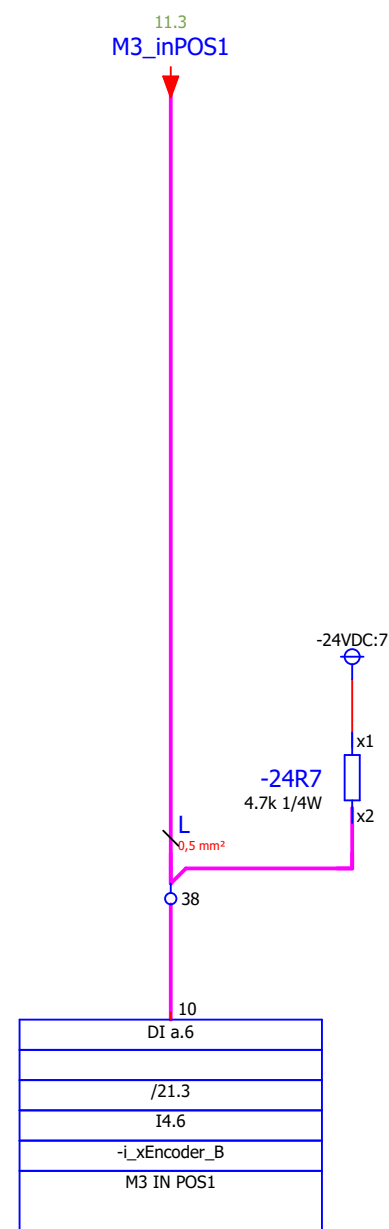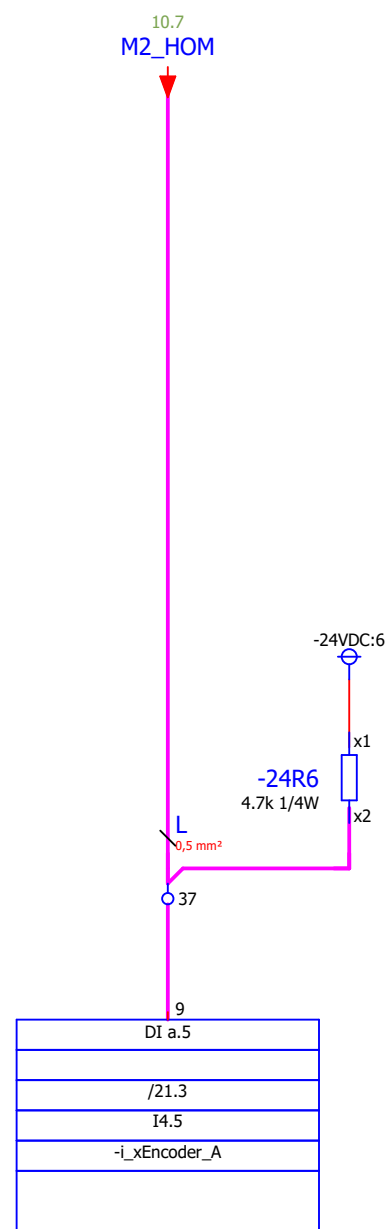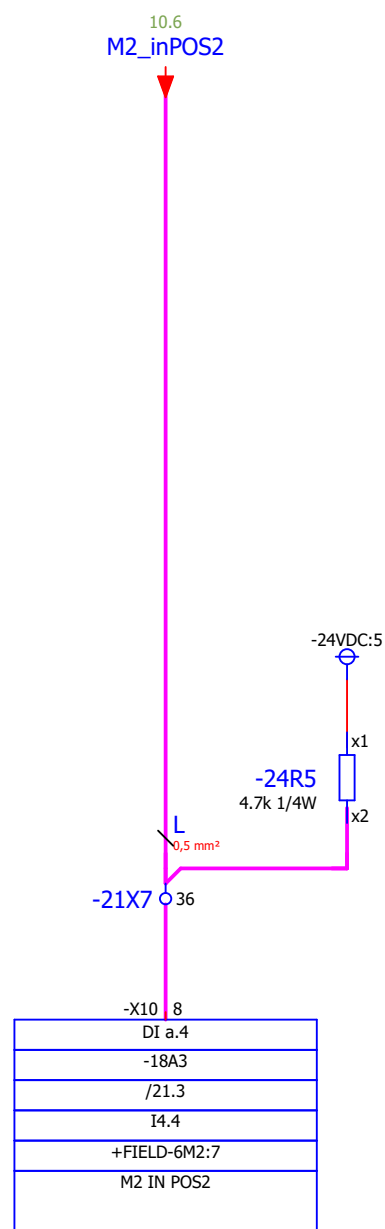


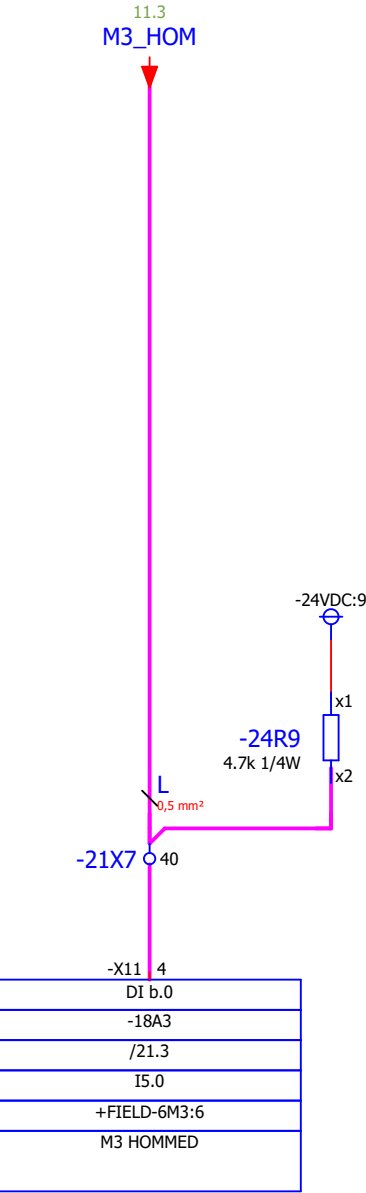


M3 HOMMED

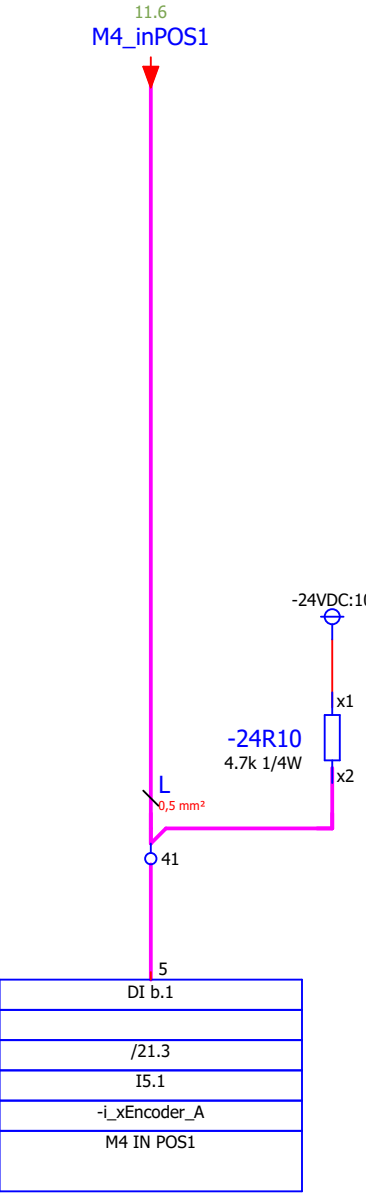


M4 IN POS1

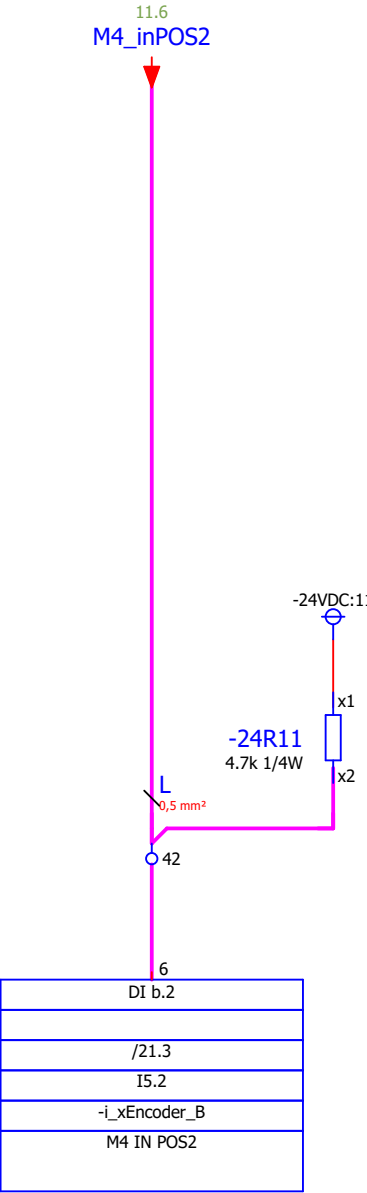


M4 IN POS2

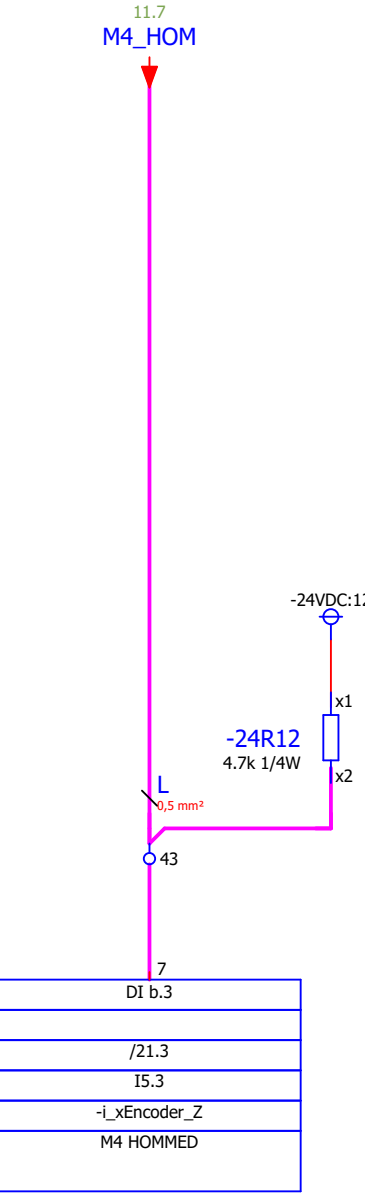


M4 HOMMED

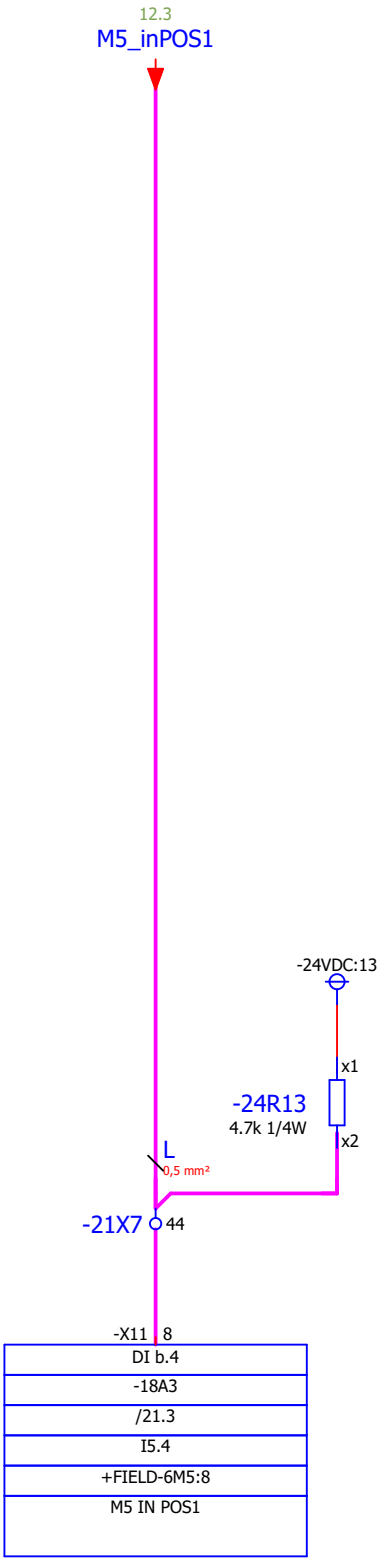


M5 IN POS1

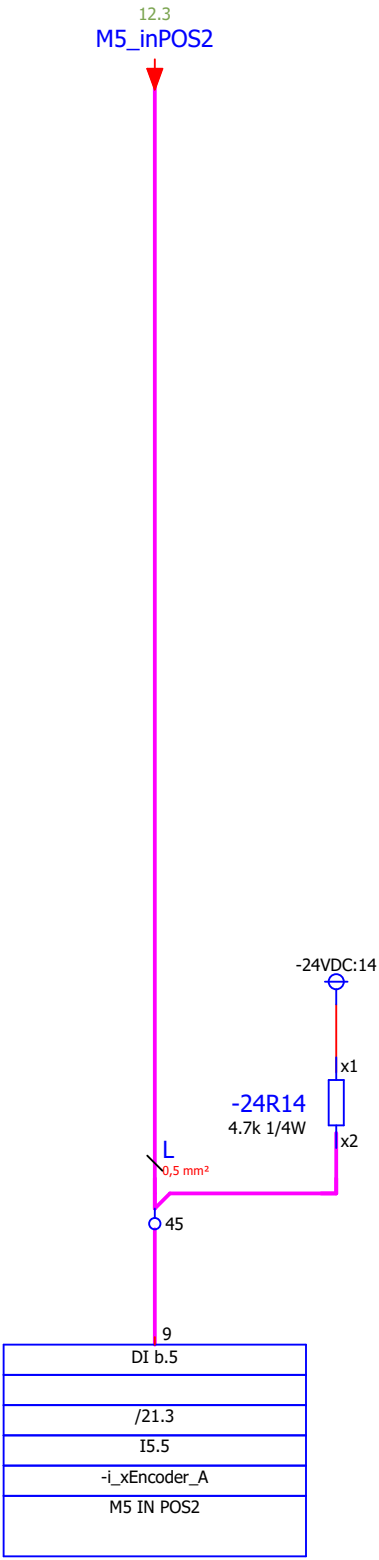

M5 IN POS2

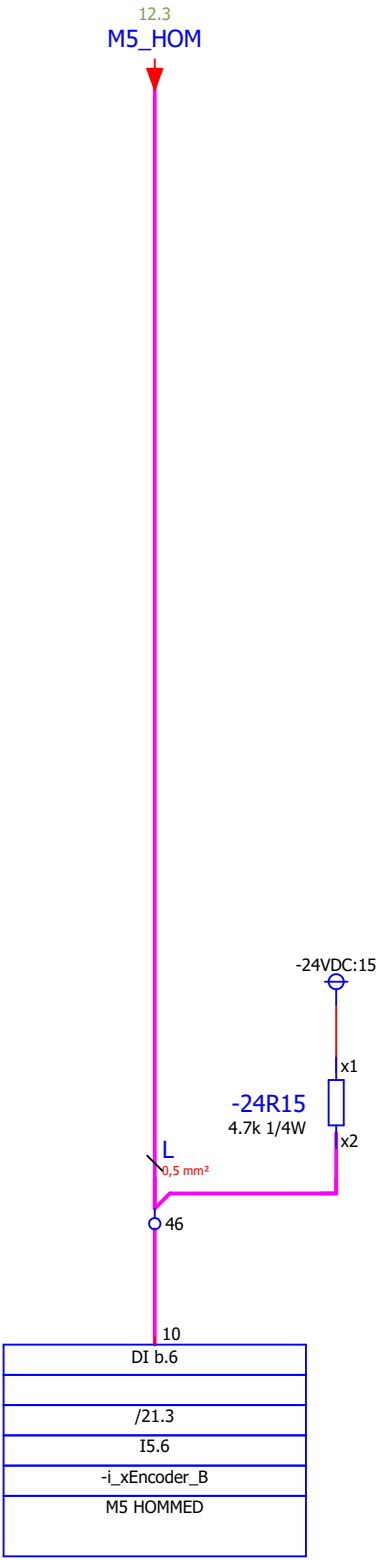

M5 HOMMED

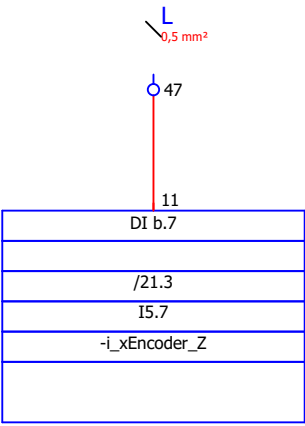

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

--	--	--	--	--	--	--	--	--	--

Sistem feedback OK
-q_xSystemFeedback
Q1.2
/19.6
-17A1
DQ a.0
-X12 3

-21X7:49
Q1.3
/19.6
DQ a.1
4

-21X7:50
Q1.4
/19.6
DQ a.2
5

-21X7:51
Q1.5
/19.6
DQ a.3
6

-21X7 48

49

50


51

L
0,5 mm²




15.2 / Feedback_L+


Sistem feedback OK

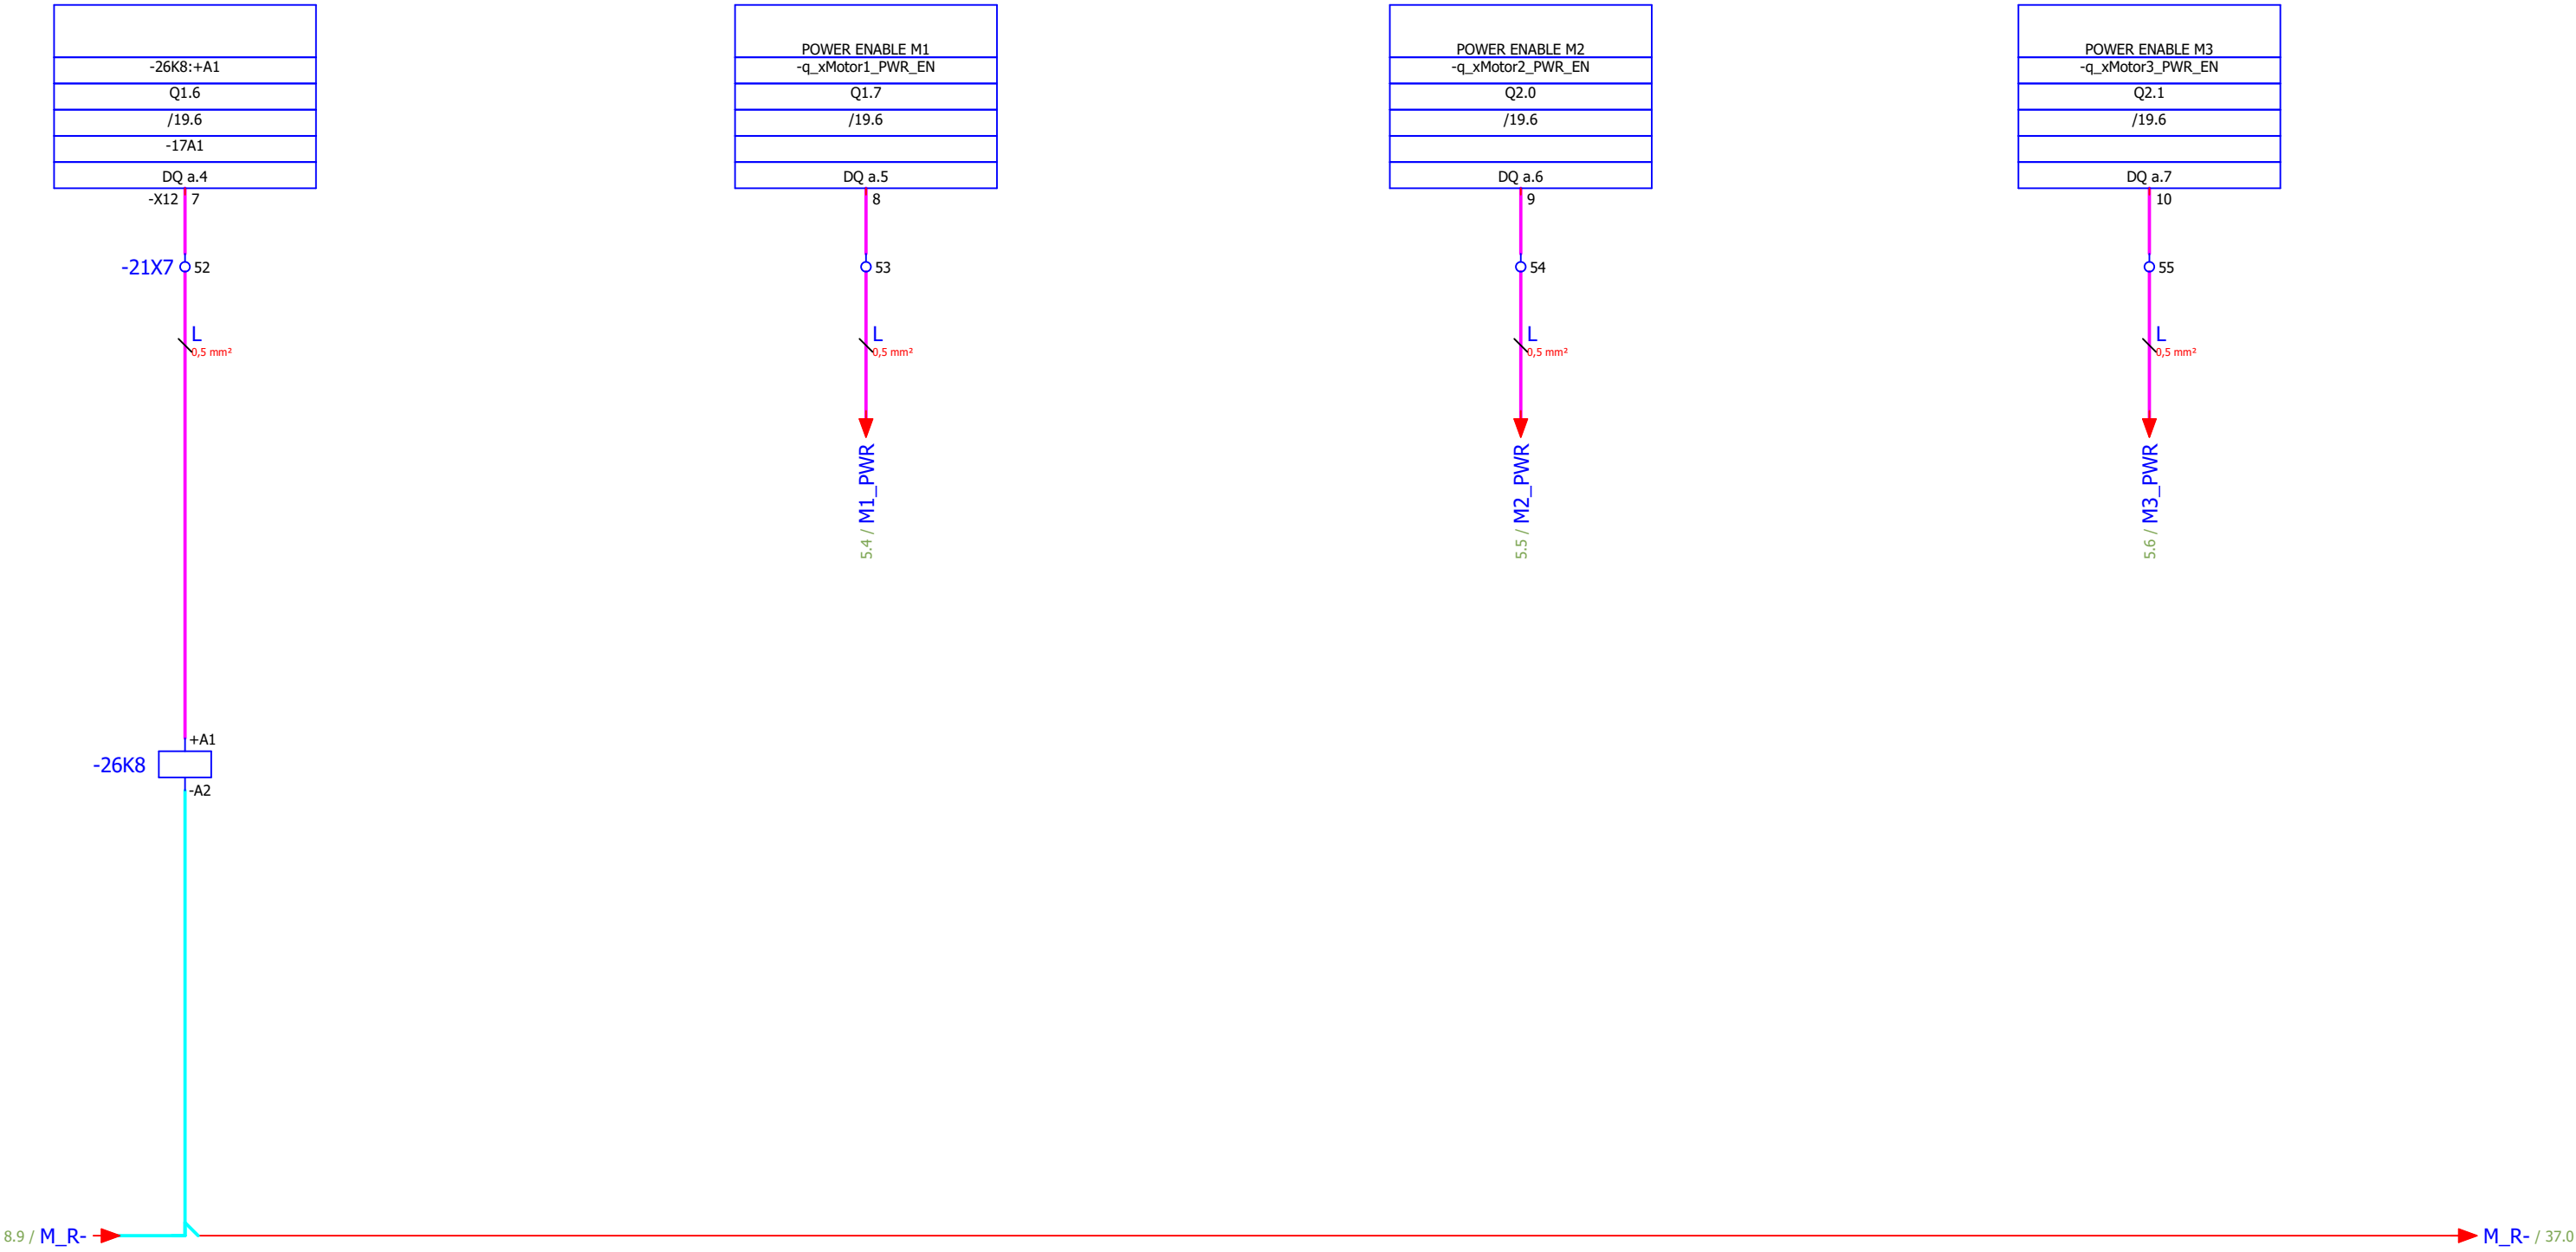

POWER ENABLE M4
-q_xMotor5_PWR_EN
Q2.2
/19.6
-17A1
DQ b.0
-X12 11

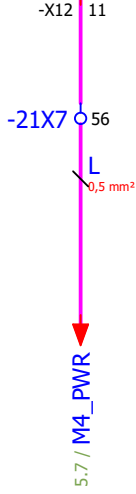

POWER ENABLE M5
-3K6:A1
Q2.3
/19.6
DQ b.1
12



M1 GO POS1
+FIELD-6M1:5
Q2.4
/21.5
-18A3
DQ a.0

-X12 4

-21X7 58

L
0,5 mm²

M1_POS1_GO
10.3

M1 GO POS2
-q_xMotor1_PWR_EN
Q2.5
/21.5
DQ a.1

5

59

L
0,5 mm²

M1_POS2_GO
10.3

M1 HOMMING
-q_xMotor2_PWR_EN
Q2.6
/21.5
DQ a.2

6

60

L
0,5 mm²

M1_HOMM_EN
10.3

M2 GO POS1
-q_xMotor3_PWR_EN
Q2.7
/21.5
DQ a.3

7

61

L
0,5 mm²

M2_POS1_GO
10.6

M1 GO POS1

M1 GO POS2

M1 HOMMING

M2 GO POS1

M2 GO POS2
+FIELD-6M2:4
Q3.0
/21.5
-18A3
DQ a.4

-X12 8

-21X7 62

L
0,5 mm²

M2_POS2_GO
10.6

M2 HOMMING
-q_xMotor1_PWR_EN
Q3.1
/21.5
DQ a.5

9

63

L
0,5 mm²

M2_HOMM_EN
10.7

M3 GO POS1
-q_xMotor2_PWR_EN
Q3.2
/21.5
DQ a.6

10

64

L
0,5 mm²

M3_POS1_GO
11.3

M3 GO POS2
-q_xMotor3_PWR_EN
Q3.3
/21.5
DQ a.7

11

65

L
0,5 mm²

M3_POS2_GO
11.3

M2 GO POS2

M2 HOMMING

M3 GO POS1

M3 GO POS2

M3 HOMMING
+FIELD-6M3:3
Q3.4
/21.5
-18A3
DQ b.0

-X13 4

-21X7 66

L
0,5 mm²

M3_HOMM_EN
11.3

M4 GO POS1
-q_xMotor1_PWR_EN
Q3.5
/21.5
DQ b.1

5

67

L
0,5 mm²

M4_POS1_GO
11.6

M4 GO POS2
-q_xMotor2_PWR_EN
Q3.6
/21.5
DQ b.2

6

68

L
0,5 mm²

M4_POS2_GO
11.6

M4 HOMMING
-q_xMotor3_PWR_EN
Q3.7
/21.5
DQ b.3

7

69

L
0,5 mm²

M4_HOMM_EN
11.7

M3 HOMMING

M4 GO POS1

M4 GO POS2

M4 HOMMING

Odgovoren	Dejan Rožič	12. 12. 2025
Preveril	Vodja projektive	
Mail	dejan.rozic@dafra-kt.si	
Verzija eplan	2024.0.3	

DAFRA D.O.O., Egasi d.o.o.
08/2024| RRI

DQ

= LIN1
+ OMA1

M5 GO POS1
+FIELD-6M5:5
Q4.0
/21.5
-18A3
DQ b.4

-X13 8

-21X7 70

L
0,5 mm²

M5_POS1_GO
12.3

M5 GO POS2
-q_xMotor1_PWR_EN
Q4.1
/21.5
DQ b.5

9

71

L
0,5 mm²

M5_POS2_GO
12.3

M5 HOMMING
-q_xMotor2_PWR_EN
Q4.2
/21.5
DQ b.6

10

72

L
0,5 mm²

M5_HOMM_EN
12.3

-q_xMotor3_PWR_EN
Q4.3
/21.5
DQ b.7

11

73



L
0,5 mm²

M5 GO POS1

M5 GO POS2

M5 HOMMING

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

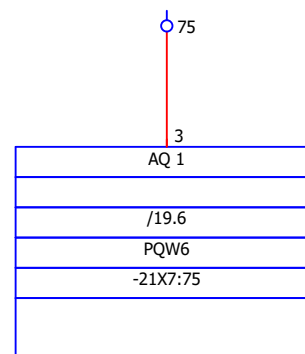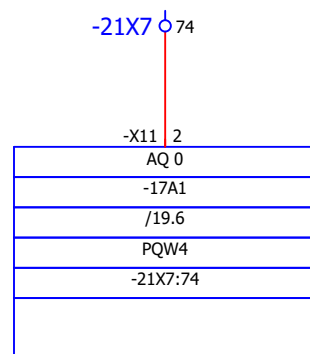

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

--	--	--	--	--	--	--	--	--	--

-21X7 76

-X11 5

AI 0
-17A1
/19.6
PIW4
-21X7:76

77

6


AI 1
/19.6
PIW6
-21X7:77


Odgovoren	Dejan Rožič	12. 12. 2025
Preveril	Vodja projektive	
Mail	dejan.rozic@dafra-kt.si	
Verzija eplan	2024.0.3	


DAFRA D.O.O., Egasi d.o.o.
08/2024 RRI

AI


= LIN1		Page 44	
+ OMA1		Page 107 / 117	
	/		

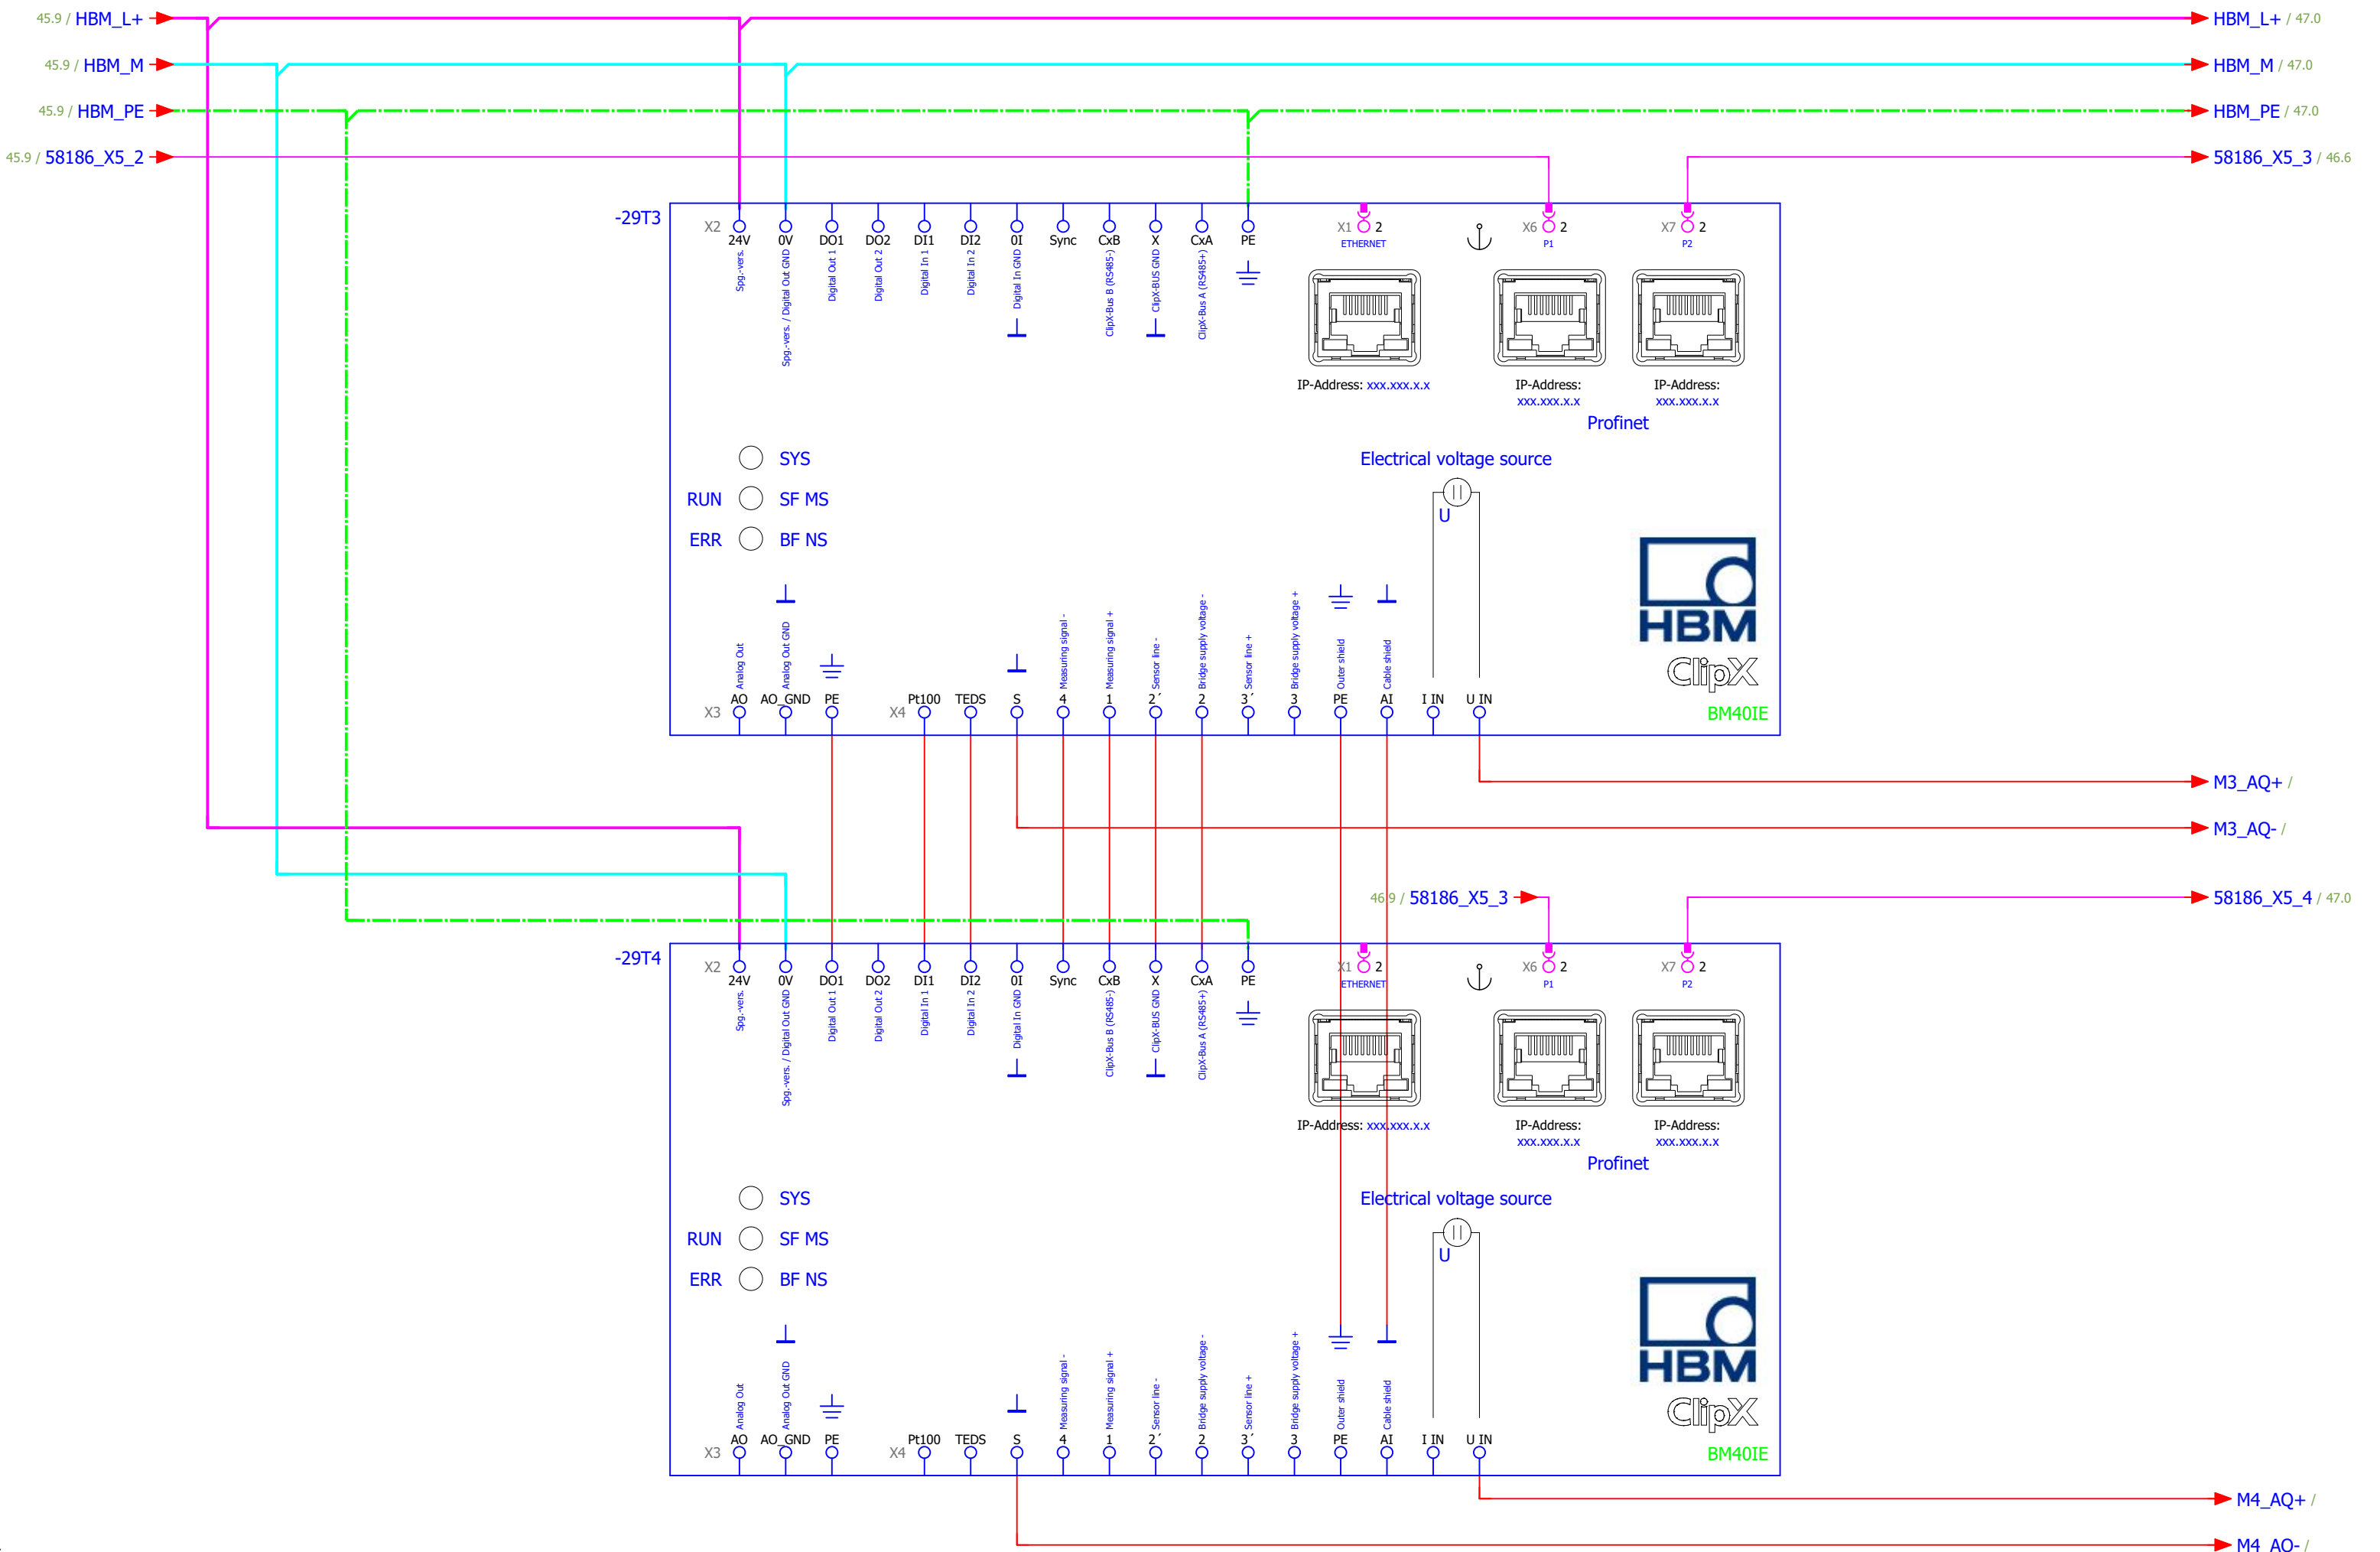

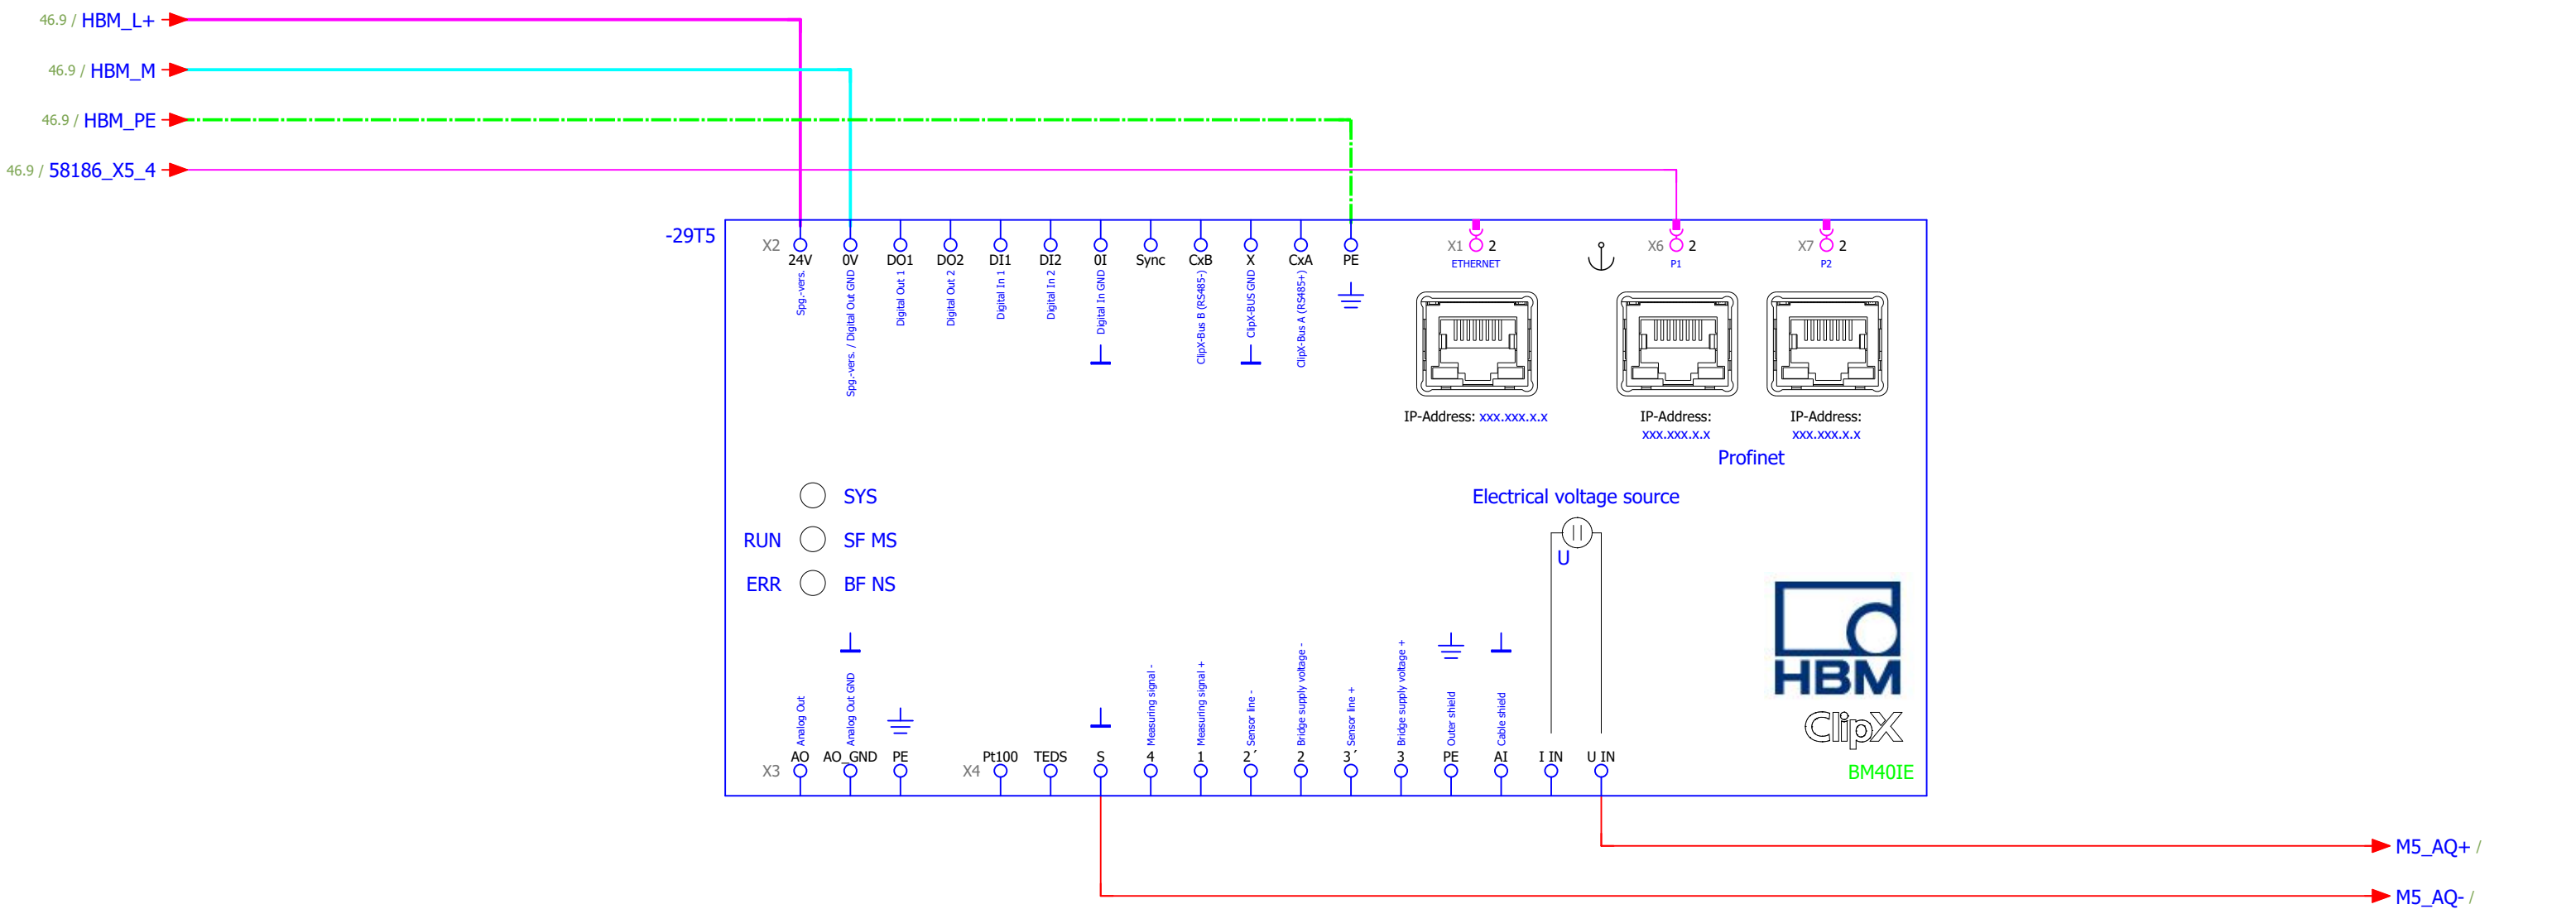


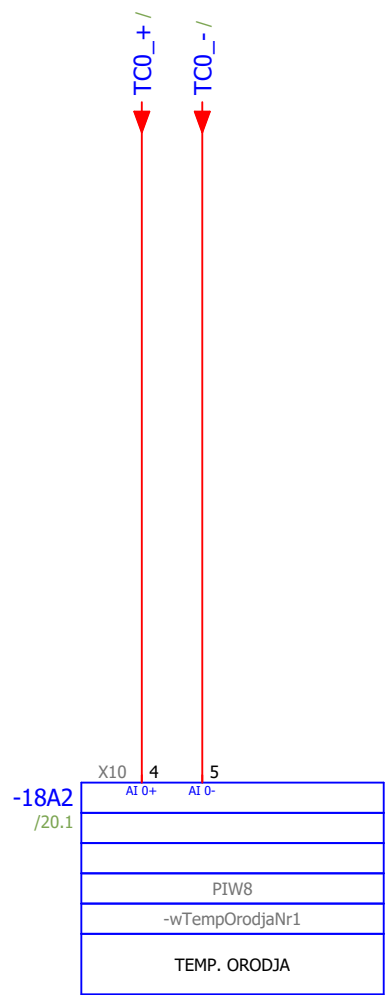


TEMP. ORODJA

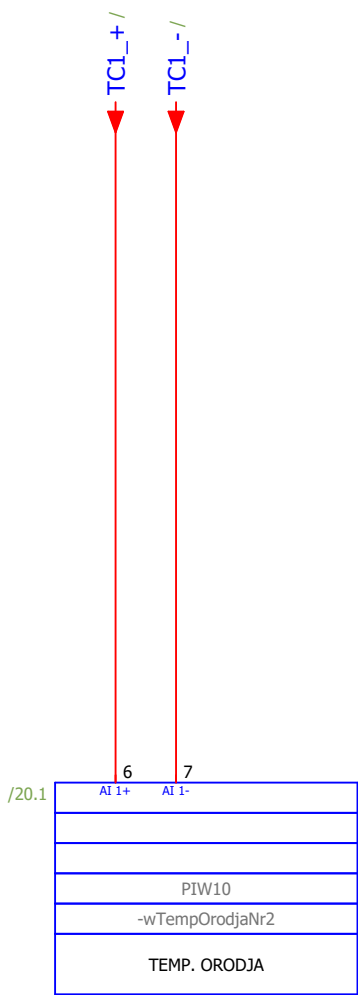


TEMP. ORODJA

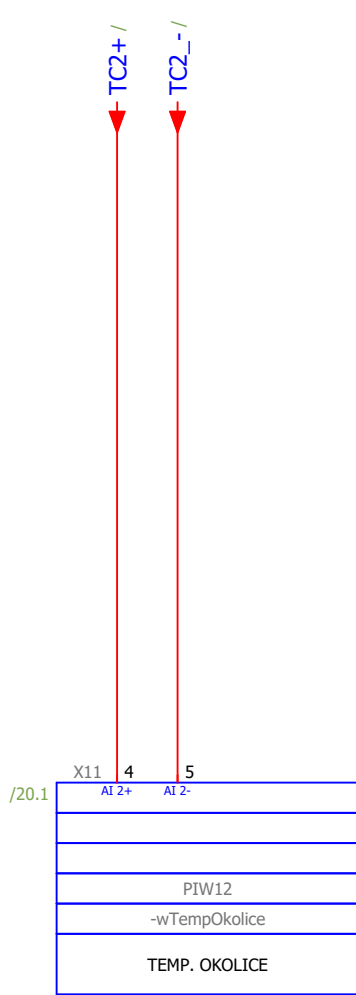

TEMP. OKOLICE

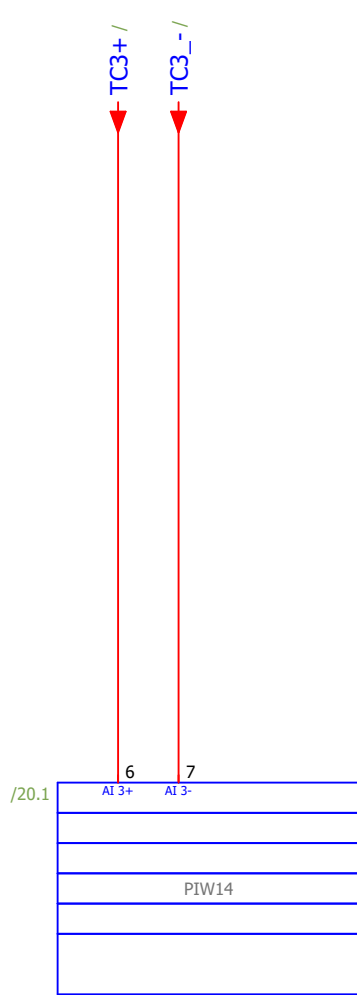

+FIELD

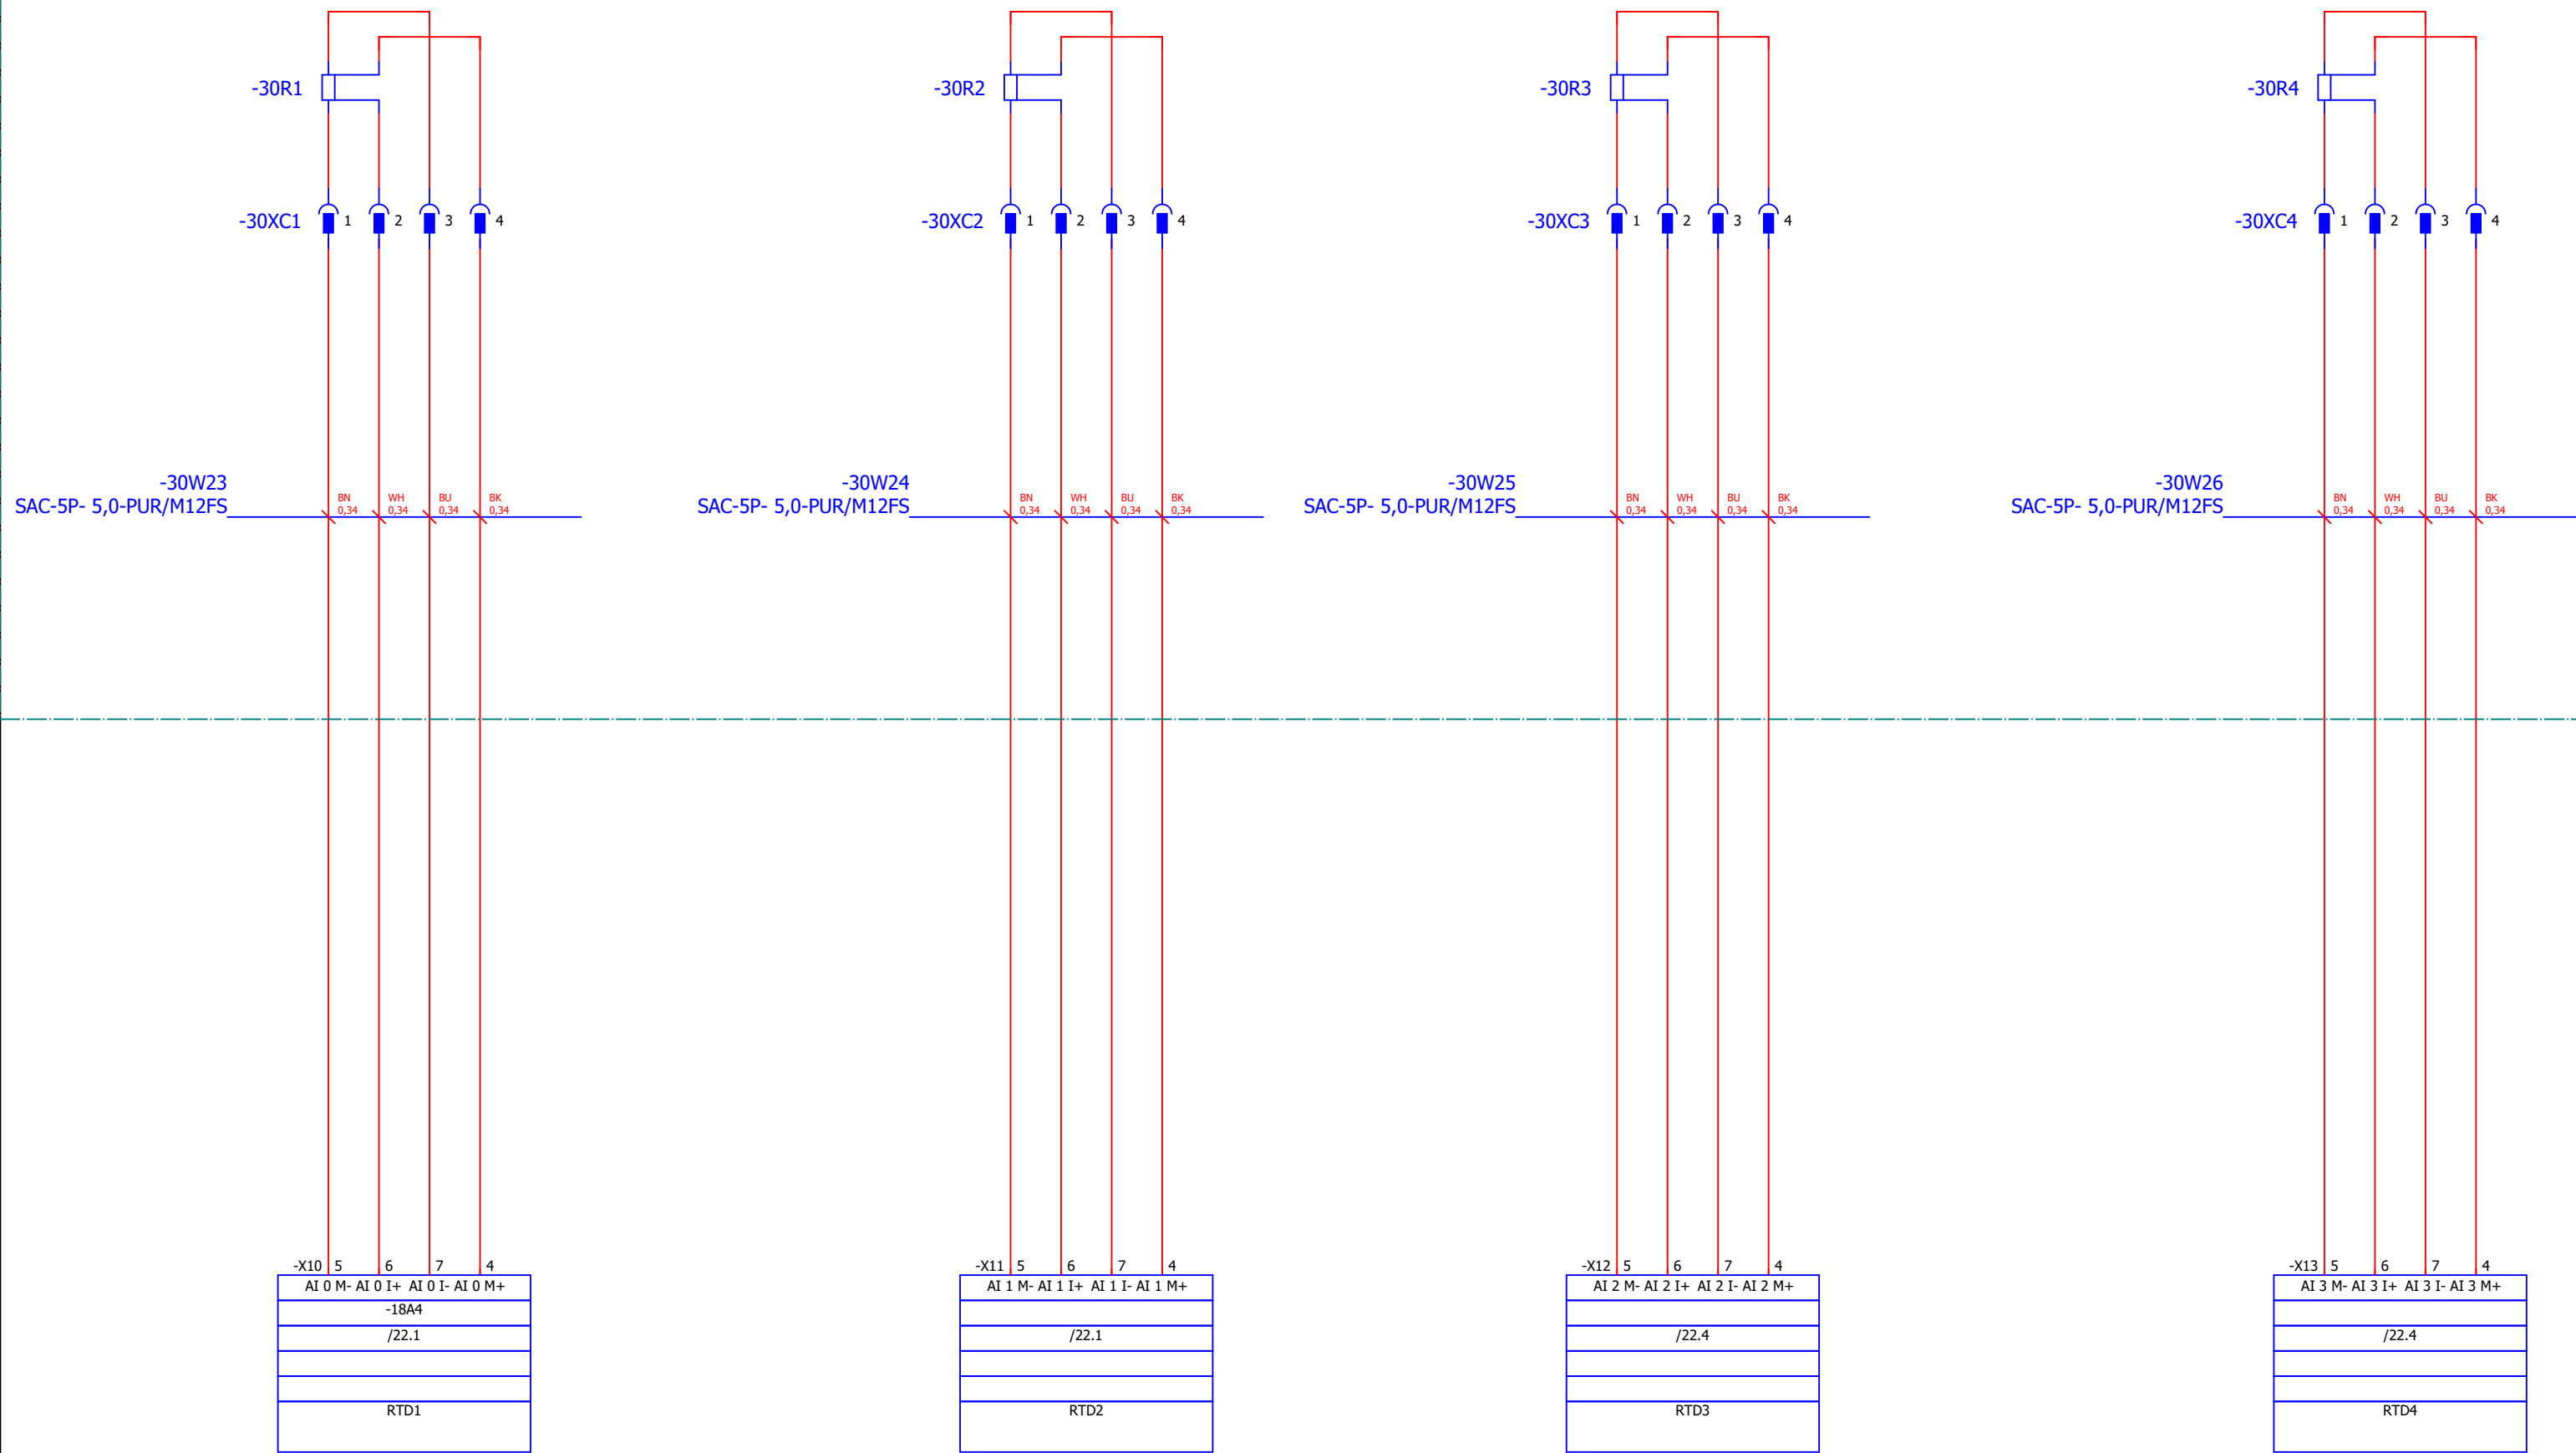


RTD1

RTD2

RTD3






RTD4

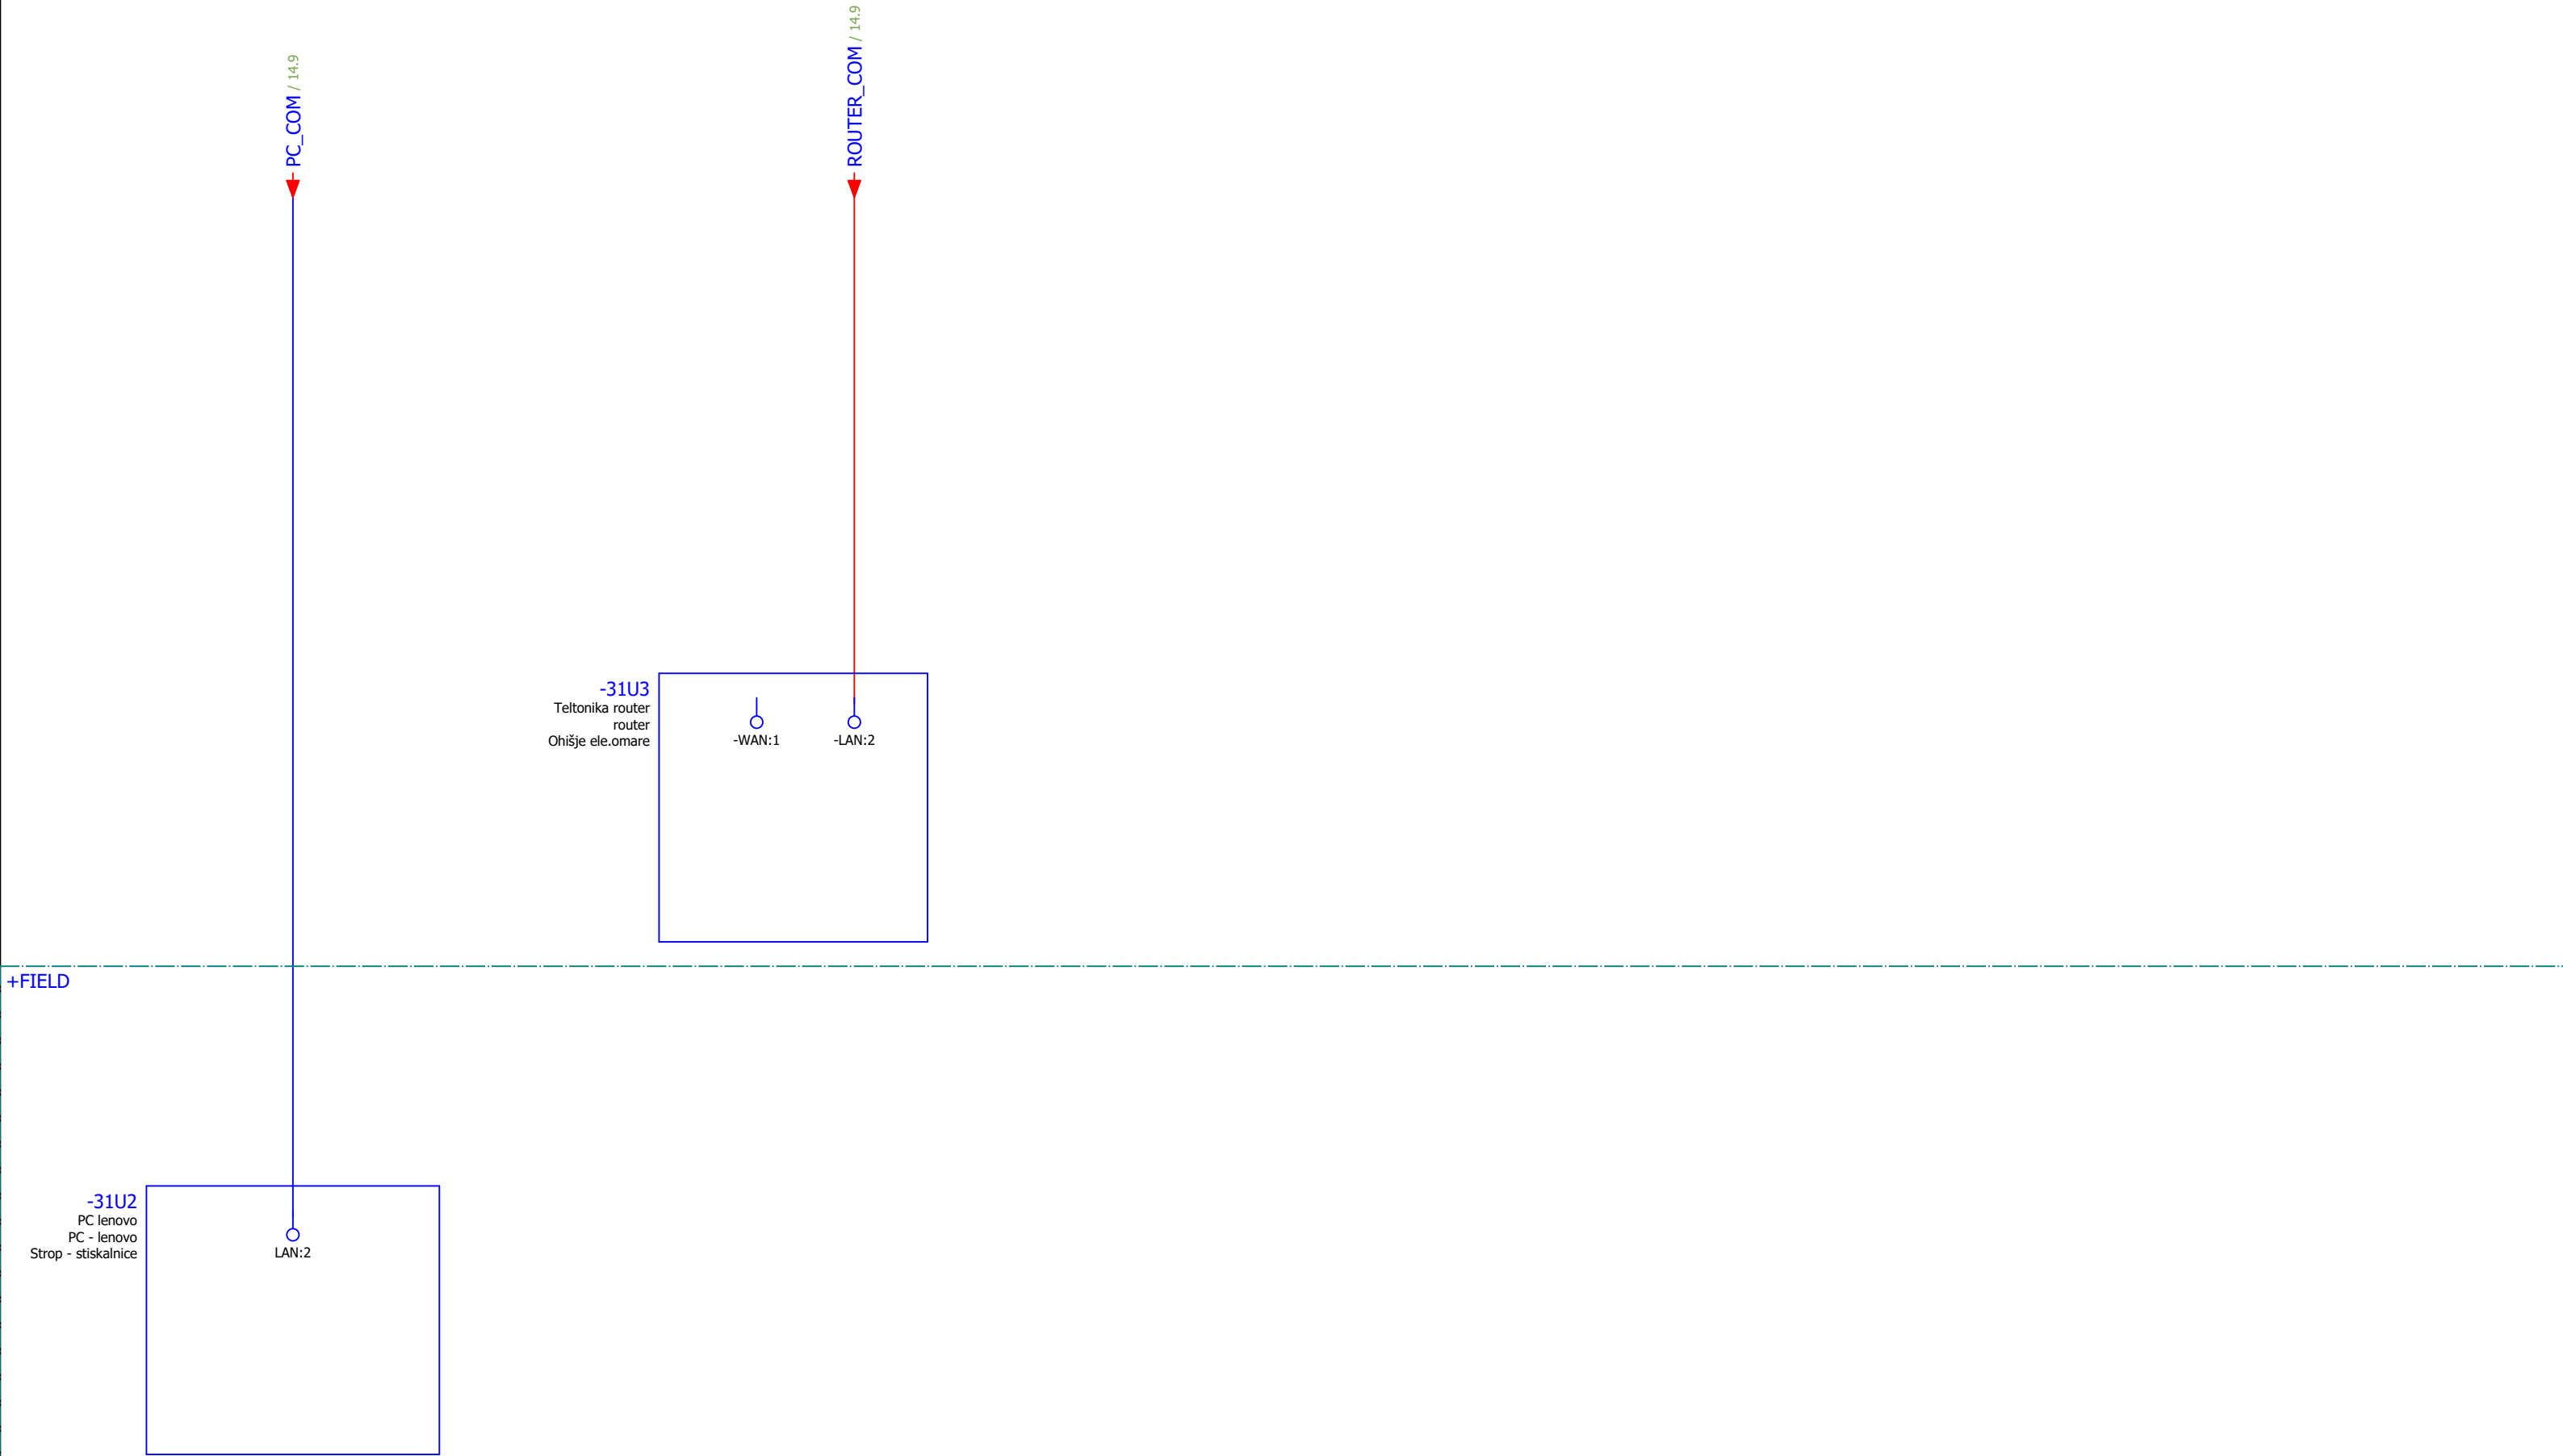


Enclosure legend

=LIN1+OMA1-32M2

Item number	Device tag	Type number
1	1S1	P3-63/EA/SVB-SW/N
4	1H1	XB4BVM4
5	1H2	XB4BVM4
6	1H3	XB4BVM4
7	2M1	IUKNF1523A
8	11XF1	4000-73000-0010000
9	11XF2	4000-73000-0010000
10	31U3	

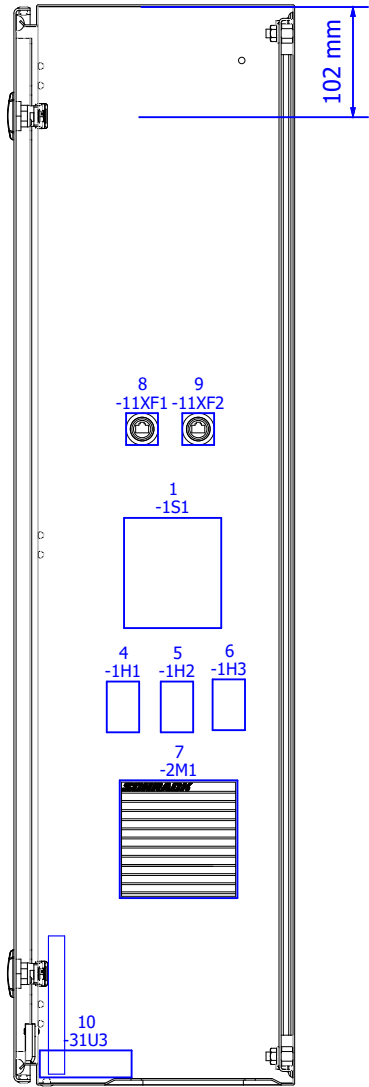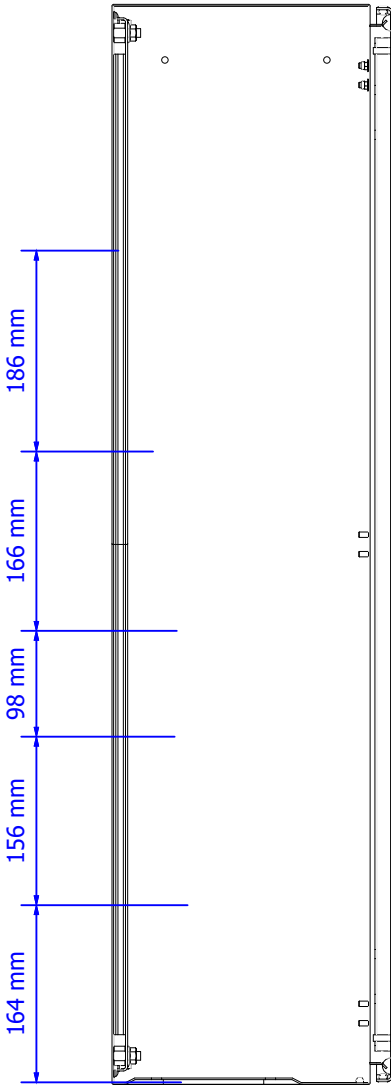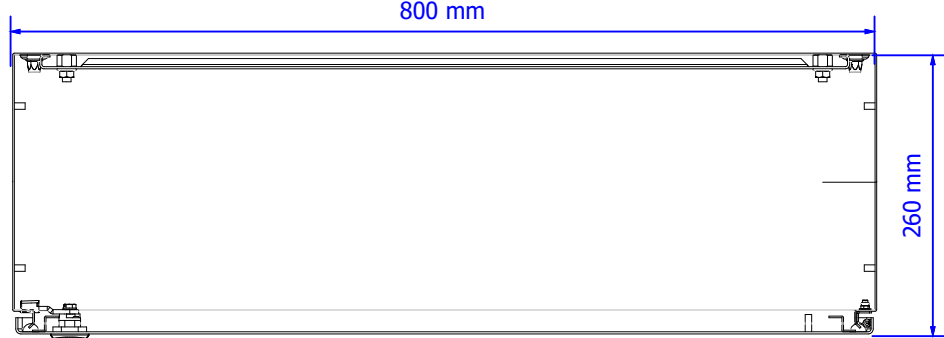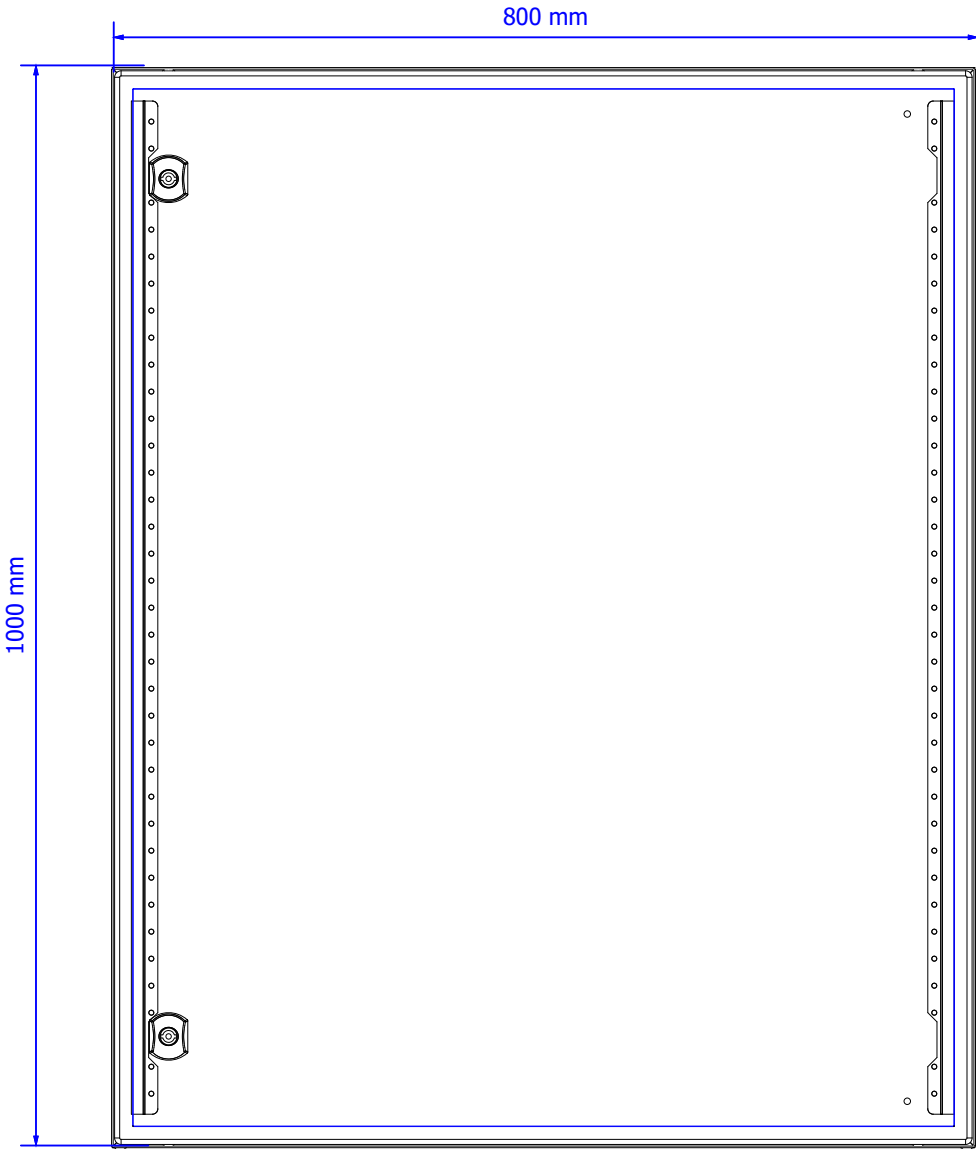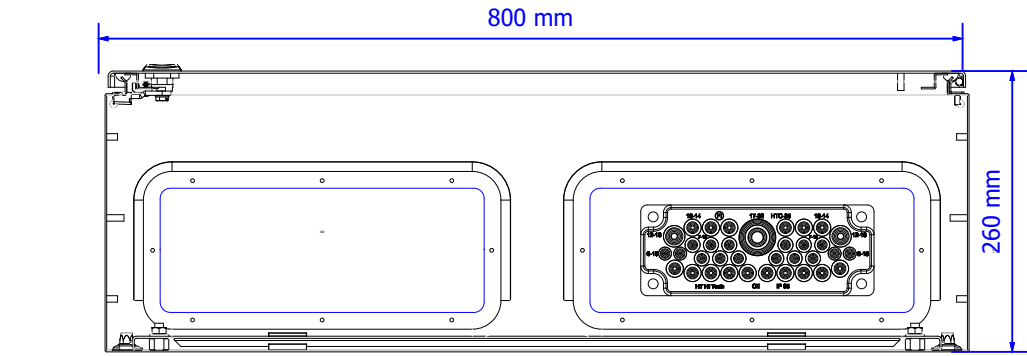

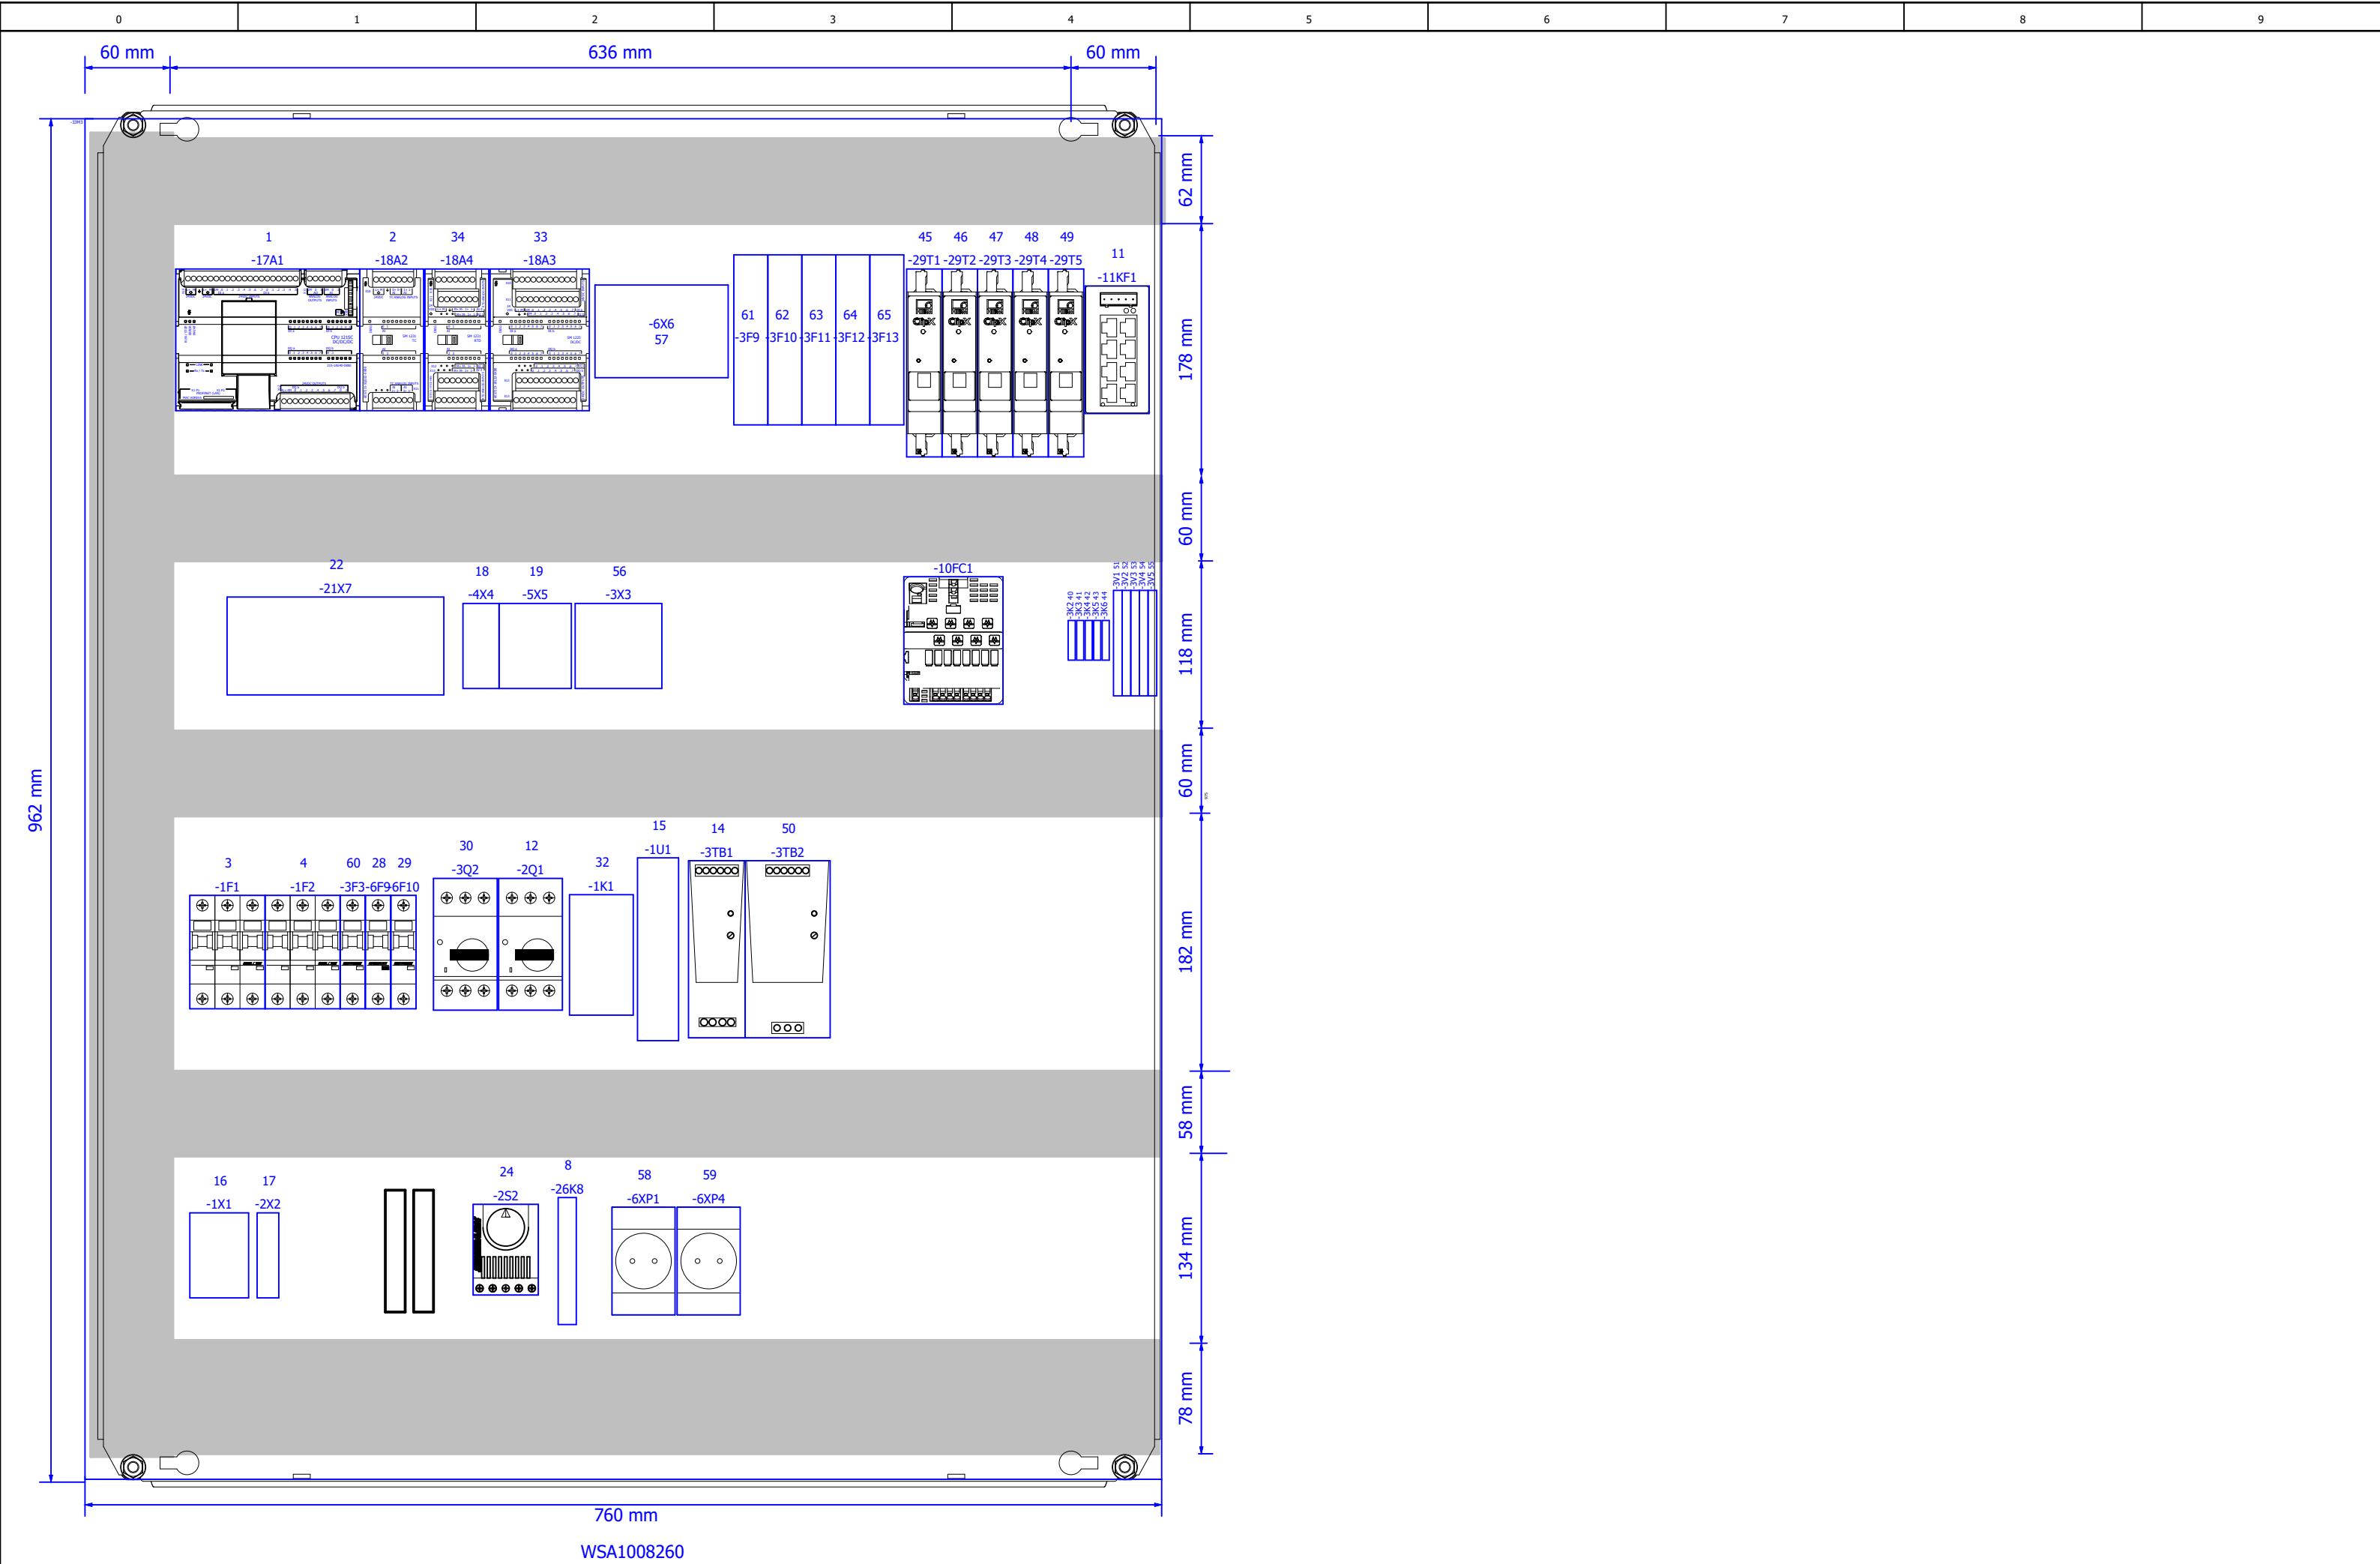

=+		
Properties		
Trade	Electrical engineering	
References		
Multi-line	=+	=LIN1+OMA1/14.9

W2		
Properties		
Trade	Electrical engineering	
Function text (automatic)	i_xSmallFeed	
Cable type	PUR	
Cable: No. of conductors	4	
Cable: Conductor cross-section / diameter	0.34	
Cable length with unit	5 m	
Part properties		
Parts: TUR.6625504 Variant: 1		
Part type	Component	
Order number	6625504	
Designation 1	Actuator and Sensor Cable, PUR	
Description	Actuator and Sensor Cable, PUR, Connection Cable, Female M12, straight, 4-pin, Cable length: 5.0 m, Sheath material: PUR, Sheath color: black, Qualified for drag chain use, Resistant to weld splatter, Resistant to chemicals, UV radiation and oils, Flame retardant, Free from halogen, silicone, PVC and LABS, Particularly resistant to abrasion, Approval: cULus, RoHS conform, Protection class IP67	
Height	0,00 mm	
Width	0,00 mm	
Depth	0,00 mm	
Weight	0,00 kg	
References		
Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	W2	=LIN1+OMA1/27.8

W3

Properties

Trade	Electrical engineering
Function text (automatic)	i_xShapeSensor_1
Cable type	PUR
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	0.34
Cable length with unit	5 m

Part properties

Parts: TUR.6625504 Variant: 1

Part type	Component
Order number	6625504
Designation 1	Actuator and Sensor Cable, PUR
Description	Actuator and Sensor Cable, PUR, Connection Cable, Female M12, straight, 4-pin, Cable length: 5.0 m, Sheath material: PUR, Sheath color: black, Qualified for drag chain use, Resistant to weld splatter, Resistant to chemicals, UV radiation and oils, Flame retardant, Free from halogen, silicone, PVC and LABS, Particularly resistant to abrasion, Approval: cULus, RoHS conform, Protection class IP67
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	W3 =LIN1+OMA1/28.0

W4

Properties

Trade	Electrical engineering
Function text (automatic)	i_xShapeSensor_2
Cable type	PUR
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	0.34
Cable length with unit	5 m

Part properties

Parts: TUR.6625504 Variant: 1

Part type	Component
Order number	6625504
Designation 1	Actuator and Sensor Cable, PUR
Description	Actuator and Sensor Cable, PUR, Connection Cable, Female M12, straight, 4-pin, Cable length: 5.0 m, Sheath material: PUR, Sheath color: black, Qualified for drag chain use, Resistant to weld splatter, Resistant to chemicals, UV radiation and oils, Flame retardant, Free from halogen, silicone, PVC and LABS, Particularly resistant to abrasion, Approval: cULus, RoHS conform, Protection class IP67
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	W4 =LIN1+OMA1/28.3

W5

Properties

Trade	Electrical engineering
Function text (automatic)	i_xDoubleFeed
Cable type	PUR
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	0.34
Cable length with unit	5 m

Part properties

Parts: TUR.6625504 Variant: 1

Part type	Component
Order number	6625504
Designation 1	Actuator and Sensor Cable, PUR
Description	Actuator and Sensor Cable, PUR, Connection Cable, Female M12, straight, 4-pin, Cable length: 5.0 m, Sheath material: PUR, Sheath color: black, Qualified for drag chain use, Resistant to weld splatter, Resistant to chemicals, UV radiation and oils, Flame retardant, Free from halogen, silicone, PVC and LABS, Particularly resistant to abrasion, Approval: cULus, RoHS conform, Protection class IP67
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	W5 =LIN1+OMA1/27.5

6W1		
Properties		
Trade	Electrical engineering	
Function text (automatic)	Actuator cable M1	
Cable type	UNITRONIC® LiYCY	
Cable: No. of conductors	15	
Cable: Conductor cross-section / diameter	0,34	
Cable length with unit	5 m	
Part properties		
Parts: LAPP.0034515 Variant: 1		
Part type	Component	
Order number	0034515	
Designation 1	Data communication systems	
Designation 2	UNITRONIC LiYCY 15x0,34	
Manufacturer	Lapp Group	
Height	0,00 mm	
Width	0,00 mm	
Depth	0,00 mm	
Weight	0,00 kg	
References		
Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	6W1	=LIN1+OMA1/10.1
	6W1	=LIN1+OMA1/10.1

6W2

Properties

Trade	Electrical engineering
Function text (automatic)	Actuator cable M2
Cable type	UNITRONIC® LiYCY
Cable: No. of conductors	15
Cable: Conductor cross-section / diameter	0,34
Cable length with unit	5 m

Part properties

Parts: LAPP.0034515 Variant: 1

Part type	Component
Order number	0034515
Designation 1	Data communication systems
Designation 2	UNITRONIC LiYCY 15x0,34
Manufacturer	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	6W2	=LIN1+OMA1/10.4
	6W2	=LIN1+OMA1/10.4

6W3

Properties	
Trade	Electrical engineering
Function text (automatic)	Actuator cable M3
Cable type	UNITRONIC® LiYCY
Cable: No. of conductors	15
Cable: Conductor cross-section / diameter	0,34
Cable length with unit	5 m

Part properties	
Parts: LAPP.0034515 Variant: 1	
Part type	Component
Order number	0034515
Designation 1	Data communication systems
Designation 2	UNITRONIC LiYCY 15x0,34
Manufacturer	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References		
Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	6W3	=LIN1+OMA1/11.1
	6W3	=LIN1+OMA1/11.1

6W4

Properties

Trade	Electrical engineering
Function text (automatic)	Actuator cable M4
Cable type	UNITRONIC® LiYCY
Cable: No. of conductors	15
Cable: Conductor cross-section / diameter	0,34
Cable length with unit	5 m

Part properties

Parts: LAPP.0034515 Variant: 1

Part type	Component
Order number	0034515
Designation 1	Data communication systems
Designation 2	UNITRONIC LiYCY 15x0,34
Manufacturer	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	6W4	=LIN1+OMA1/11.4
	6W4	=LIN1+OMA1/11.4

6W5

Properties	
Trade	Electrical engineering
Function text (automatic)	Actuator cable M1
Cable type	UNITRONIC® LiYCY
Cable: No. of conductors	15
Cable: Conductor cross-section / diameter	0,34
Cable length with unit	5 m

Part properties	
Parts: LAPP.0034515 Variant: 1	
Part type	Component
Order number	0034515
Designation 1	Data communication systems
Designation 2	UNITRONIC LiYCY 15x0,34
Manufacturer	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References		
Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	6W5	=LIN1+OMA1/12.1
	6W5	=LIN1+OMA1/12.1

11W6

Properties

Trade	Electrical engineering
Function text (automatic)	PLC KOMUNIKACIJA
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	11W6	=LIN1+OMA1/14.0

11W7

Properties

Trade	Electrical engineering
Function text (automatic)	NC
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	11W7 =LIN1+OMA1/14.2

11W8

Properties

Trade	Electrical engineering
Function text (automatic)	HMI KOMUNIKACIJA
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	11W8 =LIN1+OMA1/14.3

11W9

Properties

Trade	Electrical engineering
Function text (automatic)	NC
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	11W9	=LIN1+OMA1/14.4

11W10

Properties

Trade	Electrical engineering
Function text (automatic)	NC
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	11W10 =LIN1+OMA1/14.5

11W11

Properties

Trade	Electrical engineering
Function text (automatic)	FREKVENČNIK
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	11W11 =LIN1+OMA1/14.6

11W12

Properties

Trade	Electrical engineering
Function text (automatic)	NC
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	11W12 =LIN1+OMA1/14.7

11W13

Properties

Trade	Electrical engineering
Function text (automatic)	NC
Cable type	ETHERLINE® PN Cat.5e Y
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	22

Part properties

Parts: LAPP.2170891 Variant: 1

Part type	Component
Order number	2170891
Designation 1	Profinet 2pair cabling Cat.5/5e PVC fixed 2X2X22AWG
Description	Data Communication Systems For ETHERNET-Technology / Accessories for Industrial networking / LAN-cables for industrial cabling
Manufacturer	Lapp Group
Supplier	Lapp Group
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	11W13 =LIN1+OMA1/14.8

12W14

Properties

Trade	Electrical engineering
Function text (automatic)	Triger from PLC
Cable length with unit	5 m

Part properties

Parts: Variant:

Part type	Undefined
-----------	-----------

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	12W14 =LIN1+OMA1/15.0

12W15

Properties

Trade	Electrical engineering
Function text (automatic)	Feedback to Machine
Cable length with unit	5 m

Part properties

Parts: Variant:

Part type	Undefined
-----------	-----------

References

Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	12W15	=LIN1+OMA1/15.1

12W16

Properties

Trade	Electrical engineering
Function text (automatic)	Reserve
Cable type	PUR
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	0.34
Cable length with unit	5 m

Part properties

Parts: TUR.6625504 Variant: 1

Part type	Component
Order number	6625504
Designation 1	Actuator and Sensor Cable, PUR
Description	Actuator and Sensor Cable, PUR, Connection Cable, Female M12, straight, 4-pin, Cable length: 5.0 m, Sheath material: PUR, Sheath color: black, Qualified for drag chain use, Resistant to weld splatter, Resistant to chemicals, UV radiation and oils, Flame retardant, Free from halogen, silicone, PVC and LABS, Particularly resistant to abrasion, Approval: cULus, RoHS conform, Protection class IP67
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram	
Cable overview	Cable overview	
Multi-line	12W16	=LIN1+OMA1/15.2

12W17

Properties

Trade	Electrical engineering
Function text (automatic)	Reserve
Cable type	PUR
Cable: No. of conductors	4
Cable: Conductor cross-section / diameter	0.34
Cable length with unit	5 m

Part properties

Parts: TUR.6625504 Variant: 1

Part type	Component
Order number	6625504
Designation 1	Actuator and Sensor Cable, PUR
Description	Actuator and Sensor Cable, PUR, Connection Cable, Female M12, straight, 4-pin, Cable length: 5.0 m, Sheath material: PUR, Sheath color: black, Qualified for drag chain use, Resistant to weld splatter, Resistant to chemicals, UV radiation and oils, Flame retardant, Free from halogen, silicone, PVC and LABS, Particularly resistant to abrasion, Approval: cULus, RoHS conform, Protection class IP67
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	12W17 =LIN1+OMA1/15.3

20W18

Properties

Trade	Electrical engineering
Cable: No. of conductors	7G
Cable: Conductor cross-section / diameter	0,5

Part properties

Parts: 7G075 Variant: 1

Part type	Component
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	20W18 =LIN1+OMA1/24.5

30W23

Properties

Trade	Electrical engineering
Function text (automatic)	RTD1
Cable type	SAC-5P- 5,0-PUR/M12FS

Part properties

Parts: PXC.1669848 Variant: 1

Part type	Component
Order number	1669848
Designation 1	Sensor/actuator cable
Description	Sensor/actuator cable, 5-position, PUR halogen-free, black-grey RAL 7021, free cable end, on Socket straight M12, A-coded, cable length: 5 m
Manufacturer	Phoenix Contact
Supplier	Phoenix Contact
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,18 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	30W23 =LIN1+OMA1/49.0

30W24

Properties

Trade	Electrical engineering
Function text (automatic)	RTD2
Cable type	SAC-5P- 5,0-PUR/M12FS

Part properties

Parts: PXC.1669848 Variant: 1

Part type	Component
Order number	1669848
Designation 1	Sensor/actuator cable
Description	Sensor/actuator cable, 5-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, cable length: 5 m
Manufacturer	Phoenix Contact
Supplier	Phoenix Contact
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,18 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	30W24 =LIN1+OMA1/49.3

30W25

Properties

Trade	Electrical engineering
Function text (automatic)	RTD3
Cable type	SAC-5P- 5,0-PUR/M12FS

Part properties

Parts: PXC.1669848 Variant: 1

Part type	Component
Order number	1669848
Designation 1	Sensor/actuator cable
Description	Sensor/actuator cable, 5-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, cable length: 5 m
Manufacturer	Phoenix Contact
Supplier	Phoenix Contact
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,18 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	30W25 =LIN1+OMA1/49.5

30W26

Properties

Trade	Electrical engineering
Function text (automatic)	RTD4
Cable type	SAC-5P- 5,0-PUR/M12FS

Part properties

Parts: PXC.1669848 Variant: 1

Part type	Component
Order number	1669848
Designation 1	Sensor/actuator cable
Description	Sensor/actuator cable, 5-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket straight M12, A-coded, cable length: 5 m
Manufacturer	Phoenix Contact
Supplier	Phoenix Contact
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,18 kg

References

Cable diagram	Cable diagram
Cable overview	Cable overview
Multi-line	30W26 =LIN1+OMA1/49.8

=LIN1+OMA1-17A1

Properties	
Trade	Electrical engineering

Part properties	
Parts: SIE.6ES7215-1AG40-0XB0 Variant: 1	
Part type	Component
Order number	6ES7215-1AG40-0XB0
Designation 1	CPU 1215C, DC/DC/DC, 14DI/10DO/2AI/2AO
Designation 2	SIMATIC, S7-1200
Designation 3	Central processing unit
Description	SIMATIC S7-1200, CPU 1215C, compact CPU, DC/DC/DC, 2 PROFINET ports, onboard I/O: 14 DI 24 V DC/ 10 DO 24 V DC/ 0.5A/ 2 AI 0-10 V DC, 2 AO 0-20 mA DC, Power supply: DC 20.4-28.8V DC, Program/data memory 125 KB
Manufacturer	Siemens
Supplier	Siemens
Height	100,00 mm
Width	130,00 mm
Depth	75,00 mm
Weight	0,45 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Overview	=LIN1+OMA1-17A1	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1	=LIN1+OMA1/23.2
Single-line	=LIN1+OMA1-17A1	=LIN1+OMA1/16.1
Multi-line	=LIN1+OMA1-17A1:1	=LIN1+OMA1/23.2
Overview	=LIN1+OMA1-17A1:1	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:2	=LIN1+OMA1/23.2
Overview	=LIN1+OMA1-17A1:2	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:3	=LIN1+OMA1/23.2
Overview	=LIN1+OMA1-17A1:3	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:4	=LIN1+OMA1/23.3
Overview	=LIN1+OMA1-17A1:4	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:5	=LIN1+OMA1/23.3
Overview	=LIN1+OMA1-17A1:5	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:6	=LIN1+OMA1/23.3
Overview	=LIN1+OMA1-17A1:6	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:7	=LIN1+OMA1/25.1
Overview	=LIN1+OMA1-17A1:7	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:8	=LIN1+OMA1/25.3
Overview	=LIN1+OMA1-17A1:8	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:9	=LIN1+OMA1/25.5
Overview	=LIN1+OMA1-17A1:9	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:10	=LIN1+OMA1/25.8
Overview	=LIN1+OMA1-17A1:10	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:11	=LIN1+OMA1/26.1

=LIN1+OMA1-17A1

Overview	=LIN1+OMA1-17A1:11	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:12	=LIN1+OMA1/26.3
Overview	=LIN1+OMA1-17A1:12	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:13	=LIN1+OMA1/26.5
Overview	=LIN1+OMA1-17A1:13	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:14	=LIN1+OMA1/26.8
Overview	=LIN1+OMA1-17A1:14	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:15	=LIN1+OMA1/27.1
Overview	=LIN1+OMA1-17A1:15	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:16	=LIN1+OMA1/27.3
Overview	=LIN1+OMA1-17A1:16	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:17	=LIN1+OMA1/27.5
Overview	=LIN1+OMA1-17A1:17	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:18	=LIN1+OMA1/27.8
Overview	=LIN1+OMA1-17A1:18	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:19	=LIN1+OMA1/28.1
Overview	=LIN1+OMA1-17A1:19	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:20	=LIN1+OMA1/28.3
Overview	=LIN1+OMA1-17A1:20	=LIN1+OMA1/19.4
Multi-line	=LIN1+OMA1-17A1:1	=LIN1+OMA1/23.4
Overview	=LIN1+OMA1-17A1:1	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:2	=LIN1+OMA1/42.2
Overview	=LIN1+OMA1-17A1:2	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:3	=LIN1+OMA1/42.5
Overview	=LIN1+OMA1-17A1:3	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:4	=LIN1+OMA1/23.4
Overview	=LIN1+OMA1-17A1:4	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:5	=LIN1+OMA1/44.2
Overview	=LIN1+OMA1-17A1:5	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:6	=LIN1+OMA1/44.5
Overview	=LIN1+OMA1-17A1:6	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:1	=LIN1+OMA1/23.4
Overview	=LIN1+OMA1-17A1:1	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:2	=LIN1+OMA1/23.4
Overview	=LIN1+OMA1-17A1:2	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:3	=LIN1+OMA1/35.1
Overview	=LIN1+OMA1-17A1:3	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:4	=LIN1+OMA1/35.3
Overview	=LIN1+OMA1-17A1:4	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:5	=LIN1+OMA1/35.5
Overview	=LIN1+OMA1-17A1:5	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:6	=LIN1+OMA1/35.8
Overview	=LIN1+OMA1-17A1:6	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:7	=LIN1+OMA1/36.1
Overview	=LIN1+OMA1-17A1:7	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:8	=LIN1+OMA1/36.3
Overview	=LIN1+OMA1-17A1:8	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:9	=LIN1+OMA1/36.5

=LIN1+OMA1-17A1

Overview	=LIN1+OMA1-17A1:9	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:10	=LIN1+OMA1/36.8
Overview	=LIN1+OMA1-17A1:10	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:11	=LIN1+OMA1/37.1
Overview	=LIN1+OMA1-17A1:11	=LIN1+OMA1/19.6
Multi-line	=LIN1+OMA1-17A1:12	=LIN1+OMA1/37.3
Overview	=LIN1+OMA1-17A1:12	=LIN1+OMA1/19.6
	=LIN1+OMA1-17A1	=LIN1+OMA1/19.6
Single-line	=LIN1+OMA1-17A1	=LIN1+OMA1/16.2
Overview	=LIN1+OMA1-17A1	=LIN1+OMA1/19.6
Single-line	=LIN1+OMA1-17A1	=LIN1+OMA1/16.3
Panel layout	=LIN1+OMA1-17A1	=LIN1+OMA1/52.0

=LIN1+OMA1-18A2

Properties	
Trade	Electrical engineering

Part properties	
Parts: SIE.6ES7231-5QD32-0XB0 Variant: 1	
Part type	Component
Order number	6ES7231-5QD32-0XB0
Designation 1	S7-1200, ANALOG INPUT SM 1231 TC, 4 AI
Designation 2	SIMATIC, S7-1200
Description	SIMATIC S7-1200, Analog input, SM 1231 TC, 4 AI thermocouples
Manufacturer	Siemens
Height	100,00 mm
Width	45,00 mm
Depth	75,00 mm
Weight	0,17 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Overview	=LIN1+OMA1-18A2	=LIN1+OMA1/20.0
Multi-line	=LIN1+OMA1-18A2	=LIN1+OMA1/23.5
	=LIN1+OMA1-18A2:1	=LIN1+OMA1/23.5
Overview	=LIN1+OMA1-18A2:1	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:2	=LIN1+OMA1/23.6
Overview	=LIN1+OMA1-18A2:2	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:3	=LIN1+OMA1/23.6
Overview	=LIN1+OMA1-18A2:3	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:4	=LIN1+OMA1/48.1
Overview	=LIN1+OMA1-18A2:4	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:5	=LIN1+OMA1/48.1
Overview	=LIN1+OMA1-18A2:5	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:6	=LIN1+OMA1/48.3
Overview	=LIN1+OMA1-18A2:6	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:7	=LIN1+OMA1/48.3
Overview	=LIN1+OMA1-18A2:7	=LIN1+OMA1/20.1
	=LIN1+OMA1-18A2:1	=LIN1+OMA1/20.1
	=LIN1+OMA1-18A2:2	=LIN1+OMA1/20.1
	=LIN1+OMA1-18A2:3	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:4	=LIN1+OMA1/48.5
Overview	=LIN1+OMA1-18A2:4	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:5	=LIN1+OMA1/48.5
Overview	=LIN1+OMA1-18A2:5	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:6	=LIN1+OMA1/48.7
Overview	=LIN1+OMA1-18A2:6	=LIN1+OMA1/20.1
Multi-line	=LIN1+OMA1-18A2:7	=LIN1+OMA1/48.7
Overview	=LIN1+OMA1-18A2:7	=LIN1+OMA1/20.1
Panel layout	=LIN1+OMA1-18A2	=LIN1+OMA1/52.1

=LIN1+OMA1-18A3

Properties	
Trade	Electrical engineering

Part properties	
Parts: SIE.6ES7223-1BL32-0XB0 Variant: 1	
Part type	Component
Order number	6ES7223-1BL32-0XB0
Designation 1	DIGITAL I/O SM 1223, 16DI/16DO
Designation 2	SIMATIC, S7-1200
Designation 3	Digital module input/output
Description	SIMATIC S7-1200, Digital I/O SM 1223, 16 DI/16 DO, 16 DI 24 V DC, Sink/Source, 16 DO, transistor 0.5 A
Manufacturer	Siemens
Supplier	Siemens
Height	100,00 mm
Width	70,00 mm
Depth	75,00 mm
Weight	0,31 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Overview	=LIN1+OMA1-18A3	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3	=LIN1+OMA1/23.7
	=LIN1+OMA1-18A3:1	=LIN1+OMA1/23.8
Overview	=LIN1+OMA1-18A3:1	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:2	=LIN1+OMA1/23.8
Overview	=LIN1+OMA1-18A3:2	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:3	=LIN1+OMA1/23.8
Overview	=LIN1+OMA1-18A3:3	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:4	=LIN1+OMA1/30.1
Overview	=LIN1+OMA1-18A3:4	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:5	=LIN1+OMA1/30.3
Overview	=LIN1+OMA1-18A3:5	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:6	=LIN1+OMA1/30.5
Overview	=LIN1+OMA1-18A3:6	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:7	=LIN1+OMA1/30.8
Overview	=LIN1+OMA1-18A3:7	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:8	=LIN1+OMA1/31.1
Overview	=LIN1+OMA1-18A3:8	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:9	=LIN1+OMA1/31.3
Overview	=LIN1+OMA1-18A3:9	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:10	=LIN1+OMA1/31.5
Overview	=LIN1+OMA1-18A3:10	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:11	=LIN1+OMA1/31.8
Overview	=LIN1+OMA1-18A3:11	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:1	=LIN1+OMA1/23.8
Overview	=LIN1+OMA1-18A3:1	=LIN1+OMA1/21.3

=LIN1+OMA1-18A3

Multi-line	=LIN1+OMA1-18A3:3	=LIN1+OMA1/23.8
Overview	=LIN1+OMA1-18A3:3	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:4	=LIN1+OMA1/32.1
Overview	=LIN1+OMA1-18A3:4	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:5	=LIN1+OMA1/32.3
Overview	=LIN1+OMA1-18A3:5	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:6	=LIN1+OMA1/32.5
Overview	=LIN1+OMA1-18A3:6	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:7	=LIN1+OMA1/32.8
Overview	=LIN1+OMA1-18A3:7	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:8	=LIN1+OMA1/33.1
Overview	=LIN1+OMA1-18A3:8	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:9	=LIN1+OMA1/33.3
Overview	=LIN1+OMA1-18A3:9	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:10	=LIN1+OMA1/33.5
Overview	=LIN1+OMA1-18A3:10	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:11	=LIN1+OMA1/33.8
Overview	=LIN1+OMA1-18A3:11	=LIN1+OMA1/21.3
Multi-line	=LIN1+OMA1-18A3:4	=LIN1+OMA1/38.1
Overview	=LIN1+OMA1-18A3:4	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:5	=LIN1+OMA1/38.3
Overview	=LIN1+OMA1-18A3:5	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:6	=LIN1+OMA1/38.5
Overview	=LIN1+OMA1-18A3:6	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:7	=LIN1+OMA1/38.8
Overview	=LIN1+OMA1-18A3:7	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:8	=LIN1+OMA1/39.1
Overview	=LIN1+OMA1-18A3:8	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:9	=LIN1+OMA1/39.3
Overview	=LIN1+OMA1-18A3:9	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:10	=LIN1+OMA1/39.6
Overview	=LIN1+OMA1-18A3:10	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:11	=LIN1+OMA1/39.8
Overview	=LIN1+OMA1-18A3:11	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:4	=LIN1+OMA1/40.1
Overview	=LIN1+OMA1-18A3:4	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:5	=LIN1+OMA1/40.3
Overview	=LIN1+OMA1-18A3:5	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:6	=LIN1+OMA1/40.6
Overview	=LIN1+OMA1-18A3:6	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:7	=LIN1+OMA1/40.8
Overview	=LIN1+OMA1-18A3:7	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:8	=LIN1+OMA1/41.1
Overview	=LIN1+OMA1-18A3:8	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:9	=LIN1+OMA1/41.3
Overview	=LIN1+OMA1-18A3:9	=LIN1+OMA1/21.5
Multi-line	=LIN1+OMA1-18A3:10	=LIN1+OMA1/41.6
Overview	=LIN1+OMA1-18A3:10	=LIN1+OMA1/21.5

=LIN1+OMA1-18A3

Multi-line	=LIN1+OMA1-18A3:11	=LIN1+OMA1/41.8
Overview	=LIN1+OMA1-18A3:11	=LIN1+OMA1/21.5
Panel layout	=LIN1+OMA1-18A3	=LIN1+OMA1/52.2

=LIN1+OMA1-18A4

Properties	
Trade	Electrical engineering

Part properties	
Parts: SIE.6ES7231-5PD32-0XB0 Variant: 1	
Part type	Component
Order number	6ES7231-5PD32-0XB0
Designation 1	S7-1200, ANALOG INPUT SM 1231 RTD, 4 AI
Designation 2	SIMATIC, S7-1200
Designation 3	Analog module input
Description	SIMATIC S7-1200, Analog input, SM 1231 RTD, 4xAI RTD module
Manufacturer	Siemens
Supplier	Siemens
Height	100,00 mm
Width	45,00 mm
Depth	75,00 mm
Weight	0,21 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Overview	=LIN1+OMA1-18A4	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4	=LIN1+OMA1/23.6
	=LIN1+OMA1-18A4:1	=LIN1+OMA1/23.6
Overview	=LIN1+OMA1-18A4:1	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:2	=LIN1+OMA1/23.7
Overview	=LIN1+OMA1-18A4:2	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:3	=LIN1+OMA1/23.7
Overview	=LIN1+OMA1-18A4:3	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:4	=LIN1+OMA1/49.1
Overview	=LIN1+OMA1-18A4:4	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:5	=LIN1+OMA1/49.1
Overview	=LIN1+OMA1-18A4:5	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:6	=LIN1+OMA1/49.1
Overview	=LIN1+OMA1-18A4:6	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:7	=LIN1+OMA1/49.1
Overview	=LIN1+OMA1-18A4:7	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:4	=LIN1+OMA1/49.4
Overview	=LIN1+OMA1-18A4:4	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:5	=LIN1+OMA1/49.3
Overview	=LIN1+OMA1-18A4:5	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:6	=LIN1+OMA1/49.4
Overview	=LIN1+OMA1-18A4:6	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:7	=LIN1+OMA1/49.4
Overview	=LIN1+OMA1-18A4:7	=LIN1+OMA1/22.1
Multi-line	=LIN1+OMA1-18A4:4	=LIN1+OMA1/49.6
Overview	=LIN1+OMA1-18A4:4	=LIN1+OMA1/22.4

=LIN1+OMA1-18A4

Multi-line	=LIN1+OMA1-18A4:5	=LIN1+OMA1/49.6
Overview	=LIN1+OMA1-18A4:5	=LIN1+OMA1/22.4
Multi-line	=LIN1+OMA1-18A4:6	=LIN1+OMA1/49.6
Overview	=LIN1+OMA1-18A4:6	=LIN1+OMA1/22.4
Multi-line	=LIN1+OMA1-18A4:7	=LIN1+OMA1/49.6
Overview	=LIN1+OMA1-18A4:7	=LIN1+OMA1/22.4
Multi-line	=LIN1+OMA1-18A4:4	=LIN1+OMA1/49.9
Overview	=LIN1+OMA1-18A4:4	=LIN1+OMA1/22.4
Multi-line	=LIN1+OMA1-18A4:5	=LIN1+OMA1/49.8
Overview	=LIN1+OMA1-18A4:5	=LIN1+OMA1/22.4
Multi-line	=LIN1+OMA1-18A4:6	=LIN1+OMA1/49.8
Overview	=LIN1+OMA1-18A4:6	=LIN1+OMA1/22.4
Multi-line	=LIN1+OMA1-18A4:7	=LIN1+OMA1/49.9
Overview	=LIN1+OMA1-18A4:7	=LIN1+OMA1/22.4
Panel layout	=LIN1+OMA1-18A4	=LIN1+OMA1/52.1

=LIN1+OMA1-23B2

Properties		
Trade	Electrical engineering	
Function text (automatic)	i_xSmallFeed	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-23B2:1;3;2	=LIN1+OMA1/27.8

=LIN1+OMA1-23B3

Properties		
Trade	Electrical engineering	
Function text (automatic)	i_xDoubleFeed	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-23B3:1;3;2	=LIN1+OMA1/27.5

=LIN1+OMA1-24B1

Properties		
Trade	Electrical engineering	
Function text (automatic)	i_xShapeSensor_1	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24B1:1;3;2	=LIN1+OMA1/28.1

=LIN1+OMA1-24B2

Properties		
Trade	Electrical engineering	
Function text (automatic)	i_xShapeSensor_2	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24B2:1;3;2	=LIN1+OMA1/28.3

=LIN1+OMA1-1F1

Properties	
Trade	Electrical engineering
Technical characteristics	C10

Part properties	
Parts: SCHR.BM017310-- Variant: 1	
Part type	Component
Order number	BM017310--
Designation 1	Inštalacijski odklopnik, karak. C, 10A, 10kA, 3-polni
Description	Inštalacijski odklopnik, karak. C, 10A, 10kA, 3-polni serija B MS0, standard za izdelek EN 60898,EN 60947-2
Manufacturer	Schrack
Supplier	Schrack
Height	80,00 mm
Width	53,10 mm
Depth	74,90 mm
Weight	0,37 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1F1:2;1;4;3;6;5	=LIN1+OMA1/1.1
Panel layout	=LIN1+OMA1-1F1	=LIN1+OMA1/52.0

=LIN1+OMA1-1F2

Properties	
Trade	Electrical engineering
Technical characteristics	C2

Part properties	
Parts: SCHR.BM017302-- Variant: 1	
Part type	Component
Order number	BM017302--
Designation 1	Inštalacijski odklopnik, karak. C, 2A, 3-polni, 10kA
Description	Inštalacijski odklopnik, karak. C, 2A, 3-polni, 10kA serija BM S0, standard za izdelek EN 60898,EN 60947-2
Manufacturer	Schrack
Supplier	Schrack
Height	80,00 mm
Width	53,10 mm
Depth	74,90 mm
Weight	0,37 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1F2:2;1;4;3;6;5	=LIN1+OMA1/1.3
Panel layout	=LIN1+OMA1-1F2	=LIN1+OMA1/52.1

=LIN1+OMA1-3F3

Properties	
Trade	Electrical engineering
Technical characteristics	B4

Part properties	
Parts: SCHR.BM018104-- Variant: 1	
Part type	Component
Order number	BM018104--
Designation 1	Inštalacijski odklopnik, karak. B, 4A, 1-polni, 10kA
Description	Inštalacijski odklopnik, karak. B, 4A, 1-polni, 10kA serija BM S0, standard za izdelek EN 60898,EN 60947-2
Manufacturer	Schrack
Supplier	Schrack
Height	80,00 mm
Width	17,70 mm
Depth	74,90 mm
Weight	0,12 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3F3:1;2	=LIN1+OMA1/4.1
Panel layout	=LIN1+OMA1-3F3	=LIN1+OMA1/52.1

=LIN1+OMA1-3F9

Properties	
Trade	Electrical engineering

Part properties	
Parts: LUETZE.716406 Variant: 1	
Part type	Undefined

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3F9	=LIN1+OMA1/6.0
	=LIN1+OMA1-3F9:1	=LIN1+OMA1/6.1
	=LIN1+OMA1-3F9:2	=LIN1+OMA1/6.1
	=LIN1+OMA1-3F9:3	=LIN1+OMA1/6.1
	=LIN1+OMA1-3F9:4	=LIN1+OMA1/6.1
	=LIN1+OMA1-3F9:5	=LIN1+OMA1/6.1
	=LIN1+OMA1-3F9:6	=LIN1+OMA1/6.1
	=LIN1+OMA1-3F9:7	=LIN1+OMA1/6.1
Panel layout	=LIN1+OMA1-3F9	=LIN1+OMA1/52.3

=LIN1+OMA1-3F10		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: LUETZE.716406 Variant: 1		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3F10	=LIN1+OMA1/6.2
	=LIN1+OMA1-3F10:1	=LIN1+OMA1/6.2
	=LIN1+OMA1-3F10:2	=LIN1+OMA1/6.3
	=LIN1+OMA1-3F10:3	=LIN1+OMA1/6.3
	=LIN1+OMA1-3F10:4	=LIN1+OMA1/6.3
	=LIN1+OMA1-3F10:5	=LIN1+OMA1/6.3
	=LIN1+OMA1-3F10:6	=LIN1+OMA1/6.2
	=LIN1+OMA1-3F10:7	=LIN1+OMA1/6.2
Panel layout	=LIN1+OMA1-3F10	=LIN1+OMA1/52.3

=LIN1+OMA1-3F11		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: LUETZE.716406 Variant: 1		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3F11	=LIN1+OMA1/6.4
	=LIN1+OMA1-3F11:1	=LIN1+OMA1/6.4
	=LIN1+OMA1-3F11:2	=LIN1+OMA1/6.4
	=LIN1+OMA1-3F11:3	=LIN1+OMA1/6.4
	=LIN1+OMA1-3F11:4	=LIN1+OMA1/6.5
	=LIN1+OMA1-3F11:5	=LIN1+OMA1/6.4
	=LIN1+OMA1-3F11:6	=LIN1+OMA1/6.4
	=LIN1+OMA1-3F11:7	=LIN1+OMA1/6.4
Panel layout	=LIN1+OMA1-3F11	=LIN1+OMA1/52.3

=LIN1+OMA1-3F12		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: LUETZE.716406 Variant: 1		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3F12	=LIN1+OMA1/6.5
	=LIN1+OMA1-3F12:1	=LIN1+OMA1/6.5
	=LIN1+OMA1-3F12:2	=LIN1+OMA1/6.6
	=LIN1+OMA1-3F12:3	=LIN1+OMA1/6.6
	=LIN1+OMA1-3F12:4	=LIN1+OMA1/6.6
	=LIN1+OMA1-3F12:5	=LIN1+OMA1/6.6
	=LIN1+OMA1-3F12:6	=LIN1+OMA1/6.6
	=LIN1+OMA1-3F12:7	=LIN1+OMA1/6.5
Panel layout	=LIN1+OMA1-3F12	=LIN1+OMA1/52.3

=LIN1+OMA1-3F13		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: LUETZE.716406 Variant: 1		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3F13	=LIN1+OMA1/6.7
	=LIN1+OMA1-3F13:1	=LIN1+OMA1/6.7
	=LIN1+OMA1-3F13:2	=LIN1+OMA1/6.8
	=LIN1+OMA1-3F13:3	=LIN1+OMA1/6.8
	=LIN1+OMA1-3F13:4	=LIN1+OMA1/6.8
	=LIN1+OMA1-3F13:5	=LIN1+OMA1/6.8
	=LIN1+OMA1-3F13:6	=LIN1+OMA1/6.7
	=LIN1+OMA1-3F13:7	=LIN1+OMA1/6.7
Panel layout	=LIN1+OMA1-3F13	=LIN1+OMA1/52.3

=LIN1+OMA1-6F9

Properties		
Trade	Electrical engineering	
Part properties		
Parts: SCHR.BM017106-- Variant: 1		
Part type	Component	
Order number	BM017106--	
Designation 1	Inštalacijski odklopnik, karak. C, 6A, 1-polni, 10kA	
Description	Inštalacijski odklopnik, karak. C, 6A, 1-polni, 10kA serija BM S0, standard za izdelek EN 60898,EN 60947-2	
Manufacturer	Schrack	
Height	80,00 mm	
Width	17,70 mm	
Depth	74,90 mm	
Weight	0,12 kg	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-6F9:1;2	=LIN1+OMA1/9.1
Panel layout	=LIN1+OMA1-6F9	=LIN1+OMA1/52.1

=LIN1+OMA1-6F10

Properties		
Trade	Electrical engineering	
Part properties		
Parts: SCHR.BM017106-- Variant: 1		
Part type	Component	
Order number	BM017106--	
Designation 1	Inštalacijski odklopnik, karak. C, 6A, 1-polni, 10kA	
Description	Inštalacijski odklopnik, karak. C, 6A, 1-polni, 10kA serija BM S0, standard za izdelek EN 60898,EN 60947-2	
Manufacturer	Schrack	
Height	80,00 mm	
Width	17,70 mm	
Depth	74,90 mm	
Weight	0,12 kg	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-6F10:1;2	=LIN1+OMA1/9.2
Panel layout	=LIN1+OMA1-6F10	=LIN1+OMA1/52.1

=LIN1+OMA1-10FC1

Properties	
Trade	Electrical engineering
Technical characteristics	IN: 24 V DC OUT: 24 V DC / 5x2 A , 3x6 A

Part properties	
Parts: MURR.9000-41068-0200600 Variant: 1	
Part type	Component
Order number	9000-41068-0200600
Designation 1	Current monitoring equipment
Designation 2	MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT, 8 CHANNELS (IN: 24VDC OUT: 5x24V/2ADC 3x24V/6ADC)
Description	MICO BASIC 5.2/3.6 8 channels Current adjustment 5 × 2 A; 3 × 6 A More information may be found on https://www.muerelektronik.com or in the technical datasheet
Height	90,00 mm
Width	70,00 mm
Depth	80,00 mm
Weight	0,16 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-10FC1	=LIN1+OMA1/13.1
	=LIN1+OMA1-10FC1:14	=LIN1+OMA1/13.3
	=LIN1+OMA1-10FC1:ON	=LIN1+OMA1/13.2
	=LIN1+OMA1-10FC1:OUT1	=LIN1+OMA1/13.2
	=LIN1+OMA1-10FC1:OUT2	=LIN1+OMA1/13.3
	=LIN1+OMA1-10FC1:OUT3	=LIN1+OMA1/13.3
	=LIN1+OMA1-10FC1:OUT4	=LIN1+OMA1/13.4
	=LIN1+OMA1-10FC1:OUT5	=LIN1+OMA1/13.4
	=LIN1+OMA1-10FC1:OUT6	=LIN1+OMA1/13.5
	=LIN1+OMA1-10FC1:OUT7	=LIN1+OMA1/13.5
	=LIN1+OMA1-10FC1:OUT8	=LIN1+OMA1/13.6
	=LIN1+OMA1-10FC1:+24V	=LIN1+OMA1/13.2
	=LIN1+OMA1-10FC1:GND	=LIN1+OMA1/13.2
Panel layout	=LIN1+OMA1-10FC1	=LIN1+OMA1/52.3

=LIN1+OMA1-1H1

Properties		
Trade	Electrical engineering	
Technical characteristics	L1	
Part properties		
Parts: SE.XB4BVM4 Variant: 1		
Part type	Component	
Order number	XB4BVM4	
Designation 1	Red complete pilot light Ø22 plain lens with integral LED 230.. ..240V	
Manufacturer	Schneider Electric	
Supplier	Schneider Electric	
Height	47,00 mm	
Width	30,00 mm	
Depth	54,00 mm	
Weight	0,08 kg	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1H1:X1;X2	=LIN1+OMA1/1.2
Panel layout	=LIN1+OMA1-1H1	=LIN1+OMA1/51.7

=LIN1+OMA1-1H2

Properties		
Trade	Electrical engineering	
Technical characteristics	L2	
Part properties		
Parts: SE.XB4BVM4 Variant: 1		
Part type	Component	
Order number	XB4BVM4	
Designation 1	Red complete pilot light Ø22 plain lens with integral LED 230.. ..240V	
Manufacturer	Schneider Electric	
Supplier	Schneider Electric	
Height	47,00 mm	
Width	30,00 mm	
Depth	54,00 mm	
Weight	0,08 kg	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1H2:X1;X2	=LIN1+OMA1/1.2
Panel layout	=LIN1+OMA1-1H2	=LIN1+OMA1/51.7

=LIN1+OMA1-1H3

Properties	
Trade	Electrical engineering
Technical characteristics	L3

Part properties	
Parts: SE.XB4BVM4 Variant: 1	
Part type	Component
Order number	XB4BVM4
Designation 1	Red complete pilot light Ø22 plain lens with integral LED 230. ..240V
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	47,00 mm
Width	30,00 mm
Depth	54,00 mm
Weight	0,08 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1H3:X1;X2	=LIN1+OMA1/1.3
Panel layout	=LIN1+OMA1-1H3	=LIN1+OMA1/51.7

=LIN1+OMA1-1K1

Properties	
Trade	Electrical engineering
Technical characteristics	230VAC

Part properties	
Parts: SE.LC1D38P7 Variant: 1	
Part type	Component
Order number	LC1D38P7
Designation 1	Contacteur TeSys LC1-D - 3P - AC-3 440V 38 A, Coil 230 V AC
Designation 2	Coil 230 V AC
Description	Contacteur TeSys LC1-D - 3P - AC-3 440V 38 A, Coil 230 V AC
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	85,00 mm
Width	45,00 mm
Depth	90,00 mm
Weight	0,38 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1K1:A1;A2	=LIN1+OMA1/1.7
	=LIN1+OMA1-1K1:1/L1;2/T1	=LIN1+OMA1/1.7
	=LIN1+OMA1-1K1:3/L2;4/T2	=LIN1+OMA1/1.7
	=LIN1+OMA1-1K1:5/L3;6/T3	=LIN1+OMA1/1.8
Panel layout	=LIN1+OMA1-1K1	=LIN1+OMA1/52.2

=LIN1+OMA1-3K2

Properties	
Trade	Electrical engineering
Function text (automatic)	POWER ENABLE M1
Technical characteristics	24 VDC

Part properties	
Parts: SE.RSL1AB4BD Variant: 1	
Part type	Component
Order number	RSL1AB4BD
Designation 1	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Description	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	28,00 mm
Width	5,00 mm
Depth	18,50 mm
Weight	0,01 kg
Parts: SE.RSLZVA1 Variant: 1	
Part type	Component
Order number	RSLZVA1
Designation 1	Screw socket equipped with LED and protection circuit, 12-24 V
Description	Screw socket equipped with LED and protection circuit, 12-24 V
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	78,60 mm
Width	6,20 mm
Depth	101,00 mm
Weight	0,02 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3K2:A1;A2	=LIN1+OMA1/5.4
	=LIN1+OMA1-3K2:13;14	=LIN1+OMA1/5.1
Panel layout	=LIN1+OMA1-3K2	=LIN1+OMA1/52.4

=LIN1+OMA1-3K3

Properties	
Trade	Electrical engineering
Function text (automatic)	POWER ENABLE M2
Technical characteristics	24 VDC

Part properties	
Parts: SE.RSL1AB4BD Variant: 1	
Part type	Component
Order number	RSL1AB4BD
Designation 1	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Description	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	28,00 mm
Width	5,00 mm
Depth	18,50 mm
Weight	0,01 kg
Parts: SE.RSLZVA1 Variant: 1	
Part type	Component
Order number	RSLZVA1
Designation 1	Screw socket equipped with LED and protection circuit, 12-24 V
Description	Screw socket equipped with LED and protection circuit, 12-24 V
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	78,60 mm
Width	6,20 mm
Depth	101,00 mm
Weight	0,02 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3K3:A1;A2	=LIN1+OMA1/5.5
	=LIN1+OMA1-3K3:13;14	=LIN1+OMA1/5.1
Panel layout	=LIN1+OMA1-3K3	=LIN1+OMA1/52.4

=LIN1+OMA1-3K4

Properties	
Trade	Electrical engineering
Function text (automatic)	POWER ENABLE M3
Technical characteristics	24 VDC

Part properties	
Parts: SE.RSL1AB4BD Variant: 1	
Part type	Component
Order number	RSL1AB4BD
Designation 1	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Description	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	28,00 mm
Width	5,00 mm
Depth	18,50 mm
Weight	0,01 kg
Parts: SE.RSLZVA1 Variant: 1	
Part type	Component
Order number	RSLZVA1
Designation 1	Screw socket equipped with LED and protection circuit, 12-24 V
Description	Screw socket equipped with LED and protection circuit, 12-24 V
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	78,60 mm
Width	6,20 mm
Depth	101,00 mm
Weight	0,02 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3K4:A1;A2	=LIN1+OMA1/5.6
	=LIN1+OMA1-3K4:13;14	=LIN1+OMA1/5.1
Panel layout	=LIN1+OMA1-3K4	=LIN1+OMA1/52.4

=LIN1+OMA1-3K5

Properties	
Trade	Electrical engineering
Function text (automatic)	POWER ENABLE M4
Technical characteristics	24 VDC

Part properties	
Parts: SE.RSL1AB4BD Variant: 1	
Part type	Component
Order number	RSL1AB4BD
Designation 1	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Description	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	28,00 mm
Width	5,00 mm
Depth	18,50 mm
Weight	0,01 kg
Parts: SE.RSLZVA1 Variant: 1	
Part type	Component
Order number	RSLZVA1
Designation 1	Screw socket equipped with LED and protection circuit, 12-24 V
Description	Screw socket equipped with LED and protection circuit, 12-24 V
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	78,60 mm
Width	6,20 mm
Depth	101,00 mm
Weight	0,02 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3K5:A1;A2	=LIN1+OMA1/5.7
	=LIN1+OMA1-3K5:13;14	=LIN1+OMA1/5.2
Panel layout	=LIN1+OMA1-3K5	=LIN1+OMA1/52.4

=LIN1+OMA1-3K6

Properties	
Trade	Electrical engineering
Function text (automatic)	POWER ENABLE M5
Technical characteristics	24 VDC

Part properties	
Parts: SE.RSL1AB4BD Variant: 1	
Part type	Component
Order number	RSL1AB4BD
Designation 1	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Description	Slim interface plug-in relay – Zelio RSL – 1 C/O standard – 24 V DC – 6 A
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	28,00 mm
Width	5,00 mm
Depth	18,50 mm
Weight	0,01 kg
Parts: SE.RSLZVA1 Variant: 1	
Part type	Component
Order number	RSLZVA1
Designation 1	Screw socket equipped with LED and protection circuit, 12-24 V
Description	Screw socket equipped with LED and protection circuit, 12-24 V
Manufacturer	Schneider Electric
Supplier	Schneider Electric
Height	78,60 mm
Width	6,20 mm
Depth	101,00 mm
Weight	0,02 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3K6:A1;A2	=LIN1+OMA1/5.8
	=LIN1+OMA1-3K6:13;14	=LIN1+OMA1/5.2
Panel layout	=LIN1+OMA1-3K6	=LIN1+OMA1/52.4

=LIN1+OMA1-15K7

Properties	
Trade	Electrical engineering

Part properties	
Parts: SIE.6AV2123-2GB03-0AX0 Variant: 1	
Part type	Component
Order number	6AV2123-2GB03-0AX0
Designation 1	SIMATIC HMI KTP700 BASIC
Designation 2	SIMATIC, HMI
Designation 3	Basic Panel
Description	SIMATIC HMI, KTP700 Basic, Basic Panel, Key/touch operation, 7" TFT display, 65536 colors, PROFINET interface, configurable from WinCC Basic V13/ STEP 7 Basic V13, contains open-source software, which is provided free of charge see enclosed CD
Manufacturer	Siemens
Supplier	Siemens
Height	158,00 mm
Width	214,00 mm
Depth	39,00 mm
Weight	0,98 kg

References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-15K7	=LIN1+OMA1/17.2
Single-line	=LIN1+OMA1-15K7	=LIN1+OMA1/16.7
Multi-line	=LIN1+OMA1-15K7:1	=LIN1+OMA1/17.5
	=LIN1+OMA1-15K7:2	=LIN1+OMA1/17.6
	=LIN1+OMA1-15K7	=LIN1+OMA1/17.6
Single-line	=LIN1+OMA1-15K7	=LIN1+OMA1/16.7

=LIN1+OMA1-26K8

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1123490000 Variant: 1	
Part type	Component
Order number	1123490000
Designation 1	Relay module
Designation 2	Relay module, 24 V DC +/-20 %, Green LED, Free-wheeling diode, Reverse polarity protection, 2 CO contact (AgNi) , 250 V AC, 8 A, Screw connection
Description	Assembly of plug-in relay and plug-in socket. Control circuit and load circuit are electrically isolated.
Manufacturer	Weidmueller
Height	89,60 mm
Width	12,80 mm
Depth	87,80 mm
Weight	0,06 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-26K8:+A1;-A2	=LIN1+OMA1/36.1
Panel layout	=LIN1+OMA1-26K8	=LIN1+OMA1/52.2

=LIN1+OMA1-11KF1

Properties

Trade Electrical engineering

Part properties

Parts: MURR.58171 Variant: 1

Part type	Component
Order number	58171
Designation 1	TREE 8TX METALL – UNMANAGED SWITCH – 8 PORTS
Description	Further information is available at http://www.murrelektronik.de
Height	90,00 mm
Width	45,00 mm
Depth	78,00 mm
Weight	0,27 kg

References

Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-11KF1	=LIN1+OMA1/14.0
	=LIN1+OMA1-11KF1:F.G.	=LIN1+OMA1/14.1
	=LIN1+OMA1-11KF1:V+	=LIN1+OMA1/14.1
	=LIN1+OMA1-11KF1:V-	=LIN1+OMA1/14.1
	=LIN1+OMA1-11KF1:V+	=LIN1+OMA1/14.0
	=LIN1+OMA1-11KF1:V-	=LIN1+OMA1/14.0
Single-line	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.1
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.2
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.3
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.4
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.5
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.6
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.7
	=LIN1+OMA1-11KF1:1	=LIN1+OMA1/14.9
Panel layout	=LIN1+OMA1-11KF1	=LIN1+OMA1/52.4

=LIN1+OMA1-2M1

Properties		
Trade	Electrical engineering	
Function text (automatic)	Hlajenje ele. omare	
Part properties		
Parts: SCHR.IUKNF1523A Variant: 1		
Part type	Component	
Order number	IUKNF1523A	
Designation 1	Ventilator s filtrom 230V, 11W, 109x109x62mm, IP54, 16m3/h	
Description	Ventilator s filtrom 230V, 11W, 109x109x62mm, IP54, 16m3/h	
Manufacturer	Schrack	
Supplier	Schrack	
Height	109,00 mm	
Width	109,00 mm	
Depth	62,00 mm	
Weight	0,55 kg	
References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-2M1	=LIN1+OMA1/2.1
Panel layout	=LIN1+OMA1-2M1	=LIN1+OMA1/51.7

=LIN1+OMA1-32M2

Properties		
Trade	Electrical engineering	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Panel layout	=LIN1+OMA1-32M2	=LIN1+OMA1/51

=LIN1+OMA1-33M3		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Panel layout	=LIN1+OMA1-33M3	=LIN1+OMA1/52.0

=LIN1+OMA1-N		
Properties		
Trade	Electrical engineering	
Function text (automatic)	N BusBar	
Part properties		
Parts: Variant:		
Part type	Undefined	
Parts: SCHR.IK021038I- Variant: 1		
Part type	Component	
Order number	IK021038I-	
Designation 1	N-sponka za 15 odvodov, montaža na DIN letev, izolirana	
Description	N-sponka za 15 odvodov, montaža na DIN letev, izolirana	
Manufacturer	Schrack	
Supplier	Schrack	
Height	20,00 mm	
Width	100,00 mm	
Depth	90,00 mm	
Weight	0,06 kg	
References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Multi-line	=LIN1+OMA1-N	=LIN1+OMA1/1.1
	=LIN1+OMA1-N:1	=LIN1+OMA1/1.1
	=LIN1+OMA1-N:2	=LIN1+OMA1/1.2
	=LIN1+OMA1-N:3	=LIN1+OMA1/1.4
	=LIN1+OMA1-N:4	=LIN1+OMA1/1.7
	=LIN1+OMA1-N:5	=LIN1+OMA1/2.2
	=LIN1+OMA1-N:7	=LIN1+OMA1/9.1
	=LIN1+OMA1-N:8	=LIN1+OMA1/9.2
	=LIN1+OMA1-N:9	=LIN1+OMA1/4.1

=LIN1+OMA1-PE		
Properties		
Trade	Electrical engineering	
Function text (automatic)	PE BusBar	
Part properties		
Parts: Variant:		
Part type	Undefined	
Parts: SCHR.IK021039I- Variant: 1		
Part type	Component	
Order number	IK021039I-	
Designation 1	PE-sponka za 15 odvodov, montaža na DIN letev, izolirana	
Description	PE-sponka za 15 odvodov, montaža na DIN letev, izolirana	
Manufacturer	Schrack	
Supplier	Schrack	
Height	20,00 mm	
Width	100,00 mm	
Depth	90,00 mm	
Weight	0,06 kg	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-PE	=LIN1+OMA1/1.2
	=LIN1+OMA1-PE:1	=LIN1+OMA1/1.1
	=LIN1+OMA1-PE:2	=LIN1+OMA1/1.2
	=LIN1+OMA1-PE:3	=LIN1+OMA1/1.3
	=LIN1+OMA1-PE:4	=LIN1+OMA1/1.3
	=LIN1+OMA1-PE:5	=LIN1+OMA1/1.3
	=LIN1+OMA1-PE:6	=LIN1+OMA1/1.4
	=LIN1+OMA1-PE:7	=LIN1+OMA1/1.4
	=LIN1+OMA1-PE:8	=LIN1+OMA1/2.2
	=LIN1+OMA1-PE:9	=LIN1+OMA1/3.1
	=LIN1+OMA1-PE:10	=LIN1+OMA1/4.1
	=LIN1+OMA1-PE:11	=LIN1+OMA1/9.1
	=LIN1+OMA1-PE:12	=LIN1+OMA1/9.2
=LIN1+OMA1-PE:13	=LIN1+OMA1/14.1	

=LIN1+OMA1-2Q1

Properties	
Trade	Electrical engineering
Technical characteristics	0.5A

Part properties	
Parts: SCHR.BE082882-- Variant: 1	
Part type	Component
Order number	BE082882--
Designation 1	Pomožni kontakt MZS BE5, 1Z in 1O, čelna vgradnja
Description	Pomožni kontakt MZS BE5, 1Z in 1O, čelna vgradnja
Manufacturer	Schrack
Supplier	Schrack
Height	68,00 mm
Width	70,00 mm
Depth	76,00 mm
Weight	0,02 kg
Parts: SCHR.BE501000-- Variant: 1	
Part type	Component
Order number	BE501000--
Designation 1	Motorsko zaščitno stikalo BE5 0,63-1,0A / 3P
Description	Motorsko zaščitno stikalo BE5 0,63-1,0A / 3P Velikost BE5, Naprava Razred 10
Manufacturer	Schrack
Supplier	Schrack
Height	93,00 mm
Width	45,00 mm
Depth	76,00 mm
Weight	0,30 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-2Q1:2;1;4;3;6;5	=LIN1+OMA1/2.1
Panel layout	=LIN1+OMA1-2Q1	=LIN1+OMA1/52.2

=LIN1+OMA1-3Q2

Properties	
Trade	Electrical engineering
Technical characteristics	0.5A

Part properties	
Parts: SCHR.BE082882-- Variant: 1	
Part type	Component
Order number	BE082882--
Designation 1	Pomožni kontakt MZS BE5, 1Z in 1O, čelna vgradnja
Description	Pomožni kontakt MZS BE5, 1Z in 1O, čelna vgradnja
Manufacturer	Schrack
Supplier	Schrack
Height	68,00 mm
Width	70,00 mm
Depth	76,00 mm
Weight	0,02 kg
Parts: SCHR.BE501000-- Variant: 1	
Part type	Component
Order number	BE501000--
Designation 1	Motorsko zaščitno stikalo BE5 0,63-1,0A / 3P
Description	Motorsko zaščitno stikalo BE5 0,63-1,0A / 3P Velikost BE5, Naprava Razred 10
Manufacturer	Schrack
Supplier	Schrack
Height	93,00 mm
Width	45,00 mm
Depth	76,00 mm
Weight	0,30 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3Q2:2;1;4;3;6;5	=LIN1+OMA1/3.1
Panel layout	=LIN1+OMA1-3Q2	=LIN1+OMA1/52.1

=LIN1+OMA1-24R1

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R1:x1;x2	=LIN1+OMA1/30.1

=LIN1+OMA1-24R2

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R2:x1;x2	=LIN1+OMA1/30.4

=LIN1+OMA1-24R3

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R3:x1;x2	=LIN1+OMA1/30.6

=LIN1+OMA1-24R4

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R4:x1;x2	=LIN1+OMA1/30.8

=LIN1+OMA1-24R5

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R5:x1;x2	=LIN1+OMA1/31.1

=LIN1+OMA1-24R6

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R6:x1;x2	=LIN1+OMA1/31.4

=LIN1+OMA1-24R7

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R7:x1;x2	=LIN1+OMA1/31.6

=LIN1+OMA1-24R8

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R8:x1;x2	=LIN1+OMA1/31.8

=LIN1+OMA1-24R9

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R9:x1;x2	=LIN1+OMA1/32.1

=LIN1+OMA1-24R10

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R10:x1;x2	=LIN1+OMA1/32.4

=LIN1+OMA1-24R11

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R11:x1;x2	=LIN1+OMA1/32.6

=LIN1+OMA1-24R12

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R12:x1;x2	=LIN1+OMA1/32.8

=LIN1+OMA1-24R13

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R13:x1;x2	=LIN1+OMA1/33.1

=LIN1+OMA1-24R14

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R14:x1;x2	=LIN1+OMA1/33.4

=LIN1+OMA1-24R15

Properties		
Trade	Electrical engineering	
Technical characteristics	4.7k 1/4W	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24R15:x1;x2	=LIN1+OMA1/33.6

=LIN1+OMA1-1S1

Properties	
Trade	Electrical engineering
Function text (automatic)	Glavno stikalo 63A

Part properties	
Parts: ETN.P3-63/EA/SVB-SW/N Variant: 1	
Part type	Component
Order number	012771
Designation 1	Main switch, 3 pole + N, 63 A, STOP function, Lockable in the 0 (Off) position, flush mounting
Description	Main switch/switch-disconnector on-off according to IEC/EN 60947-3, 690V/63A, degree of protection Front IP65, handle black with black locking collar lockable with 3 padlocks, switch-disconnectors P3 have a very compact and robust design. The manual drive act directly to the connection of the contacts. The contacts are forced open when switching off. Design general: insulating material-surface mounting enclosure, flush mounting, rear mounting, IVS service distribution board mounting
Manufacturer	Eaton
Supplier	Eaton
Height	102,00 mm
Width	90,00 mm
Depth	128,00 mm
Weight	0,50 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1S1:1;2	=LIN1+OMA1/1.1
	=LIN1+OMA1-1S1:3;4	=LIN1+OMA1/1.1
	=LIN1+OMA1-1S1:5;6	=LIN1+OMA1/1.1
	=LIN1+OMA1-1S1:N1;N2	=LIN1+OMA1/1.1
Panel layout	=LIN1+OMA1-1S1	=LIN1+OMA1/51.7

=LIN1+OMA1-2S2

Properties	
Trade	Electrical engineering
Function text (automatic)	Termostat 0-60
Technical characteristics	tERMOSTAT

Part properties	
Parts: SCHR.IUK08566-- Variant: 1	
Part type	Component
Order number	IUK08566--
Designation 1	Termostat za ventilator, 0 – 60° C, 1 delovni kontakt
Description	Termostat za ventilator, 0 – 60° C, 1 delovni kontakt
Manufacturer	Schrack
Supplier	Schrack
Height	64,00 mm
Width	46,00 mm
Depth	37,00 mm
Weight	0,05 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-2S2:1;2	=LIN1+OMA1/2.1
Panel layout	=LIN1+OMA1-2S2	=LIN1+OMA1/52.1

=LIN1+OMA1-29T1

Properties	
Trade	Electrical engineering

Part properties	
Parts: HBM.BM40IE Variant: 1	
Part type	Component
Order number	1-BM40IE
Designation 1	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP
Description	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP Four individually configurable strain gauge full or half bridges (4.8kHz TF). Potentiometric sensors, Pt100 voltage / current input, 4 TEDS (0-wire) sensor detection 2 x RJ45 connector
Height	132,60 mm
Width	25,00 mm
Depth	111,70 mm
Weight	0,00 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-29T1	=LIN1+OMA1/45.2
Single-line	=LIN1+OMA1-29T1:1-8	=LIN1+OMA1/45.5
Multi-line	=LIN1+OMA1-29T1:0I	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:0V	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:24V	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:CxA	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:CxB	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:DI1	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:DI2	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:DO1	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:DO2	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:PE	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:Sync	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:X	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:AO	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:AO_GND	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:PE	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:1	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:2	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:2´	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:3	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:3´	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:4	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:AI	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:I IN	=LIN1+OMA1/45.6
	=LIN1+OMA1-29T1:PE	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T1:Pt100	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T1:S	=LIN1+OMA1/45.4

=LIN1+OMA1-29T1

Multi-line	=LIN1+OMA1-29T1:TEDS	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T1:U IN	=LIN1+OMA1/45.6
Single-line	=LIN1+OMA1-29T1:1-8	=LIN1+OMA1/45.6
	=LIN1+OMA1-29T1:1-8	=LIN1+OMA1/45.7
Panel layout	=LIN1+OMA1-29T1	=LIN1+OMA1/52.3

=LIN1+OMA1-29T2

Properties	
Trade	Electrical engineering

Part properties	
Parts: HBM.BM40IE Variant: 1	
Part type	Component
Order number	1-BM40IE
Designation 1	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP
Description	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP Four individually configurable strain gauge full or half bridges (4.8kHz TF). Potentiometric sensors, Pt100 voltage / current input, 4 TEDS (0-wire) sensor detection 2 x RJ45 connector
Height	132,60 mm
Width	25,00 mm
Depth	111,70 mm
Weight	0,00 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-29T2	=LIN1+OMA1/45.2
Single-line	=LIN1+OMA1-29T2:2	=LIN1+OMA1/45.5
Multi-line	=LIN1+OMA1-29T2:0I	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:0V	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:24V	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:CxA	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:CxB	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:DI1	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:DI2	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:DO1	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:DO2	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:PE	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:Sync	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:X	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:AO	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:AO_GND	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:PE	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:1	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:2	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:2´	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:3	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:3´	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:4	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:AI	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:I IN	=LIN1+OMA1/45.6
	=LIN1+OMA1-29T2:PE	=LIN1+OMA1/45.5
	=LIN1+OMA1-29T2:Pt100	=LIN1+OMA1/45.3
	=LIN1+OMA1-29T2:S	=LIN1+OMA1/45.4

=LIN1+OMA1-29T2

Multi-line	=LIN1+OMA1-29T2:TEDS	=LIN1+OMA1/45.4
	=LIN1+OMA1-29T2:U IN	=LIN1+OMA1/45.6
Single-line	=LIN1+OMA1-29T2:2	=LIN1+OMA1/45.6
	=LIN1+OMA1-29T2:2	=LIN1+OMA1/45.7
Panel layout	=LIN1+OMA1-29T2	=LIN1+OMA1/52.3

=LIN1+OMA1-29T3

Properties	
Trade	Electrical engineering

Part properties	
Parts: HBM.BM40IE Variant: 1	
Part type	Component
Order number	1-BM40IE
Designation 1	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP
Description	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP Four individually configurable strain gauge full or half bridges (4.8kHz TF). Potentiometric sensors, Pt100 voltage / current input, 4 TEDS (0-wire) sensor detection 2 x RJ45 connector
Height	132,60 mm
Width	25,00 mm
Depth	111,70 mm
Weight	0,00 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-29T3	=LIN1+OMA1/46.2
Single-line	=LIN1+OMA1-29T3:2	=LIN1+OMA1/46.5
Multi-line	=LIN1+OMA1-29T3:0I	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:0V	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:24V	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:CxA	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:CxB	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:DI1	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:DI2	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:DO1	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:DO2	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:PE	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:Sync	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:X	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:AO	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:AO_GND	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:PE	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:1	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:2	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:2´	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:3	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:3´	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:4	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:AI	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:I IN	=LIN1+OMA1/46.6
	=LIN1+OMA1-29T3:PE	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T3:Pt100	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T3:S	=LIN1+OMA1/46.4

=LIN1+OMA1-29T3

Multi-line	=LIN1+OMA1-29T3:TEDS	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T3:U IN	=LIN1+OMA1/46.6
Single-line	=LIN1+OMA1-29T3:2	=LIN1+OMA1/46.6
	=LIN1+OMA1-29T3:2	=LIN1+OMA1/46.7
Panel layout	=LIN1+OMA1-29T3	=LIN1+OMA1/52.4

=LIN1+OMA1-29T4

Properties	
Trade	Electrical engineering

Part properties	
Parts: HBM.BM40IE Variant: 1	
Part type	Component
Order number	1-BM40IE
Designation 1	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP
Description	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP Four individually configurable strain gauge full or half bridges (4.8kHz TF). Potentiometric sensors, Pt100 voltage / current input, 4 TEDS (0-wire) sensor detection 2 x RJ45 connector
Height	132,60 mm
Width	25,00 mm
Depth	111,70 mm
Weight	0,00 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-29T4	=LIN1+OMA1/46.2
Single-line	=LIN1+OMA1-29T4:2	=LIN1+OMA1/46.5
Multi-line	=LIN1+OMA1-29T4:0I	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:0V	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:24V	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:CxA	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:CxB	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:DI1	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:DI2	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:DO1	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:DO2	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:PE	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:Sync	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:X	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:AO	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:AO_GND	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:PE	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:1	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:2	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:2´	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:3	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:3´	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:4	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:AI	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:I IN	=LIN1+OMA1/46.6
	=LIN1+OMA1-29T4:PE	=LIN1+OMA1/46.5
	=LIN1+OMA1-29T4:Pt100	=LIN1+OMA1/46.3
	=LIN1+OMA1-29T4:S	=LIN1+OMA1/46.4

=LIN1+OMA1-29T4

Multi-line	=LIN1+OMA1-29T4:TEDS	=LIN1+OMA1/46.4
	=LIN1+OMA1-29T4:U IN	=LIN1+OMA1/46.6
Single-line	=LIN1+OMA1-29T4:2	=LIN1+OMA1/46.6
	=LIN1+OMA1-29T4:2	=LIN1+OMA1/46.7
Panel layout	=LIN1+OMA1-29T4	=LIN1+OMA1/52.4

=LIN1+OMA1-29T5

Properties	
Trade	Electrical engineering

Part properties	
Parts: HBM.BM40IE Variant: 1	
Part type	Component
Order number	1-BM40IE
Designation 1	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP
Description	BM40IE measuring amplifier PROFINET, EtherCAT, Ethernet/IP Four individually configurable strain gauge full or half bridges (4.8kHz TF). Potentiometric sensors, Pt100 voltage / current input, 4 TEDS (0-wire) sensor detection 2 x RJ45 connector
Height	132,60 mm
Width	25,00 mm
Depth	111,70 mm
Weight	0,00 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-29T5	=LIN1+OMA1/47.2
Single-line	=LIN1+OMA1-29T5:2	=LIN1+OMA1/47.5
Multi-line	=LIN1+OMA1-29T5:0I	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:0V	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:24V	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:CxA	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:CxB	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:DI1	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:DI2	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:DO1	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:DO2	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:PE	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:Sync	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:X	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:AO	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:AO_GND	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:PE	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:1	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:2	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:2´	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:3	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:3´	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:4	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:AI	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:I IN	=LIN1+OMA1/47.6
	=LIN1+OMA1-29T5:PE	=LIN1+OMA1/47.5
	=LIN1+OMA1-29T5:Pt100	=LIN1+OMA1/47.3
	=LIN1+OMA1-29T5:S	=LIN1+OMA1/47.4

=LIN1+OMA1-29T5

Multi-line	=LIN1+OMA1-29T5:TEDS	=LIN1+OMA1/47.4
	=LIN1+OMA1-29T5:U IN	=LIN1+OMA1/47.6
Single-line	=LIN1+OMA1-29T5:2	=LIN1+OMA1/47.6
	=LIN1+OMA1-29T5:2	=LIN1+OMA1/47.7
Panel layout	=LIN1+OMA1-29T5	=LIN1+OMA1/52.4

=LIN1+OMA1-3TB1

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1469530000 Variant: 1	
Part type	Component
Order number	1469530000
Designation 1	Continuous current supply
Designation 2	Power supply, 120 W, 5 A at 55 ° C
Description	Power supply unit for providing DC voltage.
Manufacturer	Weidmueller
Height	125,00 mm
Width	40,00 mm
Depth	109,00 mm
Weight	0,68 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3TB1	=LIN1+OMA1/3.0
	=LIN1+OMA1-3TB1:13	=LIN1+OMA1/3.2
	=LIN1+OMA1-3TB1:14	=LIN1+OMA1/3.2
	=LIN1+OMA1-3TB1:+	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:+	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:-	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:-	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:L1(+)	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:L2(-)	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:L3	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1:PE	=LIN1+OMA1/3.1
	=LIN1+OMA1-3TB1	=LIN1+OMA1/52.2
Panel layout	=LIN1+OMA1-3TB1	=LIN1+OMA1/52.2

=LIN1+OMA1-3TB2

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1469590000 Variant: 1	
Part type	Component
Order number	1469590000
Designation 1	Continuous current supply
Designation 2	Power supply, 240 W, 5 A at 55 ° C
Description	Power supply unit for providing DC voltage.
Manufacturer	Weidmueller
Height	125,00 mm
Width	60,00 mm
Depth	109,00 mm
Weight	1,01 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3TB2	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:13	=LIN1+OMA1/4.2
	=LIN1+OMA1-3TB2:14	=LIN1+OMA1/4.2
	=LIN1+OMA1-3TB2:+	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:+	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:-	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:-	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:L(+)	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:N(-)	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2:PE	=LIN1+OMA1/4.1
	=LIN1+OMA1-3TB2	=LIN1+OMA1/52.3
Panel layout	=LIN1+OMA1-3TB2	=LIN1+OMA1/52.3

=LIN1+OMA1-1U1

Properties	
Trade	Electrical engineering
Part properties	
Parts: SCH.UR6P3052 Variant: 1	
Part type	Component
Order number	UR6P3052
Designation 1	UR6P3052 Rele, nadzor zaporedja faz, 3-fazni, 2 preklopna kontakta
Description	UR6P3052 – Rele, nadzor zaporedja faz, 3-fazni, 2 preklopna kontakta
Manufacturer	Schrack
Supplier	Schrack
Height	129,00 mm
Width	29,00 mm
Depth	92,00 mm
Weight	0,00 kg

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1U1	=LIN1+OMA1/1.3
	=LIN1+OMA1-1U1:L1	=LIN1+OMA1/1.3
	=LIN1+OMA1-1U1:L2	=LIN1+OMA1/1.3
	=LIN1+OMA1-1U1:L3	=LIN1+OMA1/1.4
	=LIN1+OMA1-1U1:N	=LIN1+OMA1/1.4
	=LIN1+OMA1-1U1:PE	=LIN1+OMA1/1.4
Panel layout	=LIN1+OMA1-1U1	=LIN1+OMA1/52.2

=LIN1+OMA1-29U2

Properties	
Trade	Electrical engineering
Part properties	
Parts: HBM.ClipX Variant: 1	
Part type	Component
Height	0,00 mm
Width	0,00 mm
Depth	0,00 mm
Weight	0,00 kg
References	
Parts list	Parts list
Summarized parts list	Summarized parts list
Multi-line	=LIN1+OMA1-29U2 =LIN1+OMA1/45.8

=LIN1+OMA1-29U2-29X1		
Properties		
Trade	Electrical engineering	
References		
Multi-line	=LIN1+OMA1-29U2-29X1:1	=LIN1+OMA1/45.8
	=LIN1+OMA1-29U2-29X1:2	=LIN1+OMA1/45.8

=LIN1+OMA1-29U2-29X2		
Properties		
Trade	Electrical engineering	
References		
Multi-line	=LIN1+OMA1-29U2-29X2:2	=LIN1+OMA1/45.8
	=LIN1+OMA1-29U2-29X2:X4	=LIN1+OMA1/45.9

=LIN1+OMA1-31U3		
Properties		
Trade	Electrical engineering	
Function text (automatic)	router	
Technical characteristics	Teltonika router	
Part properties		
Parts: Teltonika.RUT241 Variant: 1		
Part type	Component	
Height	0,00 mm	
Width	0,00 mm	
Depth	0,00 mm	
Weight	0,00 kg	
References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-31U3	=LIN1+OMA1/50.2
Panel layout	=LIN1+OMA1-31U3	=LIN1+OMA1/51.7

=LIN1+OMA1-31U3-LAN		
Properties		
Trade	Electrical engineering	
References		
Multi-line	=LIN1+OMA1-31U3-LAN:2	=LIN1+OMA1/50.3

=LIN1+OMA1-31U3-WAN		
Properties		
Trade	Electrical engineering	
References		
Multi-line	=LIN1+OMA1-31U3-WAN:1	=LIN1+OMA1/50.2

=LIN1+OMA1-3V1		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: WEI.1275100000 Variant: 1		
Part type	Component	
Order number	1275100000	
Designation 1	Solid-state relais	
Designation 2	Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-FET), 3...33 V DC, 4 A, Screw connection	
Description	Solid-state relay for switching and amplifying digital signals. The relay operates wear-free and noiselessly. Control circuit and load circuit are electrically isolated.	
Manufacturer	Weidmueller	
Height	74,43 mm	
Width	6,10 mm	
Depth	55,00 mm	
Weight	0,02 kg	
Parts: WEI.8950930000 Variant: 1		
Part type	Undefined	
References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3V1:A1;A2	=LIN1+OMA1/4.2
Panel layout	=LIN1+OMA1-3V1	=LIN1+OMA1/52.4

=LIN1+OMA1-3V2

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1275100000 Variant: 1	
Part type	Component
Order number	1275100000
Designation 1	Solid-state relais
Designation 2	Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-FET), 3...33 V DC, 4 A, Screw connection
Description	Solid-state relay for switching and amplifying digital signals. The relay operates wear-free and noiselessly. Control circuit and load circuit are electrically isolated.
Manufacturer	Weidmueller
Height	74,43 mm
Width	6,10 mm
Depth	55,00 mm
Weight	0,02 kg
Parts: WEI.8950930000 Variant: 1	
Part type	Undefined

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3V2:A1;A2	=LIN1+OMA1/4.2
Panel layout	=LIN1+OMA1-3V2	=LIN1+OMA1/52.4

=LIN1+OMA1-3V3

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1275100000 Variant: 1	
Part type	Component
Order number	1275100000
Designation 1	Solid-state relais
Designation 2	Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-FET), 3...33 V DC, 4 A, Screw connection
Description	Solid-state relay for switching and amplifying digital signals. The relay operates wear-free and noiselessly. Control circuit and load circuit are electrically isolated.
Manufacturer	Weidmueller
Height	74,43 mm
Width	6,10 mm
Depth	55,00 mm
Weight	0,02 kg
Parts: WEI.8950930000 Variant: 1	
Part type	Undefined

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3V3:A1;A2	=LIN1+OMA1/4.2
Panel layout	=LIN1+OMA1-3V3	=LIN1+OMA1/52.4

=LIN1+OMA1-3V4

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1275100000 Variant: 1	
Part type	Component
Order number	1275100000
Designation 1	Solid-state relais
Designation 2	Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-FET), 3...33 V DC, 4 A, Screw connection
Description	Solid-state relay for switching and amplifying digital signals. The relay operates wear-free and noiselessly. Control circuit and load circuit are electrically isolated.
Manufacturer	Weidmueller
Height	74,43 mm
Width	6,10 mm
Depth	55,00 mm
Weight	0,02 kg
Parts: WEI.8950930000 Variant: 1	
Part type	Undefined

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3V4:A1;A2	=LIN1+OMA1/4.3
Panel layout	=LIN1+OMA1-3V4	=LIN1+OMA1/52.4

=LIN1+OMA1-3V5

Properties	
Trade	Electrical engineering

Part properties	
Parts: WEI.1275100000 Variant: 1	
Part type	Component
Order number	1275100000
Designation 1	Solid-state relais
Designation 2	Solid-state relais, 24 V DC +/-20 %, Varistor, Reverse polarity protection , 1 NO contact (MOS-FET), 3...33 V DC, 4 A, Screw connection
Description	Solid-state relay for switching and amplifying digital signals. The relay operates wear-free and noiselessly. Control circuit and load circuit are electrically isolated.
Manufacturer	Weidmueller
Height	74,43 mm
Width	6,10 mm
Depth	55,00 mm
Weight	0,02 kg
Parts: WEI.8950930000 Variant: 1	
Part type	Undefined

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3V5:A1;A2	=LIN1+OMA1/4.3
Panel layout	=LIN1+OMA1-3V5	=LIN1+OMA1/52.4

=LIN1+OMA1-24VDC

Properties	
Trade	Electrical engineering
Function text (automatic)	24V BusBar

Part properties	
Parts: Variant:	
Part type	Undefined
Parts: SCHR.IK021039I- Variant: 1	
Part type	Component
Order number	IK021039I-
Designation 1	PE-sponka za 15 odvodov, montaža na DIN letev, izolirana
Description	PE-sponka za 15 odvodov, montaža na DIN letev, izolirana
Manufacturer	Schrack
Supplier	Schrack
Height	20,00 mm
Width	100,00 mm
Depth	90,00 mm
Weight	0,06 kg

References		
Parts list	Parts list	
Multi-line	=LIN1+OMA1-24VDC	=LIN1+OMA1/30.1
	=LIN1+OMA1-24VDC:1	=LIN1+OMA1/30.1
	=LIN1+OMA1-24VDC:2	=LIN1+OMA1/30.4
	=LIN1+OMA1-24VDC:3	=LIN1+OMA1/30.6
	=LIN1+OMA1-24VDC:4	=LIN1+OMA1/30.8
	=LIN1+OMA1-24VDC:5	=LIN1+OMA1/31.1
	=LIN1+OMA1-24VDC:6	=LIN1+OMA1/31.4
	=LIN1+OMA1-24VDC:7	=LIN1+OMA1/31.6
	=LIN1+OMA1-24VDC:8	=LIN1+OMA1/31.8
	=LIN1+OMA1-24VDC:9	=LIN1+OMA1/32.1
	=LIN1+OMA1-24VDC:10	=LIN1+OMA1/32.4
	=LIN1+OMA1-24VDC:11	=LIN1+OMA1/32.6
	=LIN1+OMA1-24VDC:12	=LIN1+OMA1/32.8
	=LIN1+OMA1-24VDC:13	=LIN1+OMA1/33.1
	=LIN1+OMA1-24VDC:14	=LIN1+OMA1/33.4
	=LIN1+OMA1-24VDC:15	=LIN1+OMA1/33.6

=LIN1+OMA1-1X1

Properties

Trade	Electrical engineering
Function text (automatic)	Dovodne sponke

Part properties

Parts: Variant:

Part type	Undefined
-----------	-----------

Parts: WEI.1010000000 Variant: 1

Part type	Component
Order number	1010000000
Designation 1	PE terminal
Designation 2	PE terminal, Screw connection, 2.5 mm², 800 V, Number of connections: 2, Number of levels: 1, Green/yellow
Description	Terminal block for connecting protective earth conductors to the mounting base (earth). Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,50 mm
Weight	0,02 kg

Parts: WEI.1020000000 Variant: 1

Part type	Component
Order number	1020000000
Designation 1	Feed-through terminal block
Designation 2	Feed-through terminal block, Screw connection, 2.5 mm², 800 V, 24 A, Number of connections: 2
Description	Terminal block for connecting or joining conductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Supplier	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,25 mm
Weight	0,01 kg

Parts: WEI.1061200000 Variant: 1

Part type	Component
Order number	1061200000
Designation 1	End bracket
Designation 2	End bracket, Wemid, dark beige, Rail: TS 35, when screwed in
Description	The end bracket ensures a permanently secure fit on the mounting rail and prevents slipping. The end bracket has marking options for group markers and the option of receiving test plugs.
Manufacturer	Weidmueller
Height	56,10 mm
Width	8,00 mm
Depth	46,50 mm
Weight	0,01 kg

=LIN1+OMA1-1X1

References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-1X1	=LIN1+OMA1/1.0
	=LIN1+OMA1-1X1:1:1;2	=LIN1+OMA1/1.1
	=LIN1+OMA1-1X1:2:1;2	=LIN1+OMA1/1.1
	=LIN1+OMA1-1X1:3:1;2	=LIN1+OMA1/1.1
	=LIN1+OMA1-1X1:4:1;2	=LIN1+OMA1/1.1
	=LIN1+OMA1-1X1:PE:1;2	=LIN1+OMA1/1.1
	=LIN1+OMA1-1X1	=LIN1+OMA1/52.0
Panel layout	=LIN1+OMA1-1X1	=LIN1+OMA1/52.0

=LIN1+OMA1-2X2

Properties

Trade	Electrical engineering
Function text (automatic)	Hlajenje ele. omare

Part properties

Parts: Variant:

Part type	Undefined
-----------	-----------

Parts: WEI.1010000000 Variant: 1

Part type	Component
Order number	1010000000
Designation 1	PE terminal
Designation 2	PE terminal, Screw connection, 2.5 mm², 800 V, Number of connections: 2, Number of levels: 1, Green/yellow
Description	Terminal block for connecting protective earth conductors to the mounting base (earth). Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,50 mm
Weight	0,02 kg

Parts: WEI.1020000000 Variant: 1

Part type	Component
Order number	1020000000
Designation 1	Feed-through terminal block
Designation 2	Feed-through terminal block, Screw connection, 2.5 mm², 800 V, 24 A, Number of connections: 2
Description	Terminal block for connecting or joining conductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,25 mm
Weight	0,01 kg

Parts: WEI.1020080000 Variant: 1

Part type	Component
Order number	1020080000
Designation 1	Feed-through terminal block
Designation 2	Feed-through terminal block, Screw connection, 2.5 mm², 800 V, 24 A, Number of connections: 2
Description	Terminal block for connecting or joining conductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,25 mm
Weight	0,01 kg

=LIN1+OMA1-2X2

References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-2X2	=LIN1+OMA1/2.0
	=LIN1+OMA1-2X2:1:1;2	=LIN1+OMA1/2.1
	=LIN1+OMA1-2X2:N2:1;2	=LIN1+OMA1/2.2
	=LIN1+OMA1-2X2:PE:1;2	=LIN1+OMA1/2.2
	=LIN1+OMA1-2X2	=LIN1+OMA1/52.1
Panel layout		

=LIN1+OMA1-3X3

Properties	
Trade	Electrical engineering
Function text (automatic)	48VDC

Part properties	
Parts: Variant:	
Part type	Undefined
Parts: WEI.1020000000 Variant: 1	
Part type	Component
Order number	1020000000
Designation 1	Feed-through terminal block
Designation 2	Feed-through terminal block, Screw connection, 2.5 mm², 800 V, 24 A, Number of connections: 2
Description	Terminal block for connecting or joining conductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,25 mm
Weight	0,01 kg

References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-3X3	=LIN1+OMA1/4.6
	=LIN1+OMA1-3X3:1:1;2	=LIN1+OMA1/4.7
	=LIN1+OMA1-3X3:6:1;2	=LIN1+OMA1/4.7
	=LIN1+OMA1-3X3:7:1;2	=LIN1+OMA1/4.7
	=LIN1+OMA1-3X3:8:1;2	=LIN1+OMA1/4.7
	=LIN1+OMA1-3X3:9:1;2	=LIN1+OMA1/4.8
	=LIN1+OMA1-3X3:10:1;2	=LIN1+OMA1/4.8
	=LIN1+OMA1-3X3:11:1;2	=LIN1+OMA1/4.8
	=LIN1+OMA1-3X3:12:1;2	=LIN1+OMA1/4.8
Panel layout	=LIN1+OMA1-3X3	=LIN1+OMA1/52.2

=LIN1+OMA1-3X3_1

Properties	
Trade	Electrical engineering

Part properties	
Parts: Variant:	
Part type	Undefined

References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Multi-line	=LIN1+OMA1-3X3_1:1	=LIN1+OMA1/6.1
	=LIN1+OMA1-3X3_1:2	=LIN1+OMA1/6.2
	=LIN1+OMA1-3X3_1:3	=LIN1+OMA1/6.4
	=LIN1+OMA1-3X3_1:4	=LIN1+OMA1/6.6
	=LIN1+OMA1-3X3_1:5	=LIN1+OMA1/6.7

=LIN1+OMA1-4X4

Properties	
Trade	Electrical engineering
Function text (automatic)	24V DC

Part properties	
Parts: Variant:	
Part type	Undefined
Parts: WEI.1020000000 Variant: 1	
Part type	Component
Order number	1020000000
Designation 1	Feed-through terminal block
Designation 2	Feed-through terminal block, Screw connection, 2.5 mm², 800 V, 24 A, Number of connections: 2
Description	Terminal block for connecting or joining conductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,25 mm
Weight	0,01 kg

References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-4X4	=LIN1+OMA1/7.0
	=LIN1+OMA1-4X4:1:1;2	=LIN1+OMA1/7.1
	=LIN1+OMA1-4X4:2:1;2	=LIN1+OMA1/7.1
	=LIN1+OMA1-4X4:3:1;2	=LIN1+OMA1/7.1
	=LIN1+OMA1-4X4:4:1;2	=LIN1+OMA1/7.2
	=LIN1+OMA1-4X4:5:1;2	=LIN1+OMA1/7.2
	=LIN1+OMA1-4X4	=LIN1+OMA1/52.1
Panel layout	=LIN1+OMA1-4X4	=LIN1+OMA1/52.1

=LIN1+OMA1-5X5

Properties	
Trade	Electrical engineering
Function text (automatic)	0V DC

Part properties	
Parts: Variant:	
Part type	Undefined
Parts: WEI.1020000000 Variant: 1	
Part type	Component
Order number	1020000000
Designation 1	Feed-through terminal block
Designation 2	Feed-through terminal block, Screw connection, 2.5 mm², 80 0 V, 24 A, Number of connections: 2
Description	Terminal block for connecting or joining conductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensures top conductivity.
Manufacturer	Weidmueller
Height	60,00 mm
Width	5,10 mm
Depth	46,25 mm
Weight	0,01 kg

References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-5X5	=LIN1+OMA1/8.0
	=LIN1+OMA1-5X5:1:1;2	=LIN1+OMA1/8.1
	=LIN1+OMA1-5X5:2:1;2	=LIN1+OMA1/8.1
	=LIN1+OMA1-5X5:3:1;2	=LIN1+OMA1/8.1
	=LIN1+OMA1-5X5:4:1;2	=LIN1+OMA1/8.2
	=LIN1+OMA1-5X5:5:1;2	=LIN1+OMA1/8.2
	=LIN1+OMA1-5X5:6:1;2	=LIN1+OMA1/8.2
	=LIN1+OMA1-5X5:7:1;2	=LIN1+OMA1/8.2
	=LIN1+OMA1-5X5:8:1;2	=LIN1+OMA1/8.2
	=LIN1+OMA1-5X5:9:1;2	=LIN1+OMA1/8.3
	=LIN1+OMA1-5X5:10:1;2	=LIN1+OMA1/8.3
	=LIN1+OMA1-5X5:11:1;2	=LIN1+OMA1/8.3
	=LIN1+OMA1-5X5	=LIN1+OMA1/52.2
Panel layout	=LIN1+OMA1-5X5	=LIN1+OMA1/52.2

=LIN1+OMA1-6X6

Properties	
Trade	Electrical engineering

Part properties	
Parts: Variant:	
Part type	Undefined
Parts: PXC.3208511 Variant: 1	
Part type	Component
Order number	3208511
Designation 1	Double-level terminal block
Description	Double-level terminal block, Cross section: 0.14 mm² – 1.5 mm², AWG: 26 – 14, Connection type: Push-in connection, Width: 3.5 mm, Color: gray, Mounting type: NS 35/7,5, NS 35/15
Manufacturer	Phoenix Contact
Supplier	Phoenix Contact
Height	65,40 mm
Width	3,50 mm
Depth	41,10 mm
Weight	0,01 kg

References		
Parts list	Parts list	
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-6X6:1:1;4	=LIN1+OMA1/10.1
	=LIN1+OMA1-6X6:2:2;3	=LIN1+OMA1/10.1
	=LIN1+OMA1-6X6:3:2;3	=LIN1+OMA1/10.1
	=LIN1+OMA1-6X6:4:1;4	=LIN1+OMA1/10.1
	=LIN1+OMA1-6X6:5:2;3	=LIN1+OMA1/10.2
	=LIN1+OMA1-6X6:6:1;4	=LIN1+OMA1/10.2
	=LIN1+OMA1-6X6:7:2;3	=LIN1+OMA1/10.2
	=LIN1+OMA1-6X6:8:1;4	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:9:2;3	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:10:1;4	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:11:2;3	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:12:1;4	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:13:2;3	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:14:1;4	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:15:2;3	=LIN1+OMA1/10.3
	=LIN1+OMA1-6X6:16:1;4	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:17:2;3	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:18:1;4	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:19:2;3	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:20:1;4	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:21:2;3	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:22:1;4	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:23:2;3	=LIN1+OMA1/10.5
	=LIN1+OMA1-6X6:24:1;4	=LIN1+OMA1/10.6

=LIN1+OMA1-6X6

Multi-line

=LIN1+OMA1-6X6:25:2;3	=LIN1+OMA1/10.6
=LIN1+OMA1-6X6:26:1;4	=LIN1+OMA1/10.6
=LIN1+OMA1-6X6:27:2;3	=LIN1+OMA1/10.6
=LIN1+OMA1-6X6:28:1;4	=LIN1+OMA1/10.6
=LIN1+OMA1-6X6:29:2;3	=LIN1+OMA1/10.6
=LIN1+OMA1-6X6:30:1;4	=LIN1+OMA1/10.7
=LIN1+OMA1-6X6:31:2;3	=LIN1+OMA1/10.7
=LIN1+OMA1-6X6:32:1;4	=LIN1+OMA1/11.1
=LIN1+OMA1-6X6:33:2;3	=LIN1+OMA1/11.1
=LIN1+OMA1-6X6:34:1;4	=LIN1+OMA1/11.1
=LIN1+OMA1-6X6:35:2;3	=LIN1+OMA1/11.1
=LIN1+OMA1-6X6:36:1;4	=LIN1+OMA1/11.2
=LIN1+OMA1-6X6:37:2;3	=LIN1+OMA1/11.2
=LIN1+OMA1-6X6:38:1;4	=LIN1+OMA1/11.2
=LIN1+OMA1-6X6:39:2;3	=LIN1+OMA1/11.2
=LIN1+OMA1-6X6:40:1;4	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:41:2;3	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:42:1;4	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:43:2;3	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:44:1;4	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:45:2;3	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:46:1;4	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:47:2;3	=LIN1+OMA1/11.3
=LIN1+OMA1-6X6:48:1;4	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:49:2;3	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:50:1;4	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:51:2;3	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:52:1;4	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:53:2;3	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:54:1;4	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:55:2;3	=LIN1+OMA1/11.5
=LIN1+OMA1-6X6:56:1;4	=LIN1+OMA1/11.6
=LIN1+OMA1-6X6:57:2;3	=LIN1+OMA1/11.6
=LIN1+OMA1-6X6:58:1;4	=LIN1+OMA1/11.6
=LIN1+OMA1-6X6:59:2;3	=LIN1+OMA1/11.6
=LIN1+OMA1-6X6:60:1;4	=LIN1+OMA1/11.6
=LIN1+OMA1-6X6:61:2;3	=LIN1+OMA1/11.6
=LIN1+OMA1-6X6:62:1;4	=LIN1+OMA1/11.7
=LIN1+OMA1-6X6:63:2;3	=LIN1+OMA1/11.7
=LIN1+OMA1-6X6:64:1;4	=LIN1+OMA1/12.1
=LIN1+OMA1-6X6:65:2;3	=LIN1+OMA1/12.1
=LIN1+OMA1-6X6:66:1;4	=LIN1+OMA1/12.1
=LIN1+OMA1-6X6:67:2;3	=LIN1+OMA1/12.1
=LIN1+OMA1-6X6:68:1;4	=LIN1+OMA1/12.2
=LIN1+OMA1-6X6:69:2;3	=LIN1+OMA1/12.2
=LIN1+OMA1-6X6:70:1;4	=LIN1+OMA1/12.2
=LIN1+OMA1-6X6:71:2;3	=LIN1+OMA1/12.2
=LIN1+OMA1-6X6:72:1;4	=LIN1+OMA1/12.3

=LIN1+OMA1-6X6

Multi-line	=LIN1+OMA1-6X6:73:2;3	=LIN1+OMA1/12.3
	=LIN1+OMA1-6X6:74:1;4	=LIN1+OMA1/12.3
	=LIN1+OMA1-6X6:75:2;3	=LIN1+OMA1/12.3
	=LIN1+OMA1-6X6:76:1;4	=LIN1+OMA1/12.3
	=LIN1+OMA1-6X6:77:2;3	=LIN1+OMA1/12.3
	=LIN1+OMA1-6X6:78:1;4	=LIN1+OMA1/12.3
	=LIN1+OMA1-6X6:79:2;3	=LIN1+OMA1/12.3
Panel layout	=LIN1+OMA1-6X6	=LIN1+OMA1/52.2

=LIN1+OMA1-21X7		
Properties		
Trade	Electrical engineering	
Function text (automatic)	PLC sponke	
Part properties		
Parts: Variant:		
Part type	Undefined	
Parts: WE1.1021500000 Variant: 1		
Part type	Component	
Order number	1021500000	
Designation 1	Multi-tier modular terminal	
Designation 2	Multi-tier modular terminal, Screw connection, 2.5 mm², 400 V, 24 A, Number of levels: 2, dark beige	
Description	Terminal block with several levels for connecting or joining c onductors with permanently secure contact. Hardened steel withstands the mechanical forces, tin-coated copper ensure s top conductivity. Space-saving design.	
Manufacturer	Weidmueller	
Height	69,07 mm	
Width	5,10 mm	
Depth	62,25 mm	
Weight	0,01 kg	
References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-21X7	=LIN1+OMA1/25.0
	=LIN1+OMA1-21X7:1:1;2	=LIN1+OMA1/15.0
	=LIN1+OMA1-21X7:2:3;4	=LIN1+OMA1/15.1
	=LIN1+OMA1-21X7:3:1;2	=LIN1+OMA1/15.1
	=LIN1+OMA1-21X7:4:3;4	=LIN1+OMA1/15.1
	=LIN1+OMA1-21X7:5:1;2	=LIN1+OMA1/15.2
	=LIN1+OMA1-21X7:6:3;4	=LIN1+OMA1/15.2
	=LIN1+OMA1-21X7:7:1;2	=LIN1+OMA1/15.2
	=LIN1+OMA1-21X7:8:3;4	=LIN1+OMA1/15.3
	=LIN1+OMA1-21X7:9:1;2	=LIN1+OMA1/15.3
	=LIN1+OMA1-21X7:10:3;4	=LIN1+OMA1/15.3
	=LIN1+OMA1-21X7:11:1;2	=LIN1+OMA1/15.4
	=LIN1+OMA1-21X7:12:3;4	=LIN1+OMA1/15.4
	=LIN1+OMA1-21X7:13:1;2	=LIN1+OMA1/24.6
	=LIN1+OMA1-21X7:14:3;4	=LIN1+OMA1/24.6
	=LIN1+OMA1-21X7:15:1;2	=LIN1+OMA1/24.6
	=LIN1+OMA1-21X7:16:1;2	=LIN1+OMA1/25.1
	=LIN1+OMA1-21X7:17:3;4	=LIN1+OMA1/25.3
	=LIN1+OMA1-21X7:18:1;2	=LIN1+OMA1/25.5
	=LIN1+OMA1-21X7:19:3;4	=LIN1+OMA1/25.8
	=LIN1+OMA1-21X7:20:1;2	=LIN1+OMA1/26.1
	=LIN1+OMA1-21X7:21:3;4	=LIN1+OMA1/26.3

=LIN1+OMA1-21X7

Multi-line

=LIN1+OMA1-21X7:22:1;2	=LIN1+OMA1/26.5
=LIN1+OMA1-21X7:23:3;4	=LIN1+OMA1/26.8
=LIN1+OMA1-21X7:24:1;2	=LIN1+OMA1/27.1
=LIN1+OMA1-21X7:25:3;4	=LIN1+OMA1/27.3
=LIN1+OMA1-21X7:26:1;2	=LIN1+OMA1/27.5
=LIN1+OMA1-21X7:27:3;4	=LIN1+OMA1/27.8
=LIN1+OMA1-21X7:28:1;2	=LIN1+OMA1/28.1
=LIN1+OMA1-21X7:29:3;4	=LIN1+OMA1/28.3
=LIN1+OMA1-21X7:30:1;2	=LIN1+OMA1/28.5
=LIN1+OMA1-21X7:31:3;4	=LIN1+OMA1/28.8
=LIN1+OMA1-21X7:32:3;4	=LIN1+OMA1/30.1
=LIN1+OMA1-21X7:33:3;4	=LIN1+OMA1/30.3
=LIN1+OMA1-21X7:34:3;4	=LIN1+OMA1/30.5
=LIN1+OMA1-21X7:35:3;4	=LIN1+OMA1/30.8
=LIN1+OMA1-21X7:36:3;4	=LIN1+OMA1/31.1
=LIN1+OMA1-21X7:37:1;2	=LIN1+OMA1/31.3
=LIN1+OMA1-21X7:38:1;2	=LIN1+OMA1/31.5
=LIN1+OMA1-21X7:39:3;4	=LIN1+OMA1/31.8
=LIN1+OMA1-21X7:40:1;2	=LIN1+OMA1/32.1
=LIN1+OMA1-21X7:41:3;4	=LIN1+OMA1/32.3
=LIN1+OMA1-21X7:42:3;4	=LIN1+OMA1/32.5
=LIN1+OMA1-21X7:43:1;2	=LIN1+OMA1/32.8
=LIN1+OMA1-21X7:44:1;2	=LIN1+OMA1/33.1
=LIN1+OMA1-21X7:45:1;2	=LIN1+OMA1/33.3
=LIN1+OMA1-21X7:46:1;2	=LIN1+OMA1/33.5
=LIN1+OMA1-21X7:47:1;2	=LIN1+OMA1/33.8
=LIN1+OMA1-21X7:48:1;2	=LIN1+OMA1/35.1
=LIN1+OMA1-21X7:49:3;4	=LIN1+OMA1/35.3
=LIN1+OMA1-21X7:50:1;2	=LIN1+OMA1/35.5
=LIN1+OMA1-21X7:51:3;4	=LIN1+OMA1/35.8
=LIN1+OMA1-21X7:52:1;2	=LIN1+OMA1/36.1
=LIN1+OMA1-21X7:53:3;4	=LIN1+OMA1/36.3
=LIN1+OMA1-21X7:54:1;2	=LIN1+OMA1/36.5
=LIN1+OMA1-21X7:55:3;4	=LIN1+OMA1/36.8
=LIN1+OMA1-21X7:56:3;4	=LIN1+OMA1/37.1
=LIN1+OMA1-21X7:57:1;2	=LIN1+OMA1/37.3
=LIN1+OMA1-21X7:58:1;2	=LIN1+OMA1/38.1
=LIN1+OMA1-21X7:59:3;4	=LIN1+OMA1/38.3
=LIN1+OMA1-21X7:60:1;2	=LIN1+OMA1/38.5
=LIN1+OMA1-21X7:61:3;4	=LIN1+OMA1/38.8
=LIN1+OMA1-21X7:62:3;4	=LIN1+OMA1/39.1
=LIN1+OMA1-21X7:63:1;2	=LIN1+OMA1/39.3
=LIN1+OMA1-21X7:64:3;4	=LIN1+OMA1/39.6
=LIN1+OMA1-21X7:65:1;2	=LIN1+OMA1/39.8
=LIN1+OMA1-21X7:66:1;2	=LIN1+OMA1/40.1
=LIN1+OMA1-21X7:67:3;4	=LIN1+OMA1/40.3
=LIN1+OMA1-21X7:68:1;2	=LIN1+OMA1/40.6
=LIN1+OMA1-21X7:69:3;4	=LIN1+OMA1/40.8

=LIN1+OMA1-21X7

Multi-line	=LIN1+OMA1-21X7:70:3;4	=LIN1+OMA1/41.1
	=LIN1+OMA1-21X7:71:1;2	=LIN1+OMA1/41.3
	=LIN1+OMA1-21X7:72:3;4	=LIN1+OMA1/41.6
	=LIN1+OMA1-21X7:73:1;2	=LIN1+OMA1/41.8
	=LIN1+OMA1-21X7:74:1;2	=LIN1+OMA1/42.2
	=LIN1+OMA1-21X7:75:3;4	=LIN1+OMA1/42.5
	=LIN1+OMA1-21X7:76:1;2	=LIN1+OMA1/44.2
	=LIN1+OMA1-21X7:77:3;4	=LIN1+OMA1/44.5
Panel layout	=LIN1+OMA1-21X7	=LIN1+OMA1/52.0

=LIN1+OMA1-210X7

Properties	
Trade	Electrical engineering
Function text (automatic)	i_xDoubleFeed

Part properties	
Parts: PXC.3208511 Variant: 1	
Part type	Component
Order number	3208511
Designation 1	Double-level terminal block
Description	Double-level terminal block, Cross section: 0.14 mm² – 1.5 mm², AWG: 26 – 14, Connection type: Push-in connection, Width: 3.5 mm, Color: gray, Mounting type: NS 35/7,5, NS 35/15
Manufacturer	Phoenix Contact
Supplier	Phoenix Contact
Height	65,40 mm
Width	3,50 mm
Depth	41,10 mm
Weight	0,01 kg

References		
Terminal diagram	Terminal diagram	
Terminal-strip overview	Terminal-strip overview	
Multi-line	=LIN1+OMA1-210X7:1:1;4	=LIN1+OMA1/27.5
	=LIN1+OMA1-210X7:2:2;3	=LIN1+OMA1/27.6
	=LIN1+OMA1-210X7:3:1;4	=LIN1+OMA1/27.6
	=LIN1+OMA1-210X7:4:2;3	=LIN1+OMA1/27.6
	=LIN1+OMA1-210X7:5:1;4	=LIN1+OMA1/27.8
	=LIN1+OMA1-210X7:6:2;3	=LIN1+OMA1/27.8
	=LIN1+OMA1-210X7:7:1;4	=LIN1+OMA1/27.8
	=LIN1+OMA1-210X7:8:2;3	=LIN1+OMA1/27.9
	=LIN1+OMA1-210X7:9:1;4	=LIN1+OMA1/28.1
	=LIN1+OMA1-210X7:10:2;3	=LIN1+OMA1/28.1
	=LIN1+OMA1-210X7:11:1;4	=LIN1+OMA1/28.1
	=LIN1+OMA1-210X7:12:2;3	=LIN1+OMA1/28.1
	=LIN1+OMA1-210X7:13:1;4	=LIN1+OMA1/28.3
	=LIN1+OMA1-210X7:14:2;3	=LIN1+OMA1/28.3
	=LIN1+OMA1-210X7:15:1;4	=LIN1+OMA1/28.4
	=LIN1+OMA1-210X7:16:2;3	=LIN1+OMA1/28.4

=LIN1+OMA1-11XF1

Properties	
Trade	Electrical engineering

Part properties	
Parts: MURR.4000-73000-0010000 Variant: 1	
Part type	Component
Order number	4000-73000-0010000
Designation 1	Connector (special)
Designation 2	MSDD INSTALLATION SOCKET RJ45 CAT5e BU/BU
Description	Pass-through 1x RJ45, 8-pole metal, CAT5e (female/female) More information may be found on https://www.murrelektronik.com or in the technical datasheet
Height	29,50 mm
Width	29,50 mm
Depth	29,00 mm
Weight	0,02 kg

References		
Parts list	Parts list	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-11XF1	=LIN1+OMA1/14.6
	=LIN1+OMA1-11XF1:1.-8.;1-8	=LIN1+OMA1/14.6
	=LIN1+OMA1-11XF1:1.-8.;1-8	=LIN1+OMA1/14.6
Panel layout	=LIN1+OMA1-11XF1	=LIN1+OMA1/51.7

=LIN1+OMA1-11XF2

Properties

Trade Electrical engineering

Part properties

Parts: MURR.4000-73000-0010000 Variant: 1

Part type	Component
Order number	4000-73000-0010000
Designation 1	Connector (special)
Designation 2	MSDD INSTALLATION SOCKET RJ45 CAT5e BU/BU
Description	Pass-through 1x RJ45, 8-pole metal, CAT5e (female/female) More information may be found on https://www.murrelektronik.com or in the technical datasheet
Height	29,50 mm
Width	29,50 mm
Depth	29,00 mm
Weight	0,02 kg

References

Parts list	Parts list
Panel layout caption	Panel layout caption
Multi-line	=LIN1+OMA1-11XF2 =LIN1+OMA1/14.7
	=LIN1+OMA1-11XF2:1.-8.;1-8 =LIN1+OMA1/14.8
	=LIN1+OMA1-11XF2:1.-8.;1-8 =LIN1+OMA1/14.8
Panel layout	=LIN1+OMA1-11XF2 =LIN1+OMA1/51.7

=LIN1+OMA1-6XP1

Properties		
Trade	Electrical engineering	
Part properties		
Parts: SCHR.BZ325003-- Variant: 1		
Part type	Component	
Order number	BZ325003--	
Designation 1	Vtičnica za montažo na letev s LED signalizacijo	
Description	Vtičnica za montažo na letev s LED signalizacijo	
Manufacturer	Schrack	
Supplier	Schrack	
Height	62,00 mm	
Width	44,00 mm	
Depth	74,00 mm	
Weight	0,13 kg	
References		
Parts list	Parts list	
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-6XP1:1:1	=LIN1+OMA1/9.1
Panel layout	=LIN1+OMA1-6XP1	=LIN1+OMA1/52.2

=LIN1+OMA1-6XP2

Properties		
Trade	Electrical engineering	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Overview	=LIN1+OMA1-6XP2:2:1	=LIN1+OMA1/9.1

=LIN1+OMA1-6XP3		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Overview	=LIN1+OMA1-6XP3:3:1	=LIN1+OMA1/9.1

=LIN1+OMA1-6XP4		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: SCHR.BZ325003-- Variant: 1		
Part type	Component	
Order number	BZ325003--	
Designation 1	Vtičnica za montažo na letev s LED signalizacijo	
Description	Vtičnica za montažo na letev s LED signalizacijo	
Manufacturer	Schrack	
Supplier	Schrack	
Height	62,00 mm	
Width	44,00 mm	
Depth	74,00 mm	
Weight	0,13 kg	
References		
Parts list	Parts list	
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Panel layout caption	Panel layout caption	
Multi-line	=LIN1+OMA1-6XP4:1:1	=LIN1+OMA1/9.2
Panel layout	=LIN1+OMA1-6XP4	=LIN1+OMA1/52.2

=LIN1+OMA1-6XP5		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Multi-line	=LIN1+OMA1-6XP5:2:1	=LIN1+OMA1/9.2

=LIN1+OMA1-6XP6		
Properties		
Trade	Electrical engineering	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Multi-line	=LIN1+OMA1-6XP6:3:1	=LIN1+OMA1/9.2

=LIN1+FIELD-20A1

Properties	
Trade	Electrical engineering

Part properties	
Parts: SIE.6AV2123-2GB03-0AX0 Variant: 1	
Part type	Component
Order number	6AV2123-2GB03-0AX0
Designation 1	SIMATIC HMI KTP700 BASIC
Designation 2	SIMATIC, HMI
Designation 3	Basic Panel
Description	SIMATIC HMI, KTP700 Basic, Basic Panel, Key/touch operation, 7" TFT display, 65536 colors, PROFINET interface, configurable from WinCC Basic V13/ STEP 7 Basic V13, contains open-source software, which is provided free of charge see enclosed CD
Manufacturer	Siemens
Supplier	Siemens
Height	158,00 mm
Width	214,00 mm
Depth	39,00 mm
Weight	0,98 kg

References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-20A1	=LIN1+OMA1/24.2
	=LIN1+FIELD-20A1:1	=LIN1+OMA1/24.6
	=LIN1+FIELD-20A1:2	=LIN1+OMA1/24.6
	=LIN1+FIELD-20A1	=LIN1+OMA1/24.6

=LIN1+FIELD-6M1

Properties	
Trade	Electrical engineering
Function text (automatic)	Actuator
Technical characteristics	Egasi

Part properties	
Parts: Variant:	
Part type	Undefined

References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-6M1	=LIN1+OMA1/10.1
	=LIN1+FIELD-6M1:1	=LIN1+OMA1/10.1
	=LIN1+FIELD-6M1:2	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:3	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:4	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:5	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:6	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:7	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:8	=LIN1+OMA1/10.3
	=LIN1+FIELD-6M1:9	=LIN1+OMA1/10.2
	=LIN1+FIELD-6M1:10	=LIN1+OMA1/10.1
	=LIN1+FIELD-6M1:11	=LIN1+OMA1/10.1
	=LIN1+FIELD-6M1:12	=LIN1+OMA1/10.1
	=LIN1+FIELD-6M1:13	=LIN1+OMA1/10.2
	=LIN1+FIELD-6M1:14	=LIN1+OMA1/10.2
	=LIN1+FIELD-6M1:15	=LIN1+OMA1/10.3

=LIN1+FIELD-6M2

Properties	
Trade	Electrical engineering
Function text (automatic)	Actuator
Technical characteristics	Egasi

Part properties	
Parts: Variant:	
Part type	Undefined

References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-6M2	=LIN1+OMA1/10.4
	=LIN1+FIELD-6M2:1	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:2	=LIN1+OMA1/10.6
	=LIN1+FIELD-6M2:3	=LIN1+OMA1/10.7
	=LIN1+FIELD-6M2:4	=LIN1+OMA1/10.6
	=LIN1+FIELD-6M2:5	=LIN1+OMA1/10.6
	=LIN1+FIELD-6M2:6	=LIN1+OMA1/10.7
	=LIN1+FIELD-6M2:7	=LIN1+OMA1/10.6
	=LIN1+FIELD-6M2:8	=LIN1+OMA1/10.6
	=LIN1+FIELD-6M2:9	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:10	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:11	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:12	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:13	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:14	=LIN1+OMA1/10.5
	=LIN1+FIELD-6M2:15	=LIN1+OMA1/10.6

=LIN1+FIELD-6M3

Properties	
Trade	Electrical engineering
Function text (automatic)	Actuator
Technical characteristics	Egasi

Part properties	
Parts: Variant:	
Part type	Undefined

References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-6M3	=LIN1+OMA1/11.1
	=LIN1+FIELD-6M3:1	=LIN1+OMA1/11.1
	=LIN1+FIELD-6M3:2	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:3	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:4	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:5	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:6	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:7	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:8	=LIN1+OMA1/11.3
	=LIN1+FIELD-6M3:9	=LIN1+OMA1/11.2
	=LIN1+FIELD-6M3:10	=LIN1+OMA1/11.1
	=LIN1+FIELD-6M3:11	=LIN1+OMA1/11.1
	=LIN1+FIELD-6M3:12	=LIN1+OMA1/11.1
	=LIN1+FIELD-6M3:13	=LIN1+OMA1/11.2
	=LIN1+FIELD-6M3:14	=LIN1+OMA1/11.2
	=LIN1+FIELD-6M3:15	=LIN1+OMA1/11.3

=LIN1+FIELD-6M4

Properties	
Trade	Electrical engineering
Function text (automatic)	Actuator
Technical characteristics	Egasi

Part properties	
Parts: Variant:	
Part type	Undefined

References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-6M4	=LIN1+OMA1/11.4
	=LIN1+FIELD-6M4:1	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:2	=LIN1+OMA1/11.6
	=LIN1+FIELD-6M4:3	=LIN1+OMA1/11.7
	=LIN1+FIELD-6M4:4	=LIN1+OMA1/11.6
	=LIN1+FIELD-6M4:5	=LIN1+OMA1/11.6
	=LIN1+FIELD-6M4:6	=LIN1+OMA1/11.7
	=LIN1+FIELD-6M4:7	=LIN1+OMA1/11.6
	=LIN1+FIELD-6M4:8	=LIN1+OMA1/11.6
	=LIN1+FIELD-6M4:9	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:10	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:11	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:12	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:13	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:14	=LIN1+OMA1/11.5
	=LIN1+FIELD-6M4:15	=LIN1+OMA1/11.6

=LIN1+FIELD-6M5

Properties		
Trade	Electrical engineering	
Function text (automatic)	Actuator	
Technical characteristics	Egasi	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-6M5	=LIN1+OMA1/12.1
	=LIN1+FIELD-6M5:1	=LIN1+OMA1/12.1
	=LIN1+FIELD-6M5:2	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:3	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:4	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:5	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:6	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:7	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:8	=LIN1+OMA1/12.3
	=LIN1+FIELD-6M5:9	=LIN1+OMA1/12.2
	=LIN1+FIELD-6M5:10	=LIN1+OMA1/12.1
	=LIN1+FIELD-6M5:11	=LIN1+OMA1/12.1
	=LIN1+FIELD-6M5:12	=LIN1+OMA1/12.1
	=LIN1+FIELD-6M5:13	=LIN1+OMA1/12.2
	=LIN1+FIELD-6M5:14	=LIN1+OMA1/12.2
	=LIN1+FIELD-6M5:15	=LIN1+OMA1/12.3

=LIN1+FIELD-30R1

Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD1	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-30R1	=LIN1+OMA1/49.1

=LIN1+FIELD-30R2

Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD2	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-30R2	=LIN1+OMA1/49.3

=LIN1+FIELD-30R3

Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD3	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-30R3	=LIN1+OMA1/49.6

=LIN1+FIELD-30R4

Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD4	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-30R4	=LIN1+OMA1/49.8

=LIN1+FIELD-21U1		
Properties		
Trade	Electrical engineering	
Technical characteristics	Enkoder 1000PPR	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Parts list	Parts list	
Multi-line	=LIN1+FIELD-21U1	=LIN1+OMA1/25.3
	=LIN1+FIELD-21U1:A	=LIN1+OMA1/25.3
	=LIN1+FIELD-21U1:B	=LIN1+OMA1/25.5
	=LIN1+FIELD-21U1:Z	=LIN1+OMA1/25.8

=LIN1+FIELD-31U2		
Properties		
Trade	Electrical engineering	
Function text (automatic)	PC – lenovo	
Technical characteristics	PC lenovo	
Part properties		
Parts: Lenovo.PC Variant: 1		
Part type	Component	
Height	0,00 mm	
Width	0,00 mm	
Depth	0,00 mm	
Weight	0,00 kg	
References		
Parts list	Parts list	
Summarized parts list	Summarized parts list	
Multi-line	=LIN1+FIELD-31U2	=LIN1+OMA1/50.0

=LIN1+FIELD-31U2-LAN		
Properties		
Trade	Electrical engineering	
References		
Multi-line	=LIN1+FIELD-31U2-LAN:2	=LIN1+OMA1/50.1

=LIN1+FIELD-30XC1		
Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD1	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Multi-line	=LIN1+FIELD-30XC1:1	=LIN1+OMA1/49.1
	=LIN1+FIELD-30XC1:2	=LIN1+OMA1/49.1
	=LIN1+FIELD-30XC1:3	=LIN1+OMA1/49.1
	=LIN1+FIELD-30XC1:4	=LIN1+OMA1/49.1

=LIN1+FIELD-30XC2		
Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD2	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Multi-line	=LIN1+FIELD-30XC2:1	=LIN1+OMA1/49.3
	=LIN1+FIELD-30XC2:2	=LIN1+OMA1/49.4
	=LIN1+FIELD-30XC2:3	=LIN1+OMA1/49.4
	=LIN1+FIELD-30XC2:4	=LIN1+OMA1/49.4

=LIN1+FIELD-30XC3

Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD3	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Multi-line	=LIN1+FIELD-30XC3:1	=LIN1+OMA1/49.6
	=LIN1+FIELD-30XC3:2	=LIN1+OMA1/49.6
	=LIN1+FIELD-30XC3:3	=LIN1+OMA1/49.6
	=LIN1+FIELD-30XC3:4	=LIN1+OMA1/49.6

=LIN1+FIELD-30XC4

Properties		
Trade	Electrical engineering	
Function text (automatic)	RTD4	
Part properties		
Parts: Variant:		
Part type	Undefined	
References		
Plug diagram	Plug diagram	
Plug overview	Plug overview	
Multi-line	=LIN1+FIELD-30XC4:1	=LIN1+OMA1/49.8
	=LIN1+FIELD-30XC4:2	=LIN1+OMA1/49.8
	=LIN1+FIELD-30XC4:3	=LIN1+OMA1/49.9
	=LIN1+FIELD-30XC4:4	=LIN1+OMA1/49.9