



— CONSTANT · LOW-POWER · FACTORY / FIELD INSTALL

EM07-CMB/150DC

ArcticGuard Cold-Pack Emergency LED Driver

7W constant-power emergency LED driver with cold-rated lithium-ion battery. Universal 100–347 VAC input drives 60–150 VDC LED arrays at full brightness for 90 minutes during outage. IP65 sealed. UL 924 listed for both factory and field installation. Specify the /AG cold-pack variant for –4°F to 140°F operating range — required for freezer, outdoor, and unconditioned-space applications.

KEY FEATURES

- Universal 100–347 VAC input — one driver, every building voltage
- ArcticGuard cold-pack option — –4°F to 140°F operating range
- Constant brightness for 90 min — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- Test switch with red LED status indicator
- UL 924 listed for code-compliant emergency egress
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

PERFORMANCE

Emergency Output Power	7 W
Emergency Runtime	90 min
Output Type	Constant power
Recharge Time	48 hours
Battery Type	Cold-rated Li-ion
Battery Charging Current	≤250 mA

CONSTRUCTION

Driver Dimensions	7.4" × 1.5" × 1.14"
Battery Case Dimensions	6.5" × 1.61" × 0.98"
Operating Temperature	–4°F to 140°F
Location Rating	Dry, damp, extreme temp
IP Rating	IP65
Warranty	5-year limited

ELECTRICAL

Input Voltage	100–347 VAC
Input Frequency	50 / 60 Hz
Input Current	100 mA max
Input Power	7 W max
Output Voltage	DC 60–150 V
Output Power	7 W

COMPLIANCE

Safety Listings	UL 924 · CSA C22.2 No.141
Energy Compliance	CEC Title 20
Installation Li...	UL listed for factory & field install
Compatibi...	constant APPLICATION Quick Guide

INSTALLATION

Mounting Type	Surface mount
Test Switch	Test switch with indicator light
Wire Type	UL 2464, 24 AWG, 300 V, 80°C
Wire Length	550 mm (21.65")
Installation	Factory or field
Mounting Centers	7.0" driver · 6.2" battery

COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

lampARCH

luxoARCH

See full Application Quick Guide for sensor & controller pairings.

ORDERING INFORMATION

EM07-CMB/150DC	Standard 7 W driver
EM07-CMB/150DC/AG	With ArcticGuard cold-pack: –4°F operating

7W

OUTPUT POWER

90 min

EGRESS RUNTIME

100–347V

UNIVERSAL INPUT

–4° to 140°F

OPERATING RANGE

IP65

SEALED RATING

UL 924

LISTED




— CONST **A** NT · LOW-POWER · FACTORY/FIELD INSTALL

EM07-CMB/150DC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes


— DIMENSIONS

DRIVER ENCLOSURE

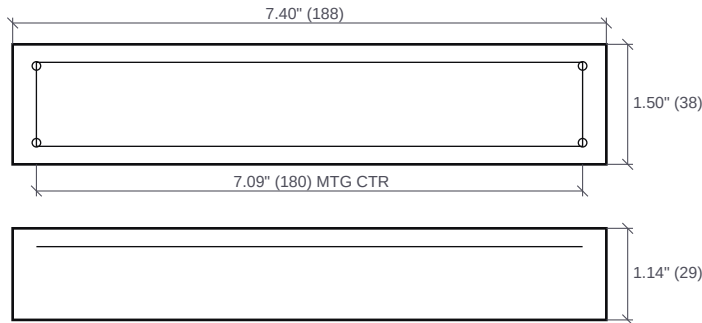

L 7.40" (188) · W 1.50" (38) · H 1.14" (29) · MtgCtr 7.09" (180) · 4×4 mtg holes


BATTERY CASE · 7W (LiFePO4)



L 3.39" (86) · W 1.61" (41) · H 0.91" (23) · MtgCtr 3.12" (79) · 4×3.2 mtg holes

All dimensions are inches (millimeters) unless otherwise indicated.

— WIRING DIAGRAM

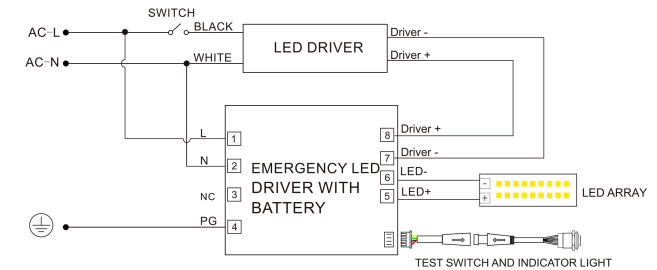

OPERATION

AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ~90 min. Red LED off during egress. AC restoration resumes charging.

— INSTALL REQUIREMENT

The AC LED driver **MUST** be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

7W

OUTPUT POWER

90 min

EGRESS RUNTIME

100-347V

UNIVERSAL INPUT

-4° to 140°F

OPERATING RANGE

IP65

SEALED RATING

UL 924

LISTED