



— CONSTANT · LOW-POWER · FACTORY / FIELD INSTALL

EM08-HMB/170DC

High-Voltage Emergency LED Driver

8W constant-power emergency LED driver for 170 VDC LED arrays. Universal 100–347 VAC input. Compatible with all constant-listed fixture series. Specify /XD adder for 120-minute extended runtime where AHJ requires it.

KEY FEATURES

- Universal 100–347 VAC input — one driver, every building voltage
- Operating range 32°F to 122°F
- Constant brightness for 90 min · 120 min (/XD) — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- /XD Extended Discharge option — 120 min runtime for AHJ requirements
- UL 924 listed for code-compliant emergency egress
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

PERFORMANCE

Emergency Output Power	8 W
Emergency Runtime	90 min · 120 min (/XD)
Output Type	Constant power
Recharge Time	≥24 hours (initial)
Battery Type	Cold-rated Li-ion
Battery Charging Current	≤250 mA

CONSTRUCTION

Driver Dimensions	7.4" × 1.5" × 1.14"
Battery Case Dimensions	6.5" × 1.61" × 0.98"
Operating Temperature	32°F to 122°F
Location Rating	Dry, damp
IP Rating	Per host fixture
Warranty	5-year limited

ELECTRICAL

Input Voltage	100–347 VAC
Input Frequency	50 / 60 Hz
Input Current	100 mA max
Input Power	8 W max
Output Voltage	DC 170 V
Output Power	8 W

COMPLIANCE

Safety Listings	UL 924 · CSA C22.2 No.141
Energy Compliance	CEC Title 20
Installation Li...	UL listed for factory & field install
Compatibi...	constant Application Quick Guide

INSTALLATION

Mounting Type	Surface mount
Test Switch	Test switch with indicator light
Wire Type	UL 2464, 24 AWG, 300 V, 80°C
Wire Length	Per OEM label
Installation	Factory or field
Mounting Centers	7.0" driver · 6.2" battery

COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

lamparch	luxoarch	planoarch	tubularch	See full Application Quick Guide for sensor & controller pairings.
----------	----------	-----------	-----------	--

ORDERING INFORMATION

EM08-HMB/170DC	Standard 8 W driver
EM08-HMB/170DC/XD	With Extended Discharge: 120-minute runtime

8W
OUTPUT POWER

90/120 min
STANDARD / /XD

100–347V
UNIVERSAL INPUT

32° to 122°F
OPERATING RANGE

All Series
COMPATIBLE

UL 924
LISTED




— CONST **A**NT · LOW-POWER · FACTORY/FIELD INSTALL

EM08-HMB/170DC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes


— DIMENSIONS

DRIVER ENCLOSURE

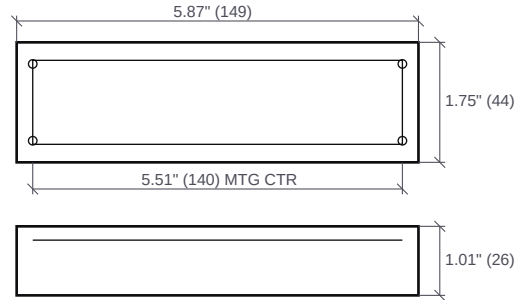

L 5.87" (149) · W 1.75" (44) · H 1.01" (26) · MtgCtr 5.51" (140) · 4×3.2 mtg holes


BATTERY CASE

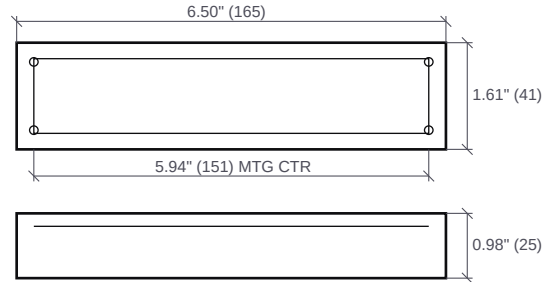

L 6.50" (165) · W 1.61" (41) · H 0.98" (25) · MtgCtr 5.94" (151) · 4×3.2 mtg holes

All dimensions are inches (millimeters) unless otherwise indicated.

— WIRING DIAGRAM

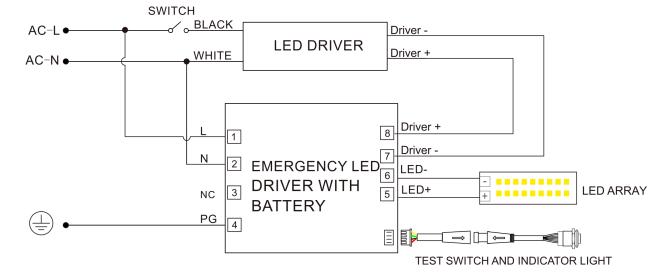

OPERATION

AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ~90 min. Red LED off during egress. AC restoration resumes charging.

— INSTALL REQUIREMENT

The AC LED driver **MUST** be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

8W
OUTPUT POWER

90/120 min
STANDARD / XD

100-347V
UNIVERSAL INPUT

32° to 122°F
OPERATING RANGE

All Series
COMPATIBLE

UL 924
LISTED