

MVAVE SMC PAD Pocket

M-VAVE SMC PAD Pocket Bluetooth MIDI Pad Controller
User Manual

Model: SMC PAD Pocket

1. PRODUCT OVERVIEW

The M-VAVE SMC PAD Pocket is a compact and versatile MIDI pad controller designed for music production and performance. It features 16 responsive backlit pads, offering expressive control for triggering samples, playing drum patterns, and controlling virtual instruments.

Advertisements





Figure 1.1: Top view of the M-VAVE SMC PAD Pocket MIDI Controller, showing the 16 illuminated pads.

Key Features:

- **Seamless Wireless Creation:** Supports low-latency Bluetooth MIDI and USB-C wired connection, compatible with iOS/Android/PC/Mac devices.
- **Professional Touch Experience:** Equipped with 16 velocity-sensitive silicone pads, supporting customizable pressure/speed adjustments for an authentic drumming experience.
- **Mobile Music Workstation:** Built-in rechargeable battery provides up to 8 hours of continuous use. Slim and lightweight (130g) for portability.
- **Deep DAW Compatibility:** Pre-configured templates for Ableton Live, FL Studio, Logic Pro, and more. Supports custom MIDI mapping.
- **Intuitive Experience:** Customizable RGB backlit pads with real-time feedback for velocity and mode, enhancing visual interaction.

2. SETUP GUIDE



2.1. Charging the Device

Before first use, ensure the SMC PAD Pocket is fully charged. Connect the included USB-C cable to the device's USB-C port and the other end to a standard USB power adapter (not included) or a computer's USB port.

- The power indicator light illuminates red while charging.
- The indicator light turns green when fully charged.

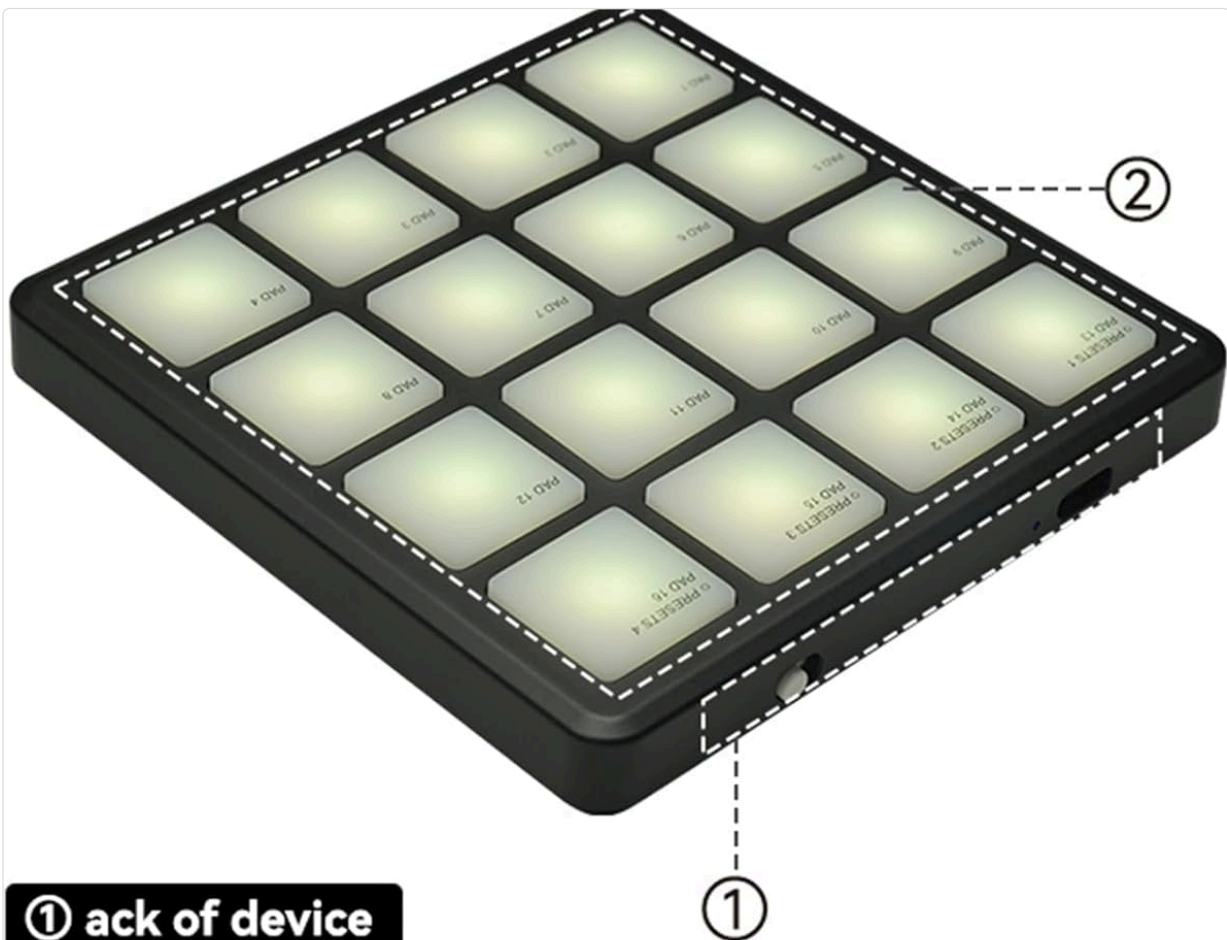


Figure 2.1: Connecting the USB-C cable for charging and wired connection.

2.2. Powering On/Off



Locate the power switch on the side of the device. Slide the switch to the "ON" position to power on the controller. Slide it to "OFF" to power down.



① ack of device

Switch : Turn on/off the device

Power indicator : The indicator light illuminates red while charging and turns green when fully charged;

USB-C : for cable connection and charging at the same time

② Pads

Sixteen RGB back-lit pads with velocity-sensitive & aftertouch;
Include Note, Midi CC, Program Change;

Note: You can only change settings inside software(Scan the QR code on the back of the machine to download the software).

Figure 2.2: Location of the power switch and USB-C port.

2.3. Connecting to a Device

The SMC PAD Pocket supports both wired and wireless connections.

Wired Connection (USB-C):

1. Connect one end of the USB-C cable to the SMC PAD Pocket.
2. Connect the other end to a USB port on your computer (PC/Mac), tablet, or smartphone.
3. The device will be recognized as a standard MIDI controller. No drivers are typically required for most operating systems.

Advertisements



Wireless Connection (Bluetooth MIDI):

1. Ensure Bluetooth is enabled on your host device (iOS/Android/PC/Mac).
2. Power on the SMC PAD Pocket.
3. On your host device, navigate to Bluetooth settings or your DAW's MIDI settings.
4. Look for "SMC PAD Pocket" or a similar name in the list of available Bluetooth MIDI devices and pair with it.



SUPPORT Windows/iOS

Battery-powered portable midi controller with wireless functionality
Support Windows / Mac / iOS / Android



Figure 2.3: The SMC PAD Pocket supports connection to various devices including Windows, Mac, iOS, and Android.

3. OPERATING INSTRUCTIONS

3.1. Using the 16 Pads

The SMC PAD Pocket features 16 RGB backlit pads arranged in a 4x4 grid. These pads are velocity-sensitive, meaning the intensity of your press affects the output (e.g., volume of a drum hit).

Advertisements



- **Velocity Sensitivity:** Press the pads with varying force to achieve different expressive results.

- **RGB Backlighting:** The pads illuminate with customizable RGB colors, providing visual feedback for velocity and mode.
- **Aftertouch:** The pads also support aftertouch, allowing for continuous control after the initial press.



Figure 3.1: Demonstrating the use of the 16 RGB backlit, velocity-sensitive pads.

3.2. Software Compatibility and Mapping

The SMC PAD Pocket is designed for deep compatibility with various Digital Audio Workstations (DAWs) and music software.

Advertisements



- **Pre-configured Templates:** The controller comes with pre-configured templates for popular DAWs such as Ableton Live, FL Studio, and Logic Pro, enabling plug-and-play functionality.
- **Custom MIDI Mapping:** For advanced users, the device supports custom MIDI mapping. This allows you to assign specific MIDI notes, CC messages, or program changes to each pad according to your workflow.
- **Note:** Settings can only be changed inside the software. Refer to the software's documentation or scan the QR code on the back of the machine to download the software for advanced configuration.

PRODUCT
PARAMETER

Product Dimensions	105mm(L) x 105mm (W)x 16mm(H)
Product Weight	130g
Pads	16 RGB Back-Lit Pads with velocity-sensitive and after touch
Output	USB-C port Wireless connection with Windows/Mac/ios/Android Wireless Midi Out Function
Power	Battery supplied or USB-bus-powered
Battery Model/Type	603040
Battery Nominal Voltage	3.7V
Battery capacity	780mAh

Figure 3.2: The SMC PAD Pocket integrates seamlessly with various DAWs like Ableton Live and FL Studio.

4. MAINTENANCE

To ensure the longevity and optimal performance of your M-VAVE SMC PAD Pocket, follow these maintenance guidelines:



Advertisements

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the surface of the device. For stubborn marks, slightly dampen the cloth with water. Avoid using harsh chemicals, solvents, or abrasive cleaners.
- **Storage:** Store the device in a cool, dry place away from direct sunlight, extreme temperatures, and high humidity.
- **Handling:** Avoid dropping the device or subjecting it to strong impacts. Do not place heavy objects on top of it.
- **Battery Care:** For optimal battery life, avoid fully discharging the battery frequently. If storing for an extended period, charge the battery to about 50% every few months.

5. TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not power on.	Battery is depleted; Power switch is off.	Charge the device using the USB-C cable. Ensure the power switch is in the "ON" position.
Pads are not responding in DAW.	Incorrect MIDI input selected in DAW; Device not connected properly (wired/Bluetooth).	Verify the SMC PAD Pocket is selected as a MIDI input device in your DAW's preferences. Reconnect the USB-C cable or re-pair Bluetooth.
Bluetooth connection is unstable.	Interference from other wireless devices; Device too far from host.	Move the device closer to your host. Minimize other wireless interference. Try re-pairing.
Pads do not light up or show incorrect colors.	Software settings; Low battery.	Check RGB lighting settings within your software. Ensure the device is sufficiently charged.

6. SPECIFICATIONS

Feature	Detail
Model Name	SMC PAD Pocket
Dimensions (L x W x H)	4.1 x 4.1 x 0.8 inches (105mm x 105mm x 16mm)
Weight	4.5 ounces (130g)
Pads	16 RGB Back-Lit Pads with velocity-sensitive and aftertouch
Connectivity	USB-C port, Wireless connection (Bluetooth MIDI Out Function)
Power	Built-in rechargeable battery (780mAh, 3.7V) or USB-bus-powered
Battery Model/Type	603040
Compatible Devices	Laptop, PC, Tablet, Smartphone
Hardware Platform	PC/Mac/iOS/Android



Feature	Detail
Supported Software	Ableton Live, FL Studio (and others via custom MIDI mapping)
Color	Black

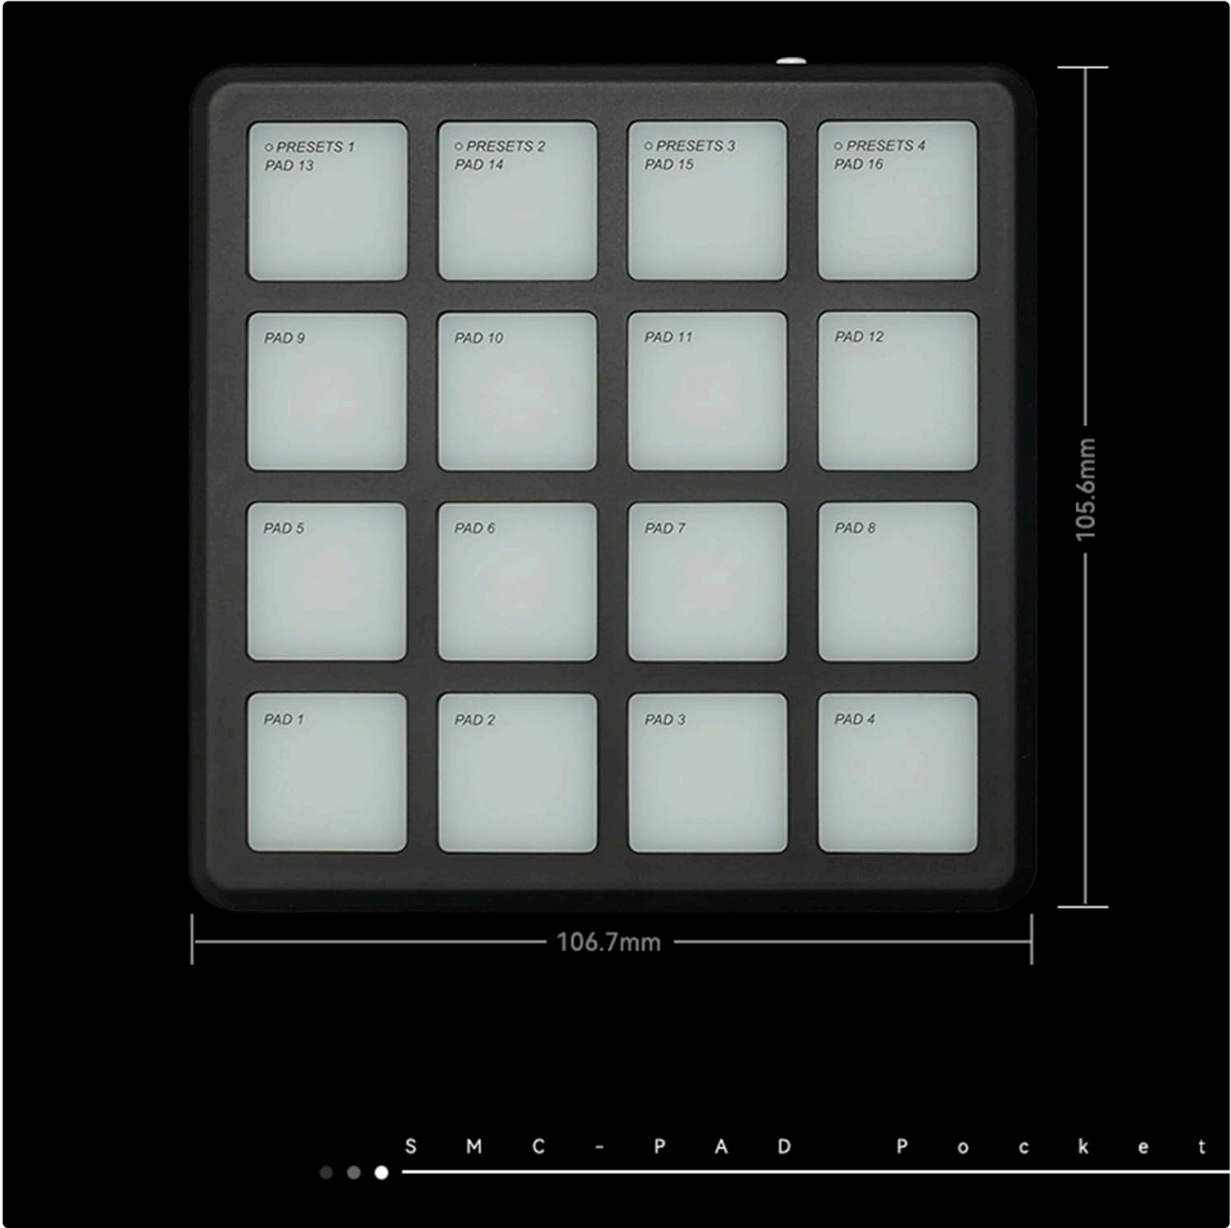


Figure 6.1: Detailed dimensions of the SMC PAD Pocket.

7. WHAT'S IN THE BOX

The M-VAVE SMC PAD Pocket package includes:

- M-VAVE SMC PAD Pocket MIDI Controller
- USB-C Cable
- User Manual (this document)



8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official MVAVE website or contact their customer service directly. Keep your purchase receipt as proof of purchase for warranty claims.



Online Resources:

- Official MVAVE Website: www.mvave.com (Note: This is a placeholder URL, please refer to actual product documentation for correct URL.)
- Product Support Page: Check the MVAVE website for product-specific FAQs, firmware updates, and additional resources.

© 2025 MVAVE. All rights reserved.
This manual is subject to change without notice.

Advertisements

