04832250: Computer Networks (Honor Track)

Lab 3: Video CDN

Lead TA:

Yang Shen <sy2006@foxmail.com>

Assigned: 10/31/2017
Final version due: 12/19/2017 (before 23:59 UTC+8)

1. Overview

In this lab you will explore how video content distribution networks (CDNs) work. In particular, you will implement adaptive bitrate selection, DNS load balancing, and pieces of OSPF (which your DNS server will use to decide which server is closest to a given client).

1.1 In the Real World

Figure 1 depicts (at a high level) what this system looks like in the real world. Clients trying to stream a video first issue a DNS query to resolve the service's domain name to an IP address for one of the CDN's content servers. The CDN's authoritative DNS server selects the "best" content server for each particular client based on (1) the client's IP address (from which it learns the client's geographic location) and (2) current load on the content servers (which the servers periodically report to the DNS server).

Once the client has the IP address for one of the content servers, it begins requesting chunks of the video the user requested. The video is encoded at multiple bitrates; as the client player receives video data, it calculates the throughput of the transfer and requests the highest bitrate the connection can support.
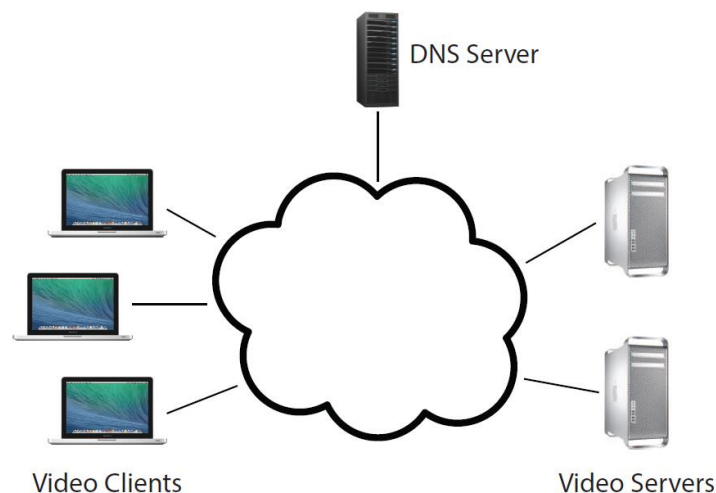

Figure 1: In the real world…

1.2 Your System

Implementing an entire CDN is clearly a tall order, so let's simplify things. First, your entire system will run on one host; we're providing a network simulator (described in §4) that will allow you to run several processes with arbitrary IP addresses on one machine. Our simulator also allows you to assign arbitrary link characteristics (bandwidth and latency) to each pair of "endhosts" (processes). For this lab, you will do your development and testing using a virtual machine we provide (§4).

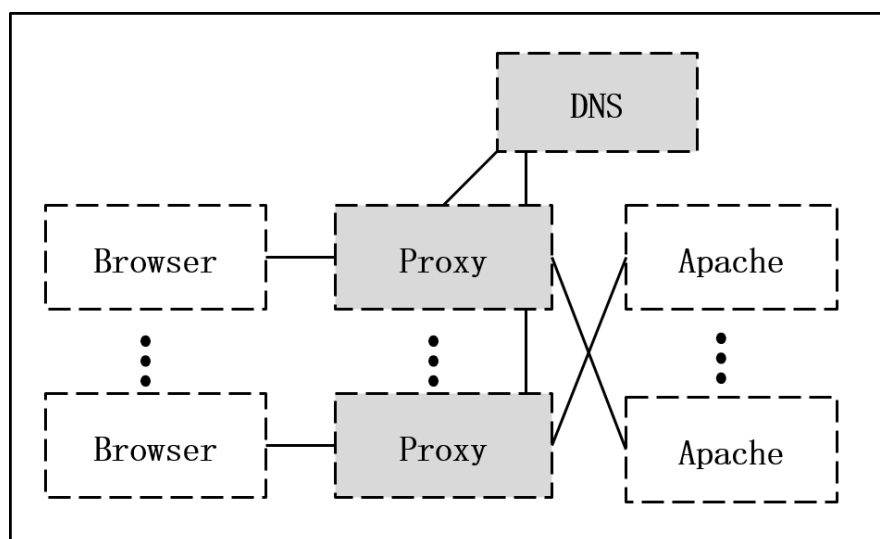Figure 2 shows the pieces of the system; those shaded in gray will be written by you.

Figure 2: Your System.

Browser. You'll use an off-the-shelf web browser to play videos served by your CDN (via your proxy).

Proxy. Rather than modify the video player itself, you will implement adaptive bitrate selection in an HTTP proxy. The player requests chunks with standard HTTP GET requests; your proxy will intercept these and modify them to retrieve whichever bitrate your algorithm deems appropriate. To simulate multiple clients, you will launch multiple instances of your proxy. More detail in §2.

Web Server. Video content will be served from an off-the-shelf web server (Apache). As with the proxy, you will run multiple instances of Apache on different fake IP addresses to simulate a CDN with several content servers. More detail in §4.

DNS Server. You will implement a simple DNS (supporting only a small portion of actual DNS functionality). Your server will respond to each request with the "best" server for that particular client. More detail in §3.

2. Video Bitrate Adaptation

Many video players monitor how quickly they receive data from the server and use this throughput value to request better or lower quality encodings of the video, aiming to stream the highest quality encoding that the connection can handle. Rather than

modifying an existing video client to perform bitrate adaptation, you will implement this functionality in an HTTP proxy through which your browser will direct requests.

2.1 Requirements

Subtask 1: The first part of the lab is all about bitrate adaptation. There are two pieces:
(1) Implement your proxy. Your proxy should calculate the throughput it receives from the video server and select the best bitrate for the connection. See §2.2 for details.
(2) Explore the behavior of your proxy. Once your proxy is working, launch two instances of it on the "dumbbell" topology (topo1) we provide. Running the dumbbell topology will also create two servers (listening on the IP addresses in topo1.servers); you should direct one proxy to each server. Now:

1. Start playing the video through each proxy.

2. Run the topo1 events file and direct netsim.py to generate a log file:

<div align="center">

./netsim.py –l <log-file> ../topos/topo1 run

</div>

3. After 1 minute, stop video playback and kill the proxies.

4. Gather the netsim log file and the log files from your proxy and use them to generate plots for link utilization, fairness, and smoothness. Use our grapher.py script to do this:

<div align="center">

./grapher.py <netsim-log> <proxy-1-log> <proxy-2-log>

</div>

Repeat these steps for α = 0.1, 0.5, 0.9 (see §2.2.1). Compile your 9 plots, labelled clearly, into a single PDF named **writeup.pdf**, along with a brief (1-3 paragraphs) discussion of the tradeoffs you make as you vary α. We're not looking for a thorough, extensive study, just general observations.

2.2 Implementation Details

You are implementing a simple HTTP proxy. It accepts connections from web browsers, modifies video chunk requests as described below, resolves the web server's DNS name (part of the HTTP request), opens a connection with the resulting IP address, and forwards the modified request to the server. Any data (the video chunks) returned by the server should be forwarded, unmodified, to the browser.

Your proxy should listen for connections from a browser on any IP address on the port specified as a command line argument (see below). When it connects to a server, it should first bind the socket to the fake IP address specified on the command line (note that this is somewhat atypical: you do not ordinarily **bind()** a client socket before connecting). Figure 3 depicts this.

In addition to a normal forward proxy server, your proxy should also be capable to serve as a reverse proxy. For more detail see §2.2.4 .

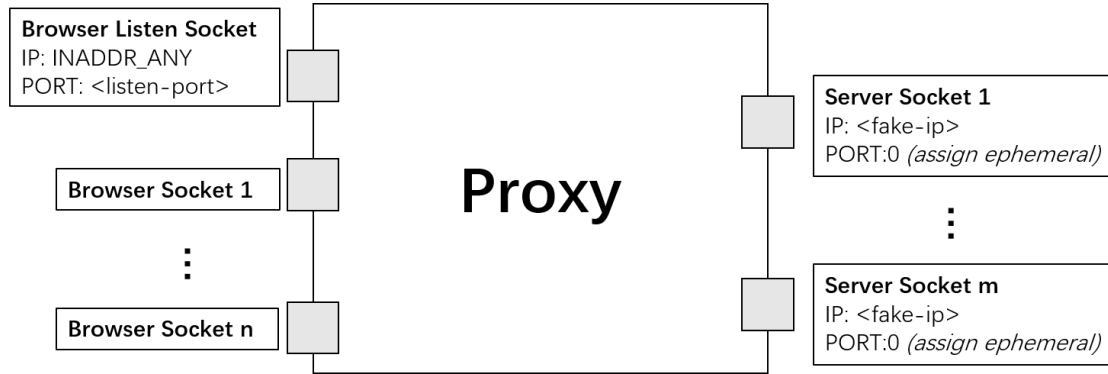Your proxy should accept multiple concurrent connections.

Figure 3: Your proxy should listen for browser connections on INADDR_ANY on the port specified on the command line. It should then connect to web servers on sockets that have been bound to the proxy's fake IP address (also specified on the command line).

2.2.1 Throughput Calculation

Your proxy could estimate each stream's throughput once per chunk as follows. Note the start time, t_s, of each chunk request (i.e., include time.h and save a timestamp using time() when your proxy receives a request from the player. Save another timestamp, t_f, when you have finished receiving the chunk from the server. Now, given the size of the chunk, B, you can compute the throughput, T, your proxy saw for this chunk:

$$T = \frac{B}{t_f - t_s}$$

To smooth your throughput estimation, your proxy should use an exponentially-weighted moving average (EWMA). Every time you make a new measurement (T_{new}), update your current throughput estimate as follows:

$$T_{current} = \alpha T_{new} + (1 - \alpha)T_{current} \qquad (1)$$

The constant $0 \leq \alpha \leq 1$ controls the tradeoff between a smooth throughput estimate (α closer to 0) and one that reacts quickly to changes (α closer to 1). You will control α via a command line argument. When a new stream starts, set $T_{current}$ to the lowest available bitrate for that video.

2.2.2 Choosing a Bitrate

Once your proxy has calculated the connection's current throughput, it should select the highest offered bitrate the connection can support. For this lab, we say a connection can support a bitrate if the average throughput is at least 1.5 times the bitrate. For example, before your proxy should request chunks encoded at 1000 Kbps,

its current throughput estimate should be at least 1.5 Mbps.

Your proxy should learn which bitrates are available for a given video by parsing the manifest file (the ".f4m" initially requested at the beginning of the stream). The manifest is encoded in XML; each encoding of the video is described by a <media> element, whose bitrate attribute you should find.

Your proxy replaces each chunk request with a request for the same chunk at the selected bitrate (in Kbps) by modifying the HTTP request's Request-URI. Video chunk URIs are structured as follows:

/path/to/video/<bitrate>Seq<num>-Frag<num>

For example, suppose the player requests fragment 3 of chunk 2 of the video Big Buck Bunny at 500 Kbps:

/path/to/video/500Seq2-Frag3

To switch to a higher bitrate, e.g., 1000 Kbps, the proxy should modify the URI like this:

/path/to/video/1000Seq2-Frag3

IMPORTANT: When the video player requests **big_buck_bunny.f4m**, you should instead return **big_buck_bunny_nolist.f4m**. This file does not list the available bitrates, preventing the video player from attempting its own bitrate adaptation. You proxy should, however, fetch **big_buck_bunny.f4m** for itself (i.e., don't return it to the client) so you can parse the list of available encodings as described above.

2.2.3   Logging

We require that your proxy create a log of its activity in a very particular format. After each request, it should append the following line to the log:

<time> <duration> <tput> <avg-tput> <bitrate> <server-ip> <chunkname>

time The current time in seconds since the epoch.

duration A floating point number representing the number of seconds it took to download this chunk from the server to the proxy.

tput The throughput you measured for the current chunk in Kbps.

avg-tput Your current EWMA throughput estimate in Kbps.

bitrate The bitrate your proxy requested for this chunk in Kbps.

server-ip The IP address of the server to which the proxy forwarded this request.

chunkname The name of the file your proxy requested from the server (that is, the modified file name in the modified HTTP GET message).

2.2.4   Running the Proxy

By running make in the root of your submission directory, we should be able to create an executable called **proxy**, which should be invoked as follows, *even if not all arguments are functional at the first subtask :*

./proxy \<log\> \<alpha\> \<listen-port\> \<fake-ip\> \<dns-ip\> \<dns-port\>
[\<www-ip\>]

log The file path to which you should log the messages described in §2.2.3.

alpha A float in the range [0, 1]. Uses this as the coefficient in your EWMA throughput estimate (Equation 1).

listen-port The TCP port your proxy should listen on for accepting connections from your browser.

fake-ip Your proxy should bind to this IP address f*or outbound connections to the web servers.* You should *not* bind your browser listen socket to this IP address — bind that socket to **INADDR ANY**.

dns-ip IP address of the DNS server.

dns-port UDP port DNS server listens on.

www-ip Your proxy should accept an optional argument specifying the IP address of the web server from which it should request video chunks. If this argument is not present, your proxy should obtain the web server's IP address by querying your DNS server for the name **video.pku.edu.cn**.

To test your proxy, you can use any web borwser you like. As a forward proxy, you should be able to access the video at **http://video.pku.edu.cn:8080/index.html** after setting **localhost:\<listen-port\>** as your browser's proxy server. As a reverse proxy, you should be able to access the video at **http://localhost:\<listen-port\>/index.html** without setting anything in your browser.

3. DNS Load Balancing

To spread the load of serving videos among a group of servers, most CDNs perform some kind of load balancing. A common technique is to configure the CDN's authoritative DNS server to resolve a single domain name to one out of a set of IP addresses belonging to replicated content servers. The DNS server can use various strategies to spread the load, e.g., round-robin, shortest geographic distance, or current server load (which requires servers to periodically report their statuses to the DNS server).

3.1 Requirements

You will write a simple DNS server that implements load balancing two different ways: round-robin and geographic distance.

Subtask 2: DNS load balancing comes into play at the second subtask. You must implement the two load balancing strategies described below. In order for your proxy

to be able to query your DNS server, you must also write an accompanying DNS resolution library (see §3.2 for details).

(1) Round robin. First, implement a simple round-robin based DNS load balancer. Your DNS process should take as input a list of video server IP addresses (the topology's **.servers** file — §4.2) on the command line (§3.2); it responds to each request to resolve the name *video.pku.edu.cn* by returning the next IP address in the list, cycling back to the beginning when the list is exhausted.

(2) Geographic distance. Next you'll make your DNS server somewhat more sophisticated — must return the closest video server to the client based on the client's IP address. In the real world, this would be done by querying a database mapping IP prefixes to geographic locations. In your implementation, you will pretend that a link state routing protocol (e.g., OSPF) is used Internet-wide and that your DNS server participates in it. Your DNS server must process link state advertisements (LSAs), build a graph of the entire network, and run Dijkstra's shortest path algorithm on the graph to determine the closest video server for a given client.

You do not need to implement LSA flooding. We will provide you with a file containing a list of LSAs which your server would have received had you actually implemented LSA flooding. The file contains one LSA per line, formatted as follows:

<div align="center">

<sender> <sequence number> <neighbors>

</div>

sender The IP address of the node that originated this LSA.

sequence number An integer allowing you to order the LSAs from a given sender. Each node sends multiple LSAs; you should accept only the most recent (even if they arrive out of order). You may assume sequence numbers don't wrap back to zero within the LSA file and that nodes in the network never reboot and start over at zero.

neighbors A comma-separated string of IP addresses denoting the sender's immediate (directly connected) neighbors.

3.2 Implementation Details

Your DNS implementation will consist of two pieces: your DNS server and your client-side resolution library. The two pieces should communicate using the DNS message formats defined in section 4.1 of RFC 1035. To make your life easier:

AA Set this to 0 in requests, 1 in responses.
RD Set this to 0 in all messages.
RA Set this to 0 in all messages.
Z Set this to 0 in all messages.

NSCOUNT Set this to 0 in all messages.

ARCOUNT Set this to 0 in all messages.

QTYPE Set this to 1 in all requests (asking for an A record).

QCLASS Set this to 1 in all requests (asking for an IP address).

TYPE Set this to 1 in all responses (returning an A record).

CLASS Set this to 1 in all responses (returning an IP address).

TTL Set this to 0 in all responses (no caching).

3.2.1 DNS Server

Your DNS server will operate over UDP. It will bind to an IP address and port specified as command line arguments. It need only respond to requests for *video.pku.edu.cn*; any other requests should generate a response with **RCODE 3**. By running **make** in the root of your submission directory, we should be able to create an executable called **nameserver**, which should be invoked as follows even if not all arguments are functional :

<p align="center">./nameserver [-r] <log> <ip> <port> <servers> <LSAs></p>

-r If present, this flag indicates the server should perform round-robin load balancing instead of processing LSAs and returing the client's closest server.

log The file path to which you should log the messages as described below.

ip The IP address on which your server should listen.

port The UDP port on which your server should listen.

servers A text file containing a list of IP addresses, one per line, belonging to content servers.

LSAs A text file containing a list of LSAs, one per line, in the format described above.

Logging Like your proxy, your DNS server must log its activity in a specific format. For each valid DNS query it services, it should append the following line to the log:

<p align="center"><time> <client-ip> <query-name> <response-ip></p>

time The current time in seconds since the epoch.

client-ip The IP address of the client who sent the query.

query-name The hostname the client is trying to resolve.

response-ip The IP address you return in response.

3.2.2 Resolution Library

The library offers 1 function: **resolve()**. We have provided the interface in **mydns.h**; you are to write the accompanying implementation in a file named **mydns.c**. Your proxy will use your resolver by including **mydns.h** and calling **resolve()** at the

beginning of each new connection.

4. Development Environment

For this lab, we are providing a virtual machine pre-configured with the software you will need. We strongly recommend that you do all development and testing in this VM; your code must compile and run correctly on this image as we will be using it for grading. This section describes the VM and the starter code it contains.

4.1 Virtual Box

The virtual machine disk (VMDK) we provide was created using VirtualBox, though you may be able to use it with other virtualization software. VirtualBox is a free download for Windows, OSX, and Linux on *https://www.virtualbox.org*. We've already set up an admin account:

Username: proj3

Password: proj3

4.2 Starter Files

You will find the following files in /home/proj3/bitrate-project-starter. This directory is a git repository. You can run **git pull** to update your files.

mydns.h The interface for your DNS resolution library (§3.2).

common Common code used by our network simulation and LSA generation scripts.

lsa

lsa/genlsa.py Generates LSAs for a provided network topology. You may use this to generate LSA files beyond those we provide, if you like.

netsim

netsim/netsim.py This script controls the simulated network; see §4.3.

netsim/tc_setup.py This script adjusts link characteristics (BW and latency) in the simulated network. It is called by **netsim.py**; you do not need to interact with it directly.

netsim/apache_setup.py This file contains code used by netsim.py to start and stop Apache instances on the IP addresses in your **.servers** file; you do not need to interact with it directly.

grapher.py A script to produce plots of link utilization, fairness, and smoothness from log files. (See §2.1.)

topos

topos/topo1

t**opos/topo1/topo1.clients** A list of IP addresses, one per line, for the proxies. (Used by **netsim.py** to create a fake network interface for each proxy.)

topos/topo1/topo1.servers A list of IP addresses, one per line, for the video servers. (Used by your DNS server and by **netsim.py** to create a fake interface for each server.)

topos/topo1/topo1.dns A single IP address for your DNS server. (Used by **netsim.py** to create a fake interface for your DNS server.)

topos/topo1/topo1.links A list of links in the simulated network. (Used by **genlsa.py.**)

topos/topo1/topo1.bottlenecks A list of bottleneck links to be used in topo1.events. (See §4.3.)

topos/topo1/topo1.events A list of changes in link characteristics (BW and latency) to "play." See the comments in the file. (Used by **netsim.py.**)

topos/topo1/topo1.lsa A list of LSAs heard by the DNS server in this topology.

topos/topo1/topo1.pdf A picture of the network.

topos/topo2

...

4.3 Network Simulation

To test your system, you will run everything (proxies, servers, and DNS server) on a simulated network in the VM. You control the simulated network with the **netsim.py** script. You need to provide the script with a directory containing a network topology, which consists of several files. We provide two sample toplogies; feel free to create your own. See §4.2 for a description of each of the files comprising a topology. Note that **netsim.py** requires that each constituent file's prefix match the name of the topology (e.g., in the topo1 directory, files are named topo1.clients, topo1.servers, etc.).

To start the network from the **netsim** directory:

<div align="center">

./netsim.py <topology> start

</div>

Starting the network creates a fake network interface for each IP address in the **.clients**, **.servers**, and **.dns** files; this allows your proxies, Apache instances, and DNS server to bind to these IP addresses.

To stop it once started (thereby removing the fake interfaces), run:

<div align="center">

./netsim.py <topology> stop

</div>

To facilitate testing your adaptive bitrate selection, the simulator can vary the bandwidth and latency of any link designated as a bottleneck in your topology's **.bottlenecks** file. (Bottleneck links must be declared because our simulator

limits you to adjusting the characteristics of only one link between any pair of endpoints. This also means that some topologies simply cannot be simulated by our simulator.) To do so, add link changes to the **.events** file you pass to **netsim.py**. Events can run automatically according to timings specified in the file or they can wait to run until triggered by the user (see **topos/topo1/topo1.events** for an example). When your **.events** file is ready, tell netsim.py to run it:

./netsim.py <topology> run

Note that you must start the network before running any events. You can issue the **run** commands as many times as you want without restarting the network. You may modify the **.events** file between runs, but you must not modify any other topology files, including the **.bottlenecks** file, without restarting the network. Also note that the links stay as the last event configured them even when **netsim.py** finishes running.

Link State Advertisements You'll notice that the simulated network described above doesn't actually contain any routers —we've taken them out of the picture to make your lives simpler by allowing you to independently set the bandwidth between any pair of endpoints (fake NICs). But, for the sake of the LSAs your DNS server needs to process, *we need to pretend that there are fake routers*. Yes, this is a tad confusing and contrived. Sorry. Deal with it. So, in each sample topology, we provide a **.links** file containing pairs of network elements (hosts or routers) between which there is a link in this pretend fake network. If the endpoint is a host, use its fake IP address in the **.links** file.

If it is a pretend fake router, we use any string (e.g., "router1"). If want to make a new LSA file based on a new network topology for your testing, you can generate one using the **genlsa.py** script (run **./genlsa.py -h** for information on how to use it).

4.4 Apache

You will use the Apache web server to serve the video files. **netsim.py** automatically starts an instance of Apache for you on each IP address listed in your topology's **.servers** file. Each instance listens on port 8080 and is configured to serve files from **/var/www**; we have put sample video chunks here for you.

5. Hand In

5.1 What to Submit

You will submit your code as a tarball named *teamname.** by sending email to *<sy2006@foxmail.com>*. Untarring this file should give us a directory named **handin** which should contain the following:

- **Makefile** — Running **make** should produce an executable named **proxy**, as described in §2.2.4, and an executable named **nameserver**, as described in

- **writeup.pdf** — This should contain the plots and analysis described in §2.1.
- **src** — A directory named **src** containing your source code. You may organize your code within this directory as you see fit, with the exception that we should find **mydns.c** immediately inside **src**.

5.2 Where to Submit

You will submit your code by sending email to < *sy2006@foxmail.com* >. If you have any questions about it, please let us know ASAP. Besides, we will hand out a few test scripts for testing.

You are expected to perform tests apart from the ones we give to you.

6. Grading

Your grade will consist of the following components:

Proxy *(50 points)*

- A right proxy
- Throughput estimation (EWMA)
- Adaptive bitrate selection
- Concurrent connection

Writeup *(15 points)*

- Plots of utilization, fairness, and smoothness for $\alpha \in \{0.1, 0.5, 0.9\}$
- Discussion of tradeoffs for varying α

DNS *(30 points)*

- DNS client-side resolution library
- Correct DNS message format
- Round robin load balancing
- LSA processing and "geographic" load balancing

Style *(5 points)*

- Code thoroughly commented
- Code organized and modular
- README listing your files and what they contain