

Totally Integrated Automation Portal

Safety Administration

Safety summary

General information

F-signatures		
Collective F-Signature	F2C00E69	
Collective F-SW-Signature	5FB13D45	
Collective F-HW-Signature	930ED124	
F-Communication Address Signature	----	
Current compilation		
Safety program state	The offline safety program is consistent.	
Compilation time	8/12/2026 4:10:45 PM (UTC +2:00)	
Used versions		
STEP 7	STEP 7 Professional V20	
Safety	STEP 7 Safety V20	
Access protection		
Safety-related project data	The safety program is protected by password	
F-CPU	Full access with fail-safe (no protection)	
Important note	Note that the settings regarding access protection only reflect the current settings while creating this safety summary. They can be changed later without any effect to the F-signature or compilation time stamp. Refer to the Device configuration for current valid access protection on the F-CPU.	

Notes

Location	Note	Additional info
General information	The response time of your safety function also depends on the cycle time of the F-OB and the runtime of the F-runtime group. When using distributed F-I/O modules, the response time also depends on the PROFINET/PROFIBUS parameter assignment. The configuration and parameter assignment of the standard system also has an effect on the response time of your safety function. Note that the configuration and parameter assignment of the standard system is not subject to the access protection of the safety program and does not change the Collective F-Signature.	Note the warning "S085" in the manual and in the STEP 7 Safety online help.

Safety program settings

Safety mode can be disabled	No
Assignment of F-system block numbers	F-system managed
Safety system version	V1.6

System library elements used in safety program

Instructions (STEP 7 Safety)	
Name	Used version
ESTOP1	V1.6

Safety information: F2C00E69 Consistent; STEP 7 Safety V20;

Information on F-runtime group

RTG1

Fail-safe organization block

Name	FOB_RTG1 [OB123]
Event class	Cyclic interrupt
Cycle time	100000 µs
Phase shift	0 µs
Priority	12

Main safety block

Name	Main_Safety_RTG1 [FB1]
I-DB for main safety block	Main_Safety_RTG1_DB [DB1]

F-runtime group parameters

Name	F-runtime group 1
Warn cycle time of the F-runtime group	110000 μs
Maximum cycle time of the F-runtime group	120000 μs
DB for F-runtime group communication	--
F-runtime group information DB	RTG1SysInfo

Pre/Post processing

FC for pre processing	--
FC for post processing	--

F-blocks in safety program

Block name [Block number]	Function in safety program	Used and compiled in F-RTG	Signature
FOB_RTG1 [OB123]	F-OB [system-protected]	RTG1	ED9A0784
Main_Safety_RTG1 [FB1]	F-FB	RTG1	6D081AEB
Main_Safety_RTG1_DB [DB1]	F-IDB	RTG1	6DA5955C

Know-how protected F-blocks in the safety program

The safety program does not contain any know-how protected F-blocks.

F-compliant PLC data types in the safety program

The safety program does not contain any F-compliant PLC data types (UDT).

Named value data types used in the safety program

The safety program does not contain any named value data types (NVT).

Constants in the safety program

The safety program does not contain any constants.

Totally Integrated Automation Portal				
Data from the standard user program				
Absolute address	Symbolic operand	F-runtime group	Block name [Block number]	Network
I15.0	"Acknowledge"	RTG1	Main_Safety_RTG1 [FB1]	1
I15.0	"Acknowledge"	RTG1	Main_Safety_RTG1 [FB1]	2
I15.0	"Acknowledge"	RTG1	Main_Safety_RTG1 [FB1]	3
I15.0	"Acknowledge"	RTG1	Main_Safety_RTG1 [FB1]	4
IW100	"ENC_A"	RTG1	Main_Safety_RTG1 [FB1]	5
IW102	"ENC_B"	RTG1	Main_Safety_RTG1 [FB1]	5
IW100	"ENC_A"	RTG1	Main_Safety_RTG1 [FB1]	7
I15.0	"Acknowledge"	RTG1	Main_Safety_RTG1 [FB1]	7
IW100	"ENC_A"	RTG1	Main_Safety_RTG1 [FB1]	9
IW100	"ENC_A"	RTG1	Main_Safety_RTG1 [FB1]	10
Parameters for safety-related CPU-CPU communications via RCVDP, SENDDP				
No safety-related CPU-CPU communication via RCVDP, SENDDP is configured.				
Safety information: F2C00E69 Consistent; STEP 7 Safety V20;				

Totally Integrated Automation Portal		
Communications via Flexible F-Link No communications via Flexible F-Link are defined for the F-Program.		
Safety information: F2C00E69 Consistent; STEP 7 Safety V20;		

Totally Integrated Automation Portal		
Communications via OPC UA Safety No communications via OPC UA Safety are defined for the safety program.		
Safety information: F2C00E69 Consistent; STEP 7 Safety V20;		

Hardware configuration of F-I/O

F-CPU information					
Short designation		CPU 1516F-3 PN/DP			
Article number		6ES7 516-3FN00-0AB0			
Firmware version		V1.8			
Central F-source address		1			
F-destination address range (PROFIsafe address type 1)		--			
F-destination address range (PROFIsafe address type 2)		65533 .. 65534			

Central periphery					
Rail - Slot	Module	Start address	F-destination address	F-monitoring time	Parameter signature (w/o addresses)
Rail_0-2	6ES7 526-1BH00-0AB0 F-DI 16x24V DC_1	0	65534	150 ms	0xC147 (49479)
Rail_0-3	6ES7 526-2BF00-0AB0 F-DQ 8x24V DC/2A PPM_1	9	65533	150 ms	0x10B5 (4277)

Safety information: F2C00E69 Consistent; STEP 7 Safety V20;

Totally Integrated Automation Portal			
F-DI 16x24V DC_1 : Central I/O Rail_0, Slot 2			
General parameters		Specific Parameters	
Hardware		Sensor supply 0	
Name	F-DI 16x24V DC_1	Supplied channels	Channels [0...3]
Slot	2	Short-circuit test activated	Yes
Short designation	F-DI 16x24V DC	Time for short-circuit test	4.2 ms
Article number	6ES7 526-1BH00-0AB0	Startup time of sensor after short-circuit test	4.2 ms
Start address input	0	Sensor supply 1	
Start address output	0	Supplied channels	Channels [4...7]
Hardware identifier	257	Short-circuit test activated	Yes
F-monitoring time	150 ms	Time for short-circuit test	4.2 ms
F-source address	1	Startup time of sensor after short-circuit test	4.2 ms
F-destination address	65534	Sensor supply 2	
F-parameter signature (without addresses)	0xC147 (49479)	Supplied channels	Channels [8...11]
F-parameter signature (with addresses)	0xDA84 (55940)	Short-circuit test activated	Yes
Behavior after channel fault	Passivate channel	Time for short-circuit test	4.2 ms
RIOforFA-Safety	Yes	Startup time of sensor after short-circuit test	4.2 ms
PROFIsafe mode	V2 mode	Sensor supply 3	
PROFIsafe protocol version	Expanded protocol (XP)	Supplied channels	Channels [12...15]
Firmware version	V1.0	Short-circuit test activated	Yes
Software		Time for short-circuit test	4.2 ms
F-I/O DB number	30009	Startup time of sensor after short-circuit test	4.2 ms
F I/O DB name	F00000_F-DI16x24VDC_1	Channel 0, 8	
Used in F-runtime group	RTG1	Sensor evaluation	1oo2 evaluation, equivalent
		Discrepancy behavior	Supply value 0
		Discrepancy time	5 ms
		Reintegration after discrepancy error	Test 0-Signal not necessary
		Channel 0	
		Channel activated	Yes
		Input delay	3.2 ms
		Channel failure acknowledge	Manual
		Pulse extension	--- sec
		Chatter monitoring	No
		Number of signal changes	5
		Monitoring window	2 sec
		Channel 8	
		Channel activated	Yes
		Input delay	3.2 ms
		Channel failure acknowledge	Manual
		Pulse extension	--- sec
		Chatter monitoring	No
		Number of signal changes	5
		Monitoring window	2 sec
		Channel 1, 9	
		Sensor evaluation	1oo2 evaluation, equivalent
		Discrepancy behavior	Supply value 0
		Discrepancy time	5 ms
		Reintegration after discrepancy error	Test 0-Signal not necessary
		Channel 1	
		Channel activated	Yes
		Input delay	3.2 ms
		Channel failure acknowledge	Manual
		Pulse extension	--- sec
		Chatter monitoring	No
		Number of signal changes	5
		Monitoring window	2 sec
		Channel 9	
		Channel activated	Yes
		Input delay	3.2 ms
		Channel failure acknowledge	Manual
		Pulse extension	--- sec
		Chatter monitoring	No
		Number of signal changes	5
		Monitoring window	2 sec
		Channel 2, 10	
		Sensor evaluation	1oo2 evaluation, equivalent
		Discrepancy behavior	Supply value 0
		Discrepancy time	5 ms
		Reintegration after discrepancy error	Test 0-Signal not necessary
		Channel 2	
		Channel activated	Yes
		Input delay	3.2 ms
		Channel failure acknowledge	Manual
		Pulse extension	--- sec
		Chatter monitoring	No
		Number of signal changes	5
		Monitoring window	2 sec
		Channel 10	
		Channel activated	Yes
Safety information: F2C00E69 Consistent; STEP 7 Safety V20;			

Totally Integrated Automation Portal		
General parameters	Specific Parameters	
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 3, 11	
	Sensor evaluation	1oo2 evaluation, equivalent
	Discrepancy behavior	Supply value 0
	Discrepancy time	5 ms
	Reintegration after discrepancy error	Test 0-Signal not necessary
	Channel 3	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 11	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 4, 12	
	Sensor evaluation	1oo2 evaluation, equivalent
	Discrepancy behavior	Supply value 0
	Discrepancy time	5 ms
	Reintegration after discrepancy error	Test 0-Signal not necessary
	Channel 4	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 12	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 5, 13	
	Sensor evaluation	1oo2 evaluation, equivalent
	Discrepancy behavior	Supply value 0
	Discrepancy time	5 ms
	Reintegration after discrepancy error	Test 0-Signal not necessary
	Channel 5	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 13	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 6, 14	
	Sensor evaluation	1oo2 evaluation, equivalent
	Discrepancy behavior	Supply value 0
	Discrepancy time	5 ms
	Reintegration after discrepancy error	Test 0-Signal not necessary
	Channel 6	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
Safety information: F2C00E69 Consistent; STEP 7 Safety V20;		

Totally Integrated Automation Portal		
General parameters	Specific Parameters	
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 14	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 7, 15	
	Sensor evaluation	1oo2 evaluation, equivalent
	Discrepancy behavior	Supply value 0
	Discrepancy time	5 ms
	Reintegration after discrepancy error	Test 0-Signal not necessary
	Channel 7	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
	Channel 15	
	Channel activated	Yes
	Input delay	3.2 ms
	Channel failure acknowledge	Manual
	Pulse extension	--- sec
	Chatter monitoring	No
	Number of signal changes	5
	Monitoring window	2 sec
Safety information: F2C00E69 Consistent; STEP 7 Safety V20;		

Totally Integrated Automation Portal		
--------------------------------------	--	--

F-DQ 8x24V DC/2A PPM_1 : Central I/O Rail_0, Slot 3

General parameters		Specific Parameters	
Hardware		Maximum test period	1000 sec
Name	F-DQ 8x24V DC/2A PPM_1	Operating mode of the output	PM-switching mode
Slot	3	Channel 0	
Short designation	F-DQ 8x24V DC/2A PPM	Channel activated	Yes
Article number	6ES7 526-2BF00-0AB0	Channel failure acknowledge	Manual
Start address input	9	Max. readback time dark test	1.0 ms
Start address output	9	Disable dark test for 48 hours	No
Hardware identifier	258	Max. readback time switch on test	0.8 ms
F-monitoring time	150 ms	Activated light test	No
F-source address	1	Wire break	No
F-destination address	65533	Channel 1	
F-parameter signature (without addresses)	0x10B5 (4277)	Channel activated	Yes
F-parameter signature (with addresses)	0x4A58 (19032)	Channel failure acknowledge	Manual
Behavior after channel fault	Passivate channel	Max. readback time dark test	1.0 ms
RIOforFA-Safety	Yes	Disable dark test for 48 hours	No
PROFIsafe mode	V2 mode	Max. readback time switch on test	0.8 ms
PROFIsafe protocol version	Expanded protocol (XP)	Activated light test	No
Firmware version	V1.0	Wire break	No
Software		Channel 2	
F-I/O DB number	30010	Channel activated	Yes
F I/O DB name	F00009_F-DQ8x24VDC/2APPM_1	Channel failure acknowledge	Manual
Used in F-runtime group	RTG1	Max. readback time dark test	1.0 ms
		Disable dark test for 48 hours	No
		Max. readback time switch on test	0.8 ms
		Activated light test	No
		Wire break	No
		Channel 3	
		Channel activated	Yes
		Channel failure acknowledge	Manual
		Max. readback time dark test	1.0 ms
		Disable dark test for 48 hours	No
		Max. readback time switch on test	0.8 ms
		Activated light test	No
		Wire break	No
		Channel 4	
		Channel activated	Yes
		Channel failure acknowledge	Manual
		Max. readback time dark test	1.0 ms
		Disable dark test for 48 hours	No
		Max. readback time switch on test	0.8 ms
		Activated light test	No
		Wire break	No
		Channel 5	
		Channel activated	Yes
		Channel failure acknowledge	Manual
		Max. readback time dark test	1.0 ms
		Disable dark test for 48 hours	No
		Max. readback time switch on test	0.8 ms
		Activated light test	No
		Wire break	No
		Channel 6	
		Channel activated	Yes
		Channel failure acknowledge	Manual
		Max. readback time dark test	1.0 ms
		Disable dark test for 48 hours	No
		Max. readback time switch on test	0.8 ms
		Activated light test	No
		Wire break	No
		Channel 7	
		Channel activated	Yes
		Channel failure acknowledge	Manual
		Max. readback time dark test	1.0 ms
		Disable dark test for 48 hours	No
		Max. readback time switch on test	0.8 ms
		Activated light test	No
		Wire break	No

Supplementary information

Safety summary created on	8/12/2026 5:10:09 PM (UTC +2:00)	Page numbers for safety summary	From 1 - 1 to 1 - 11
---------------------------	----------------------------------	---------------------------------	----------------------

Safety information: F2C00E69 Consistent; STEP 7 Safety V20;

--	--	--

Totally Integrated Automation Portal

Safety Administration / Fail-safe user blocks

Main_Safety_RTG1

Main_Safety_RTG1 Properties

General

Name	Main_Safety_RTG1	Number	1	Type	FB	Language	FBD
Numbering	Manual						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID					

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
Input									
Output									
InOut									
▼ Static									
▼ ESTOP1_Instance	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment neces-sary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ ESTOP1_Instance_1	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment neces-sary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ ESTOP1_Instance_2	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment neces-sary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ ESTOP1_Instance_3	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment neces-sary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request

Safety information: F2C00E69 Consistent; STEP 7 Safety V20;

Totally Integrated Automation Portal											
Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion			Comment
DIAG	Byte	B#16#00	Non-retain	True	True	True	False				Service information
InOut											
Static											
▼ ESTOP1_Instance_4	ESTOP1			True	True	True	False				
▼ Input											
E_STOP	Bool	false	Non-retain	True	True	True	False				Emergency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False				1=Acknowledgment neces-sary
ACK	Bool	false	Non-retain	True	True	True	False				1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False				Time delay
▼ Output											
Q	Bool	false	Non-retain	True	True	True	False				1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False				Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False				1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False				Service information
InOut											
Static											
▼ Temp											
estop_button	Bool										
pf	Bool										
diff	Int										
enc_fault	Bool										
speed_ok	Bool										
pf_right	Bool										
pf_left	Bool										
▼ Constant											
case_b1_min	Int	1000									
case_b0_min	Int	1000									
case_b0_max	Int	1800									
speed_ok_max	Int	2800									

Network 1:

The diagram shows a function block labeled #ESTOP1_Instance with an internal ESTOP1 block. Inputs include EN, %I0.0 (labeled "E-Stop"), true, %I15.0 (labeled "Acknowledge"), and 0 (labeled TIME_DEL). Outputs include Q (labeled #estop_button), Q_DELAY (false), ACK_REQ (false), DIAG (B#16#00), and ENO.

Network 2:


The diagram shows a function block labeled #ESTOP1_Instance_1 with an internal ESTOP1 block. Inputs include EN, %I0.1 (labeled "PF_OSSD"), true, %I15.0 (labeled "Acknowledge"), and 0 (labeled TIME_DEL). Outputs include Q (labeled #pf), Q_DELAY (false), ACK_REQ (false), DIAG (B#16#00), and ENO.

Network 3:


The diagram shows a function block labeled #ESTOP1_Instance_3 with an internal ESTOP1 block. Inputs include EN, %I0.3 (labeled "PF_OSSD_right"), true, %I15.0 (labeled "Acknowledge"), and 0 (labeled TIME_DEL). Outputs include Q (labeled #pf_right), Q_DELAY (false), ACK_REQ (false), DIAG (B#16#00), and ENO.

Network 4:


Safety information: F2C00E69 Consistent; STEP 7 Safety V20;

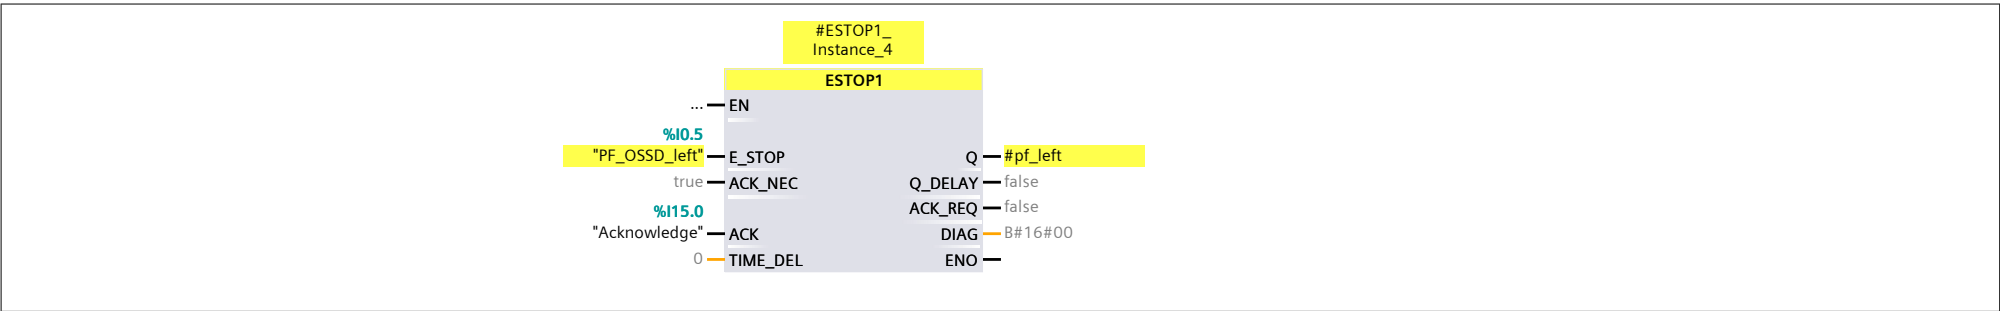


Network 5:

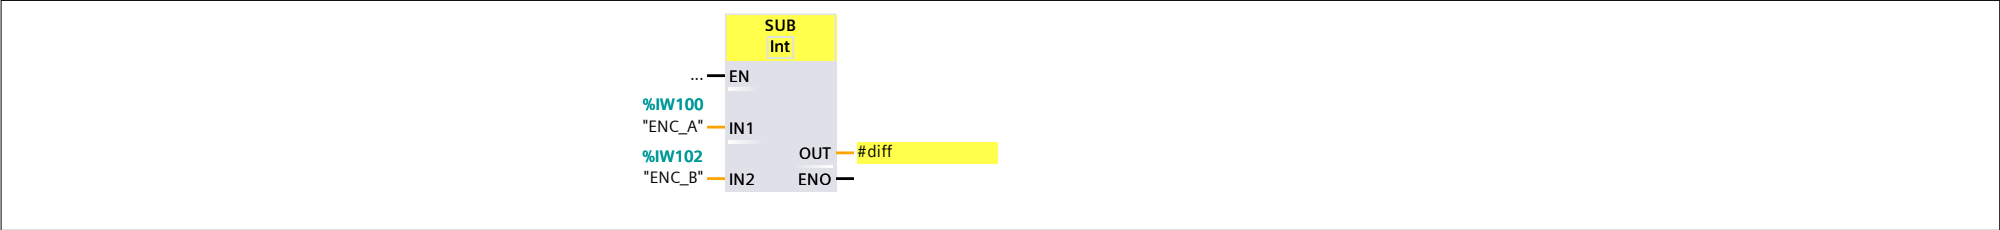


Network 6:

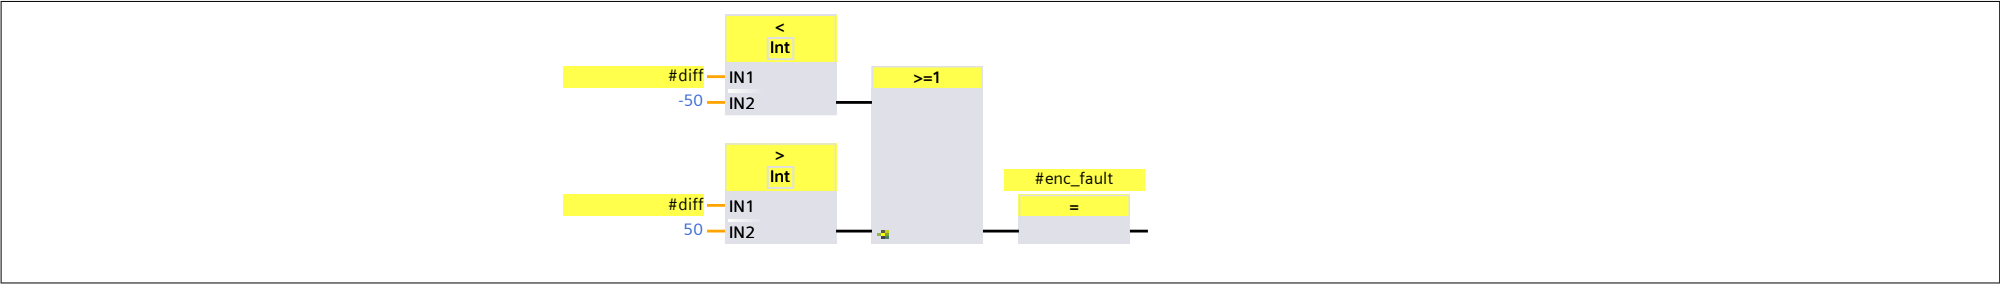


Network 7:

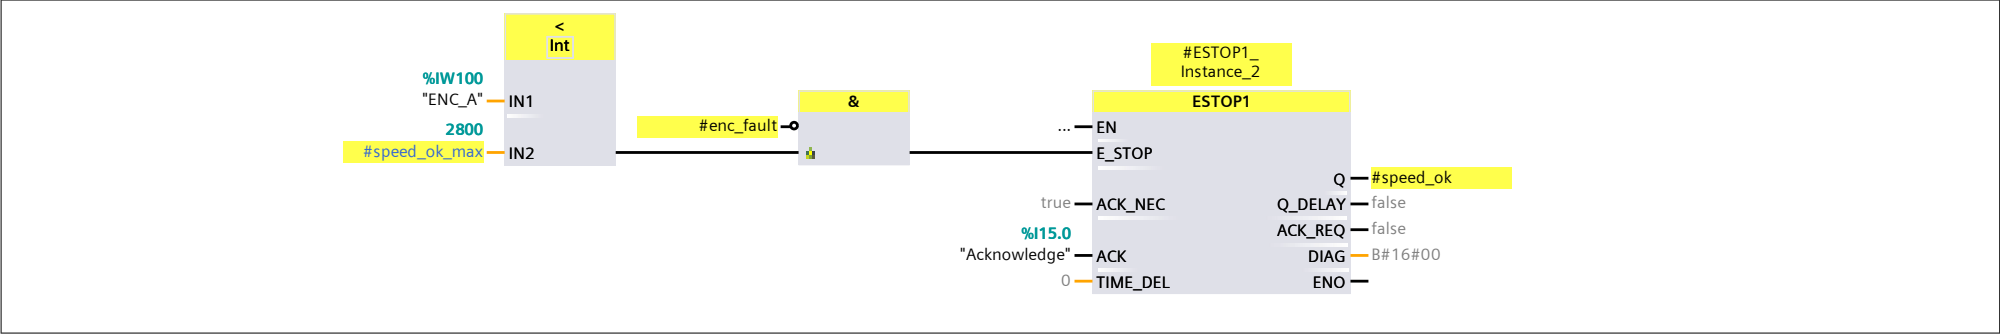


Network 8:

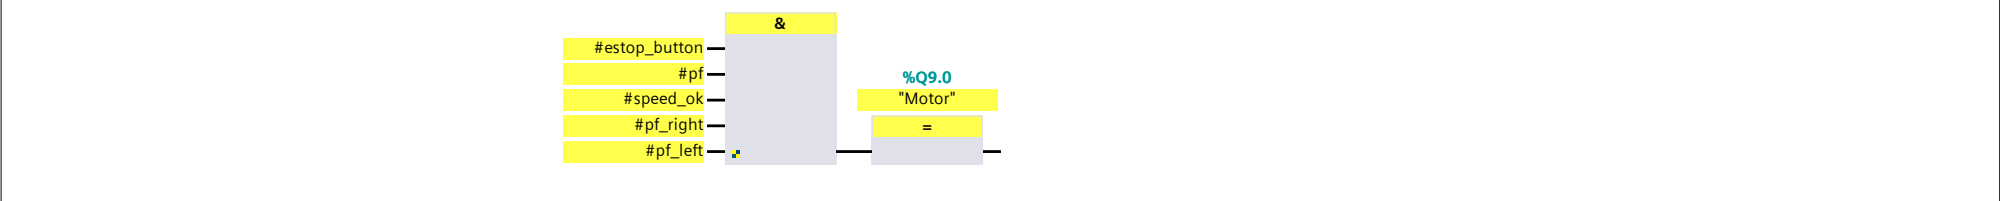

Network 9:

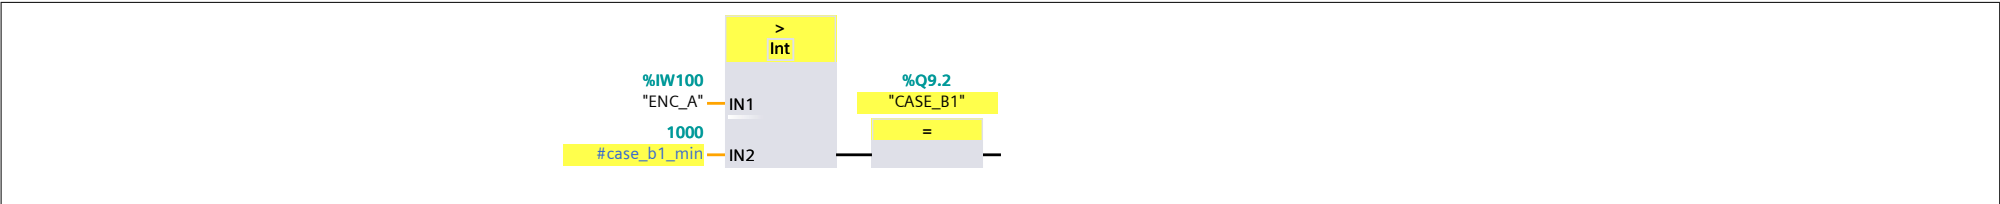

Network 10:

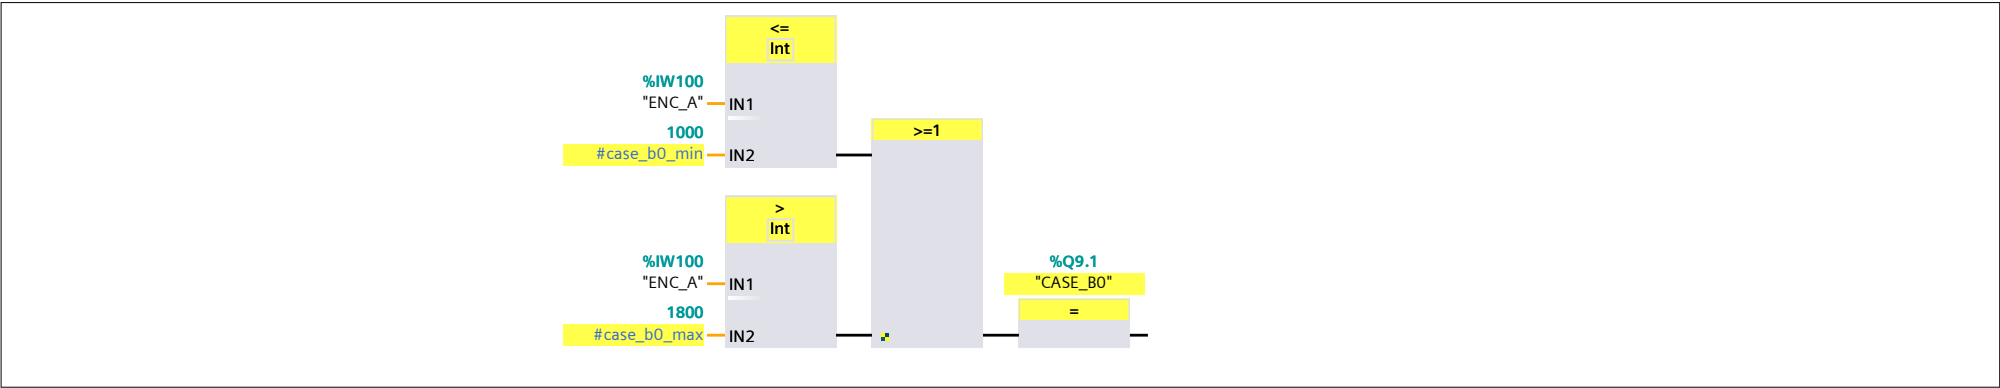

Totally Integrated Automation Portal

Safety Administration / Fail-safe user blocks

Main_Safety_RTG1_DB

Main_Safety_RTG1_DB Properties

General

Name	Main_Safety_RTG1_DB	Number	1	Type	DB	Language	DB
Numbering	Automatic						

Information

Title		Author		Comment		Family	
Version	0.1	User-defined ID	FUSI				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
Input									
Output									
InOut									
▼ Static									
▼ ESTOP1_Instance	ESTOP1		False	True	True	True	False		
▼ Input									
E_STOP	Bool	false	False	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	False	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	False	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	False	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	False	True	True	True	False		1=Enable
Q_DELAY	Bool	false	False	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	False	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	False	True	True	True	False		Service information
InOut									
Static									
▼ ESTOP1_Instance_1	ESTOP1		False	True	True	True	False		
▼ Input									
E_STOP	Bool	false	False	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	False	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	False	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	False	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	False	True	True	True	False		1=Enable
Q_DELAY	Bool	false	False	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	False	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	False	True	True	True	False		Service information
InOut									
Static									
▼ ESTOP1_Instance_2	ESTOP1		False	True	True	True	False		
▼ Input									
E_STOP	Bool	false	False	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	False	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	False	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	False	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	False	True	True	True	False		1=Enable
Q_DELAY	Bool	false	False	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	False	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	False	True	True	True	False		Service information
InOut									
Static									
▼ ESTOP1_Instance_3	ESTOP1		False	True	True	True	False		
▼ Input									
E_STOP	Bool	false	False	True	True	True	False		Emergency STOP
ACK_NEC	Bool	true	False	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	False	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	False	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	False	True	True	True	False		1=Enable
Q_DELAY	Bool	false	False	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	False	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	False	True	True	True	False		Service information
InOut									
Static									

Safety information: F2C00E69 Consistent; STEP 7 Safety V20;

[illegible]