

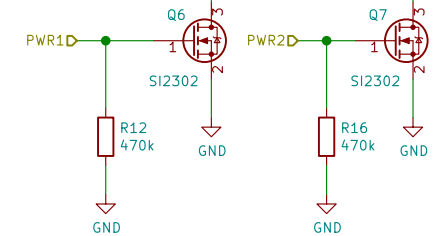


3.5mm Audio Jack  
Port to trigger the camera

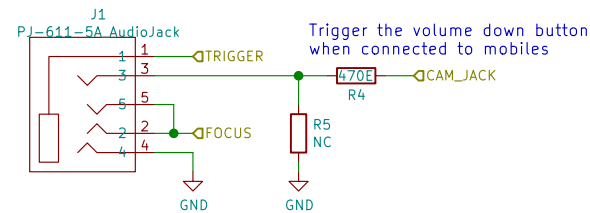


Change the feedback voltage such that the  
IR LED voltage changes. This is to control  
the emitted power of the LED.

IR pattern receiver  
with an enable switch

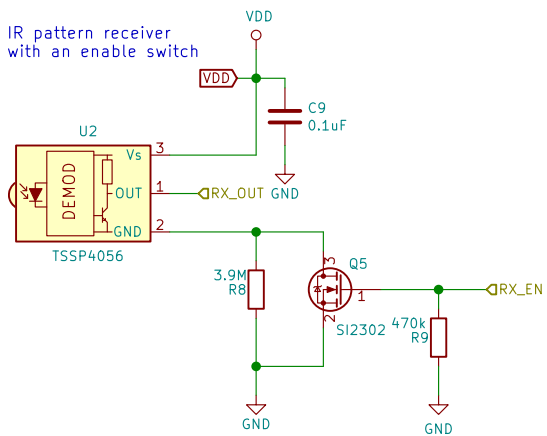

A momentary push button  
with debouncing cap to  
switch to config. mode

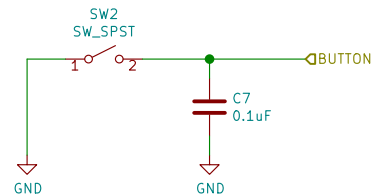

MK1 Mounting\_Hole  
MK2 Mounting\_Hole  
MK3 Mounting\_Hole  
MK4 Mounting\_Hole

Sheet: /Sheet5C63BFE7/  
File: senseBe\_Tx.sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 5.1.4-e60b26684ubuntu18.04.1

Rev:

Id: 2/2