

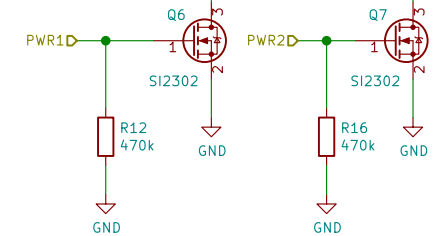



3.5mm Audio Jack
Port to trigger the camera

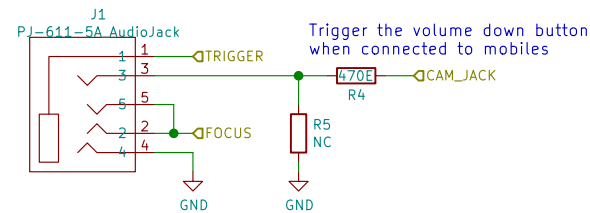

Change the feedback voltage such that the IR LED voltage changes. This is to control the emitted power of the LED.

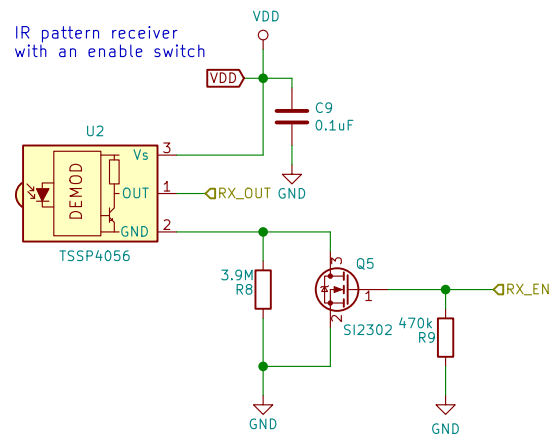

A momentary push button
with debouncing cap to
switch to config. mode

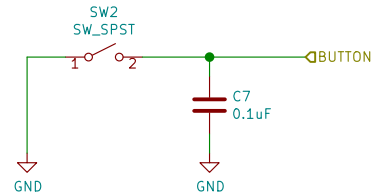

MK1 Mounting_Hole
MK2 Mounting_Hole
MK3 Mounting_Hole
MK4 Mounting_Hole

Sheet: /Sheet5C63BFE7/
File: senseBe_Tx.sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 5.1.4-e60b26684ubuntu18.04.1

Rev:

Id: 2/2