

COMP SIDE
#6-32 PAN HD. SCREW
STRAIN RELIEF

USE THIS TERMINAL WHEN
USING +5V REGULATED
(ADD INSULATED JUMPER AS SHOWN)
+5V
REG.


+8V
UNREG.

GND

117VAC

6.3-8VAC (NOT REQ'D IF +5 REGULATED OR
+8 UNREGULATED SUPPLIES ARE
USED)

WINCHESTER HW43CO-III
OR EQUIV 86 PIN
(5 NOT SUPPLIED)

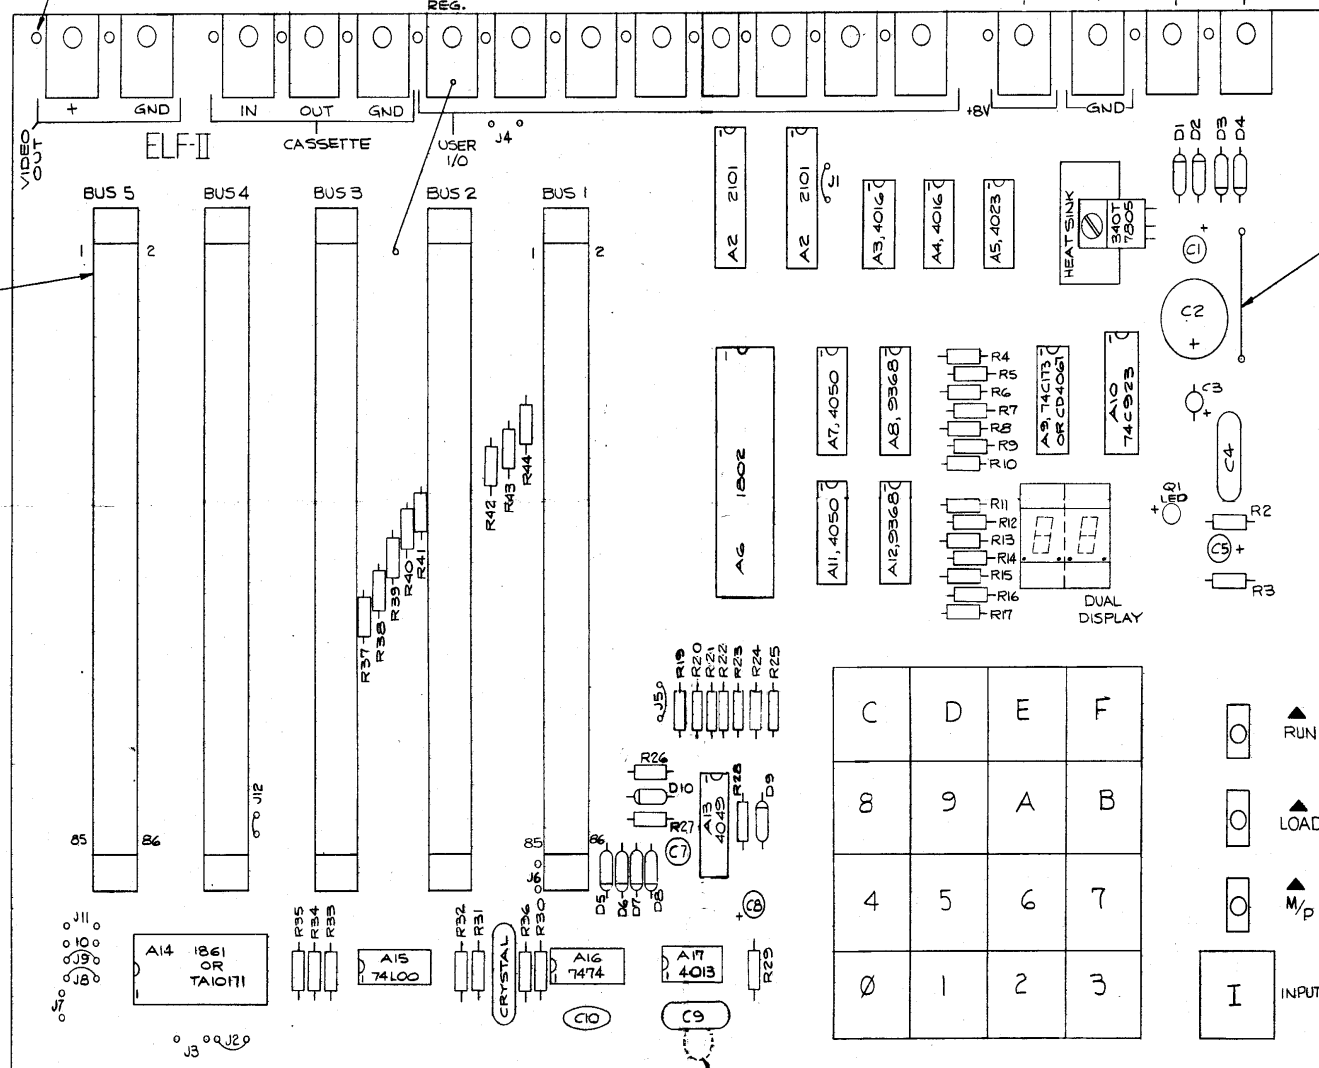

R1 JUMPER (INSULATED)

D1-4 IN4001
D5-10 IN4148
R2, 32 470Ω
R28 200Ω
R4-17 120Ω
R19, 26, 29 47K
R30, 34, 36 10K
R33 1K
R31, 35 2.2K
R34 22K
C1 10μF
C2 1000μF
C3 1.0μF
C4, 9 .15μF
C8 22μF
C10 330μF
CRYSTAL 3.58

C5, 6, 7 } OMITTED
R3, 18, 27 }

WHEN NOT USING MEMORY,
LEARNING OR GIANT BOARD
CONNECT JUMPERS J1, J2,
J5, J8, J9, J12. ALL OTHER
JUMPERS TO BE UNCONNECTED
(INSTRUCTIONS FOR CONNECTIONS
SUPPLIED WITH ACCESSORY
BOARDS)

	C	D	E	F
8		9	A	B
4		5	6	7
0	1	2	3	

