
# MEDIUM PEDAL — INTERNAL LAYOUT, TOP DOWN

178.26 × 110.26 mm internal · draft, not a drilling template · positions from your corrections

Lid removed / see-through: the screen cutout is in the lid, the Pi hangs below it.

REAR

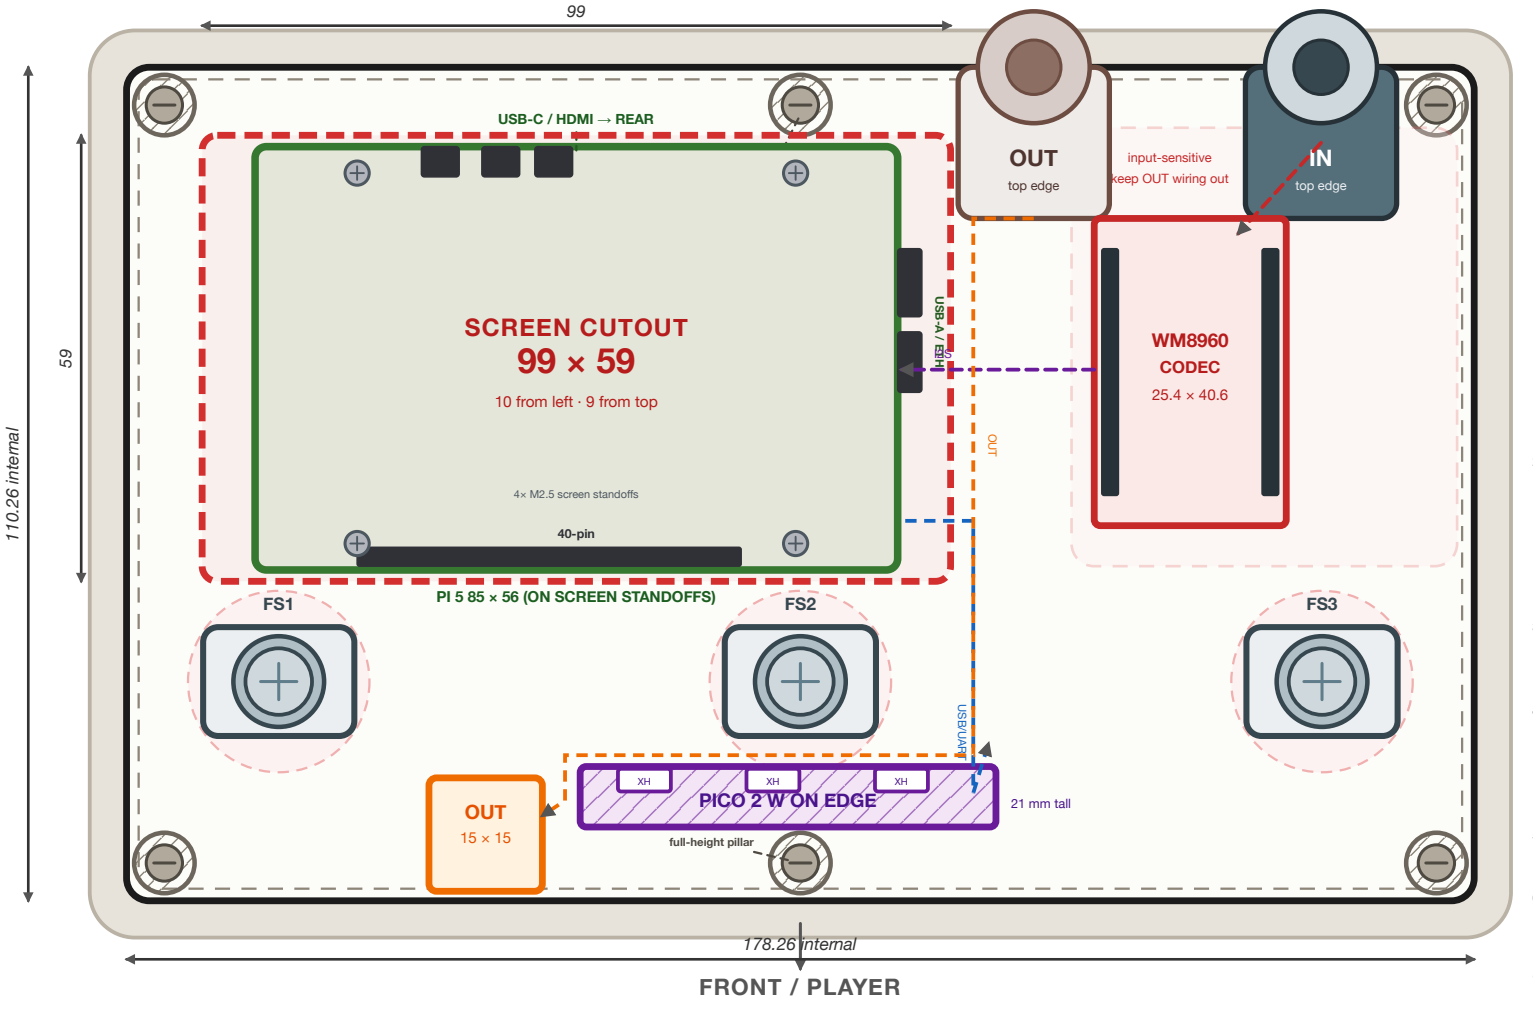


NOTES

Case 178.26 × 110.26 × ~33 mm. Front (player) bottom; rear top. mm. 6 screw pillars (corners + top/bottom centre) are full-height aluminium. Keep parts and wires clear of them. Draft — check before cutting. Dashed = above / proposed.

1 SCREEN cutout 99 × 59, 10 from left, 9 from top. No module outline is dimensioned; the cutout is exact. The 9 mm strip above it is free for the Pi's USB-C/HDMI leads; the Pi top edge sits 1.5 mm below the cutout top.

2 Pi 5 85 × 56 landscape, centred on the screen's Pi standoffs. USB-C/HDMI on the top edge; USB-A/Ethernet on the right edge; 40-pin header on the bottom edge. Holes 58 × 49. The Pi is clear of the footswitches.

3 FOOTSWITCHES: middle at W/2 = 89.13; ±69 gives 20.13 / 158.13; 29 mm from the bottom edge.

4 IN / OUT both on the top edge: OUT x=120, IN x=158, ~38 mm apart. Codec sits between them, FS3, the Pi and the right wall; input lead < 20 mm.


5 CODEC WM8960 25.4 × 40.6, x=128..153, y=20..61.

6 OUT BOARD 15 × 15, front-left, clear of the input side. A second fits beside it.

7 PICO 2 W on edge: 55 × 8 plan, 21 mm tall; moved up by the pillar width to clear it. XH sockets on top.

8 Screen 7 + standoff 6 + Pi 17 ≈ 30 of 33; Pi clear of FS2 in plan.

## SECTION A–A (through x = 89: Pi, FS2, Pico and bottom-centre pillar)

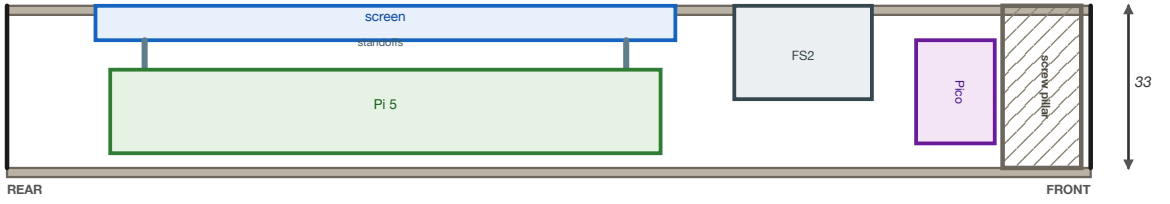


screen 7 + standoff 6 + Pi 17 ≈ 30 of 33; Pi clear of FS2; pillar full height.

Drawing units are mm; print 300 mm wide for 1:1 (not to scale on screen).

