

A Project Report on

# **BeSafe: IoT Based Safety Band**

Submitted in partial fulfillment of the requirements for the award  
of the degree of

**Bachelor of Engineering**

in


**Information Technology**

by

**Ganesh Jambuka(18104044)**  
**Krishi Shah(19204009)**  
**Riddhi Shah(19204010)**

Under the Guidance of

**Prof. Anagha Aher**



**Department of Information Technology**

**NBA Accredited**

A.P. Shah Institute of Technology  
G.B.Road,Kasarvadavli, Thane(W), Mumbai-400615

UNIVERSITY OF MUMBAI

**Academic Year 2020-2021**

## Approval Sheet

This Project Report entitled ***“BeSafe: IoT Based Safety Band”*** Submitted by ***“Ganesh Jambuka”(18104044), “Krishi Shah”(19204009), “Riddhi Shah”(19204010)*** is approved for the partial fulfillment of the requirement for the award of the degree of ***Bachelor of Engineering*** in ***Information Technology*** from ***University of Mumbai***.

Prof. Anagha Aher  
Guide

Prof. Kiran Deshpande  
Head Department of Information Technology

Place:A.P.Shah Institute of Technology, Thane  
Date:

## CERTIFICATE

This is to certify that the project entitled “*BeSafe: IoT Based Safety Band*” submitted by “*Ganesh Jambuka*”(18104044), “*Krishi Shah*”(19204009), “*Riddhi Shah*”(19204010) for the partial fulfillment of the requirement for award of a degree *Bachelor of Engineering in Information Technology*, to the University of Mumbai, is a bonafide work carried out during academic year 2020-2021.

Prof. Anagha Aher  
Guide

Prof. Kiran Deshpande  
Head Department of Information Technology

Dr. Uttam D.Kolekar  
Principal

External Examiner(s)

1.

2.

Place: A.P. Shah Institute of Technology, Thane

Date:

## Acknowledgement

We have great pleasure in presenting the report on **BeSafe: IoT Based Safety Band**. We take this opportunity to express our sincere thanks towards our guide **Prof. Anagha Aher** Department of IT, APSIT thane for providing the technical guidelines and suggestions regarding line of work. We would like to express our gratitude towards his constant encouragement, support and guidance through the development of project.

We thank **Prof. Kiran B. Deshpande** Head of Department, IT, APSIT for his encouragement during progress meeting and providing guidelines to write this report.

We thank **Prof. Vishal S. Badgujar** BE project co-ordinator, Department of IT, APSIT for being encouraging throughout the course and for guidance.

We also thank the entire staff of APSIT for their invaluable help rendered during the course of this work. We wish to express our deep gratitude towards all our colleagues of APSIT for their encouragement.

**Student Name1: Ganesh Jambuka**  
**Student ID1: 18104044**

**Student Name2: Krishi Shah**  
**Student ID2: 19204009**

**Student Name3: Riddhi Shah**  
**Student ID3: 19204010**

## Declaration

We declare that this written submission represents our ideas in our own words and where others' ideas or words have been included, We have adequately cited and referenced the original sources. We also declare that We have adhered to all principles of academic honesty and integrity and have not misrepresented or fabricated or falsified any idea/data/fact/source in our submission. We understand that any violation of the above will be cause for disciplinary action by the Institute and can also evoke penal action from the sources which have thus not been properly cited or from whom proper permission has not been taken when needed.

---

(Signature)

---

(Ganesh Jambuka 18104044)  
(Krishi Shah 19204009)  
(Riddhi Shah 19204010)

Date:

## **Abstract**

Women nowadays do not feel safe, either inside or outside of their homes. The crime rate is high, and accidents happen on every other route for various reasons. As a result, we proposed the idea of a safety band to help women and victims in critical situations. Given the circumstances, we devised a method for a woman to obtain administrative assistance on time. The Bluetooth module will help to connect hardware with software. We used a band for hardware and a mobile software application. Our technology will help women who have been sexually harassed, as well as victims of accidents or other crises, by tracking and communicating their real-time location, to the family and the police via Short Message Service (SMS) using the Global System for Mobile Communications (GSM) module and Global Positioning System (GPS) module while the victim is in the process of being tracked. Our method helps them remember the coordinates of where they pressed the push button. All data will be stored on Firebase and analyzed before reporting to law enforcement and government agencies. Based on the investigation's findings, the police may take further actions to help the victims.

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Literature Review</b>	<b>2</b>
<b>3</b>	<b>Objectives</b>	<b>4</b>
<b>4</b>	<b>Project Design</b>	<b>5</b>
4.1	Existing System . . . . .	5
4.1.1	Flow of Band . . . . .	5
4.1.2	Flow of Application . . . . .	6
4.2	Proposed System . . . . .	6
4.2.1	Flow of Proposed Band . . . . .	6
4.2.2	Flow when APP and Band are connected . . . . .	7
4.2.3	Flow of Proposed Application . . . . .	8
4.3	UML Diagrams . . . . .	8
4.3.1	Use Case Diagram . . . . .	8
4.3.2	Activity Diagrams . . . . .	9
4.3.3	Class Diagram . . . . .	10
4.3.4	Sequence Diagrams . . . . .	11
<b>5</b>	<b>Project Implementation</b>	<b>13</b>
5.1	Application Implementation . . . . .	13
5.1.1	AuthService . . . . .	13
5.1.2	Location . . . . .	13
5.1.3	The Emergency Button . . . . .	14
5.1.4	Analysis . . . . .	15
<b>6</b>	<b>Testing</b>	<b>16</b>
6.1	Functional Testing . . . . .	16
6.1.1	Unit Testing . . . . .	16
6.1.2	Integration Testing . . . . .	16
6.2	Non Functional Testing . . . . .	17
6.2.1	Compatibility Testing . . . . .	17
<b>7</b>	<b>Result</b>	<b>18</b>
<b>8</b>	<b>Conclusions and Future Scope</b>	<b>19</b>

<b>Bibliography</b>	<b>19</b>
<b>Appendices</b>	<b>22</b>
Appendix-A . . . . .	22
<b>Publication</b>	<b>24</b>



# List of Figures

4.1	Flow of Band . . . . .	5
4.2	Flow of App . . . . .	6
4.3	Flow of Proposed Band . . . . .	7
4.4	Flow when APP and Band are connected . . . . .	7
4.5	Flow of Proposed Application . . . . .	8
4.6	Use Case Diagram for Esecure App . . . . .	9
4.7	Activity Diagram for Login . . . . .	10
4.8	Activity Diagram for Home . . . . .	10
4.9	Class Diagram for Esecure App . . . . .	11
4.10	Sequence diagram for Login and Contacts . . . . .	12
4.11	Sequence diagram for SOS and Analysis . . . . .	12
5.1	AuthService . . . . .	13
5.2	Tracking current location . . . . .	14
5.3	SOS Function . . . . .	14
5.4	Downloading JSON File . . . . .	15
5.5	Hardware Code . . . . .	15

# List of Abbreviations

GSM:	Global System for Mobile Communications
GPS:	Global Positioning System
SMS:	Short Message Service
URL:	Uniform Resource Locator
JSON:	JavaScript Object Notation
IoT:	Internet of Things

# Chapter 1

## Introduction

Women's safety is a hot topic in India. Currently, It has become a vital source of concern. The crime rate is increasing. Women are unsafe both outside and inside their homes. However, despite this fear, social activity will continue. Even if we have strict regulations, there should be adequate safety precautions that we must strictly follow to protect women from assault. Considering the above-stated circumstances, We have proposed a system that will quickly receive aid from family and the police. It is a hybrid of hardware and software that prioritises women's safety because only hardware or software won't provide complete security. The band serves as both hardware and software for mobile applications. Bluetooth enables hardware and software to exchange data. If a woman is in danger, an emergency switch located on the band should be pressed. As a result, in the event of an emergency, SMS will be sent to the user's family and police. Our system assists women who are victims of sexual harassment and is also designed to assist victims who are involved in a car accident or other crisis by tracking and sending their real-time location to the family via SMS using the GSM and GPS module when the band is connected to the application, The band will send a signal or either it will work independently. The user can send the Google Map Uniform Resource Locator (URL) link to the immediate family by pressing the push button. Our system will store the location area name where the push button was pressed, which could be useful to the police by allowing them to access data from Firebase or the application in JavaScript Object Notation (JSON) file format. This way we can help the victim when they come across any problems.

# Chapter 2

## Literature Review

In 2019, S. Pandey et.al.[1] They proposed a methodology that uses an app a victim can send their location and log a complaint to a police station, family member, compatriots, and admin. The admin then forwards the victim's notification to all users within 100 metres of the victim. The App generates a unique code that allows two users to track each other. This would be more beneficial if it was completely automated and did not require monitoring. In 2018, N. R. Sogi et.al.[2]The proposed methodology uses a device for women's safety using a Raspberry Pi and a Raspberry camera module. The priority here is on helping the victim by informing the police or other designated parties of the victim's current location and information about the criminal with a single click of a button. The limitation includes the fact that this device is purposed to protect women and that obtaining assistance will be difficult due to the fixed access numbers. In 2019, V. Sharma et.al.[3]The proposed methodology consists of GSM, GPS, shock circuit, camera, Arduino UNO, and Raspberry Pi-3. When the user presses the switch, it sends the link to the guardians, with the live streaming video clips saved in the Google Drive link, activates the electric teaser for self-defence, and sends the location via the gsm module. The camera module is not able to be carried with the user. In 2019, R.R. Khandoker et.al.[4]The proposed system is an application where, if the user pushes the SOS button or yells with the voice command, the app will send an alert message to the user's registered contacts, including the user's position and record the surrounding sound for the first five minutes as a proof. The newer Android version has a restriction to listen to the sound continuously. In 2019, T. M. R et.al.[5]The authors designed a security device that included GPS, GSM, a Raspberry Pi, and various sensors. The smart band will provide the user's location and physical condition to the user's guardian and police. The proposed device is not wearable, it takes up a lot of space, and people cannot carry the band around. In 2019, S. Khanam et.al.[6]They proposed a better approach that uses a high voltage current producing circuit to stun the opposition for a few seconds. The fingerprint module for device activation and the GSM/GPS module for alerting and location tracking were all interfaced with a microcontroller to create a small baton-shaped device that is handy and portable. If there are too many people, it may be hard to use. In 2019, T. Sen et.al.[7]The proposed methodology uses a device that ensures women safety in three ways. They designed a mobile application that uses voice recognition. This device sends an alarm message to a pre-programmed number, rings the bell, records video, and aids in communication with an emergency number. It does not ensure the user's complete safety. The design is a little heavy, making it unwearable. In 2020, A. Anand et.al.[8]The proposed system uses Firebase, Twilio, MapBox API in their application. They have designed a crowdsourcing

application. Whenever the user is in trouble and presses the SOS button, It will notify other users nearby by sending the real-time location. The MapBox API update's position on an hourly basis of the user. But it has privacy concerns where other individuals may become a threat. In 2020, H.Chaudhary et.al.[9]The proposed system uses a band for children and GPS-enabled smartphones for parents to track their children's positions. The child's finder can utilise the information stored on the wristband to locate the youngster. The band has parents contact information, as well as a QR code. The app's difficulties include the lack of automatic calling to responsible persons when the system detects the youngster has gone missing. In 2020, Z.A.M. Fernandez et.al.[10]The proposed system used Artificial Intelligence for Speech Recognition, Accelerometer and Gyroscope for human activity recognition. The Application will detect the dangerous situation. The Algorithms will recognise the condition and forward it to a Firebase that will send alert messages with GPS Coordinates and the recorded video link. But it doesn't provide the specific places with the most insecure and finding strategies to put users in a safer situation. In 2020, A. Z. M. Tahmidul et.al.[11]The proposed methodology is an Android app and an Internet of Things (IoT) device to make women's movement safer. The app also provides the user with the location of the nearest safe zone. The app can transmit a notification to the nearest police station and volunteer support. The software has a flaw that causes the transmission of SMS to volunteers in a different zone. In 2020, V. Mishra et.al.[12]The proposed system uses SQL for the database, voice recorder, and GPS for getting coordinates. It gathers the required information, like personal and contact details. The application is activated when the user shakes the phone, uses voice, or presses the button present in it. It sends the latitude and longitude coordinates to the contacts via SMS and records audio for proof. The system could have sent the map URL link instead of sending the latitude and longitude coordinates. In 2020, D.V. Savla et.al.[13]They designed a safety band that uses data thresholding algorithms and a Wi-Fi-enabled microprocessor to detect falls. If there is a fall or spike, the server starts a 30-second timer. The user can cancel the emergency using the cancel button while the timer is still running. It conveys the nature of the crisis, user information, and precise position. The system can introduce a mobile app with live tracking and additional data analytics. In 2020, D. Sunehra et.al.[14]The proposed system is, implemented using the Raspberry Pi3 to improve the safety and security of women/children. It sends a buzzer alert to people who are close to the user. It locates the user using the GPS transmits via SMS to the emergency contact and police using the GSM. It interfaces with a USB Web Camera and sends an e-mail alert to the emergency contact. The system can be portable by enclosing all components in a small enclosure and using batteries. In 2021, K. Venkatesh et.al.[15]They proposed a device that has a wearable "Wrist band" that constantly communicates with a smartphone. The device includes a trigger, GSM module (SIM800), GPS module (Neo-6M), IoT module (ESP-12E), Neuro Stimulator, Buzzer, and Vibrating Sensor. The IoT device helps to track the surroundings and inform the internet tab. The proposed device is not wearable, it takes up a lot of space, and people cannot transport it.

The application developed will be a cross-platform application. So, It can run on both IOS and Android. The app will send the Google Map URL links instead of coordinates. The application will have a feature to show safer locations for the user, to get there in a dangerous situation. It will ensure the privacy of the users. The solution we proposed includes both hardware and software. The band provides hardware assistance when the victim does not have access to a mobile phone during a crisis.

# Chapter 3

## Objectives

- To achieve the location of the victim we will be using the GPS and GSM module which will help their family to locate them.
- To develop an application compatible with multiple OS like Android and iOS.
- To achieve the current location it will be converted into a Google Map URL link and send through cross platform application to the concerned one.
- To store the emergency location data in cloud for data analysis.
- To analyse the data/logs received from all the users so that it can be further used by police to identify the areas where emergencies had occurred with the help of bluetooth module which will send the data to the application and stored into the firebase.

# Chapter 4

## Project Design

### 4.1 Existing System

#### 4.1.1 Flow of Band

When the user will turn on the device, all modules will be launched simultaneously. The band will check whether the emergency switch has been pressed twice within five seconds or not. If the switch is not pressed or pressed for a single time, the band will not take any further action. But if the band user is in danger and presses the emergency switch on her band twice within five seconds, an emergency SMS will be sent immediately to the nearest police box, volunteers and her family. Police boxes and some volunteers' mobile number of each branch will be provided to the system in advance. When the emergency switch will be pressed, the emergency message will be sent to the police and volunteers of that zone in which the user will be in. If a user presses the button from a vehicle, the emergency SMS will be continuously sent with her updated location after every thirty seconds to the police until she presses the emergency button four times. As vehicle can go from one area to another in a very short time, if the vehicle enters the next zone then the system will send SMS to the previous zone volunteers and also to the new zone volunteers.

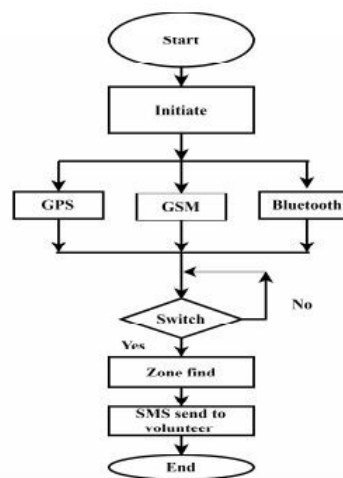


Figure 4.1: Flow of Band

### 4.1.2 Flow of Application

The user can trigger the app in two ways. One is through the emergency switch in the app. Another one is the emergency button with Smart band, which transmits signals with the app using Bluetooth support. When the emergency switch is pressed, the system will see if the GPS is ON. If not, the app will turn on GPS location service. The system will be informed about the current location of victim through Google Geolocation Service. The app will then send a notification via the Firebase Notification Service to the closest active user of the victim. As a result, the volunteers will reach out to help her and the attacker will not have enough time to harm the victim. The smart band shown in the figure above will be worn by the women like a watch. Here, the white color push button acts as the emergency switch. The HC-06 Bluetooth module connects between this band and the app.

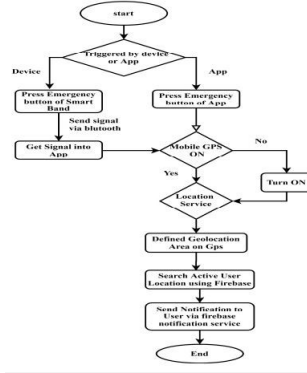


Figure 4.2: Flow of App

## 4.2 Proposed System

The system we proposed includes a band and a cross-platform application for a woman to receive assistance. We prioritised women's safety above all else, so we created a system that combines hardware and software. It will assist women in a desperate situation, accident or other crisis by tracking and sending their real-time location to the emergency contacts as an SMS via the GSM module. After tracing the current location, it will be converted into a Google Map URL link and sent either by a band or a cross-platform mobile application. Our proposed system can store the GPS coordinates of the location where the victims pressed the help button so that the police can view the records for investigation purposes in the future by accessing the JSON data. In an emergency, we have two techniques in our system for ensuring the safety of female victims: an IoT-based band or a cross-platform application via a smartphone.

### 4.2.1 Flow of Proposed Band

When the IoT-based band has started, it activates all modules, including GPS, GSM, Bluetooth, refer to the below Fig. 2. After then, the band will check to see if the emergency button is active. If the victim presses the switch, the antenna will collect the signal, and then it will be monitored by the GPS module. The band must ensure that all modules have permitted if the network is not connected. When the computer shows the longitude and



latitude using the signals received by the antenna, the coordinates are confirmed. When the victim is in a crisis, the coordinates are communicated to the police and emergency contacts via an SMS via GSM module in link format.

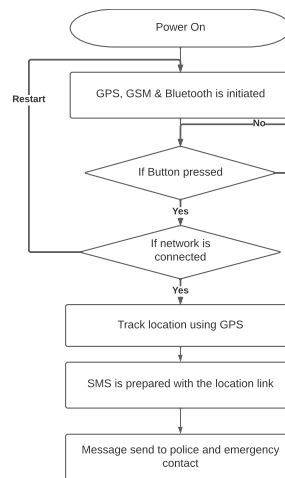


Figure 4.3: Flow of Proposed Band

#### 4.2.2 Flow when APP and Band are connected

When the IoT-enabled band is activated and connected to the application, the band alert all of the modules GPS, GSM, and Bluetooth. The safety band sends the Bluetooth signal to check the connection with the application. The safety band will also relay the victim's current location if the location is on. It would also communicate the location coordinates to the victim's emergency contacts. When the victim presses the SOS button, the app sends the victim's current position to the emergency contacts. Whenever the band would connect to the mobile app, the coordinates would be saved and accessed from the Firebase. Refer to the below Fig. 3.

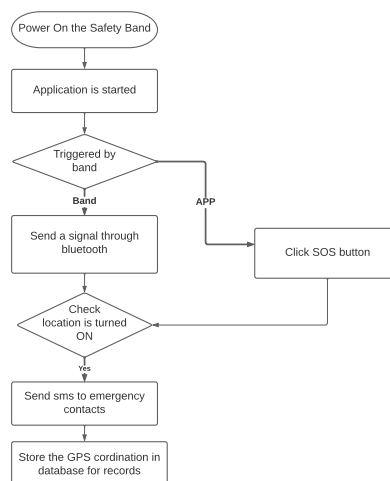


Figure 4.4: Flow when APP and Band are connected

### 4.2.3 Flow of Proposed Application

After starting the application, the user must register and give personal details stored in Firebase, including emergency contacts stored in the local database. The verification of the user's e-mail will be taken care of by FirebaseAuth. If the user presses the SOS button, it will fetch the coordinates with the help of Geolocator and convert them as a Google Map URL link, And then the application will retrieve contacts from the local database. The telephony package will send the message to the emergency contacts retrieved with the link present in it. Then, Geocoding will convert coordinates into sub locality names and store that data in Firebase Cloud Storage, refer the below Fig. 1. The admin can access that data from the application in a JSON file format refer Fig. 5. That will further be useful for data analysis of the most unsafe places, Which be helpful for government officials to investigate or to place CCTV cameras.

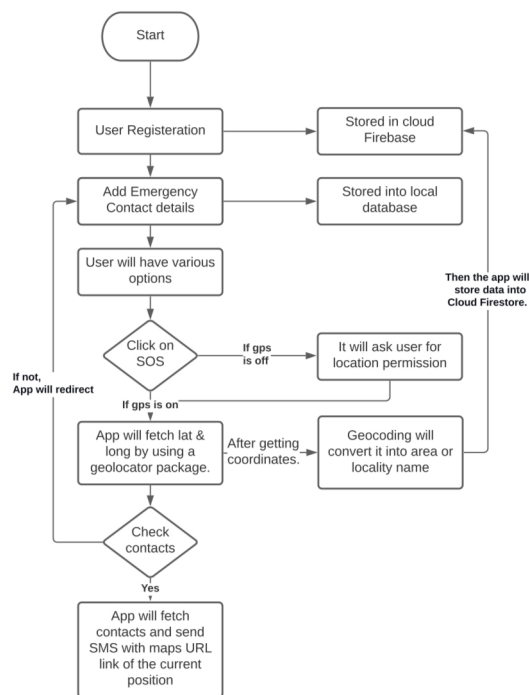


Figure 4.5: Flow of Proposed Application

## 4.3 UML Diagrams

### 4.3.1 Use Case Diagram

Use case diagrams are used to gather the requirements of a system including internal and external influences. These requirements are mostly design requirements. Hence, when a system is analyzed to gather its functionalities, use cases are prepared and actors are identified. In this use case diagram, we have defined what use cases will be available for the primary actor like the user. And the use cases need a secondary actor like FirebaseAuth, Safety Band, Database and Firestore in Fig 3.1. Some use cases have included use cases

or extended use cases e.g. while login, App needs to verify the email and password details before directing the user into the application. So, the login use case must have verify but it may not be necessary to have a login error use case every time. Some use cases need to be performed on the secondary actor side like for verification app sends the request to firebase for authentication. The user can log in, Register, Connect the safety band, Look for safe places, Make an emergency call, Add or Delete contacts, View his/her current location and The Location data can be accessed from the Analysis use case.

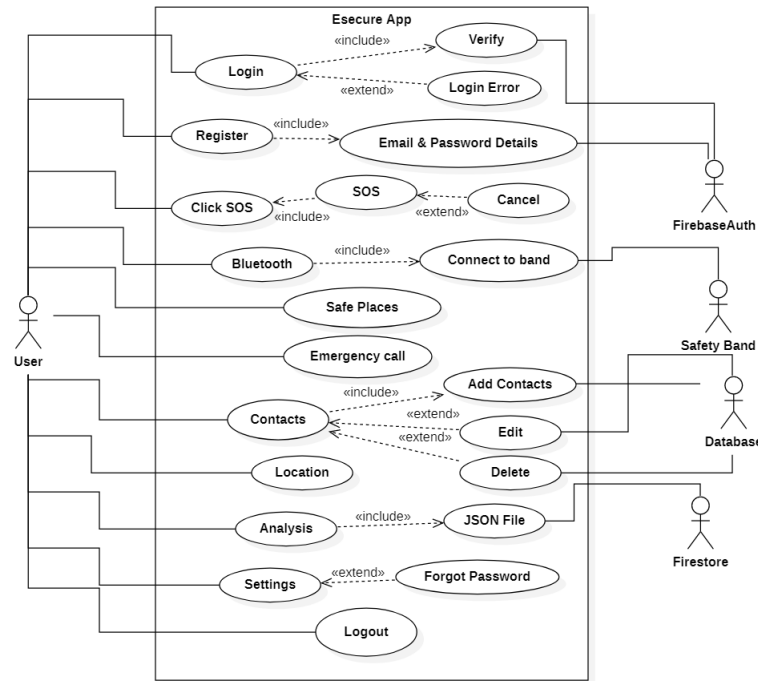


Figure 4.6: Use Case Diagram for Esecure App

### 4.3.2 Activity Diagrams

Activity diagram is basically a flowchart to represent the flow from one activity to another activity. Activity diagrams deal with all type of flow control by using different elements such as fork, join, etc. In this activity diagram, we will discuss the login flow. When the app is started user will have two options either to register or log in. When the user clicks register, the user must enter the details and it will check the fields and redirect to the home page. Likewise, the login will also verify with FirebaseAuth then redirect to the Home Page in fig 3.2. This shows the control flow of the login. On the home page, The users have multiple actions to perform like Side Menu, Bluetooth, SOS, Safe Places and Speed Dial. Under Side Menu, It has different actions like Settings, Analysis and Logout. The Bluetooth action is to connect the safety band. The SOS is the action the user wants to use while in an emergency. The Safe Place actions will redirect to google maps for direction. The Speed Dial action has three more under it Emergency call, Current Location and Contacts in fig 3.3. This shows the control flow inside the application.

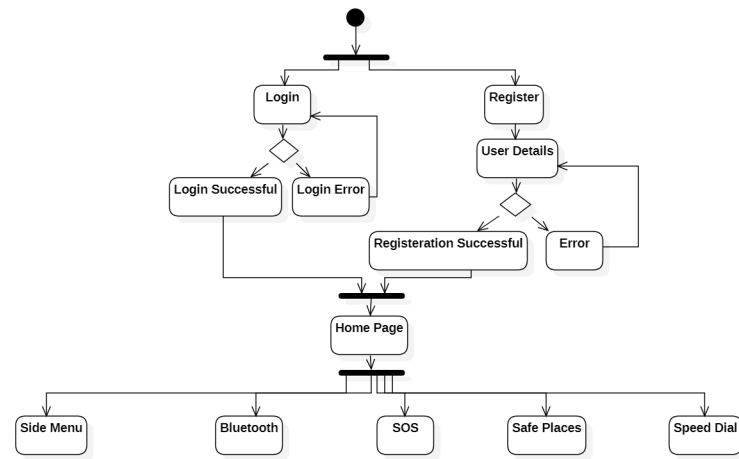


Figure 4.7: Activity Diagram for Login

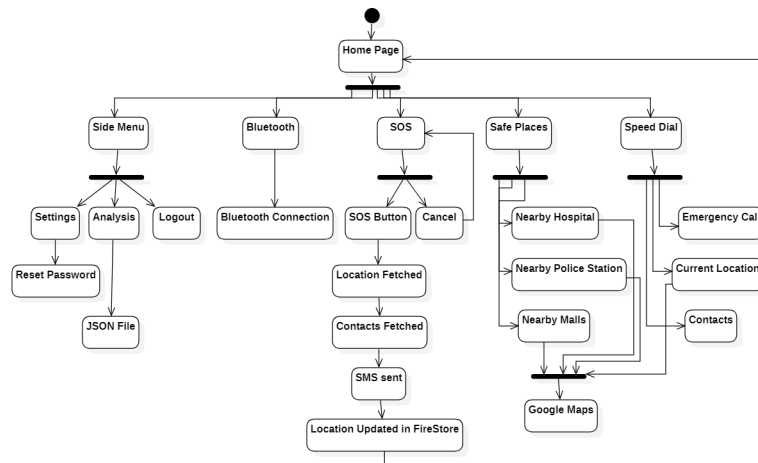


Figure 4.8: Activity Diagram for Home

### 4.3.3 Class Diagram

Class diagram is a static diagram. Class diagram describes the attributes and operations of a class and also the constraints imposed on the system. In the class diagram, the login class is the main class which is the first thing to execute before implementing different methods. The attributes needed for the login class are email and password. And the operations performed are checking the fields, validating email and authenticating the user to log in. The snapshot of the user details is stored. So, The user doesn't need to log in every time using the application. The handleAuth operation checks the state of user details and redirects to the home page in fig 3.4. The user then can perform different actions from the classes on the home page. In the side menu, the settings will use to reset the password, the analysis will use to download JSON files and logout will directly log the user out of the application. The SOS class will perform functions like fetching location, fetching contacts, starting the timer, updating the location in the Firestore. If it is a false call, the stop timer will execute. The Bluetooth class will have operations like scanning the devices, connecting or disconnecting

the device. The Speed Dial class have subclasses like making an emergency call, adding, deleting, editing or viewing the contacts and location will track the current location.

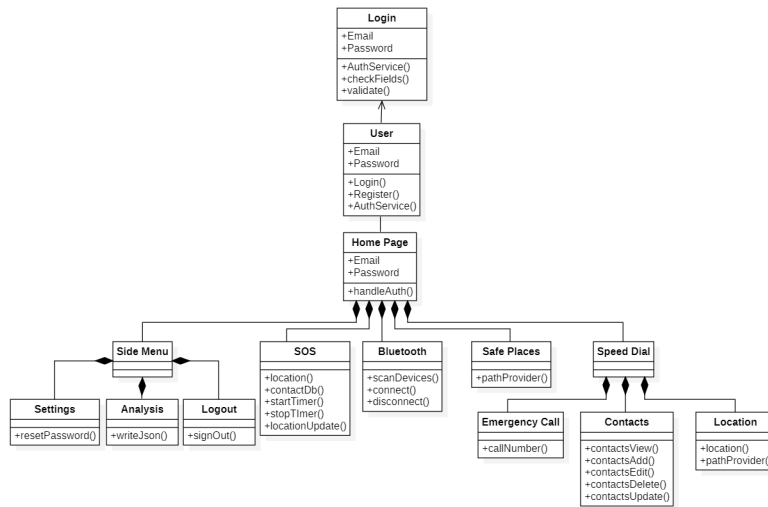


Figure 4.9: Class Diagram for Esecure App

### 4.3.4 Sequence Diagrams

The sequence diagram is used primarily to show the interactions between objects in the sequential order that those interactions occur. And to understand the process flow and the active time when the user is interacting with the application. In fig 3.5, The process flow is when the user interacts with the application for the first time. The user must click on register and enter the details. The app will validate the email and redirect the user to the Home Page. The user has to add contacts before using SOS in an emergency. The flow starts when the user adds a new phone number for the first time, The application will create a contact table and stores the contact details in the table. The other operations like Edit and Delete will be performed according to the user. In fig 3.6, The process flow is when the user wants to reset the password. The user needs to give a valid email. Then the FirebaseAuth service will send a reset link to the registered mail. The process flow when the SOS is clicked. The user will see the timer has started, If it was a false alert the user can directly cancel it before the time runs out. Either way, if it was an emergency after the time runs out. The application will fetch the current position, contacts and will send an SMS with a map link. The sending of an SMS will be in a loop till every phone number given by the user has received an SMS. The application will also be able to download a JSON file with location data in it, which will be read from the Firestore and written in JSON file format.

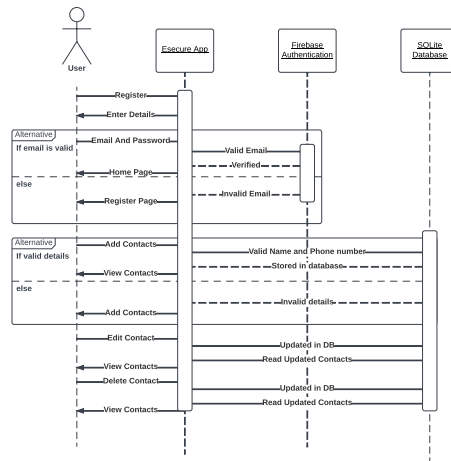


Figure 4.10: Sequence diagram for Login and Contacts

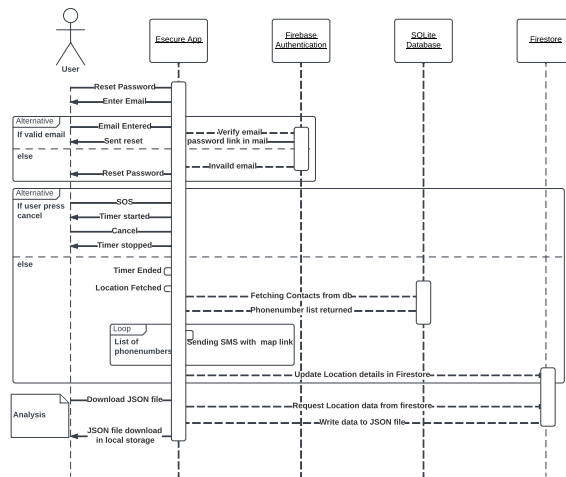


Figure 4.11: Sequence diagram for SOS and Analysis

# Chapter 5

## Project Implementation

### 5.1 Application Implementation

#### 5.1.1 AuthService

The AuthService class is the main one to check the state of the user credentials. It decides whether the user is authentic. And the user doesn't need to log in every time he uses the application fig 4.1. It will help when the user logouts AuthService will change the user credentials with a new one if the user uses another mail id. So, this is the security check that unauthorized users can't access the homepage.

```
class AuthService {
  //Determine if the user is authenticated.
  handleAuth() {
    return StreamBuilder(
      stream: FirebaseAuth.instance.authStateChanges(),
      builder: (BuildContext context, snapshot) {
        if (snapshot.hasData) {
          return HomePage();
        } else {
          return LoginPage();
        }
      }); // StreamBuilder
  }
}
```

Figure 5.1: AuthService

#### 5.1.2 Location

The Location function is the crucial part of the code used to track the current location. It first asks the user to give permission to access GPS to the app. The getCurrentPosition method returns all the requests to the Geolocator package fig 4.2. The Instance of the Position object is to get the latitude and longitude. The placemark is to convert the coordinates into place/area names. It comes under geocoding package and can return multiple information like country, state, locality, sub locality names etc.

```

Future<Position?> _getGeoLocationPosition() async {
  bool serviceEnabled;
  LocationPermission permission;
  // Test if location services are enabled.
  serviceEnabled = await Geolocator.isLocationServiceEnabled();
  if (!serviceEnabled) {
    // Location services are not enabled don't continue accessing the position and request
    // App to enable the location services.
    await Geolocator.openLocationSettings();
    return Future.error('Location services are disabled.');
```

Figure 5.2: Tracking current location

### 5.1.3 The Emergency Button

This function integrates all the methods in one single module. It is the most critical part of the code. It calls all the future functions, that's why we have used async to wait for the future function to return the output. It calls `getGeoLocationPosition` which is a tracking current position function. The `currentAddress` variable is defined with the result of the `Position` instance in the form of a string. The message is defined with a link variable. The `getContacts` function is called to get all the phone numbers from the database in the form of a list. The app will now take permission from the user for sending SMS. If the permission is granted the for loop will send the SMS to phone numbers from the list. Finally, The current position data will be added to `Firestore`.

```

void onSosTap() async {
  await _getGeoLocationPosition();
  String currentAddress = currentPosition.latitude.toString() +
    "," +
    currentPosition.longitude.toString();
  String link =
    "Help I'm in danger this my location:\n" + mapLink + currentAddress;
  List<dynamic> phoneNumber = await _contactHelper.getContacts();
  bool? permissionsGranted = await telephony.requestPhoneAndSmsPermissions;
  if (permissionsGranted == true) {
    for (String number in phoneNumber) {
      await telephony.sendSms(
        to: number, message: link, statusListener: listener);
    }
  }
  await location
    .add({'areaname': currentLocation})
    .then((value) => print('location updated'))
    .catchError((e) {
      ErrorHandler().errorDialog(context, e);
    });
}
```

Figure 5.3: SOS Function



### 5.1.4 Analysis

The write JSON function is for the analysis part. The function first asks the user for permission to access the storage for writing data to the file. Before writing to the file, It gets the path from the local file function it needs to await as it is a future function. Then we will create an instance for having a snapshot of cloud DB and get a location document, which contains the area name as a key and the value as an actual area name. All the data in that document will be defined as a variable. Now, we will encode to JSON file with the input from the variable. Now the function will check the permission is allowed. The file will be written in the hardcoded path.

```
Future<void> _writeJson() async {
  var status = await Permission.storage.status;
  File _filePath = await _localFile;

  QuerySnapshot querySnapshot = await location.get();

  // Get data from docs and convert map to List
  final allData = querySnapshot.docs.map((doc) => doc.data()).toList();
  _jsonString = jsonEncode(allData);
  print('3.(_writeJson) _jsonString: $_jsonString\n - \n');

  //4. Write _jsonString to the _filePath
  if (!status.isGranted) {
    await Permission.storage.request();
    await _filePath.writeAsString(_jsonString);
  }
}
```

Figure 5.4: Downloading JSON File

```
Hardware code  x  index.html  x

void gsm(String value1, String value2, int value3){
  ss.end();
  sim.begin(9600);
  Serial.println("In GSM");
  sim.println("AT"); // Configuring TEXT mode
  delay(2000);
  ShowSerialData();
  sim.println("AT+CMGF=1"); // Configuring TEXT mode
  delay(2000);
  ShowSerialData();
  sim.println("AT+CMGS=\"+917977361247\""); //change ZZ with country code and
  sms
  delay(2000);
  ShowSerialData();
  String SMSsentlast1 = "HELP!! I AM IN TROUBLE.";
  String SMSsentlast2 = "www.google.com/maps/search" + String (lat1)+ String(
  sim.print(SMSsentlast1); //text content
  sim.print(SMSsentlast2); //text content
  delay(1000);
  ShowSerialData();
  sim.write(26);
  delay(5000);
  sim.end();
  bt.begin(9600);
  bt.print(SMSsentlast1); //text content
  bt.print(SMSsentlast2); //text content
  bt.end();
  ss.begin(9600);
  Serial.println("GSM-GSM Out");
}
void setup()
```

Figure 5.5: Hardware Code

# Chapter 6

## Testing

### 6.1 Functional Testing

#### 6.1.1 Unit Testing

Unit testing is the first level of testing and is often performed by the developers themselves. It is the process of ensuring individual components of a piece of software at the code level are functional and work as they were designed to. Developers in a test-driven environment will typically write and run the tests before the software or feature is passed over to the test team. Unit testing can be conducted manually. Unit testing will also make debugging easier because finding issues earlier means they take less time to fix than if they were discovered later in the testing process.

The Unit testing is best suited for our application development phase. In that phase, we started to code in units create different modules. And test each module separately, like the login page, register page, home page, contacts page, emergency screen, analysis page etc. All these pages are tested and debugged before going further integrating. And check whether we are getting the desired output from each module as for the objectives.

#### 6.1.2 Integration Testing

After each unit is thoroughly tested, it is integrated with other units to create modules or components that are designed to perform specific tasks or activities. These are then tested as group through integration testing to ensure whole segments of an application behave as expected (i.e, the interactions between units are seamless). These tests are often framed by user scenarios, such as logging into an application or opening files. Integrated tests can be conducted by either developers or independent testers and are usually comprised of a combination of automated functional and manual tests.

As we have discussed unit testing the next step is integration testing. All the units which we have tested and debugged are now ready to integrate into a whole single module. The integration part is crucial as we need to know which unit must interact without error, calling them in a different class accessing the instance of that class all these can be cleared with help of the sequence diagram which was represented in Project Design. So accordingly, modules are integrated and checked whether they behave as for the objectives.

## 6.2 Non Functional Testing

### 6.2.1 Compatibility Testing

Compatibility testing is used to gauge how an application or piece of software will work in different environments. It is used to check that your product is compatible with multiple operating systems, platforms, browsers, or resolution configurations. The goal is to ensure that your software's functionality is consistently supported across any environment you expect your end-users to be using.

The framework we are using to develop our application is Flutter. It is an open-source framework by Google for building beautiful, natively compiled, multi-platform applications from a single codebase. We make sure that our application is compatible with both IOS and Android operating systems. The features we developed are perfectly run in multiple operating systems without an error. For this reason, compatibility testing is best suited for our project.

# Chapter 7

## Result

This shall form the penultimate chapter of the report and shall include a thorough evaluation of the investigation carried out and bring out the contributions from the study. The discussion shall logically lead to inferences and conclusions as well as scope for possible further future work.

## Chapter 8

### Conclusions and Future Scope

Women's progress plays a crucial role in any country moving ahead. Still, several women are experiencing various problems like harassment, abuse and many more. Considering this situation, we have designed a system that will help women during an emergency and make them feel safe and secure. The proposed system will include GSM, GPS and Bluetooth modules, with an Arduino Nano and a cross-platform application. The system consists of two parts IoT band and application. The IoT band will work when the user presses the button. It will send an SMS and the current location as a google map URL link to the emergency contacts. The IoT band can also work independently without the application. The application has a feature that shows the users nearest safe locations like hospitals, police stations and crowded areas. It will store the data where the emergencies occurred in the Firebase. Finally, our system will be helpful for women in need as well as for other people during an emergency. The band size can reduce with the help of PCB by putting the essential components on it like a micro-controller, GPS, GSM and Bluetooth IC's(Integrated chip). The App can have other features like a live tracking dashboard interface. Safety bands are not just for women but also used by anyone. As more incidents occur, victims can protect themselves by wearing this band instance during an emergency, such as robbery or a car accident. The user can contact their family for help without making a phone call just by using our application. It will respond by sending the victim's current location. The application makes it easier to send the position without the attacker's knowing. It's convenient because the user can select who receives the message, usually someone that the user knows.

# Bibliography

- [1] S. Pandey, N. Jain, A. Bhardwaj, G. Kaur, and V. Kumar, “Reach360: A comprehensive safety solution,” in *2017 Tenth International Conference on Contemporary Computing (IC3)*, pp. 1–3, IEEE, 2017.
- [2] N. R. Sogi, P. Chatterjee, U. Nethra, and V. Suma, “Smarisa: a raspberry pi based smart ring for women safety using iot,” in *2018 International Conference on Inventive Research in Computing Applications (ICIRCA)*, pp. 451–454, IEEE, 2018.
- [3] V. Sharma, Y. Tomar, and D. Vydeki, “Smart shoe for women safety,” in *2019 IEEE 10th International Conference on Awareness Science and Technology (iCAST)*, pp. 1–4, IEEE, 2019.
- [4] R. R. Khandoker, S. Khondaker, F. N. Nur, S. Sultana, *et al.*, “Lifecraft: an android based application system for women safety,” in *2019 International Conference on Sustainable Technologies for Industry 4.0 (STI)*, pp. 1–6, IEEE, 2019.
- [5] H. Nagamma *et al.*, “Iot based smart security gadget for women’s safety,” in *2019 1st international conference on advances in information technology (ICAIT)*, pp. 348–352, IEEE, 2019.
- [6] S. Khanam and T. Shah, “Self defence device with gsm alert and gps tracking with fingerprint verification for women safety,” in *2019 3rd International conference on Electronics, Communication and Aerospace Technology (ICECA)*, pp. 804–808, IEEE, 2019.
- [7] T. Sen, A. Dutta, S. Singh, and V. N. Kumar, “Protecht-implementation of an iot based 3-way women safety device,” in *2019 3rd International conference on Electronics, Communication and Aerospace Technology (ICECA)*, pp. 1377–1384, IEEE, 2019.
- [8] A. Anand, S. Nishanth, P. V. Krishna, S. Krishna, and T. Anjali, “Ally-a crowdsourced distress signal app,” in *2020 International Conference on Communication and Signal Processing (ICCSP)*, pp. 502–506, IEEE, 2020.
- [9] H. Chaudhary, R. Zinjore, and V. Pathak, “Parent-hook: A child tracking system based on cloud url,” in *2020 International Conference on Smart Innovations in Design, Environment, Management, Planning and Computing (ICSIDEMPC)*, pp. 219–224, IEEE, 2020.
- [10] Z. A. M. Fernandez, M. A. T. Cruz, C. Peñaloza, and J. H. Morgan, “Challenges of smart cities: How smartphone apps can improve the safety of women,” in *2020 4th International Conference on Smart Grid and Smart Cities (ICSGSC)*, pp. 145–148, IEEE, 2020.

- [11] A. T. Kabir, T. Tasneem, *et al.*, “Safety solution for women using smart band and cws app,” in *2020 17th International Conference on Electrical Engineering/Electronics, Computer, Telecommunications and Information Technology (ECTI-CON)*, pp. 566–569, IEEE, 2020.
- [12] V. Mishra, N. Shivankar, S. Gadpayle, S. Shinde, M. A. Khan, and S. Zunke, “Women’s safety system by voice recognition,” in *2020 IEEE International Students’ Conference on Electrical, Electronics and Computer Science (SCEECS)*, pp. 1–5, IEEE, 2020.
- [13] D. V. Savla, S. Parekh, A. R. Gupta, D. Agarwal, and N. M. Shekokar, “Resq-smart safety band automated heart rate and fall monitoring system,” in *2020 Fourth International Conference on I-SMAC (IoT in Social, Mobile, Analytics and Cloud)(I-SMAC)*, pp. 588–593, IEEE, 2020.
- [14] D. Sunehra, V. S. Sreshta, V. Shashank, and B. U. K. Goud, “Raspberry pi based smart wearable device for women safety using gps and gsm technology,” in *2020 IEEE International Conference for Innovation in Technology (INOCON)*, pp. 1–5, IEEE, 2020.
- [15] K. Venkatesh, S. Parthiban, P. S. Kumar, and C. V. Kumar, “Iot based unified approach for women safety alert using gsm,” in *2021 Third International Conference on Intelligent Communication Technologies and Virtual Mobile Networks (ICICV)*, pp. 388–392, IEEE, 2021.

# Appendices

Detailed information, lengthy derivations, raw experimental observations etc. are to be presented in the separate appendices, which shall be numbered in Roman Capitals (e.g. “Appendix I”). Since reference can be drawn to published/unpublished literature in the appendices these should precede the “Literature Cited” section.

## Appendix-A: NS2 Download and Installation

1. Download ns-allinone-2.35.tar.gz from <http://sourceforge.net/projects/nsnam/>
2. Place ns-allinone-2.35.tar in your desired directory; like /home/vishal.
3. Go to terminal and do as following commands  
**sudo apt-get update**  
**sudo apt-get install automake autoconf libxmu-dev build-essential**
4. Extract ns-allinone-2.35 and after extracting go to folder ns-allinone-2.35 from Terminal as  
**\$cd ns-allinone-2.35**  
**\$/install**
5. Path Setting  
**\$ gedit .bashrc**

This command will open an existing file in editor. Just put the following path which is given bellow. [Remember that our ns-allinone path is /home/vishal. we will change this path according to our ns-allinone folder’s path]

```
export PATH=$PATH:/home/vishal/ns-allinone-2.35/bin:/home/vishal/ns-allinone-2.35/tcl8.5.10/unix/home/vishal/ns-allinone-2.35/tk8.5.10/unix
```

```
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/home/vishal/ns-allinone-2.35/otcl-1.14:/home/vishal/ns-allinone-2.35/lib
```

```
export TCL_LIBRARY_PATH=$TCL_LIBRARY_PATH:/home/vishal/ns-allinone-2.35/tcl8.5.10/library
```

After this save and exit.



6. Now type in terminal to check that, is all command we entered in .bashrc is correct or not? And To take the effect immediately

**\$source .bashrc**

7. Then perform the validation test using this command.

**\$ ./validate**

8. Run ns2 using this command

**\$ns**

We will get % prompt in our terminal. Now ns2 has been installed.

# Publication

Paper entitled **“BeSafe: IoT Based Safety Band”** is presented at **“International Conference on Smart Data Intelligence (ICSMDI 2022)”** by **“Ganesh Jambuka, Krishi Shah, Riddhi Shah”**.

**NOTE:**

In Project Report Project Group will have to elaborate sections included as per work done after Sem VII. It can't be same Sem VII. Report must have proper description, Elaboration of Digrams included in Design & Implementation. It can't be just Digram on Page. You will have to write there why this has been included, What it is representing. Same is Applicable to snippets of Project implementation you have included in Report. Include your publications in your Report if You have.