

ABLEPick

5-digit pick tag with DI/DO(AT705-IO)

Data Sheet



VERSION : 1.0
DATE : July. 1, 2019

(C) Copyright of ATOP Tech. Inc., 2019, All Rights Reserved

Atop Technologies, Inc.

1. Introduction:

AT705-IO has the combination design of 5-digit pick tag and DI/DO interface. Its communication protocol is fully compatible with the other light modules based on ABLEPick communication protocol.

2. Hardware specification and feature


Specification

- ABLEPick communication protocol
- 5-digit , 7-segment LED display
- 2 up/down count keys
- One big illuminated confirmation button with 6- color LED
- Digital Input * 1, Digital Output *1
- Transmission speed: 57.6 Kbps
- Input voltage and current: +12VDC $\pm$ 10% , Max 80mA
- Temperature: 0 °C to 40 °C operating, -40 °C to 70 °C storage
- Humidity: 90% non-condense
- Dimension: 148 (L)*46(W)*30(H) mm
- Weight: 80g




Detail description

The default mode for AT705-IO is its DI and DO are working independently from its LED display and confirmation button. However, it also could be configured the linkage between DI/DO and illuminated button to work Synchronously. Once the linkage is enabled, that means once there is a trigger coming from DI will cause the illuminated button to be confirmed instead of pushing the confirmation button (such as connected sensor to DI). Or when turn on the illuminated button also will have signal output to DO to trigger the connected device (such as turn out external connected LED via DO).

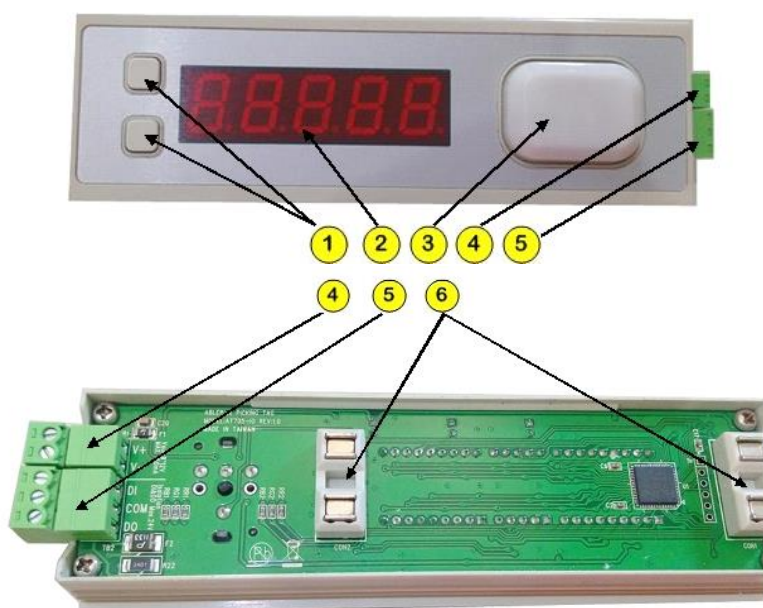

- (1) UP/down count keys
- (2) 5-digit 7-segment LED display
- (3) Illuminated confirmation button with 6 colors LED
- (4) DC OUT PORT: 9-12V; Max 50mA
- (5) DI/DO PORT: Isolation Max 24V
- (6) Magnetic connectors


3. The definition of interface pin

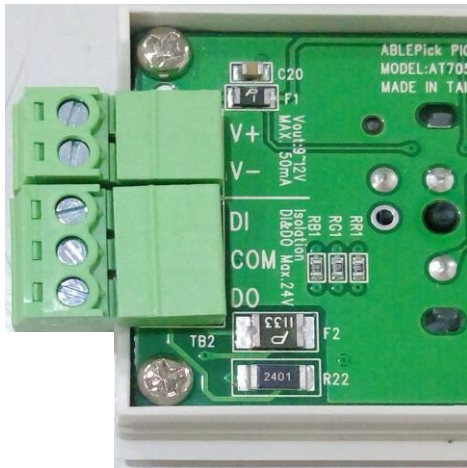


V+	Output DC 9-12V; 50Ma(Max)
V-	
DI	L level:0~1.5V H level:4~24V(Max0
COM	Common
DO	Dry contact/Normal open Load operating voltage :Max DC24V;1A

4. AT705-IO wiring illustrated chart

External power supply

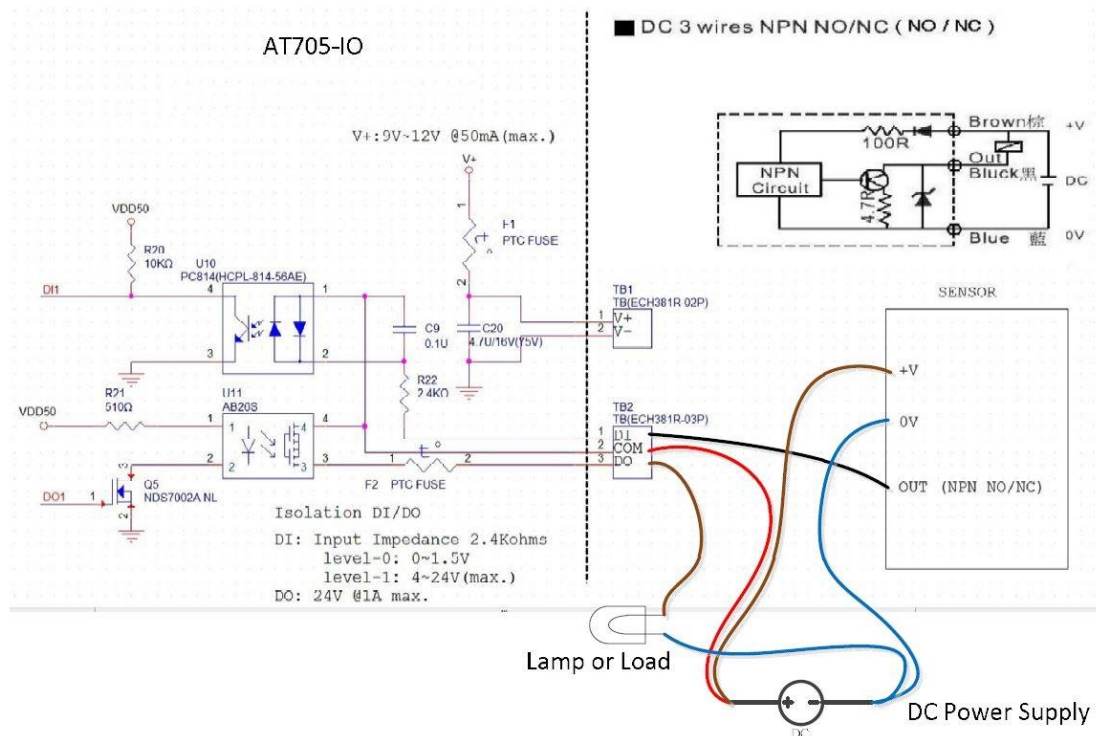


Get power from AT705-IO

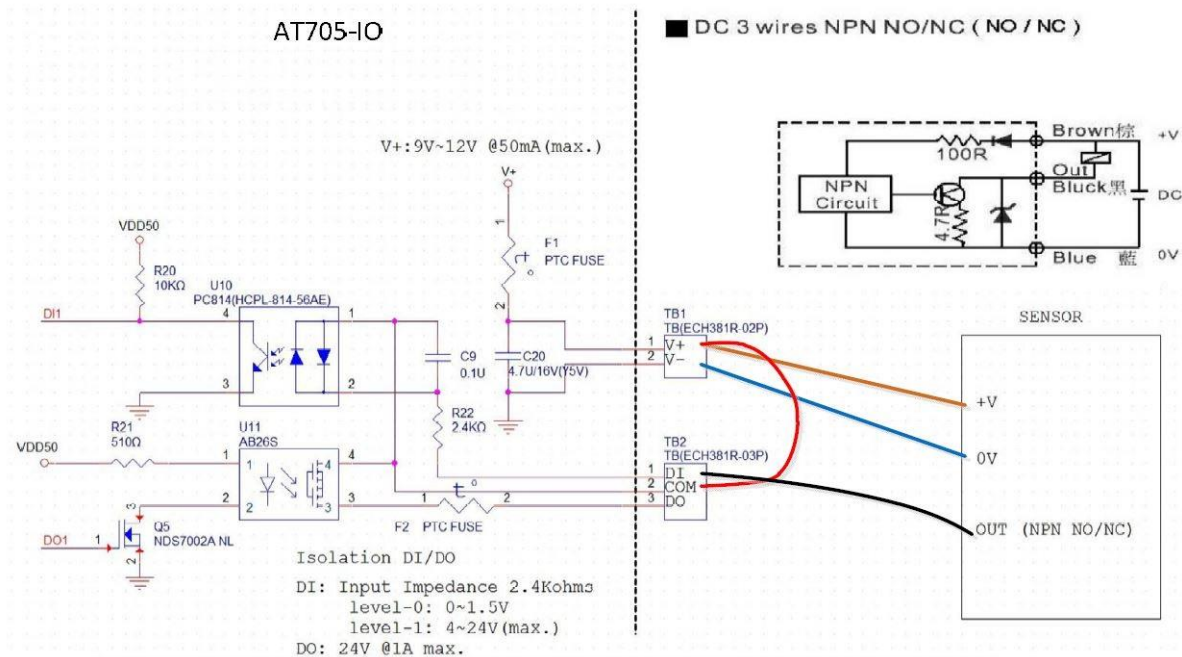


5. AT705-IO wiring illustration

Digital Input (DI) : external power supply

NPN SENSOR

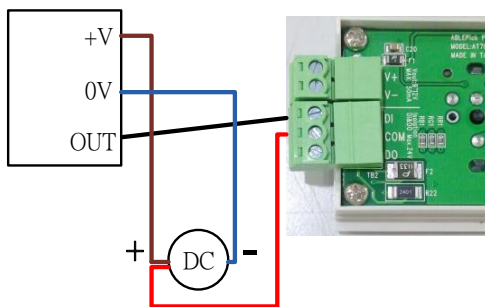


PNP SENSOR

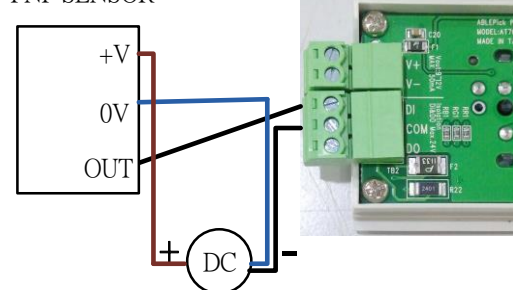


Digital Input (DI) : get power from AT705-IO



NPN SENSOR

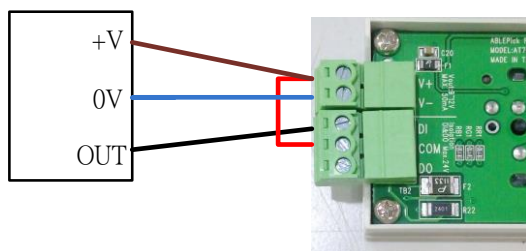

PNP SENSOR

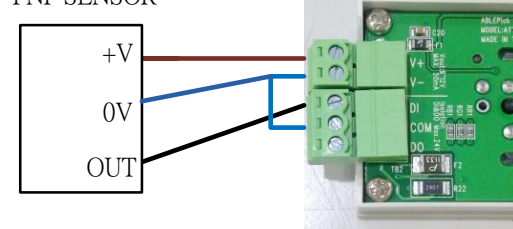

Digital Output(DO) : external power supply

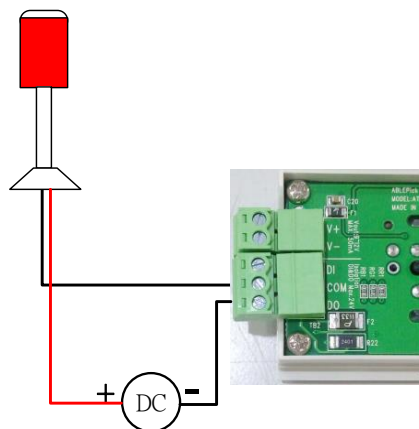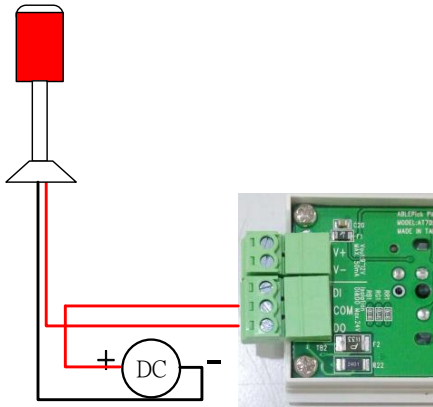

Digital Output (DO) : get power from AT705-IO

