

## 1. Description


### 1.1. Project

Project Name	STM32F429I
Board Name	STM32F429I
Generated with:	STM32CubeMX 4.11.0
Date	12/07/2015

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F429/439
MCU name	STM32F429IGTx
MCU Package	LQFP176
MCU Pin number	176

## 2. Pinout Configuration

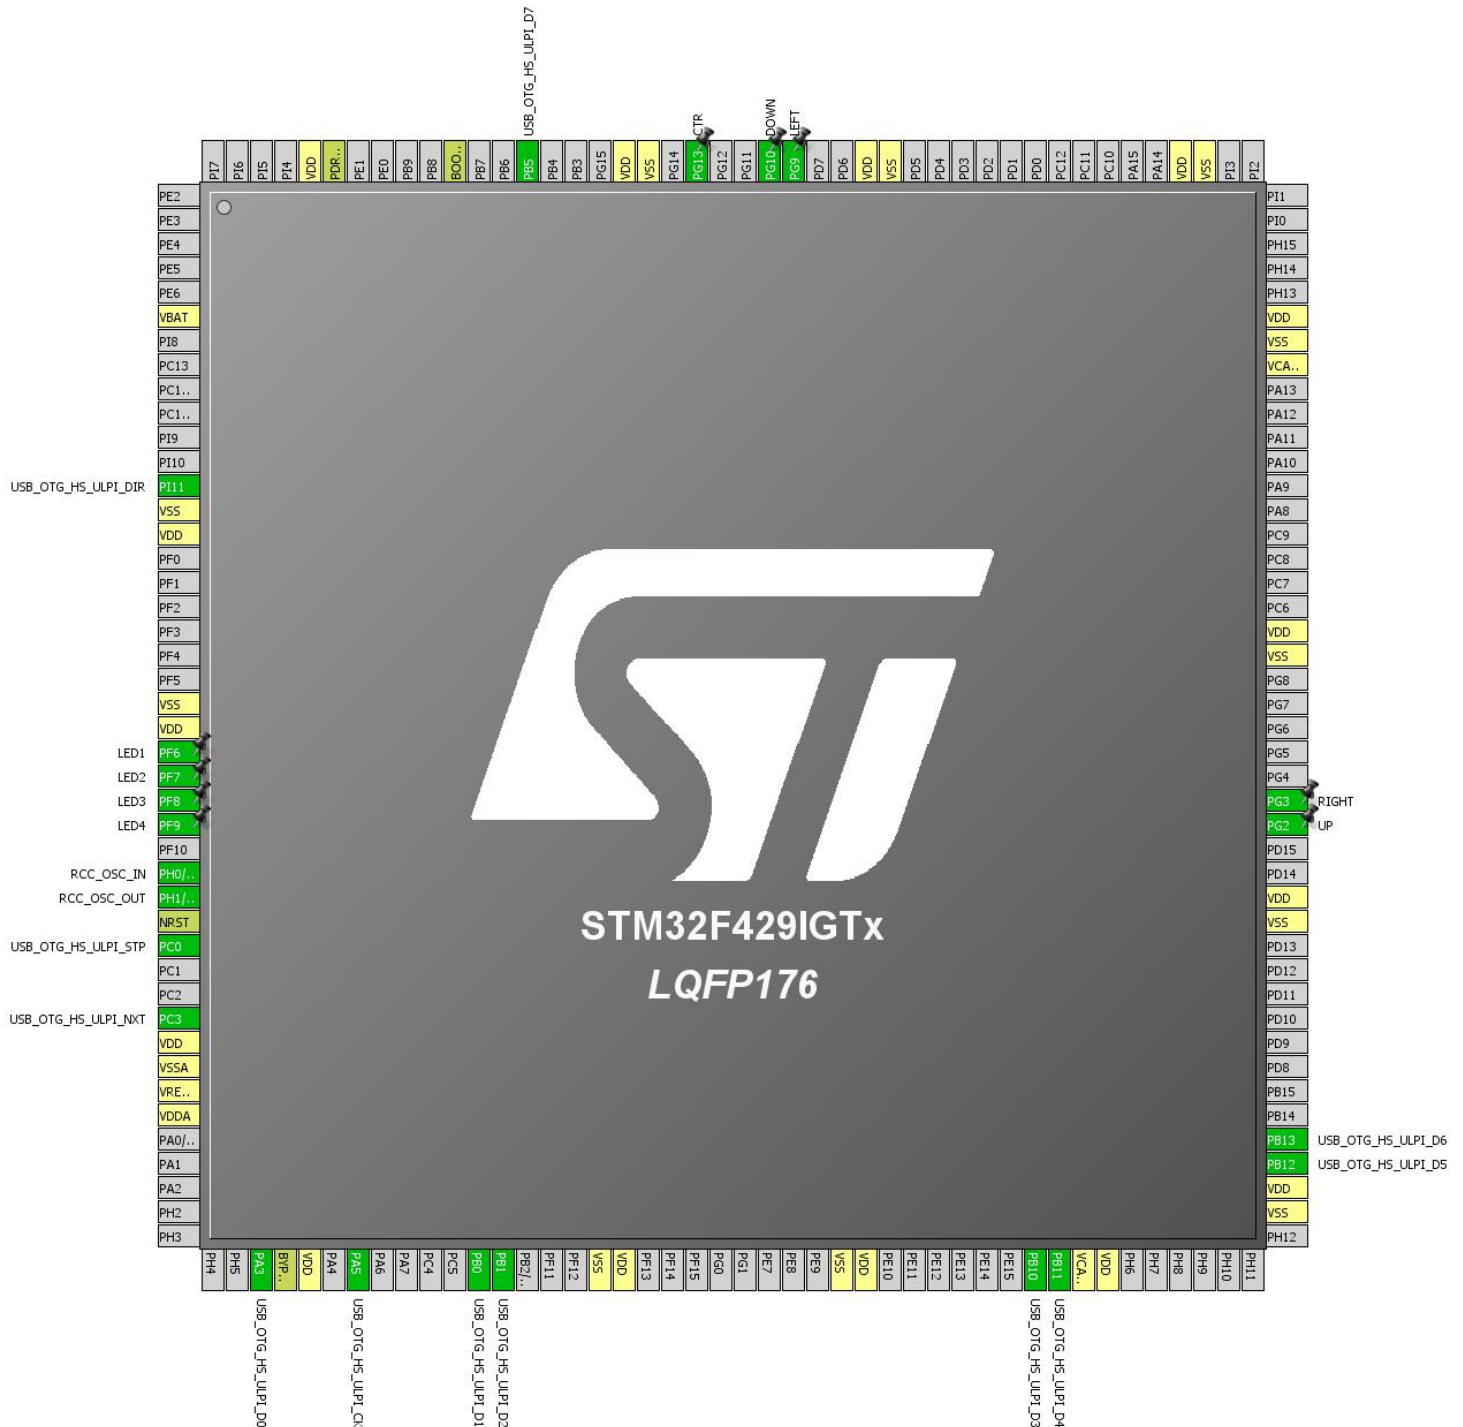


### 3. Pins Configuration

Pin Number LQFP176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
13	PI11	I/O	USB_OTG_HS_ULPI_DIR	
14	VSS	Power		
15	VDD	Power		
22	VSS	Power		
23	VDD	Power		
24	PF6 *	I/O	GPIO_Output	LED1
25	PF7 *	I/O	GPIO_Output	LED2
26	PF8 *	I/O	GPIO_Output	LED3
27	PF9 *	I/O	GPIO_Output	LED4
29	PH0/OSC_IN	I/O	RCC_OSC_IN	
30	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
31	NRST	Reset		
32	PC0	I/O	USB_OTG_HS_ULPI_STP	
35	PC3	I/O	USB_OTG_HS_ULPI_NXT	
36	VDD	Power		
37	VSSA	Power		
38	VREF+	Power		
39	VDDA	Power		
47	PA3	I/O	USB_OTG_HS_ULPI_D0	
48	BYPASS_REG	Reset		
49	VDD	Power		
51	PA5	I/O	USB_OTG_HS_ULPI_CK	
56	PB0	I/O	USB_OTG_HS_ULPI_D1	
57	PB1	I/O	USB_OTG_HS_ULPI_D2	
61	VSS	Power		
62	VDD	Power		
71	VSS	Power		
72	VDD	Power		
79	PB10	I/O	USB_OTG_HS_ULPI_D3	
80	PB11	I/O	USB_OTG_HS_ULPI_D4	
81	VCAP_1	Power		
82	VDD	Power		
90	VSS	Power		
91	VDD	Power		
92	PB12	I/O	USB_OTG_HS_ULPI_D5	

Pin Number LQFP176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
93	PB13	I/O	USB_OTG_HS_ULPI_D6	
102	VSS	Power		
103	VDD	Power		
106	PG2 *	I/O	GPIO_Input	UP
107	PG3 *	I/O	GPIO_Input	RIGHT
113	VSS	Power		
114	VDD	Power		
125	VCAP_2	Power		
126	VSS	Power		
127	VDD	Power		
135	VSS	Power		
136	VDD	Power		
148	VSS	Power		
149	VDD	Power		
152	PG9 *	I/O	GPIO_Input	LEFT
153	PG10 *	I/O	GPIO_Input	DOWN
156	PG13 *	I/O	GPIO_Input	CTR
158	VSS	Power		
159	VDD	Power		
163	PB5	I/O	USB_OTG_HS_ULPI_D7	
166	BOOT0	Boot		
171	PDR_ON	Reset		
172	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

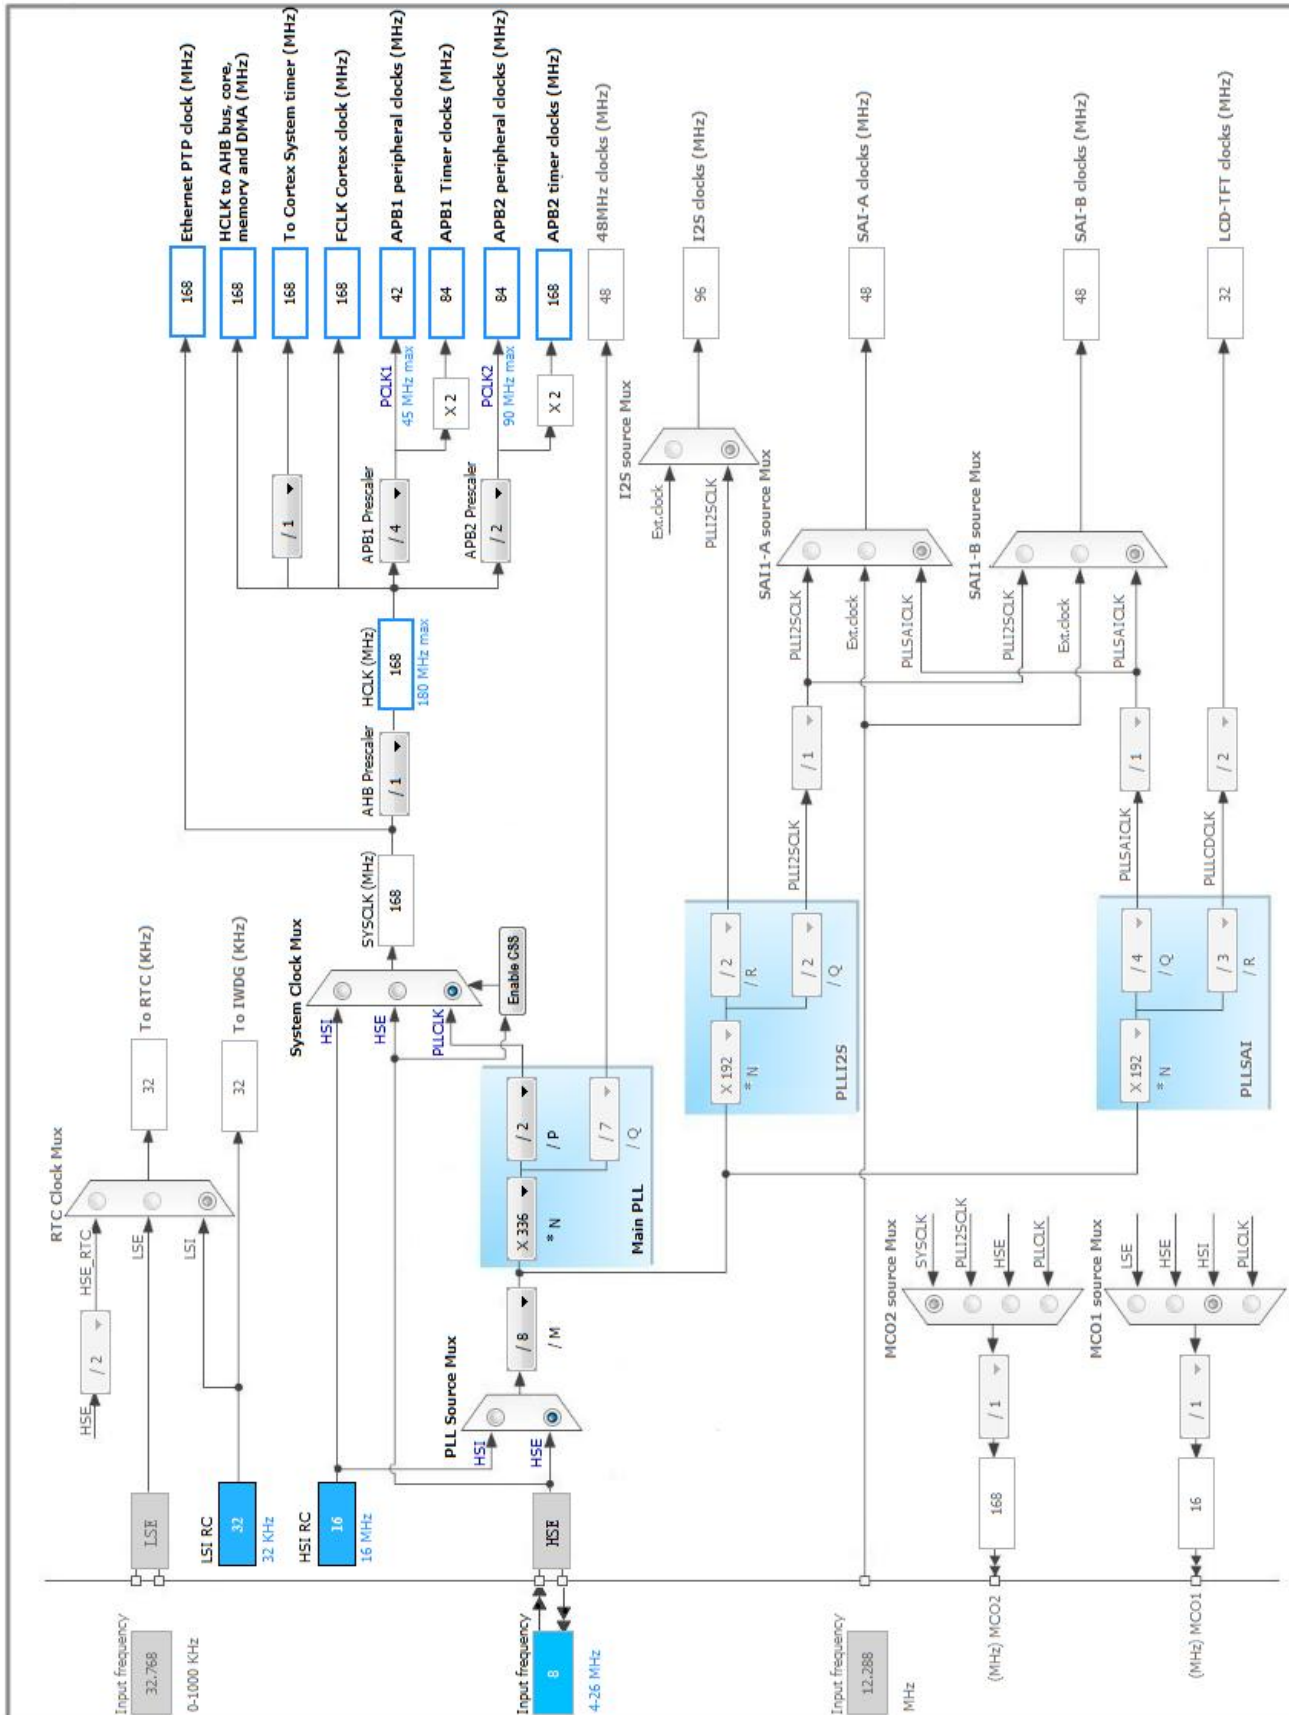

## 5. IPs and Middleware Configuration

### 5.1. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled

###### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Disabled

### 5.2. USB\_OTG\_HS

#### External Phy: Device\_Only

##### 5.2.1. Parameter Settings:

Speed	<b>Device Full Speed 12MBit/s *</b>
Endpoint 0 Max Packet size	64 Bytes
Enable internal IP DMA	Disabled
Physical interface	External Phy
Low power	Disabled
Link Power Management	Disabled
Use dedicated end point 1 interrupt	Disabled
VBUS sensing	Disabled

## 5.3. USB\_DEVICE

### Class For HS IP: Human Interface Device Class (HID)

#### 5.3.1. Parameter Settings:

##### Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

#### 5.3.2. Device Descriptor:

##### Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

##### Device Descriptor HS:

PID (Product Identifier)	22315
PRODUCT_STRING (Product Identifier)	STM32 Human interface
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	HID Config
INTERFACE_STRING (Interface Identifier)	HID Interface

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USB_OTG_HS	PI11	USB_OTG_HS_ULPI_DIR	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PC0	USB_OTG_HS_ULPI_STP	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PC3	USB_OTG_HS_ULPI_NXT	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PA3	USB_OTG_HS_ULPI_D0	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PA5	USB_OTG_HS_ULPI_CK	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB0	USB_OTG_HS_ULPI_D1	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB1	USB_OTG_HS_ULPI_D2	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB10	USB_OTG_HS_ULPI_D3	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB11	USB_OTG_HS_ULPI_D4	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB12	USB_OTG_HS_ULPI_D5	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB13	USB_OTG_HS_ULPI_D6	Alternate Function Push Pull	No pull-up and no pull-down	High	
	PB5	USB_OTG_HS_ULPI_D7	Alternate Function Push Pull	No pull-up and no pull-down	High	
GPIO	PF6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED1
	PF7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED2
	PF8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED3
	PF9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED4
	PG2	GPIO_Input	Input mode	<b>Pull-up *</b>	n/a	UP
	PG3	GPIO_Input	Input mode	<b>Pull-up *</b>	n/a	RIGHT
	PG9	GPIO_Input	Input mode	<b>Pull-up *</b>	n/a	LEFT
	PG10	GPIO_Input	Input mode	<b>Pull-up *</b>	n/a	DOWN



IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PG13	GPIO_Input	Input mode	<b>Pull-up *</b>	n/a	CTR

## 6.2. DMA configuration

DMA request	Stream	Direction	Priority
MENTOMEM	DMA2_Stream0	Memory To Memory	Low

### MENTOMEM: DMA2\_Stream0 DMA request Settings:

Mode: Normal  
 Use fifo: **Enable \***  
 FIFO Threshold: Full  
 Src Memory Increment: **Enable \***  
 Dst Memory Increment: **Enable \***  
 Src Memory Data Width: **Word \***  
 Dst Memory Data Width: **Word \***  
 Src Memory Burst Size: Single  
 Dst Memory Burst Size: Single

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
System tick timer	true	0	0
USB On The Go HS global interrupt	true	0	0
Non maskable interrupt	unused		
Memory management fault	unused		
Pre-fetch fault, memory access fault	unused		
Undefined instruction or illegal state	unused		
Debug monitor	unused		
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
DMA2 stream0 global interrupt	unused		
USB On The Go HS End Point 1 Out global interrupt	unused		
USB On The Go HS End Point 1 In global interrupt	unused		

\* User modified value

## ***7. Power Plugin report***

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F429/439
MCU	STM32F429IGTx
Datasheet	024030_Rev5

### 7.2. Parameter Selection

Temperature	25
Vdd	null

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	STM32F429I
Project Folder	C:\Users\Administrator\Desktop\stm32cube\STM32F429I\USB HS\USB
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.9.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No