


Lesson 3 Start ArmPi

1. Connect Camera to ArmPi


After setting the camera, place the camera stand on the map and connect the camera to any USB ports on the Raspberry Pi board.

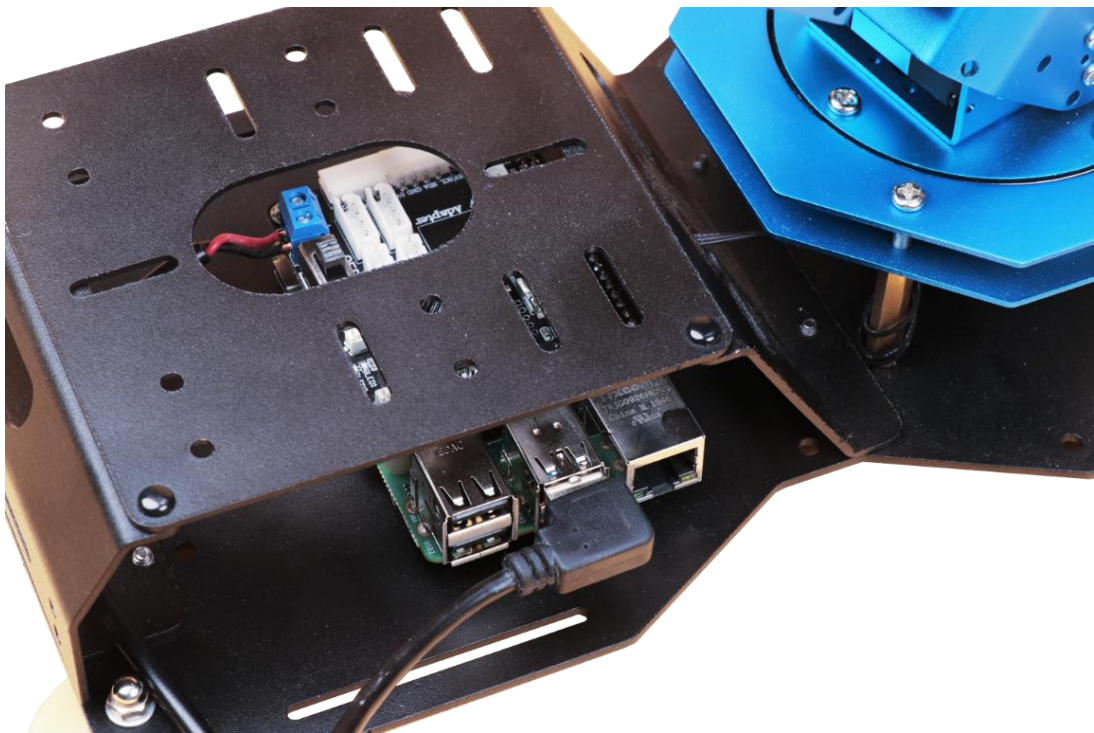

2. Connect Power Supply

Note: If the DC power cable is not connected to the expansion board, do not directly connect the adapter interface to prevent the danger of short circuit caused by the contact between the positive and negative poles.

1) Connect the butted line into the Raspberry Pi expansion board. Red line to positive pole and black to negative pole.

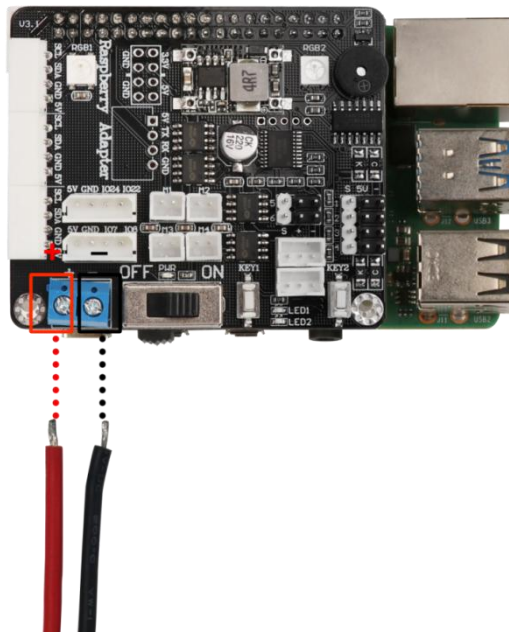


2) Connect the power adapter as shown on the picture.

3. Turn on ArmPi

1) Switch on Raspberry Pi expansion board. The LED1 and LED2 of the Raspberry Pi will be on firstly and then the LED2 will flash every 2 seconds, which means the robot is turned on successfully.

The Raspberry Pi is a small minicomputer. It usually takes about 1 minute to boot up from the time it is Powered ON, which is normal and expected.

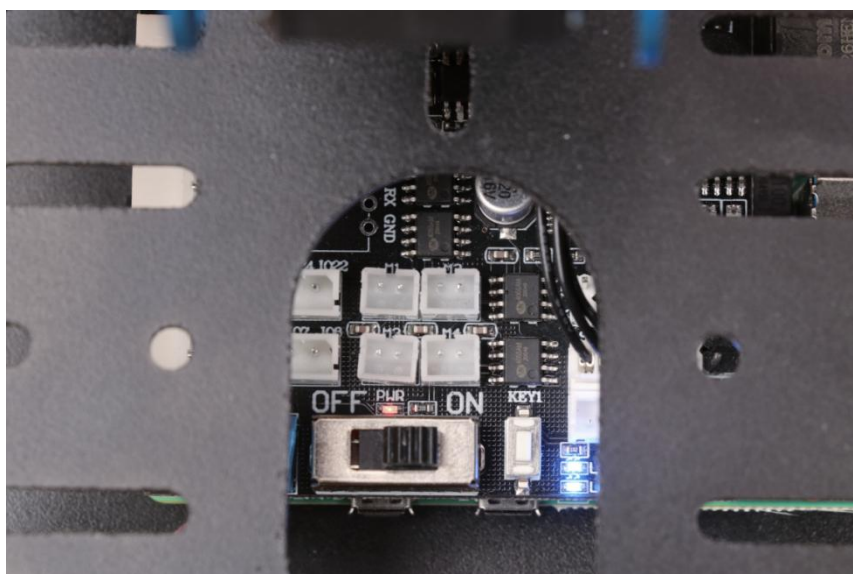

2) After turning on, Raspberry Pi will be in a AP hotspot mode and launch a Wi-Fi hotspot with a network named with the first letters “HW”.

HW-CB1C69E5	 
KR1	  
KR5	  
LH_5G	  