
# KUBIK

Set up your agent.
Connect. Start talking.

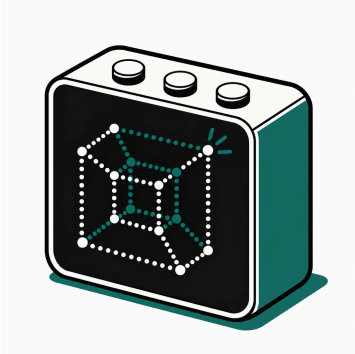

Have USB-C power, a phone and your **2.4 GHz Wi-Fi** password ready. Prepare OpenClaw on page 3.


---

## Open the setup guide on GitHub

https://github.com/pfrankov/kubik
Download the kit for the detailed setup guide.

# Know the buttons.

**C6 2.16: diagram and controls below.**




| | |
|---|---|
| **BOOT**<br>Left | **Press:** go back one screen.<br>**Hold:** open or close Settings. |
| **PWR**<br>Middle | **Press:** screen off or on.<br>**Hold ~2 s:** power off or on. |
| **KEY**<br>Right | Start voice input.<br>Ways to speak and send: page 7. |

---

**S3 1.8 V2: BOOT and PWR only. No KEY.** Short BOOT talks on the connected home screen; elsewhere it goes back. Hold BOOT for Settings. PWR works as above.

C6 positions shown when facing the screen.

# Prepare your agent.



Install OpenClaw on your computer or server. Check a text reply, then add the npm channel:

```
openclaw plugins install openclaw-kubik
```

```
openclaw channels add --channel kubik --enable
```

Configure speech using the GitHub guide. Keep OpenClaw running.

At home, use the same trusted network. For a remote server, prepare the connection using the GitHub guide first.

---

**Ready:** OpenClaw running with the Kubik channel.

2 · On your phone

# Scan both QR codes.

Connect USB-C power. Press **PWR** to wake the screen; if powered off, hold it for about two seconds.







## First: join Kubik's Wi-Fi

Scan **Scan to join Wi-Fi** and join **KUBIK-XXXX**. Stay connected if your phone says "no internet".

## Then: open setup

Wait for the gold title **Scan again for setup**. Scan the **new QR** to open the setup page.

---

**Next:** "Let's connect Kubik" opens on your phone.

# Connect to your agent.

1. Select your **2.4 GHz Wi-Fi**, enter its password and tap **Continue to agent**.
2. Continue with **OpenClaw**.
3. **OpenClaw:** at home, leave **Server address** blank. Remote OpenClaw: enter **kubik://PUBLIC-IP:18790**.
4. Tap **Connect Kubik**.

Kubik saves the settings and restarts. Your phone may disconnect from KUBIK-XXXX. Watch Kubik now.

The address belongs to the Kubik integration, not your agent's dashboard or speech provider. The online guide shows where to find it.

---

**Next:** Kubik shows its OpenClaw pairing code.

No code? See page 8.

3 · Confirm the connection

# Approve your Kubik.

If Kubik says Open Telegram, match the code in your agent bot chat and tap **Allow**. Otherwise, run this on your OpenClaw server:


```
openclaw pairing approve kubik CODE
```

Replace CODE with the current code on your device. No listing command is required.

You can also approve it in OpenClaw Web UI / Channels / Pairing requests.

**Connected:** follow Guide; BOOT returns home.

# Talk to Tess.



Say **“Hi Tessa”**, then your question. C6 buttons:

## STT / Classic

Hold **KEY**, speak, release. Or press once to start, again to send.

## Realtime

Press **KEY**, speak, then pause to send.

## GPT Live

Start with KEY or “Hi Tessa”. Speak at **Listening**, even during replies. KEY ends it; pauses do not.

**S3 1.8 V2:** short BOOT replaces KEY. Classic: press, speak, press again or tap; 60 s maximum. No held recording: hold BOOT opens Settings.

---

Voice output + volume **20+**: spoken replies. Otherwise: text.

# Settings and help.

## Open Settings

Hold **BOOT** for Settings. Hold volume for **Sound**: Speech/Interface. **Agent → Voice**: OpenClaw modes/models. Set Hermes models in Hermes. **Guide** replays the tour. Short BOOT goes back.

## Add a Wi-Fi network

Open **Settings → Status → Network → Wi-Fi**, then scan both codes again. Known networks are remembered.

## Setup page will not open

Stay on KUBIK-XXXX and open **http://192.168.4.1/** in your browser.

## No pairing code or reply

Keep the agent computer and Kubik service running. **Settings → Status** shows IP, MAC and server address. See the GitHub setup guide.

---

https://github.com/pfrankov/kubik
Help, downloads and updates