

P2P IP/Network Camera

Quick Installation Guide



Android

iOS


More download,Please visit online CD Web site:

<http://cd.365cam.net>


1. Installation

1.1 Hardware installation

Insert the USB power adapter attached to the video camera, waiting for the camera to start the self inspection, when the camera sent "welcome to use" "please configure the network" to open the APP and configuration WiFi.

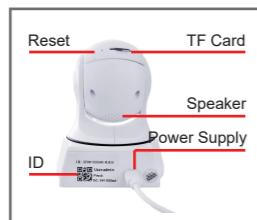

Please use the power correctly, so as not to damage the camera.



1.2 Software installation

Make sure your phone is connected with WiFi/3G Internet.

The android mobile phone users can scan QR Code in the installation manual to download "P2PWIFICAM" client.Or enter the link



3.3 User setting

Modify the equipment user and password, after finished, log back in.

Administrator: all permissions

Visitor: can only watch

3.4 Alarm setting

There are two alarm mode, Motion Detection Alarm and I/O Alarm. Alarm upload pictures: This function is captured images uploaded to the FTP server.

3.5 Mail setting

Setting personal email account, Camera automatically captures images and send to your specified email after alarm.



3.6 FTP setting

Enter the FTP Server, FTP Port, FTP User, FTP Password and click Done. After setting upload images, camera will screenshots and upload images to designated FTP Server at the time of alarm.

2 App Using


2.1 Add camera

1) Connect the power adapter, waiting for the camera to start. 2) When you hear "please connect WiFi", connect the phone to WiFi, open the App "P2PWIFICAM" and press "add camera". If you do not hear "please connect WiFi", please hold down the RESET button on the camera for about 5 seconds to reset the camera.

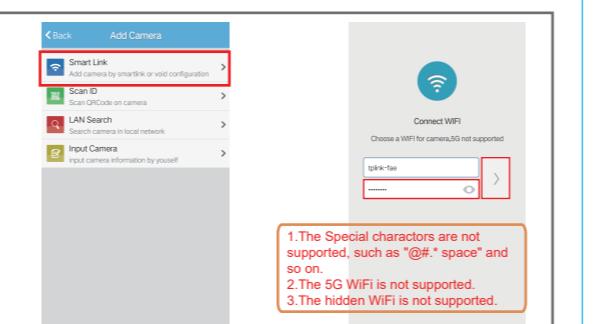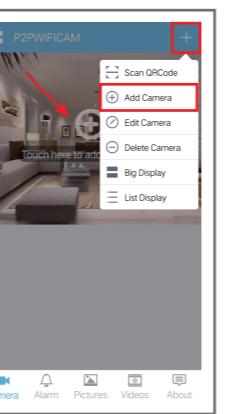


4) When the configuration is started, you will hear "WIFI connection start", until you hear "WIFI connection is successful", the App will search the camera automatically, choose the camera in the search result then input the password of the camera and finally press the "Done" button.

If you do not hear "WIFI connection start" or hear "WIFI connection is failed", please check the WiFi ssid and WiFi password, then repeat the configuration steps.

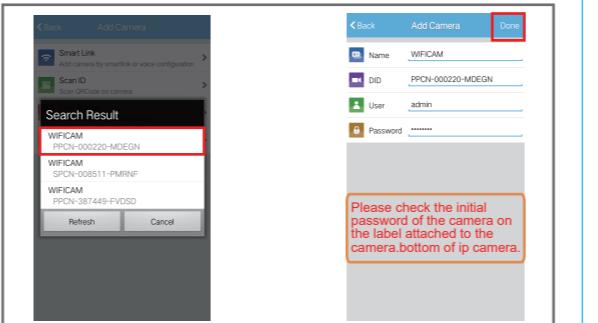


2.2 Watch the video

Click the camera on the list, enter the browsing interface, watch the video in real time. Action button interface as shown in the figure below.

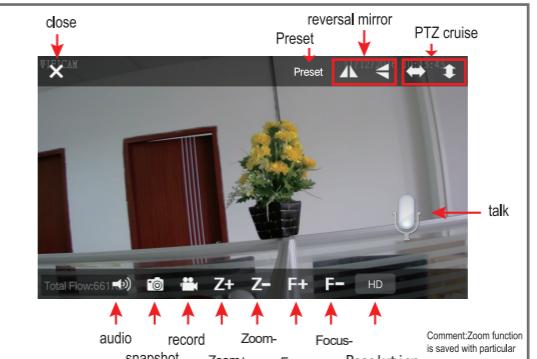


3. Camera setting

Click on the round label, enter the camera setting interface

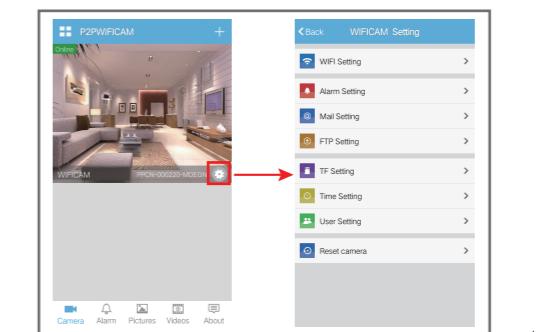


3.1 WiFi setting

Click WiFi Setting, enter the UI of Getting WiFi Params, Choose the wifi searched and enter the password. Click the Done its change successful.

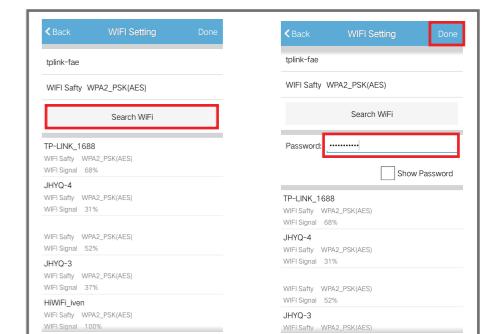

3.2 TF card setting

The TF card must be formatting when you first use it. Check record coverage and timer recording. For safety, make sure to power off the camera whenever you insert or pull out the TF card.

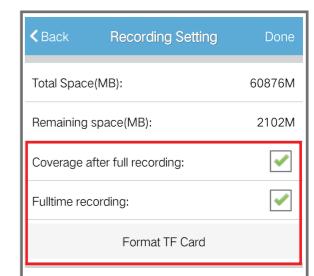

5

1

2


3

4

5

4 More window video

Click on the top left corner graphic to enter more window video preview interface. Click on the right side camera to watch the real-time video.

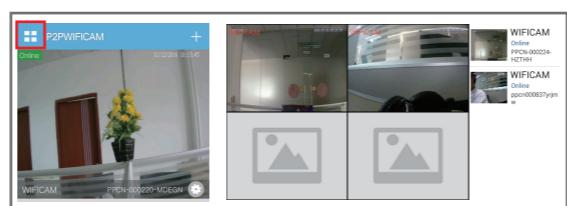


5 Record playback

Click "Videos" to watch the record, including local and remote to video (in TF card).


5.1 Local (phone) video playback



5.2 Remote (TF) video playback

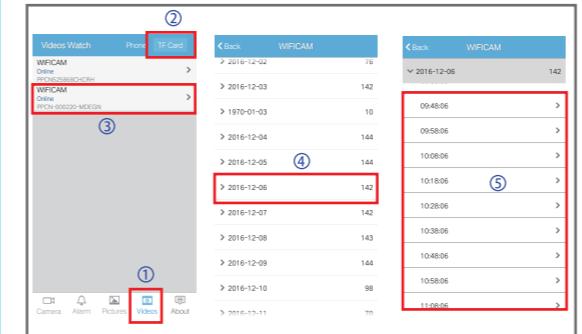


6 Alarm log

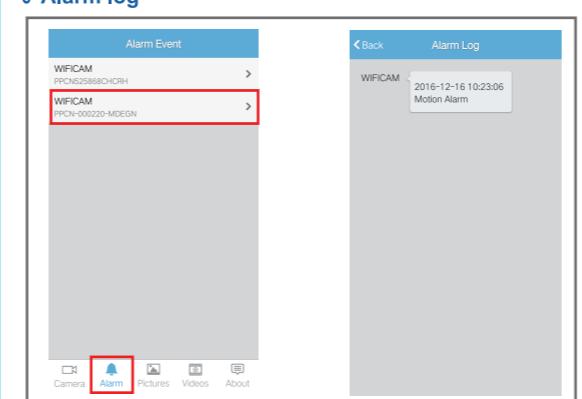


7 Local Pictures

Real-time Watching Screenshots are saved here.

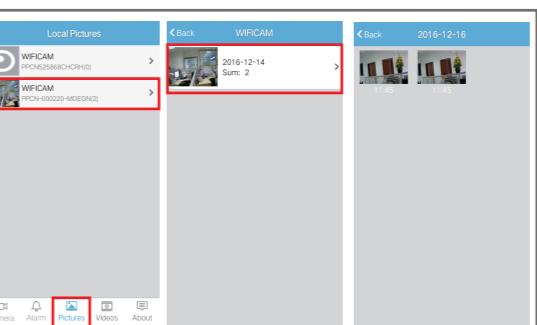

8 Edit camera

Click Edit button, chose the equipment to Delete or change password.

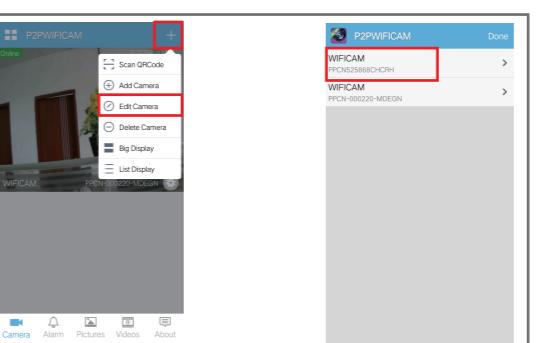

► Instruction


Android client contains alarm log function, and the rest of the function remains the same as the ios.

► About

Check the software version.

Version Upgrade: Click the Update App

Alarm warning: After setting Motion Detection Alarm, if any trigger searched, will receive bell alarm as following picture. Click enter the local screen, Default Open Mode, click it again off.

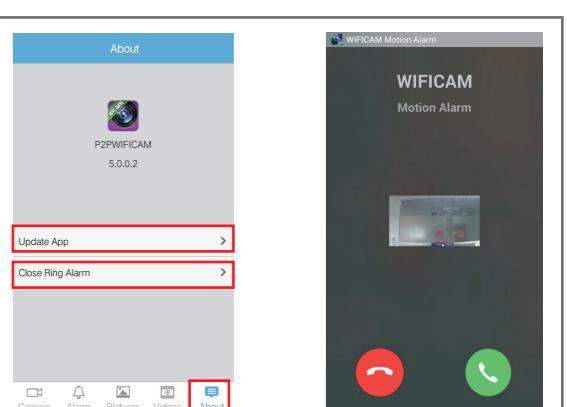

11

6

7

8

9

10

11