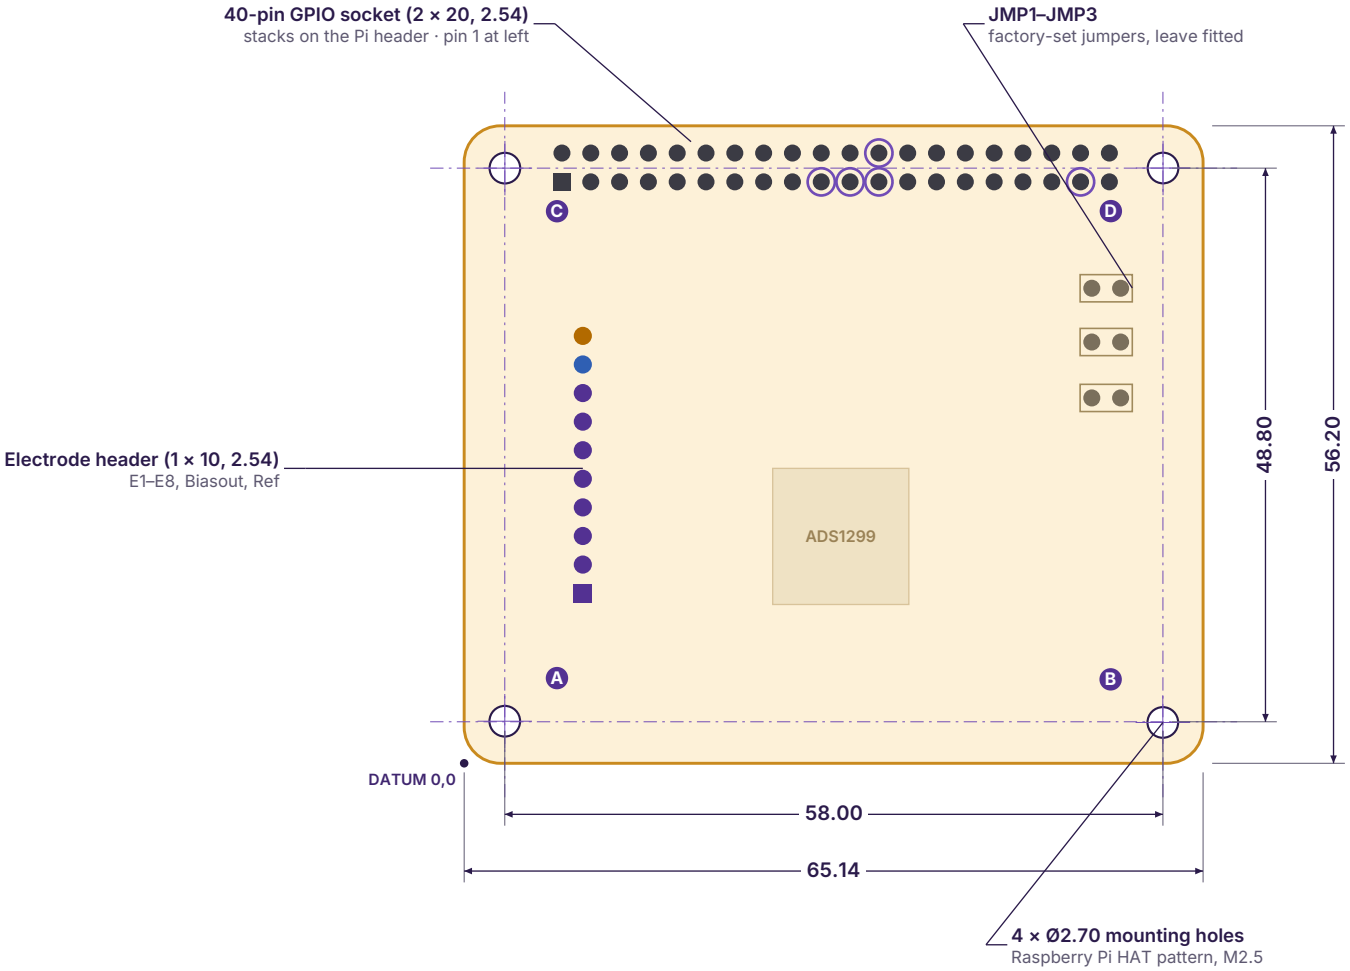


Mounting holes

Hole	X	Y	Ø	Use
A	3.58	3.71	2.70	M2.5
B	61.59	3.60	2.70	M2.5
C	3.59	52.47	2.70	M2.5
D	61.61	52.48	2.70	M2.5

Notes

- Outline 65.14 × 56.20 mm, rounded corners; 1.6 mm FR-4.
- Mounting holes on the Raspberry Pi HAT pattern (58.0 × 48.8 mm); use M2.5 stand-offs.
- 40-pin socket sits on the underside and plugs onto the Pi header; 2.54 mm pitch.
- Electrode header: 10 pins at 2.54 mm, pin 1 (E1) nearest the bottom edge.
- Datum 0,0 at the lower-left corner of the outline; all dimensions in mm.

Title	PiEEG-8 board outline & interfaces
Doc. No.	PE8-MD-002
Revision	Rev. A · 10 Nov 2026
Board	PiEEG V2.1
Units	mm; datum lower-left corner
Scale	1.5 : 1 (A4 print)

For research and education only. Not a medical device. Specifications subject to change.

02 INTERFACE LOCATIONS

Interface	Position from datum	Details
40-pin GPIO socket	pins at X 8.62–56.88, Y 51.26 / 53.80	2 × 20, 2.54 mm; pin 1 at X 8.62, Y 51.26; mounts on the Pi header
Electrode header	X 10.46, Y 15.0 (E1) to 37.7 (Ref)	1 × 10, 2.54 mm: E1…E8, Biasout, Ref
Jumpers JMP1–JMP3	X 55.3 / 57.9, Y 32.2 · 37.1 · 41.9	Factory set; leave fitted as supplied
Mounting holes	see hole table, page 1	4 × Ø2.70, HAT pattern
Status LED	upper-left area, marked “Power”	On when the shield is powered



PiEEG-8 shield.



Mounted on a Raspberry Pi.

NOTE Stacking height.

The shield uses an extra-high stacking socket so it clears the Pi’s USB and Ethernet ports. Check clearance for your own case; the PiEEG case (PE8-ENC-007) has 6 mm extra height for the shield.

CAUTION Handling.

Never fit or remove the shield while the Pi is powered. Press it on evenly so every pin is fully seated.

For research and education only. Not a medical device. Specifications subject to change.