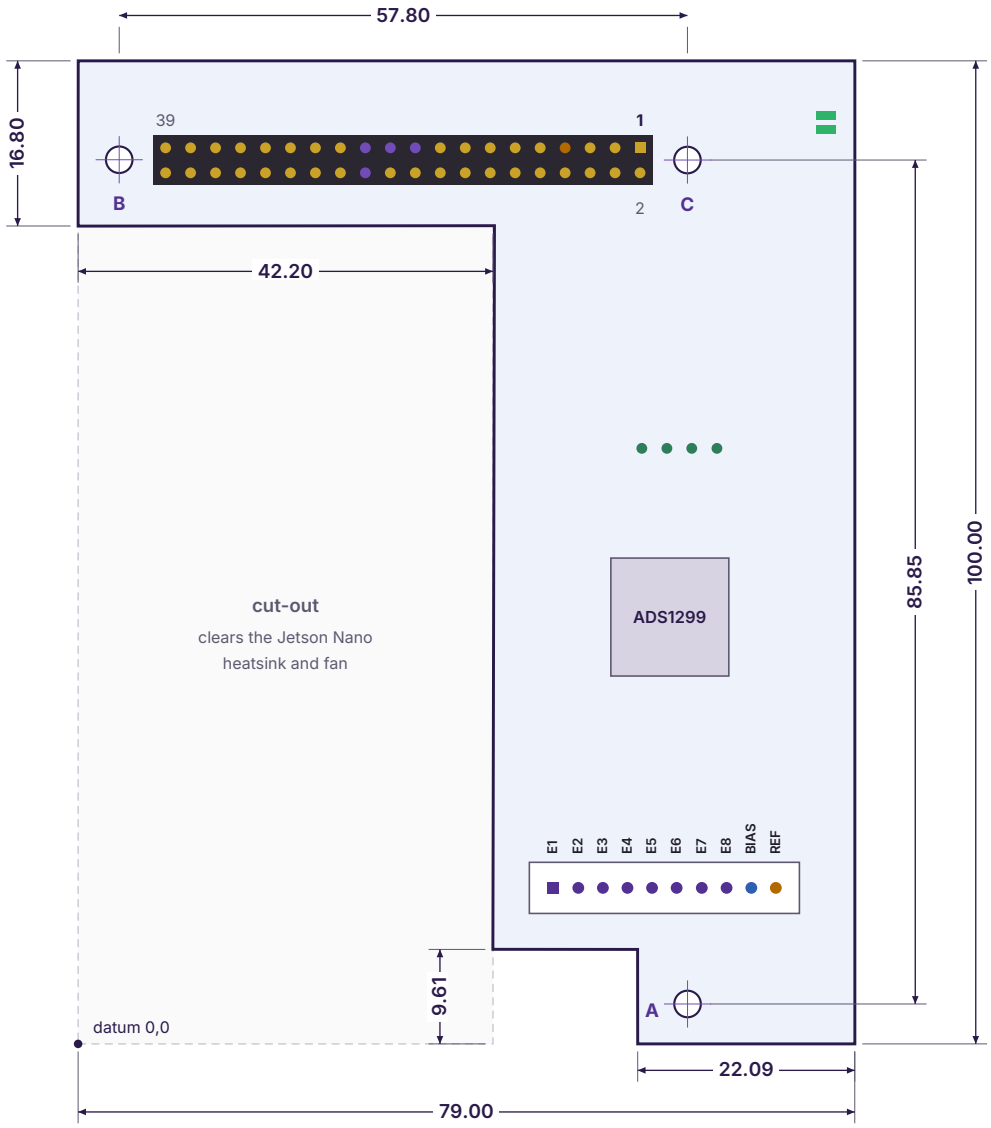


Mounting holes

Hole	X	Y	Ø	Use
A	61.99	4.06	2.70	M2.5
B	4.18	89.94	2.70	M2.5
C	61.98	89.91	2.70	M2.5

Notes


- L-shaped outline 79.0 × 100.0 mm; the 42.2 × 83.2 mm cut-out leaves the Jetson Nano heatsink and fan uncovered.
- Holes B and C sit 57.80 mm apart along the header edge; hole A is on the lower tab, 85.85 mm below C.
- 40-pin socket on the underside, 2.54 mm pitch; pin 1 at the right end (marked “1”), odd pins on the outer row.
- Electrode header along the lower tab, E1 on the left.
- Board thickness 1.6 mm FR-4.

Title	JNEEG outline & interfaces
Doc. No.	JN-MD-002
Revision	Rev. A · 10 Nov 2026
Board	JNEEG V2.0
Units	mm; datum lower-left of bounding box
Scale	1.3 : 1 (A4 print)


For research and education only. Not a medical device. Specifications subject to change.

02 INTERFACE LOCATIONS

Interface	Position from datum (mm)	Details
40-pin socket J2	pins X 8.90–57.16; Y 88.61 / 91.15	2 × 20 elevated socket, 2.54 mm; pin 1 at X 57.16, Y 91.15 (outer row, right end)
Electrode header J3	Y 15.87; X 48.30 (E1) … 70.97 (Ref)	1 × 10, 2.54 mm: E1…E8, Biasout, Ref; pin 1 = E1 (square pad)
Test header J1	Y 60.58; X 57.34 … 64.98	4-pin socket: −2.5 V, +2.5 V, 3.2 V, GND (supply check)
LEDs D1 / D2	X 76.0; Y 94.4 / 93.0	D1 “power” · D2 “connection”
Cut-out	X 0–42.2, Y 0–83.2	Leaves the Jetson Nano heatsink, fan and module free
Mounting holes	see hole table, page 1	3 × Ø2.70 mm (M2.5)

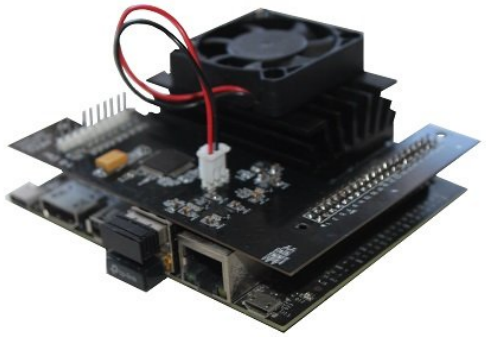

JNEEG mounted on the Jetson Nano.

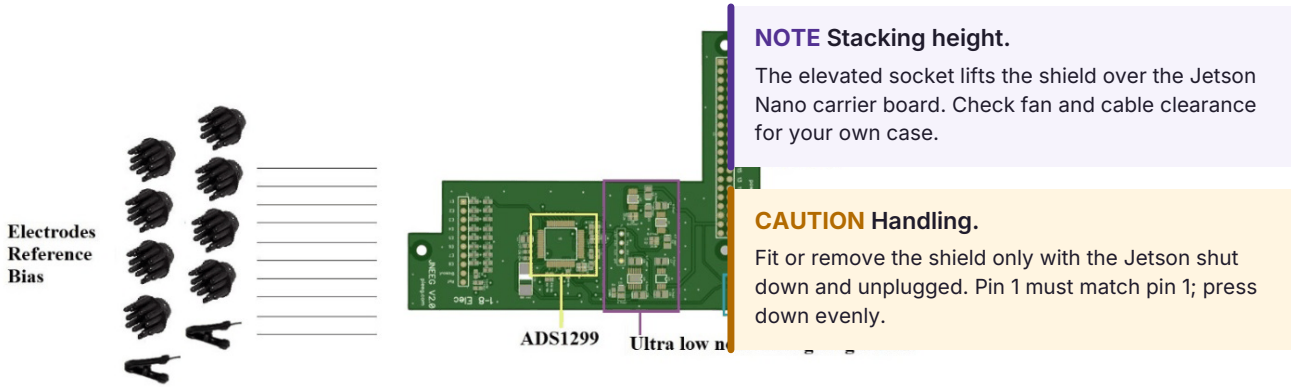

Electrodes, ADS1299, regulators, LED and 40-pin header.

NOTE Stacking height.

The elevated socket lifts the shield over the Jetson Nano carrier board. Check fan and cable clearance for your own case.

CAUTION Handling.

Fit or remove the shield only with the Jetson shut down and unplugged. Pin 1 must match pin 1; press down evenly.

For research and education only. Not a medical device. Specifications subject to change.