

3524021

Sonoco Tudela



A.Celli Paper s.p.a.
Via Del Rogio, 17
55012 Tassignano, Lucca Italy
Tel. +39.0583.98441
Fax. +39.0583.9844735
www.acelli.it

AS-BUILT

				07/10/2024		Sonoco Tudela	1	Portada	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS		=	
				LR						+		
				CB								
R.				Standard								
				IEC			1		3524021			19

AS-BUILT

CustomerSONOCO TUDELA

DestinationSpagna, Tudela

MECHANICAL DATA

Type of MachineSEE TECHNICAL SPEC.

ProductSEE TECHNICAL SPEC.

Design speedm/min SEE TECHNICAL SPEC.

Drive speedm/min SEE TECHNICAL SPEC.

Untrimmed Roll Widthmm SEE TECHNICAL SPEC.

Max unwind roll diametermm SEE TECHNICAL SPEC.

Max finish roll diametermm SEE TECHNICAL SPEC.

Accel./Decel. Ratem/min/s SEE TECHNICAL SPEC.

E-Stop times SEE TECHNICAL SPEC.

Machine drive sideSEE TECHNICAL SPEC.

Slitter numbersSEE TECHNICAL SPEC.

Coreinch SEE TECHNICAL SPEC.

Load cellquantity SEE TECHNICAL SPEC.

Add data 1SEE TECHNICAL SPEC.

Add data 2SEE TECHNICAL SPEC.

.....

.....

.....

.....

.....

PAINT COLOUR

CabinetRAL 7030

Control deskRAL 7030

Junction boxRAL 7030

Control boxRAL 7030

MotorsRAL 7030

.....

.....

CABINET ELECTRICAL DATA

Main supply voltage (Un)V 400 VAC

Auxiliary control voltage (Un)V 24 VDC

Instruments supply voltage (Un)V 24 VDC

Rated Insulation Voltage (Ui)V 690

Rated Imp. Withstand Voltage (Uimp)kV 10

Rated frequency (Hz)Hz 50

Rated current in assembly (I_{na})A 32

Rated conditional short circuit curr. (I_{cc})kA 10

Rated diversity factor1

Max installing quotem 1000

StandardsEN60204-1

HarmonicEN61800-3

.....

.....

.....

MOTORS ELECTRICAL DATA

Standard efficiency IE1

High efficiency IE2

Premium efficiency IE3

☐

☐

☐

Degree protectionIP 55

Form constructionB3 AND B5

Class insulationB/F

CoolingIC411 (SELF VENTILATED)

Rated voltageV 400

Nominal frequencyHz 50

StandardsIE3

Temperature°C -20...+40 CLASS 155 (F)

Max installing quotem 1000

OTHER CHARACTERISTICS

Pollution degree3

Type of earthing systemTN-S

Indoor or outdoor installationINDOOR

Stationary or movableSTATIONARY

Degree of protectionIP 43

Intended for use skilled or ordinary personsSKILLED

Environment A,B,EMCA

Special service condition0 TO 50C° (>40C°WITH DERATING)

External designENCLOSED ASSEMBLY

Mechanical impact protectionIK10

Fixed or removable. withdrawable partsFIXED

Nature of short-circuit protective deviceCIRCUIT BREAKER

Form of internal separationFORM 1

Measures for protection against electric shockEARTHING SYSTEM

Types electrical connectionsTN-S

.....

.....

.....

.....

ENVIRONMENTAL LIMITS

Absolute max operating temperature°C -40...+55

Storage temperature°C -40...+70

Transportation temperature°C 0...+40

Relative Humidity% 5...95

Cooling methodVENTILADOR

.....

.....

.....

.....

07/10/2024

LR

CB

IEC

ACelli

Sonoco Tudela

1Portada

3Project data

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

3524021

19

Wire colours for power and control circuits



BLACK: for underground AC, DC power conductor operating at the supply voltage



LIGHT BLUE: neutral conductor



RED: for underground AC control conductor operating at less than supply voltage



ORANGE:
Underground control circuit conductor which remains energized when the main supply circuit disconnecting means is in the OFF position



BLUE:
for DC control circuit conductor operated operating at less than supply voltage



GREEN YELLOW stripe: identify the equipment grounding conductor where insulated or covered

Wire colours and minimum sections

Wire used	Colour	Min gauge Metric
AC power circuit	Black	2,5mmq
DC power circuit	Black	2,5mmq
AC auxiliary > 50V	Red	1,5mmq
DC auxiliary < 50V	Blue	1,5mmq
I/O PLC < 50V	Blue	0,5mmq
External AC auxiliary External AC auxiliary when the supply is unknown. Interconnecting	Orange	1,5mmq
UPS >50V	Orange	1,5mmq
Current transformer	Black	2,5mmq
PE earthing protection	Green/Yellow	2,5mmq
EQS equipotential bonding	Green/Yellow	6mmq

Pushbutton colours

Wire used	Colour
Emergency stop Stop	Red
Start	Green
Reset	Yellow
Mandatory action	Blue
No specific assigned	Black

Pilot light

Wire used	Colour
Alarm/Faulty Warning/Caution Danger	Yellow
Normal	Red
Running	Green
Mandatory action	Blue

AS-BUILT

07/10/2024

LR

CB

IEC

ACelli

Sonoco Tudela

1 Portada

6 Colours code

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

3524021

6

19

	1	2	3	4	5	6	7	8
A	REFERENCE STANDARDS Norma CEI 64-8 Plant using a rated voltage not exceeding 1000Vac and 1500Vdc Electrical plant with a higher risk of fire IEC 364 Norma CEI 17-13/1 EN61439-2 IEC439-1/2/4 Norma CEI 44-5 EN60204-1 Norma CEI 11-25 Norma CEI 110-13 EN50081-1 Norma EN ISO 13850 Norma EN ISO 14121-1 Tabelle CEI_UNEL 35024/1 Low voltage switchgear and controlgear assemblies (LV switchboards) Safety of machinery. Electrical equipment of machines General requirements Calculation of short-circuit currents in three-phase alternating current networks Electromagnetic Compatibility - Generic Emission Standard part 2: Industrial environment Safety of machinery — Emergency stop function Principles for design Safety of machinery — Risk assessment Electric cables capacity							
B								
C								
D								
E								
F	AS-BUILT 07/10/2024 LR CB IEC Standard ACelli Sonoco Tudela 1 Portada 8 Normative 3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS 3524021 19 = +							
	1	2	3	4	5	6	7	8

TAG machine description

- 1) PLANT
- 2) FUNCTION
- 3) KIND OF EQUIPMENT
- 4) SEQUENTIAL NUMBER


=193 .MU010 -Y 4

LEGEND

- 1) PLANT: Used to identify Mill production line or plant number
- 2) FUNCTION: Used to identify a Machine Area
- 3) KIND OF EQUIPMENT: Used to identify product type. Kind of equipment code letters are:

A	MODULES, SUB-MODULES	N	AMPLIFIERS
B	BLUETHOOOTH TRANSMITTER	O	
C		P	PUMP, PRESSURE SWITCHES/TRANSDUCERS
D	CONTROL PANEL	Q	HIGH-POWER SWITCHGEAR
SV	PNEUMATIC VALVE	R	RESISTORS, CONTROL BOXES
FA	SWITCHGEAR (AUXILIARY CIRCUITS)	S	SWITCHES, SELECTORS
G	POWER SUPPLY UNITS, SENSORS	T	TRANSFORMERS, TRANSMITTERS
H	SIGNALLING SYSTEM, LIGHTS	U	MODULATORS, CONVERTERS
J	JUNCTION BOXES	V	VALVE, VIBRATION CONTROL
K	RELAYS, CONTACTORS	W	LOAD CELLS
L	INDUCTANCES, REACTORS	X	TERMINALS, CONNECTORS
M	MOTORS	Y	SOLENOID ELECTROVALVES
		Z	SAFETY DEVICES

- 4) SEQUENTIAL NUMBER: Identification number assigned to distinguish a series of components

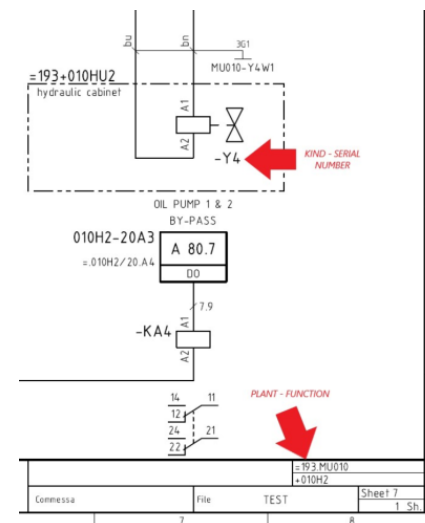

AS-BUILT

A

- B

C

- C




D

- 1

E

- E



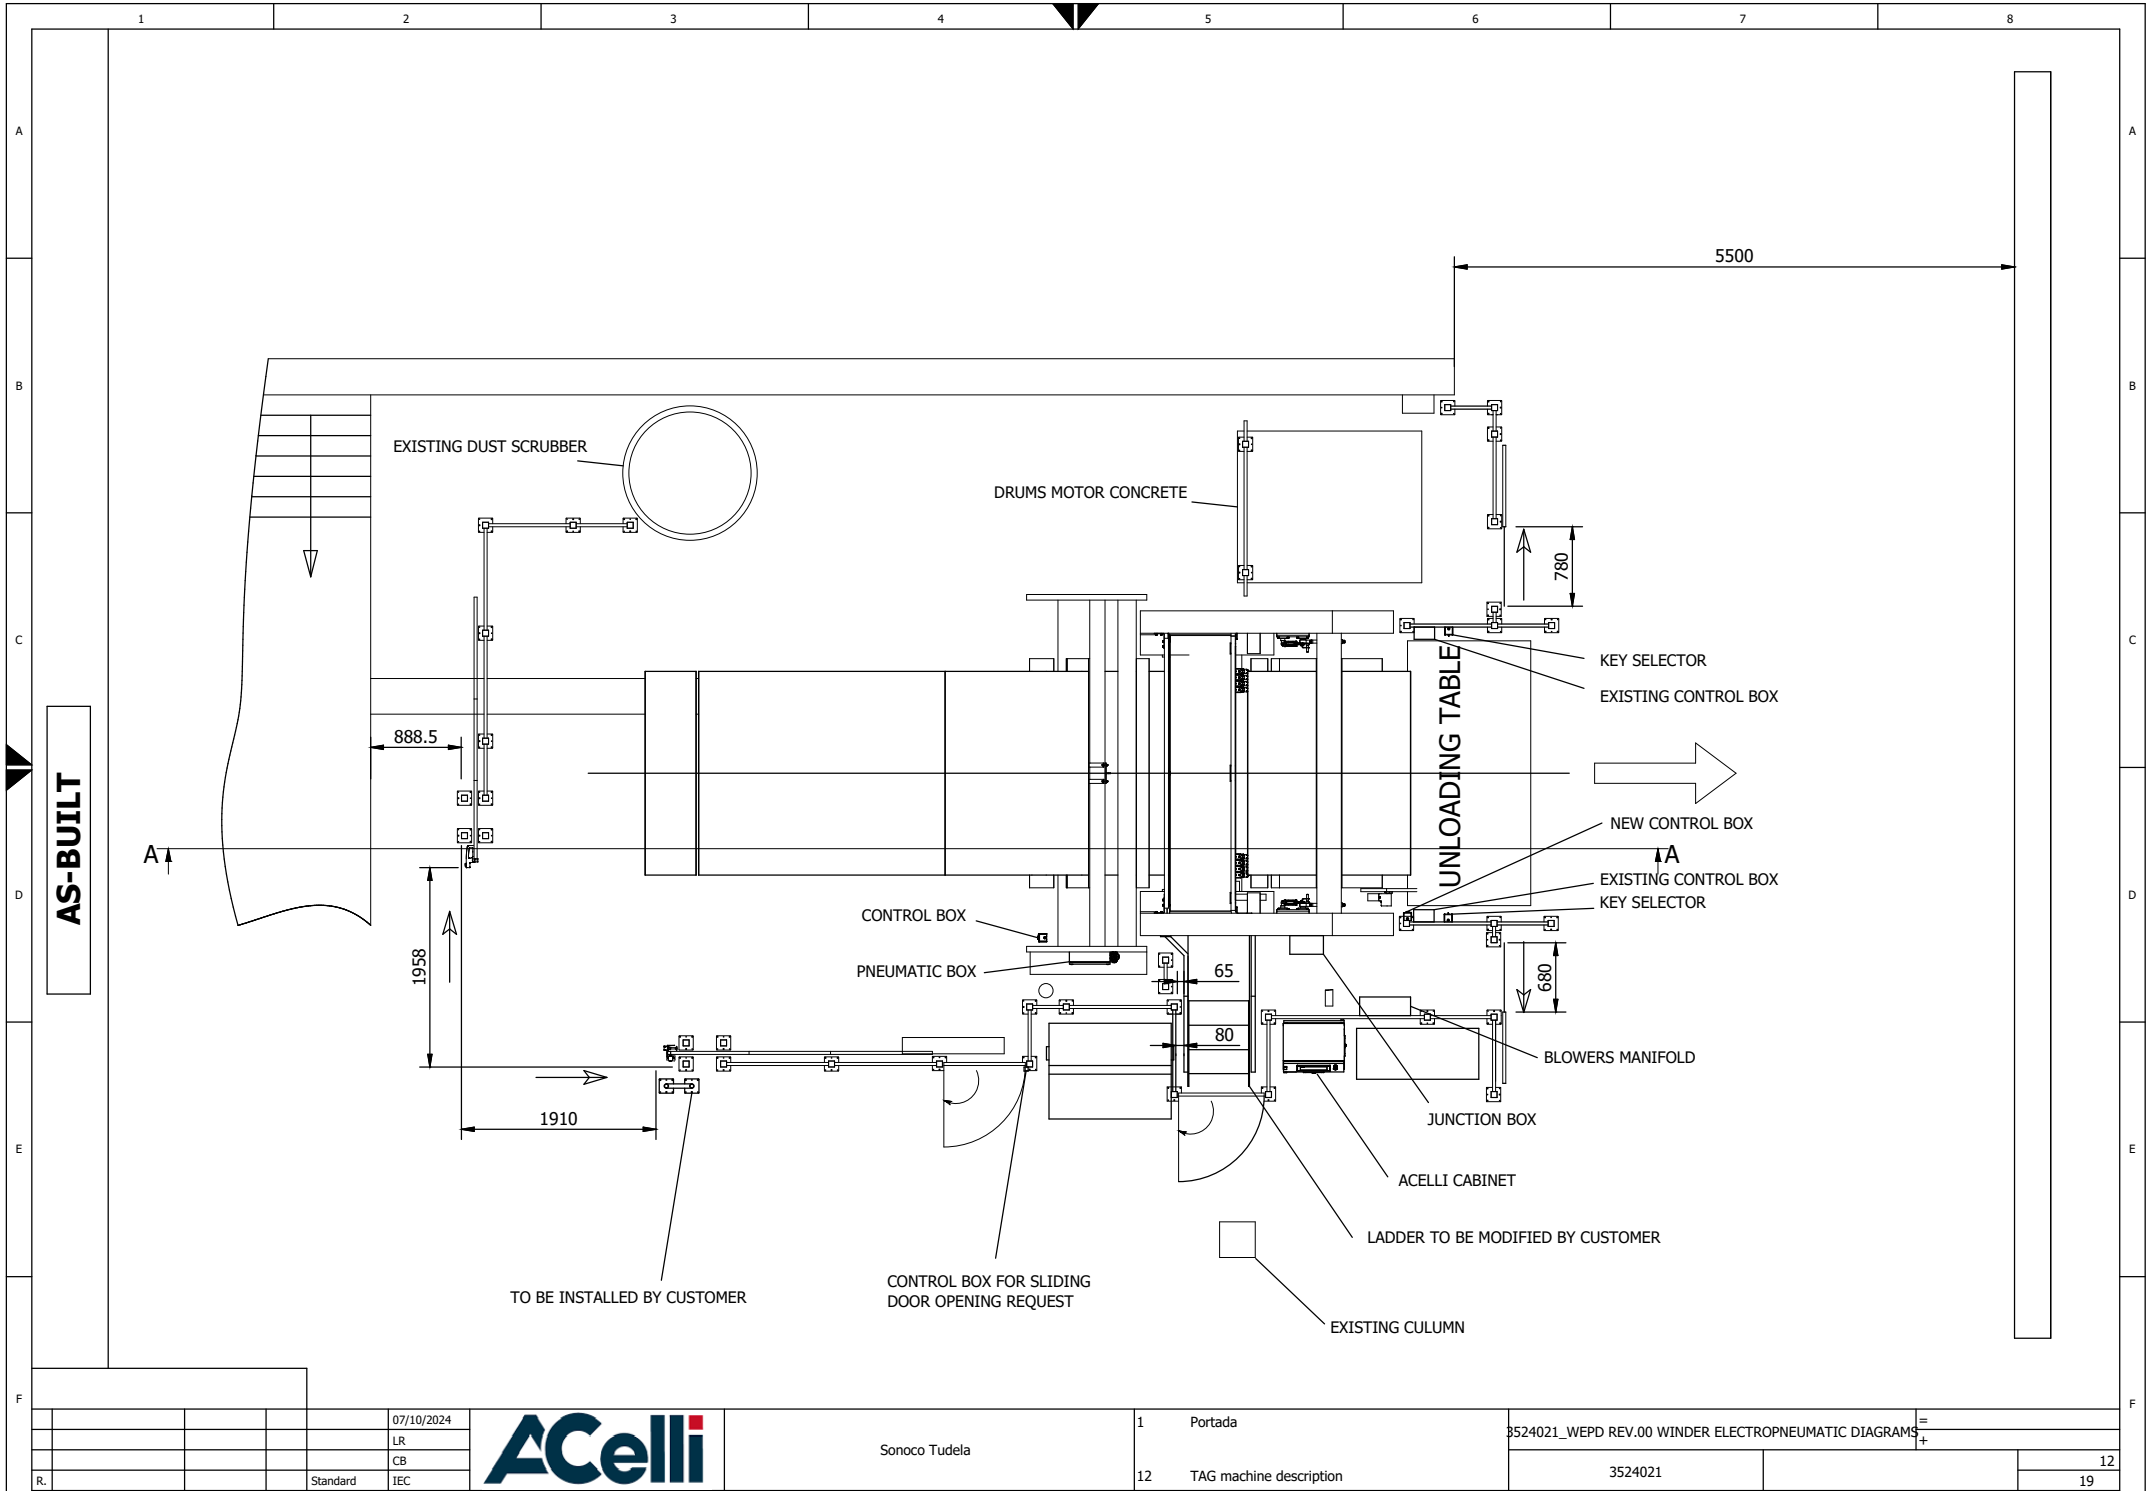

				07/10/2024
				LR
				CB
R.			Standard	IEC




Sonoco Tudela


1	Portada	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	
12	TAG machine description	3524021	12
			19

Layout plan of earthing and cabling


TRANSFORMER

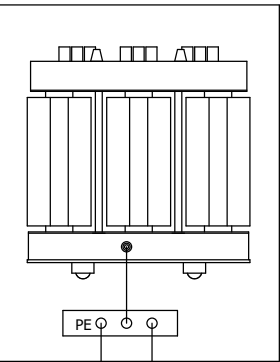


Electrical Cabinet

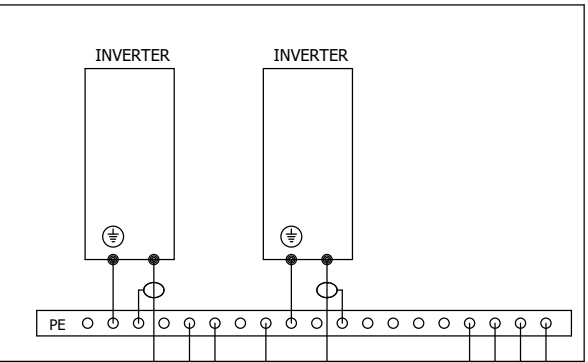


MCS Control Sytem





REMOTE UNIT



CONTROL DESK



CONTROL BOX

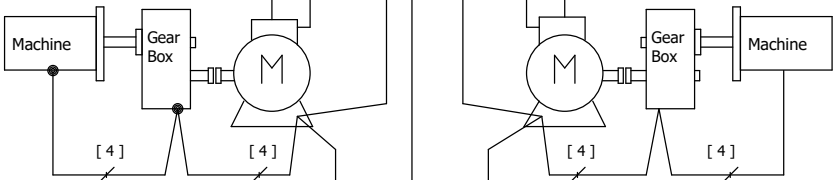


Main Earth
Terminal in
Control Room

- [1] shielded symmetrical power cable
- [2] additional yellow-green ground cable
- [3] filo di rame stagnato finemente intrecciato
- [4] equipotential bonding cable
- [5] yellow-green cable

Foundation ground meshed network


EARTH INSPECTION PIT

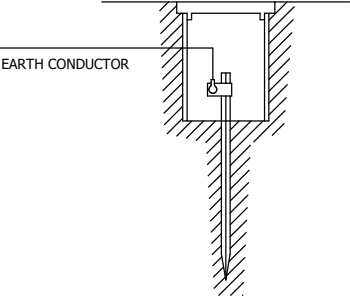

AS-BUILT


Typical of Earthing system

TYPICAL OF CONNECTION EARTHING FOR AC MOTOR

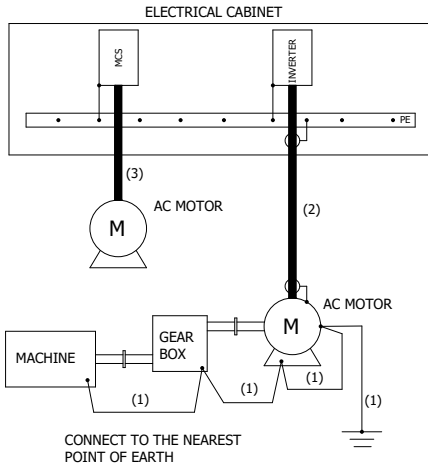


- (1) FINELY STRANDED, COPPER WIRE
- (2) SHIELDED, SYMMETRICAL CABLE WITH EARTH CONDUCTOR
- (3) SYMMETRICAL CABLE WITH EARTH CONDUCTOR

TYPICAL GROUND CONNECTION FOR METAL DUCT

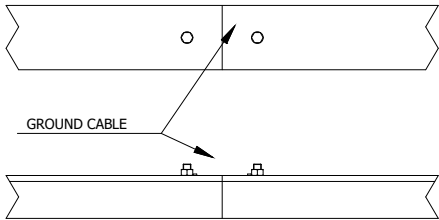

THE MAIN CONNECTION OF EARTH WILL BE MADE IN THE MCC ROOM

FOUNDATION EARTHING TYPICAL FOR METALLIC COLUMN

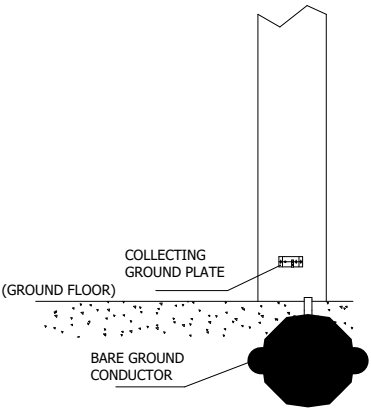


COLLECTING
GROUND PLATE

PVC PIPE


(FROM GROUND
LEVEL COLLECTOR)

AS-BUILT

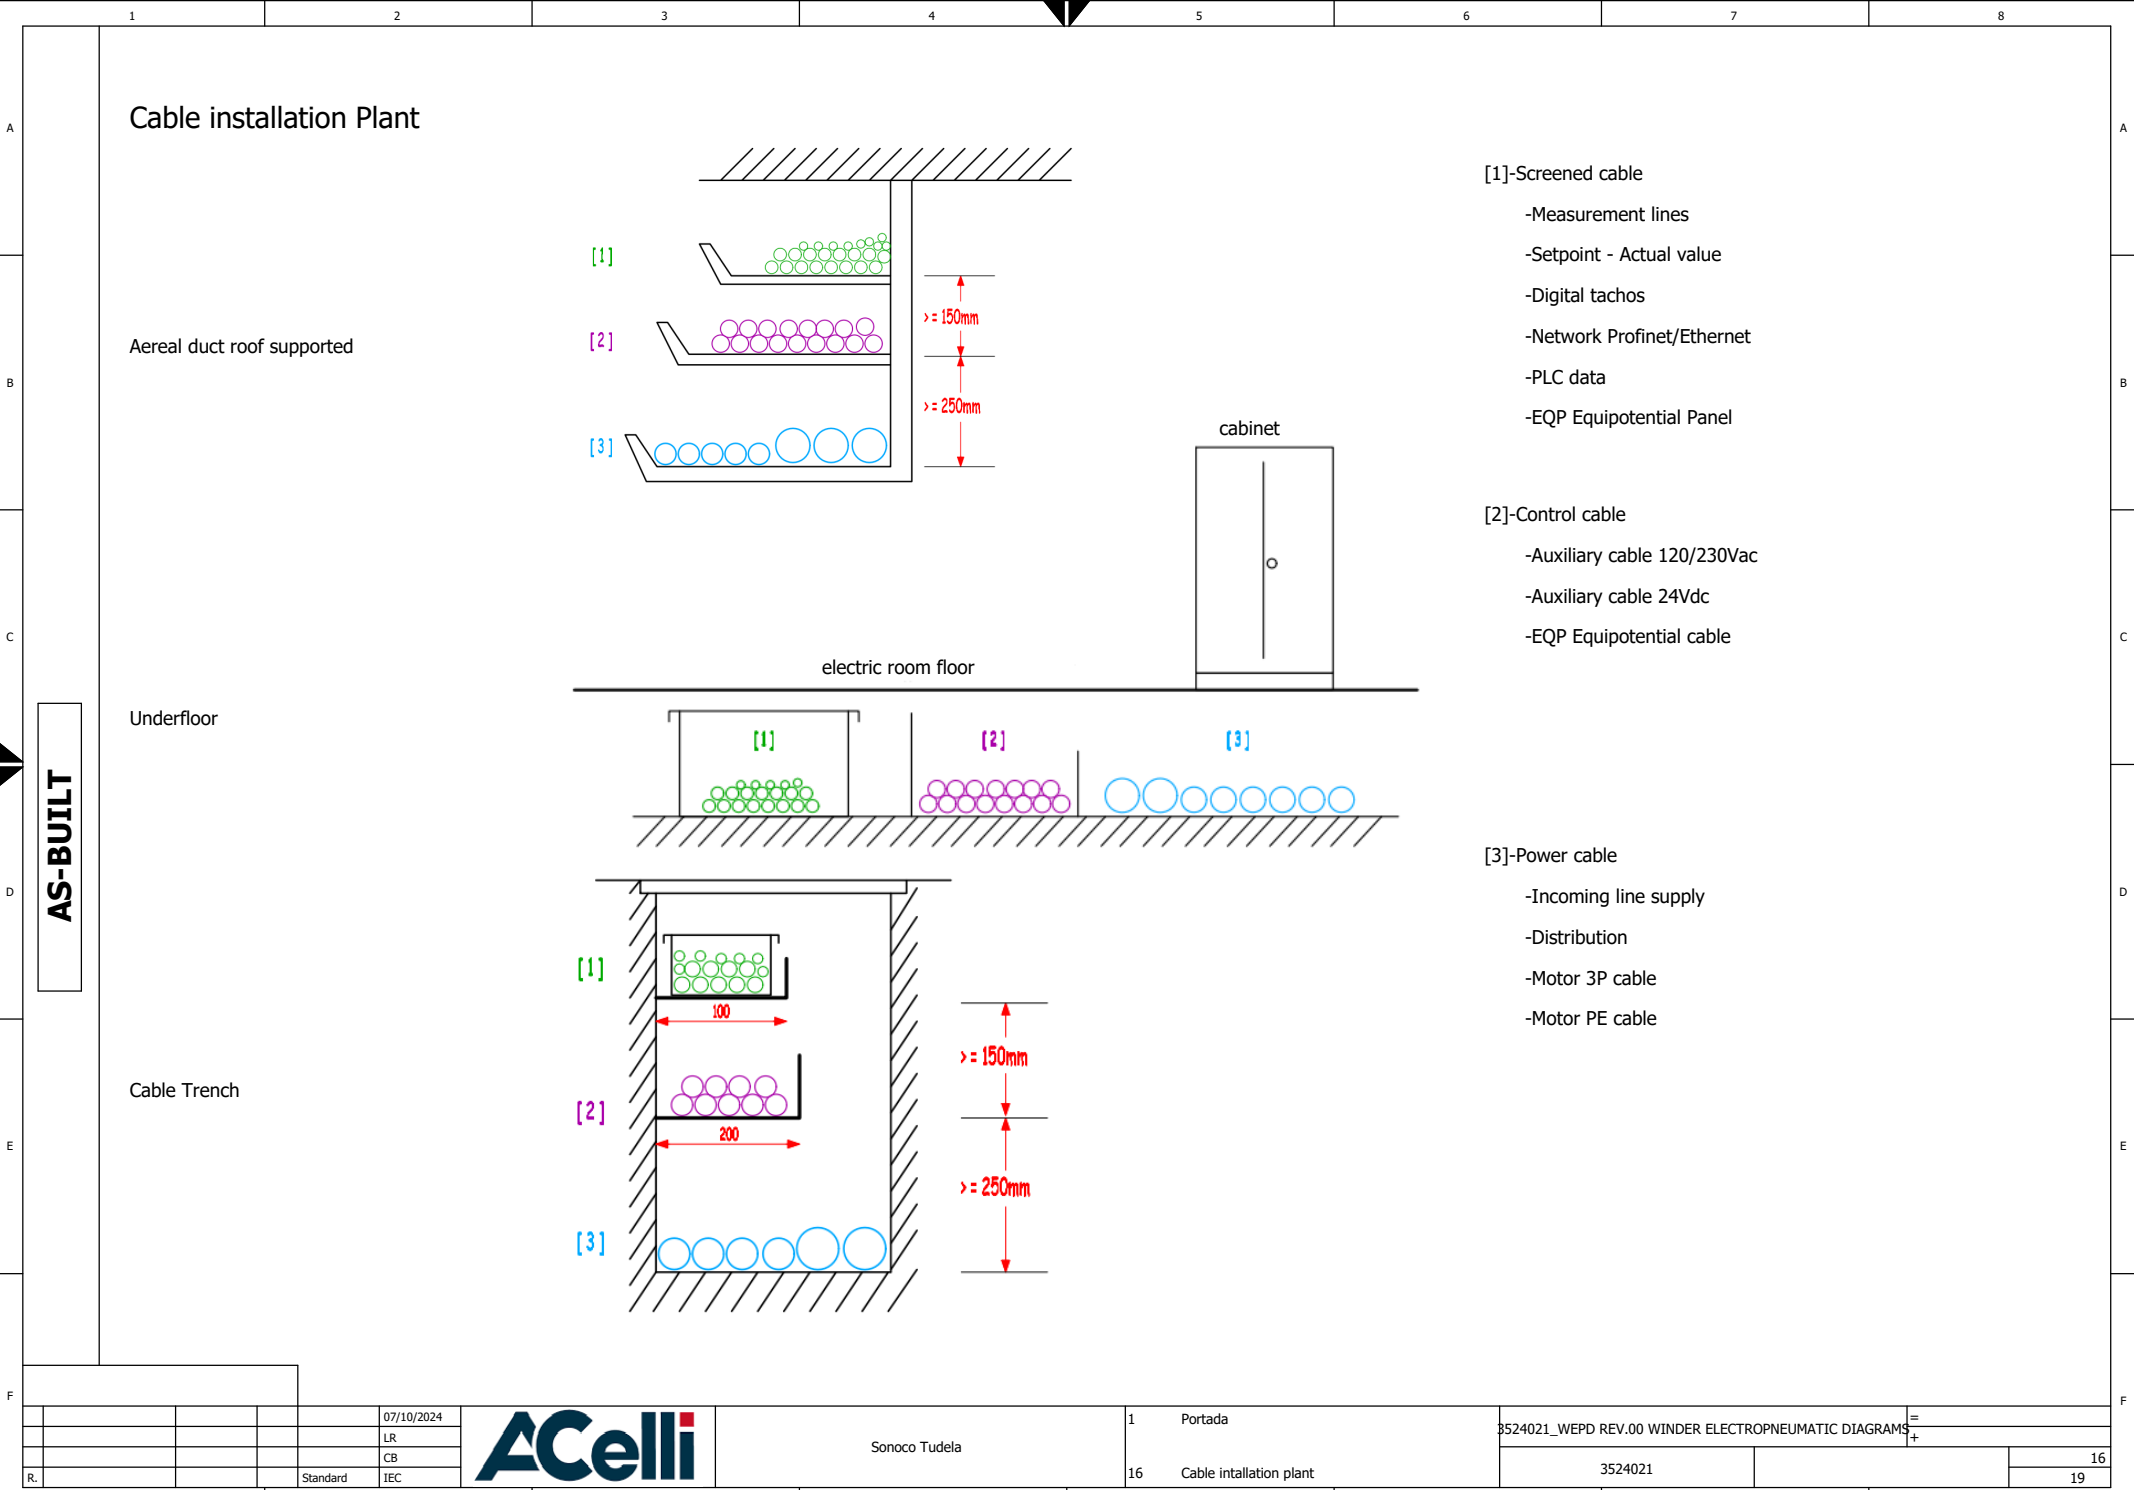

AS-BUILT



				07/10/2024		Sonoco Tudela		1	Portada	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS			=
				LR									+
				CB									
R.				Standard	IEC			16	Cable intallation plant	3524021			16
													19

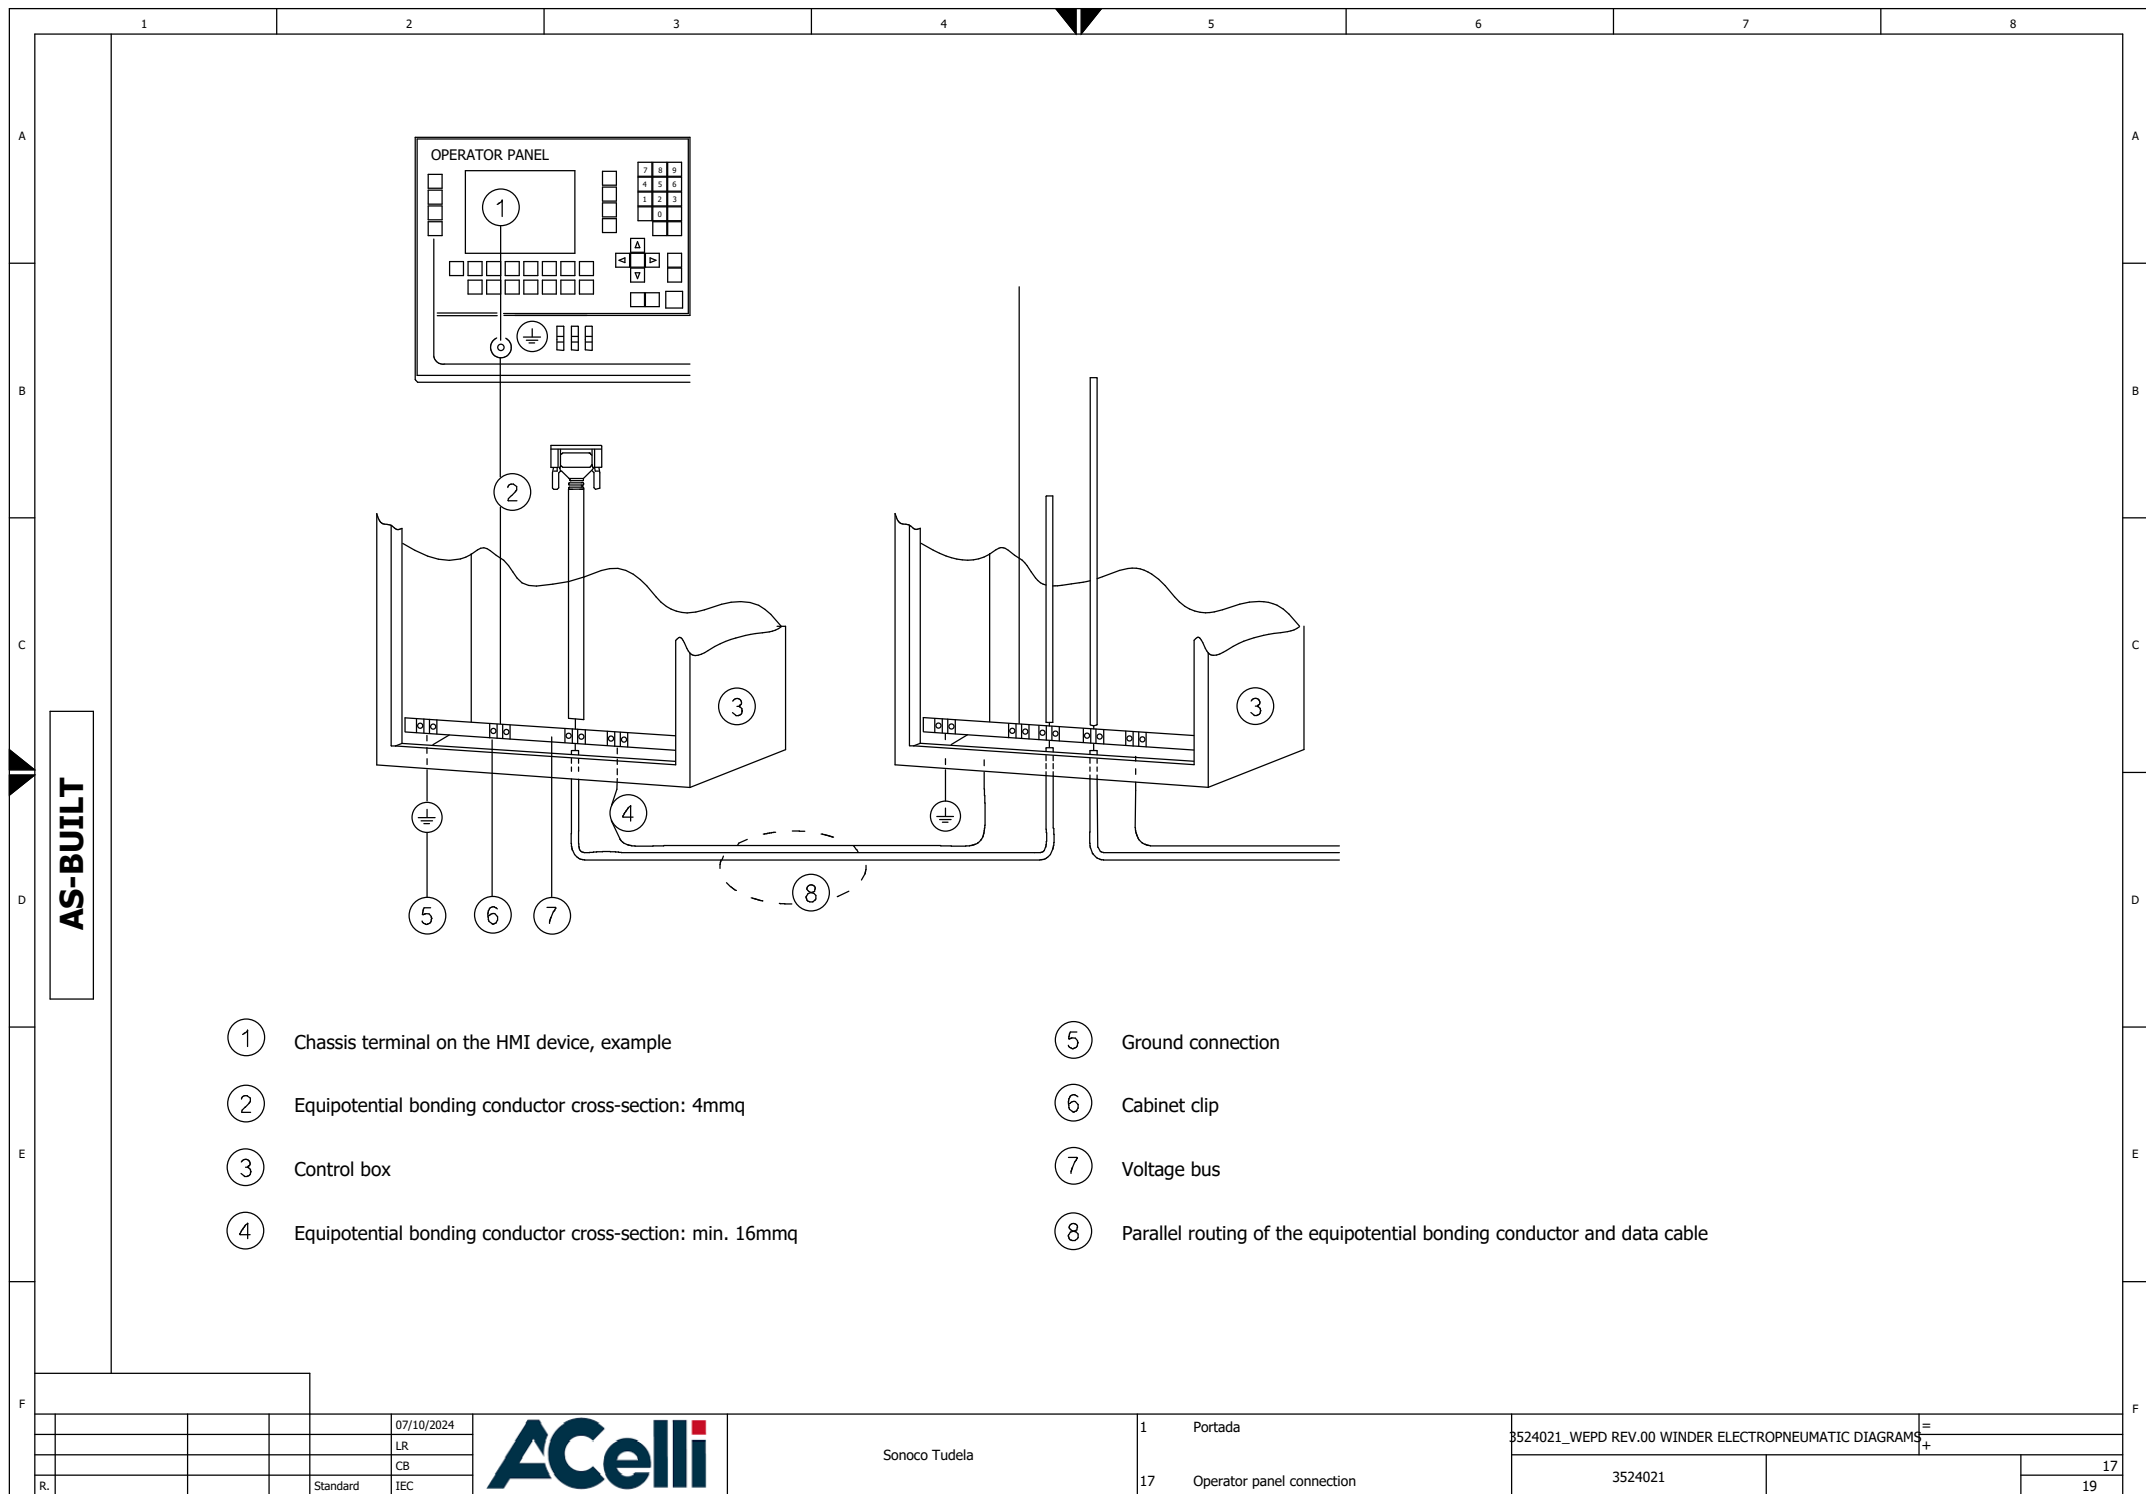


EMC Compliant Installation

Cables connections


Inverter

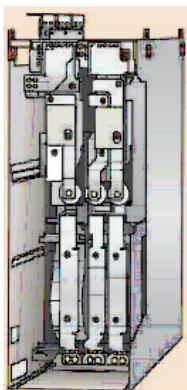


Symmetrical 3 wire cable plus
symmetrical arranged PE conductor

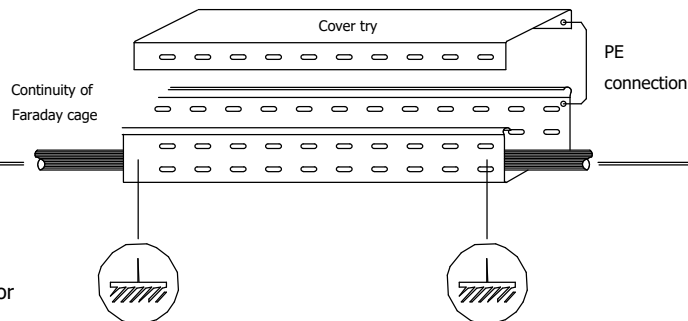


NOT CORRECT

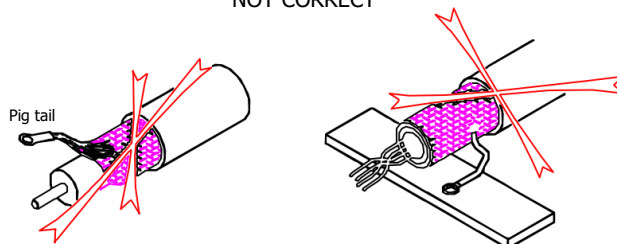

CORRECT

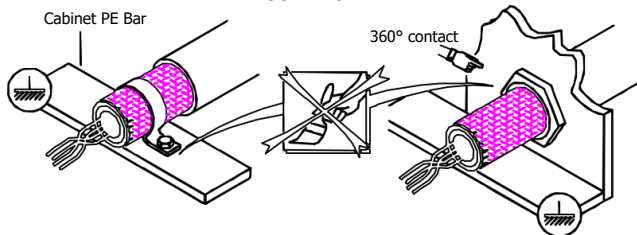

cable connection - motor side

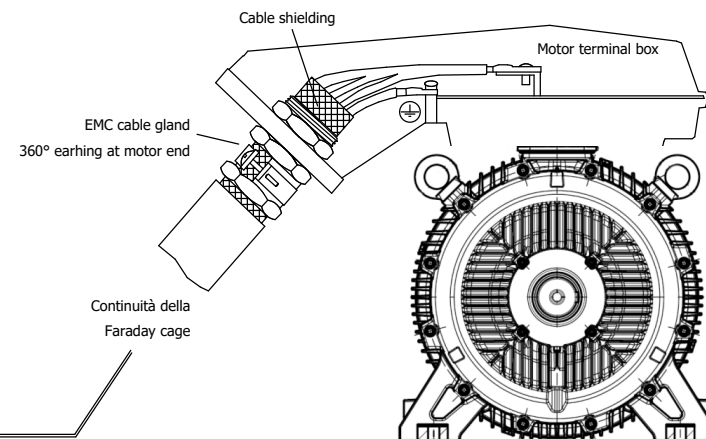

Continuità della
Faraday cage

[illegible]

	1	2	3	4	5	6	7	8	
A									A
B									B
C									C
D									D
E									E
F									F

22	2	Indice		16		INDICE	AIS/CB Cristiano Biondi 20/02/2026	
23	2	Indice		17		INDICE	AIS/CB Cristiano Biondi 20/02/2026	
24	2	Indice		18		INDICE	AIS/CB Cristiano Biondi 20/02/2026	
25	2	Indice		19		INDICE	AIS/CB Cristiano Biondi 20/02/2026	
194	10	Layout quadri elettrici		1		Layout	AIS/LR Luca Romoli 20/02/2026	
195	10	Layout quadri elettrici		2		Layout	AIS/LR Luca Romoli 20/02/2026	
196	10	Layout quadri elettrici		3		Layout	AIS/LR Luca Romoli 20/02/2026	
197	10	Layout quadri elettrici		4		Layout	AIS/LR Luca Romoli 20/02/2026	
198	10	Layout quadri elettrici		5		Layout	AIS/LR Luca Romoli 20/02/2026	
199	10	Layout quadri elettrici		6		Layout	AIS/LR Luca Romoli 20/02/2026	
200	10	Layout quadri elettrici		1		Layout	AIS/LR Luca Romoli 17/12/2025	
201	10	Layout quadri elettrici		1		Layout	AIS/LR Luca Romoli 17/12/2025	
202	10	Layout quadri elettrici		1		Layout	AIS/LR Luca Romoli 17/12/2025	
203	10	Layout quadri elettrici		1		Layout	AIS/LR Luca Romoli 17/12/2025	
204	10	Layout quadri elettrici		1		Layout	AIS/LR Luca Romoli 17/12/2025	
205	10	Layout quadri elettrici		2		Layout	AIS/LR Luca Romoli 17/12/2025	
206	10	Layout quadri elettrici		3		Layout	AIS/LR Luca Romoli 17/12/2025	
207	11	Layout quadri pneumatici		1		Layout	AIS/LR Luca Romoli 17/12/2025	
208	11	Layout quadri pneumatici		2		Layout	AIS/LR Luca Romoli 17/12/2025	
209	11	Layout quadri pneumatici		1		Layout	AIS/CBi 17/12/2025	
210	11	Layout quadri pneumatici		2		Layout	AIS/CBi 17/12/2025	

R.			Standard	IEC	Sonoco Tudela	2	Directorio	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	= +	11	19
----	--	--	----------	-----	---------------	---	------------	--	--------	----	----

AS-BUILT

ACelli

07/10/2024
LR
CB
IEC

		1		2		3		4		5		6		7		8	
A																	
	123	7	Morsettiere		010 REWINDER				12				Schema morsetti =+000CD1-X35	AIS/CB Cristiano Biondi			
														20/02/2026			
	124	7	Morsettiere		010 REWINDER				13				Schema morsetti =+000CD1-X36	AIS/LR Luca Romoli			
														17/12/2025			
	125	7	Morsettiere		010 REWINDER				14				Schema morsetti =+000CD1-X47	AIS/CB Cristiano Biondi			
														20/02/2026			
	126	7	Morsettiere		010 REWINDER				15				Schema morsetti =+000CD1-X50	AIS/LR Luca Romoli			
														17/12/2025			
	127	7	Morsettiere		010 REWINDER				16				Schema morsetti =125.MU016+000CD1-XEQP	AIS/LR Luca Romoli			
														17/12/2025			
	128	7	Morsettiere		010 REWINDER				17				Schema morsetti =125.MU011+000CD1-4XFU1	AIS/LR Luca Romoli			
														17/12/2025			
	129	7	Morsettiere		010 REWINDER				18				Schema morsetti =125.MU011+000CD1-4XFU2	AIS/LR Luca Romoli			
														17/12/2025			
	130	7	Morsettiere		010 REWINDER				19				Schema morsetti =125.MU011+000CD1-5XFU1	AIS/CB Cristiano Biondi			
														20/02/2026			
	131	7	Morsettiere		010 REWINDER				20				Schema morsetti =125.MU011+000CD1-5XFU2	AIS/CB Cristiano Biondi			
														20/02/2026			
	132	7	Morsettiere		010 REWINDER				21				Schema morsetti =125.MU011+000CD1-6XFU1	AIS/CB Cristiano Biondi			
														20/02/2026			
	133	7	Morsettiere		010 REWINDER				22				Schema morsetti =125.MU011+000CD1-6XFU2	AIS/CB Cristiano Biondi			
														20/02/2026			
	134	7	Morsettiere		010 REWINDER				23				Schema morsetti =125.MU011+000CD1-7XFU1	AIS/CB Cristiano Biondi			
														20/02/2026			
	135	7	Morsettiere		010 REWINDER				24				Schema morsetti =125.MU011+000CD1-7XFU2	AIS/CB Cristiano Biondi			
														20/02/2026			
	136	7	Morsettiere		010 REWINDER				1				Schema morsetti =125.MU016+000RE1-XPE	AIS/LR Luca Romoli			
														17/12/2025			
	137	7	Morsettiere		010 REWINDER				1				Schema morsetti =125.MU016+000RE2-XPE	AIS/LR Luca Romoli			
														17/12/2025			
	138	7	Morsettiere		010 REWINDER				1				Schema morsetti =+015J1-X1	AIS/LR Luca Romoli			
														17/12/2025			
	50	6	Schema elettrico		010 REWINDER	125.MU011	CANCELLI SICUREZZA		1				COPERTINA	AIS/LR Luca Romoli			
														27/06/2025			
	51	6	Schema elettrico		010 REWINDER	125.MU011	CANCELLI SICUREZZA		1				Layout macchanico	AIS/LR Luca Romoli			
														21/02/2025			
	52	6	Schema elettrico		010 REWINDER	125.MU011	CANCELLI SICUREZZA		2				CANCELLO DI SICUREZZA	AIS/LR Luca Romoli			
														20/02/2026			
	53	6	Schema elettrico		010 REWINDER	125.MU011	CANCELLI SICUREZZA		3				CANCELLO DI SICUREZZA	AIS/LR Luca Romoli			
														20/02/2026			
	54	6	Schema elettrico		010 REWINDER	125.MU011	CANCELLI SICUREZZA		4				CANCELLO DI SICUREZZA	AIS/LR Luca Romoli			
														20/02/2026			

1		2		3		4		5		6		7		8													
A															A												
	55	6	Schema elettrico	010 REWINDER	125.MU011	CANCELLI SICUREZZA	5			CANCELLO DI SICUREZZA	AIS/LR Luca Romoli																
											20/02/2026																
	56	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	1			COPERTINA	AIS/LR Luca Romoli																
											27/06/2025																
	57	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	2			mechanical structure	AIS/LR Luca Romoli																
											13/02/2025																
	58	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	1			POSIZIONATORE	AIS/LR Luca Romoli																
											28/11/2025																
	59	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	2			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	60	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	3			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	61	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	4			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	62	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	5			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	63	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	6			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	64	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	7			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	65	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	8			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	66	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	9			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	67	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	10			POSIZIONATORE	AIS/LR Luca Romoli																
											20/02/2026																
	68	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	11			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	69	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	12			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	70	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	13			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	71	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	14			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	72	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	15			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	73	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	16			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	74	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	17			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
	75	6	Schema elettrico	010 REWINDER	125.MU015	Automatic spreading device	18			POSIZIONATORE EWELLIX	AIS/LR Luca Romoli																
											20/02/2026																
F																											
	R.																										
1		2		3		4		5		6		7		8													
				07/10/2024						2		Directorio		3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS													
				LR																							
				CB																							
				IEC		Sonoco Tudela				17				17													
				Standard								3524021		19													

Descripción

PANEL MANDOS REBOBINADORA

Disposición

000CD1

AS-BUILT

AS-BUILT

-ET2




A.Celli paper s.p.a.
Via del Rogio, 17
55012 Tassignano, Lucca Italy
Phone +39058398441
Fax +3905839844735
www.acelli.it


Serial number	3524021
Rated Main Voltage [V]	400 ±10%
Phase	3+PE
Frequency [Hz]	39
Total load current [A]	40
Auxiliary Supply Voltage [V]	24
Largest Motor FLA [A]	xxx
Enclosure Environmental Type	xxx
Short circuit current rating	xxx
Field Wiring Diagram	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAM
Year	2024


Industrial Control Panel for Industrial Machinery

				07/10/2024		Sonoco Tudela	6	Diagrama de circuitos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.000CD1	
				LR			000	MAIN PARTS		=000CD1	
				CB			000CD1	PANEL MANDOS REBOBINADORA			
R.			Standard	IEC			2	RÓTULOS		3524021	

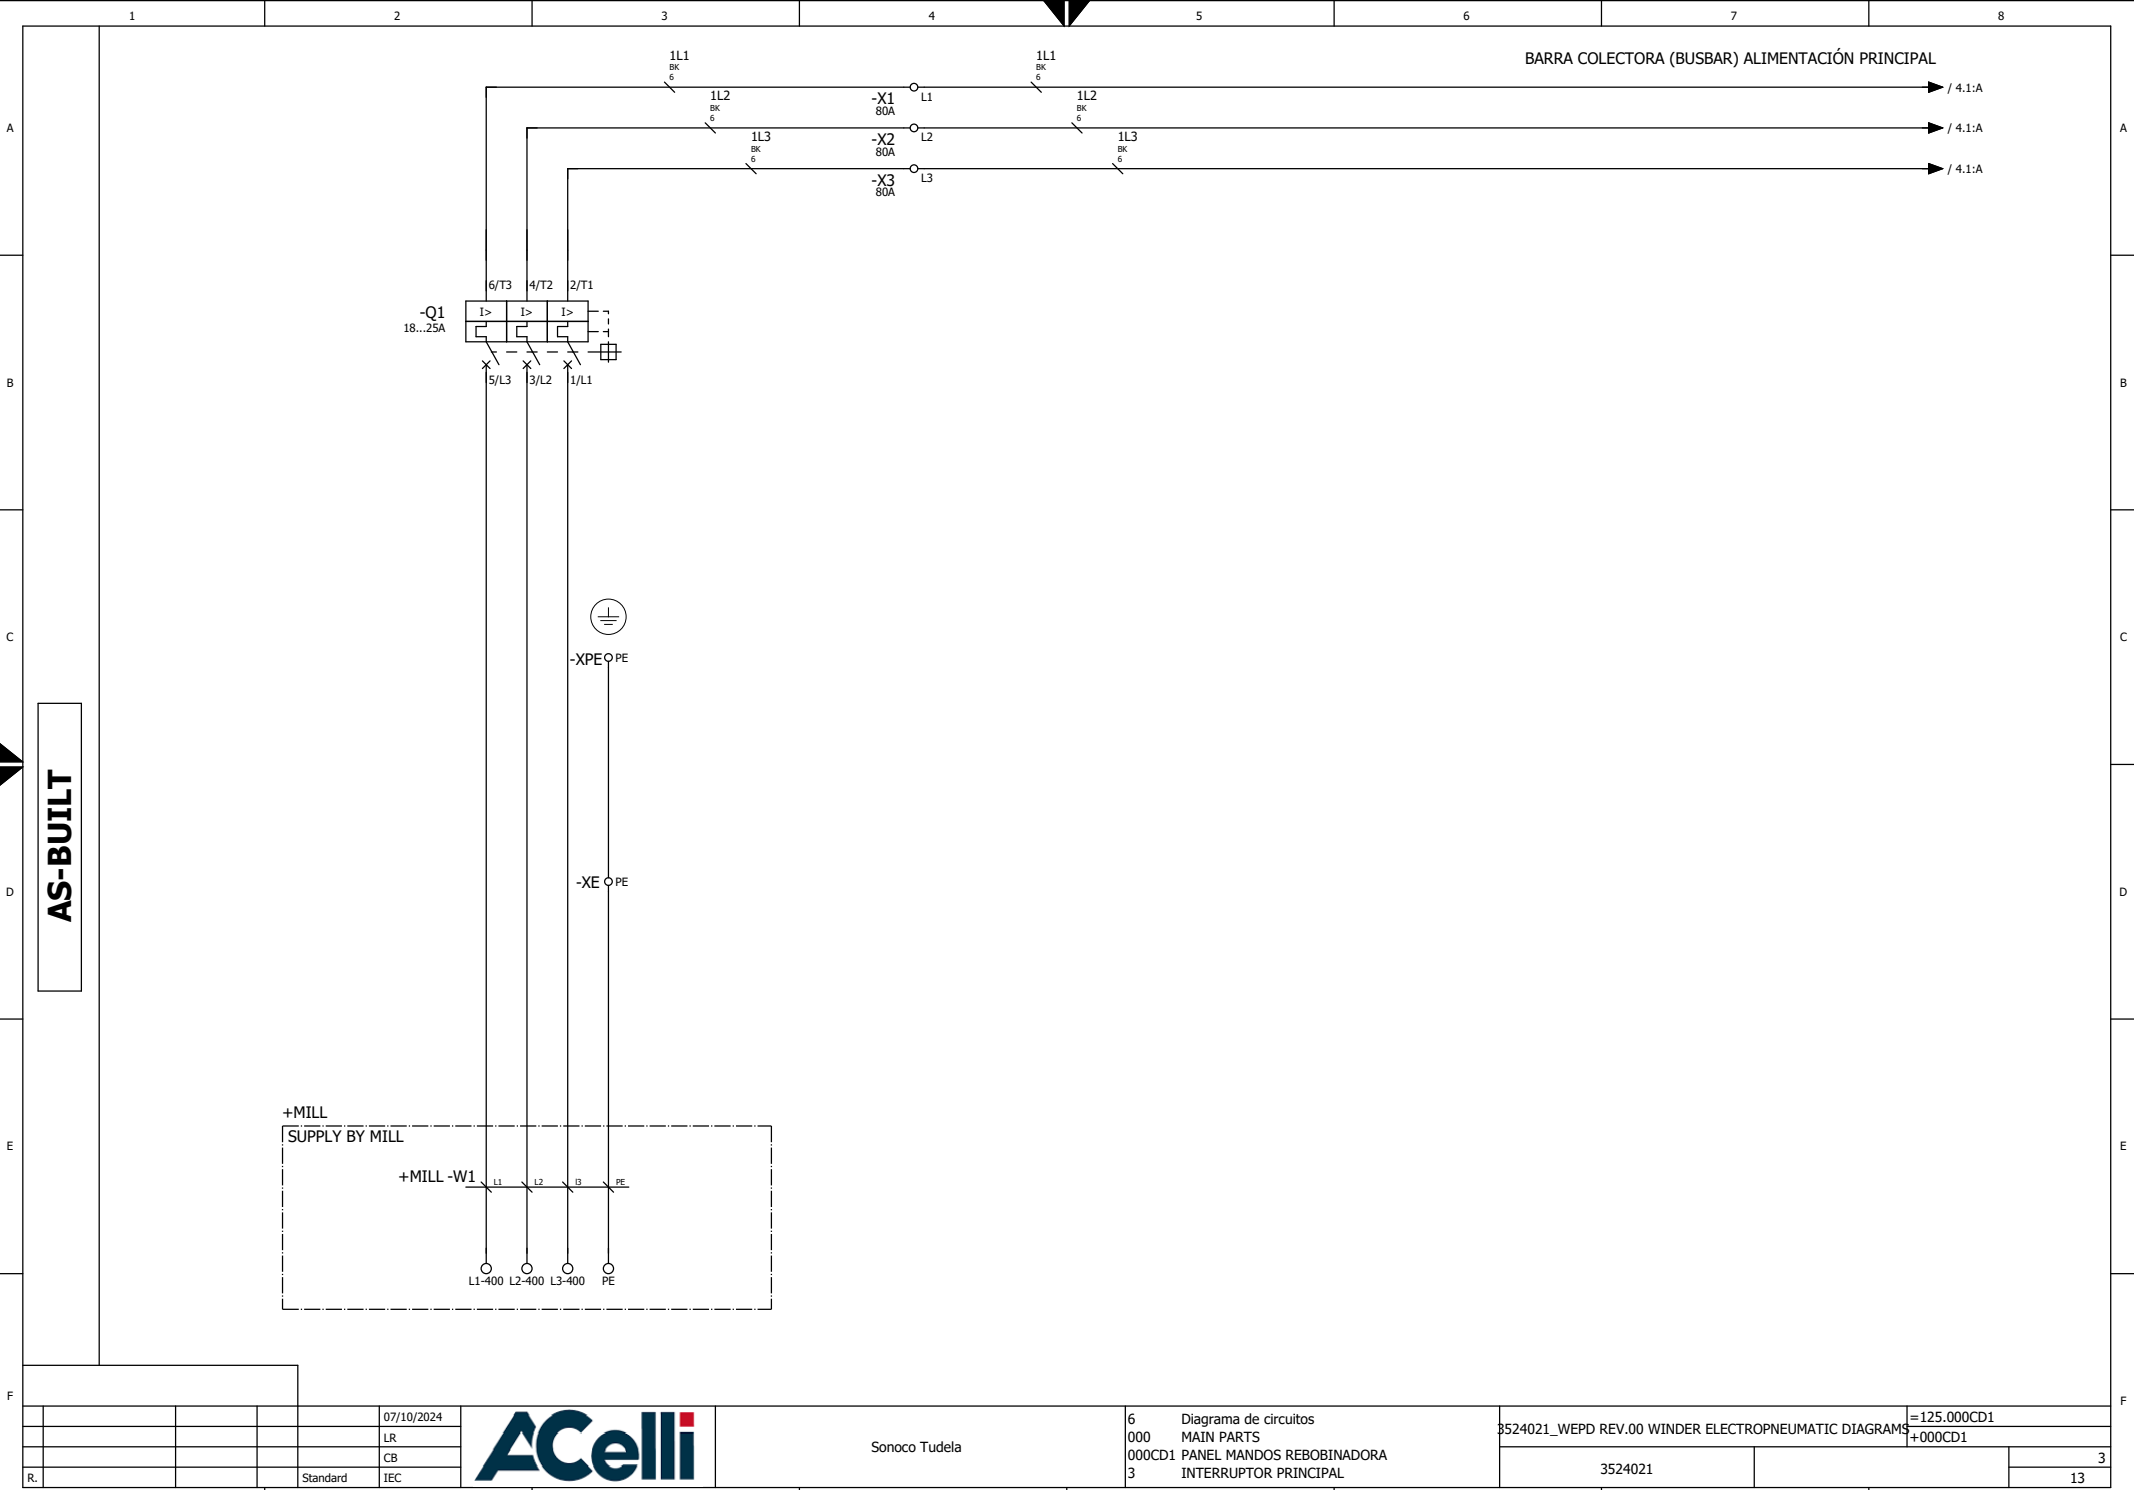



				07/10/2024		Sonoco Tudela	6 000 000CD1 3	Diagrama de circuitos MAIN PARTS PANEL MANDOS REBOBINADORA INTERRUPTOR PRINCIPAL	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.000CD1 +000CD1		3	
				LR									
				CB									
R.			Standard	IEC					3524021			13	

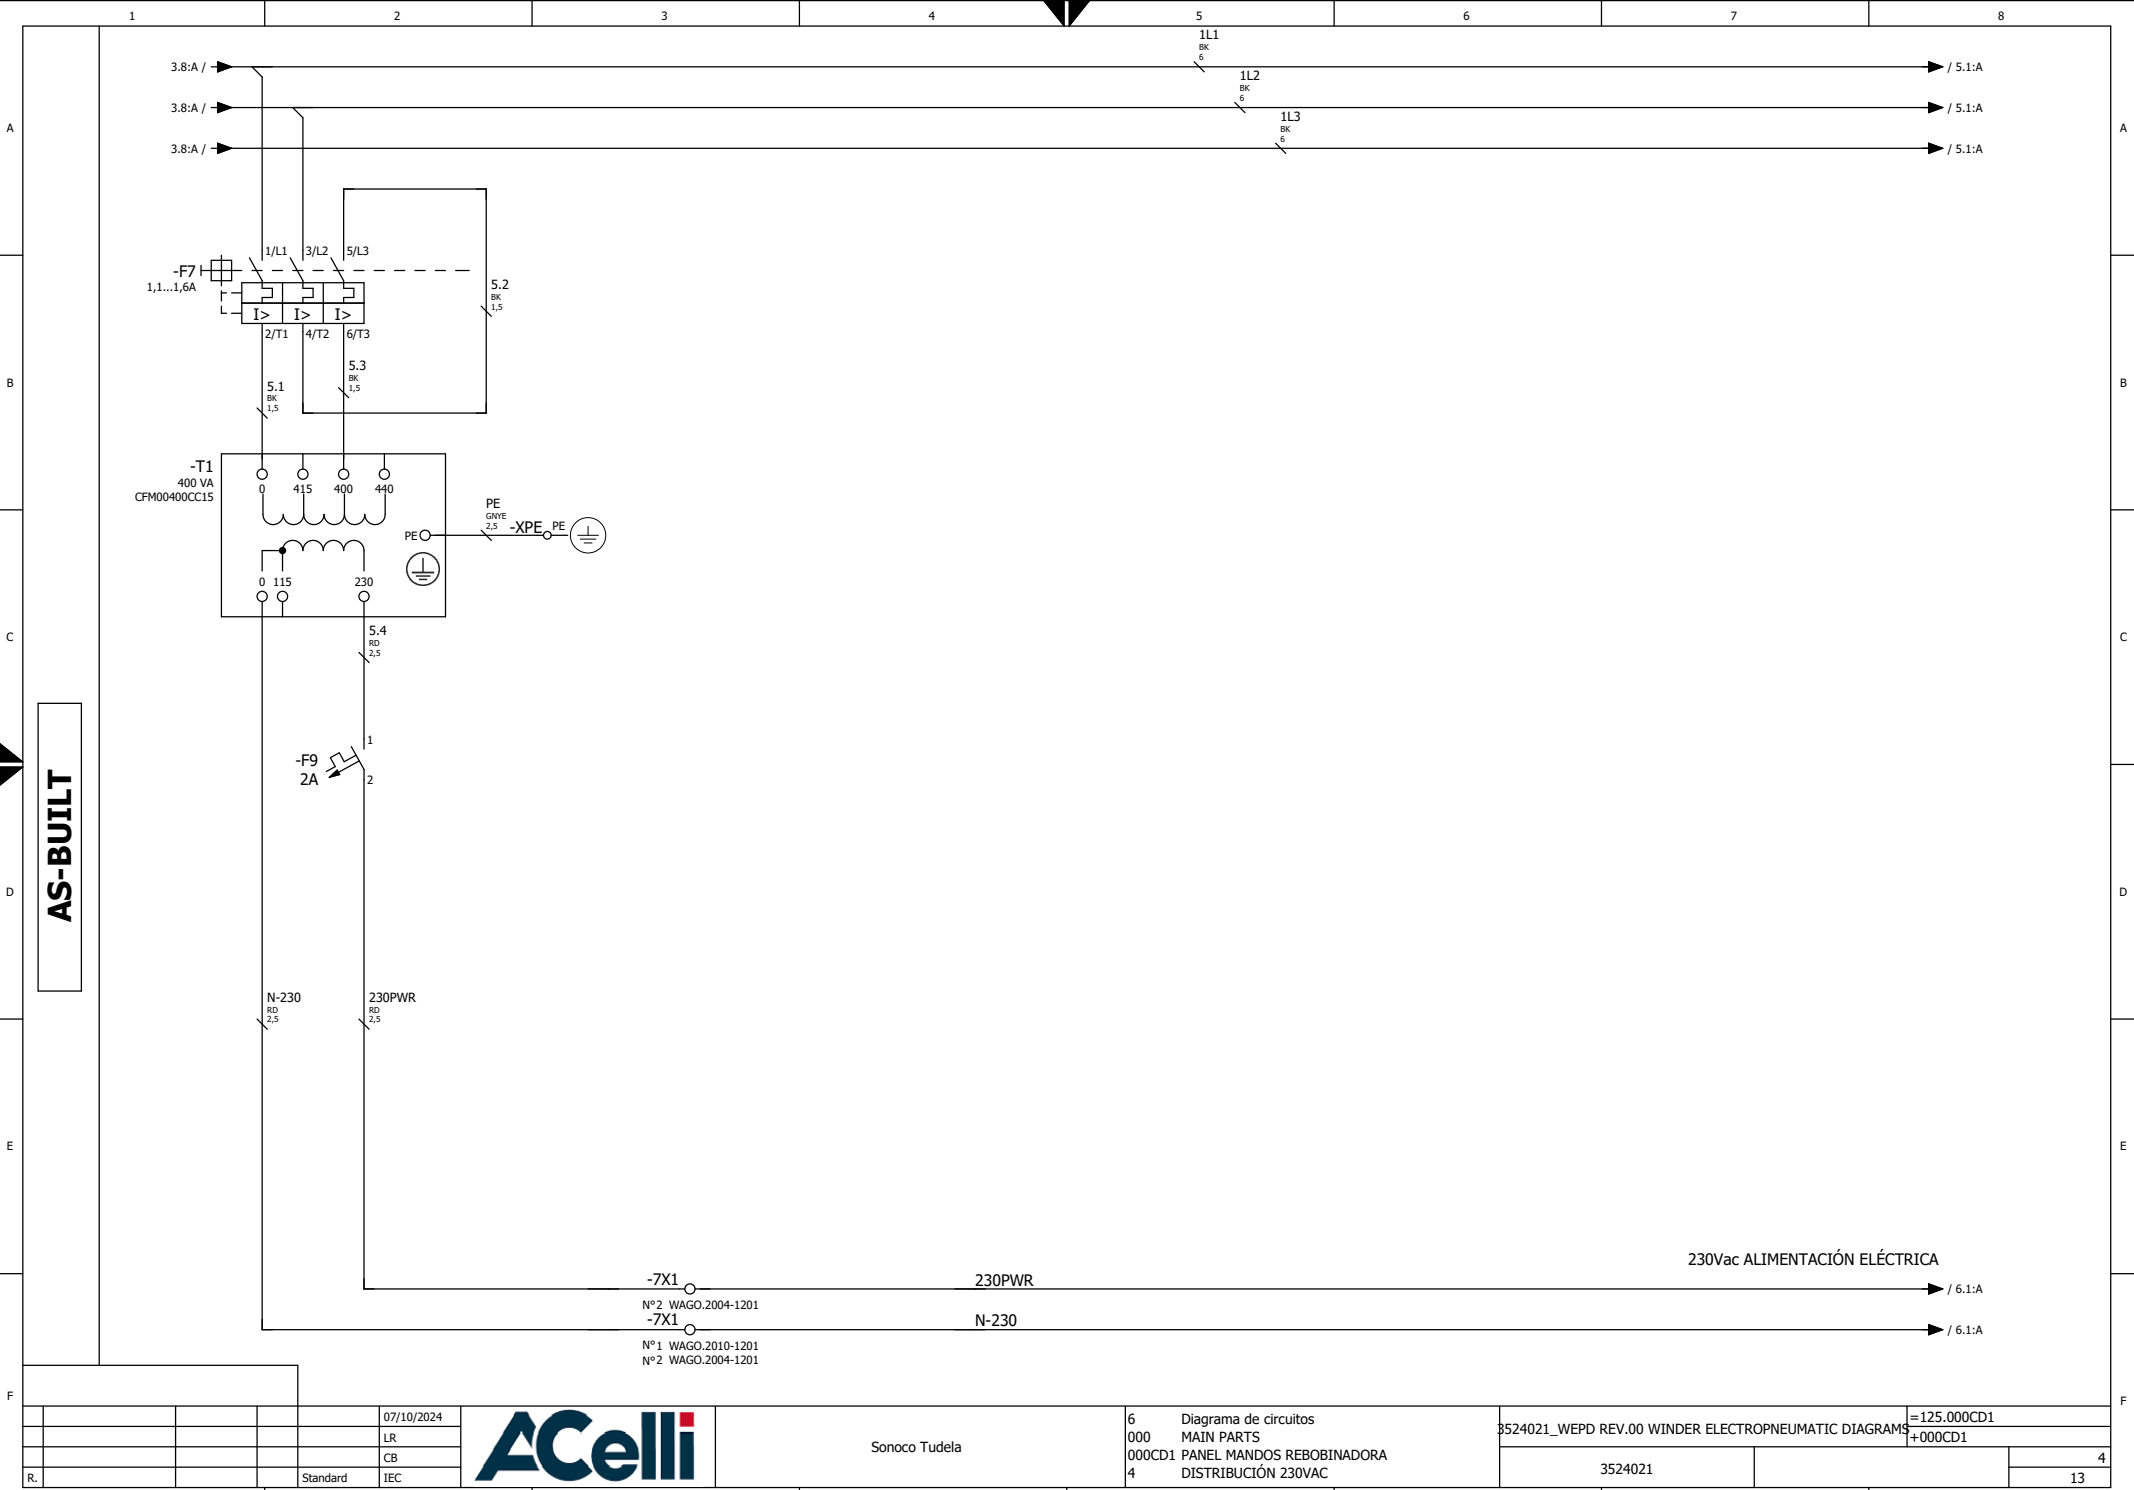

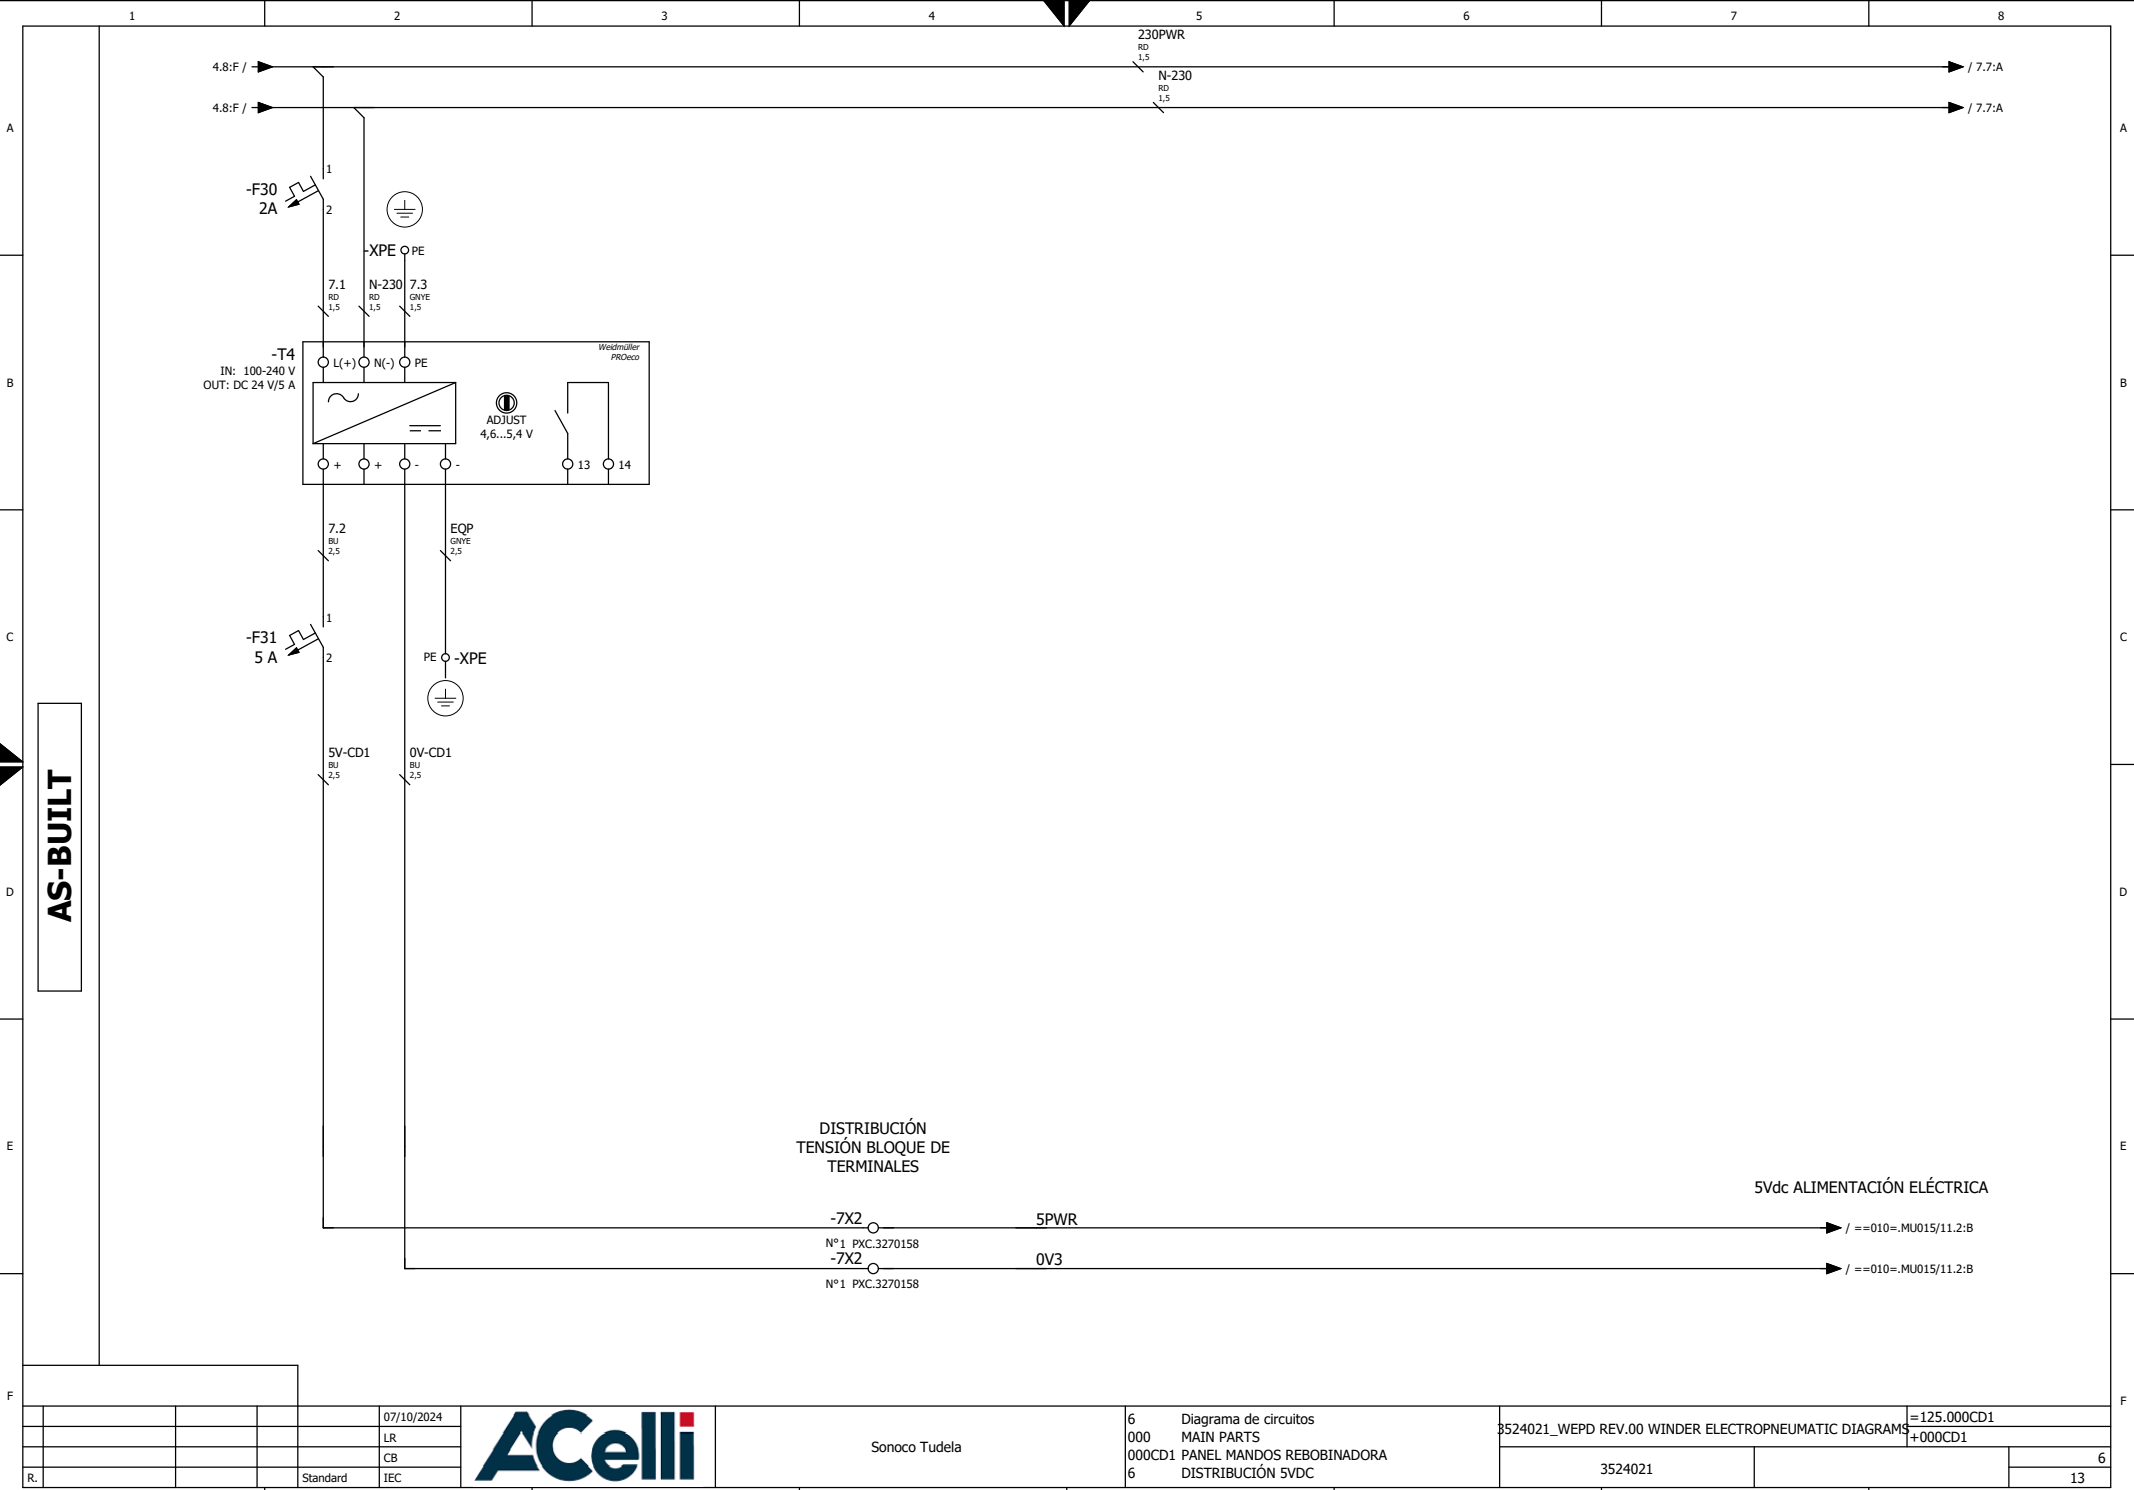

				07/10/2024		Sonoco Tudela	6 000 000CD1 6	Diagrama de circuitos MAIN PARTS PANEL MANDOS REBOBINADORA DISTRIBUCIÓN 5VDC	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.000CD1 +000CD1		6 13
				LR								
				CB								
R.				Standard	IEC				3524021			

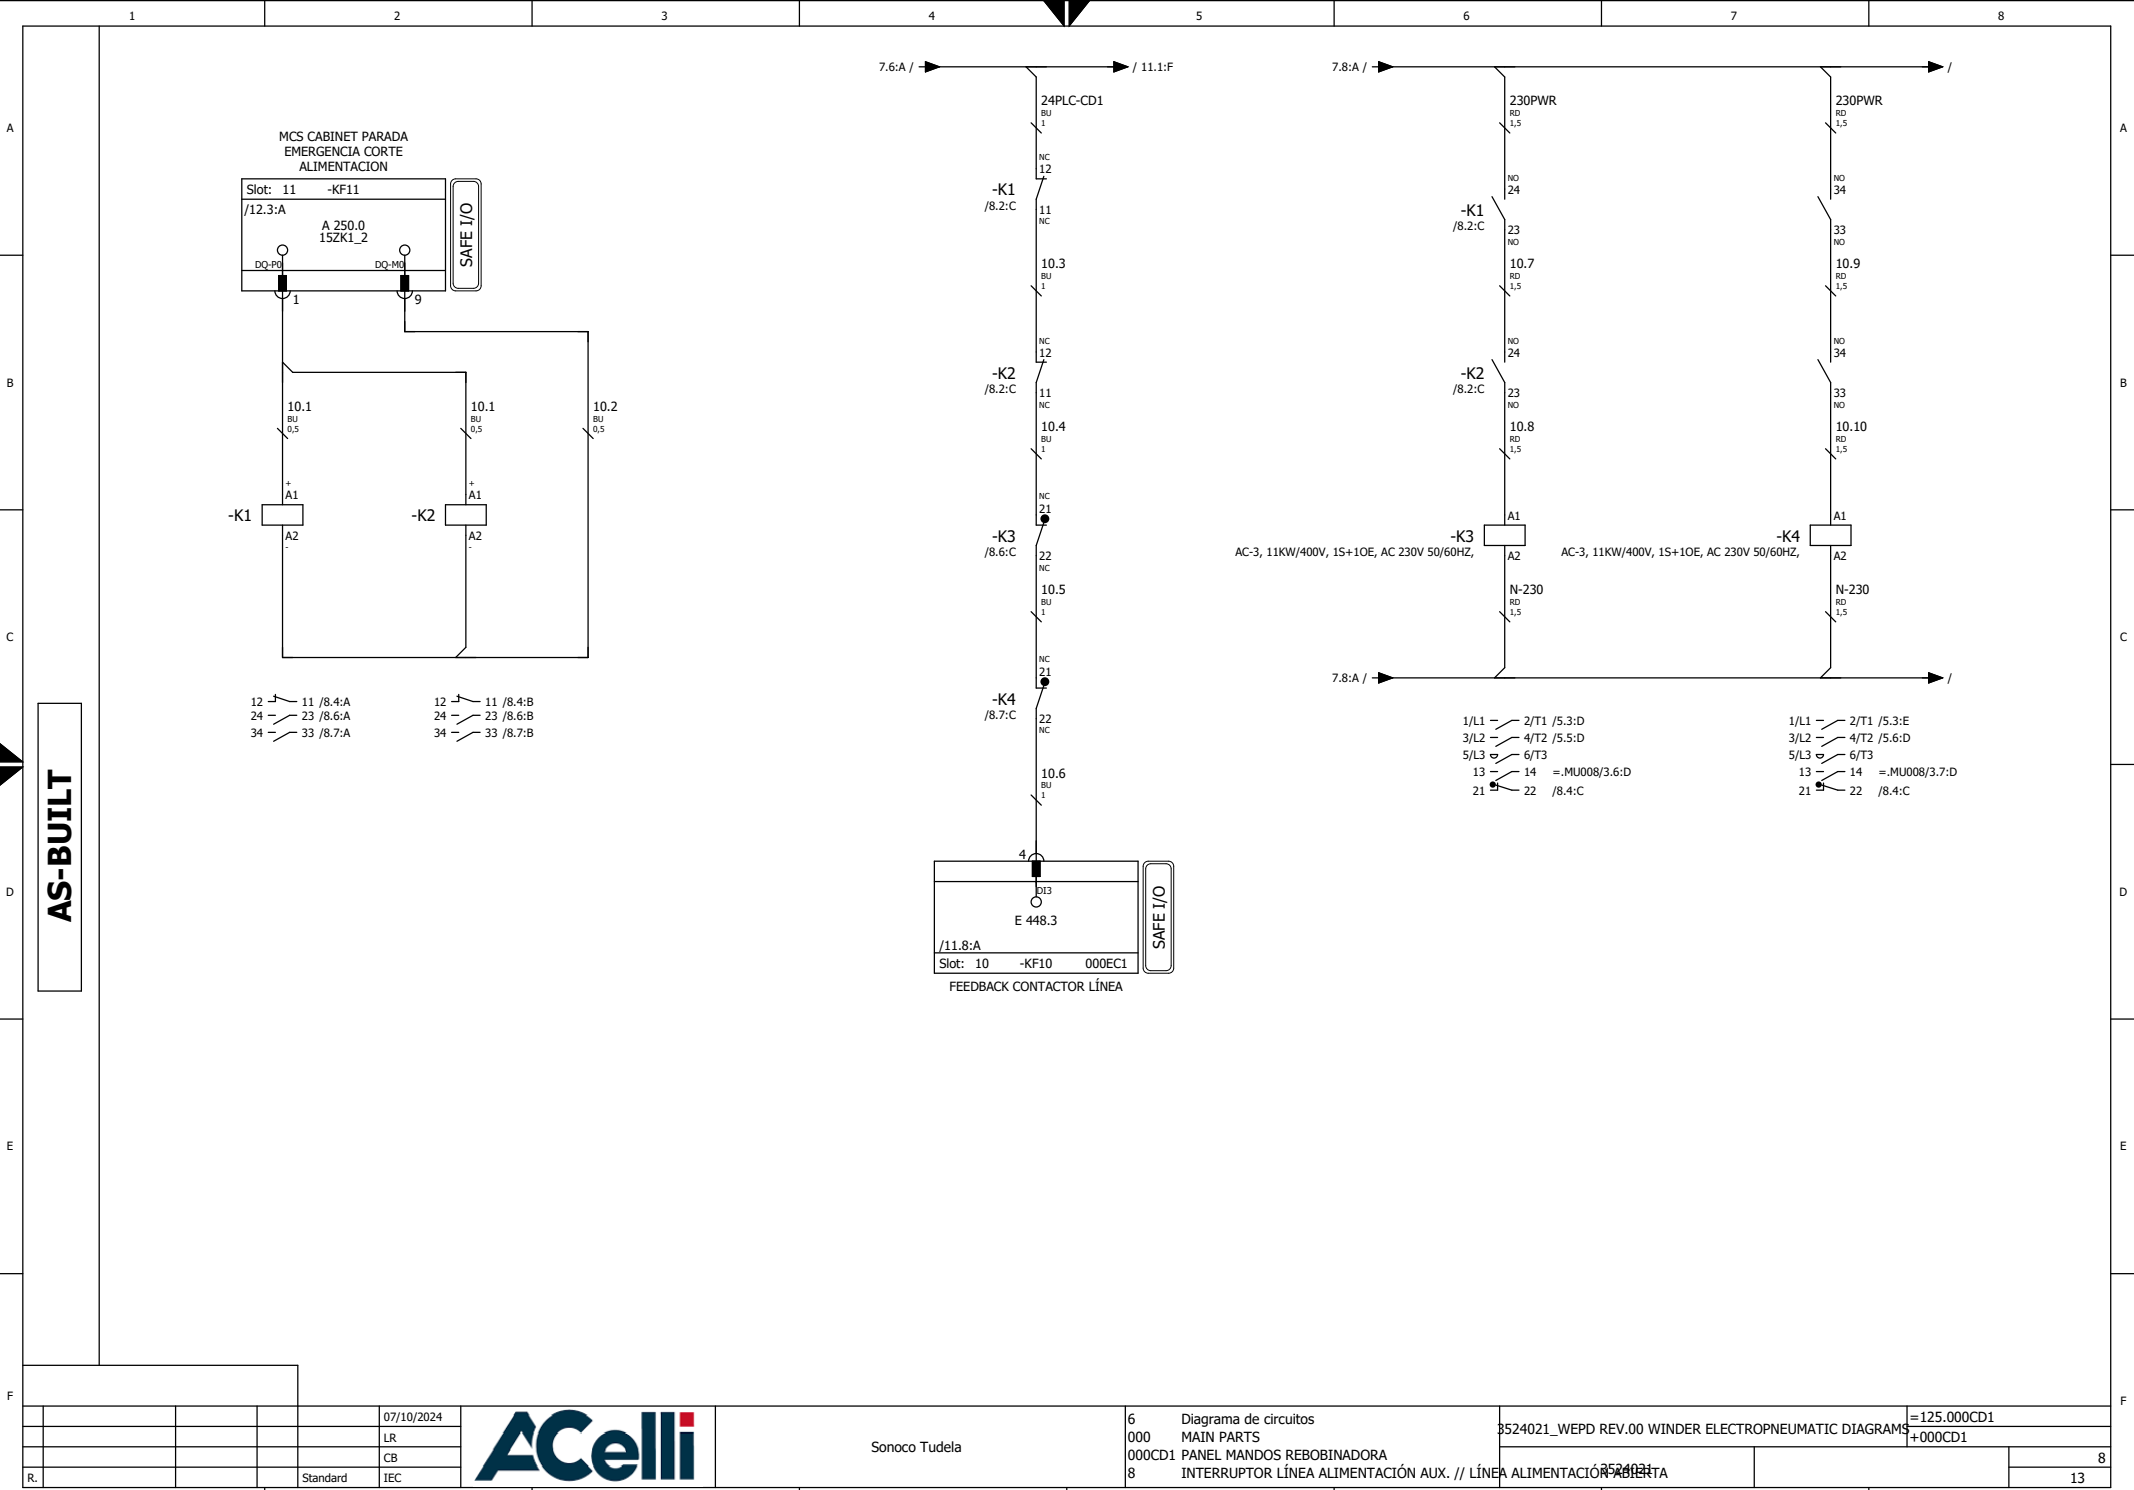

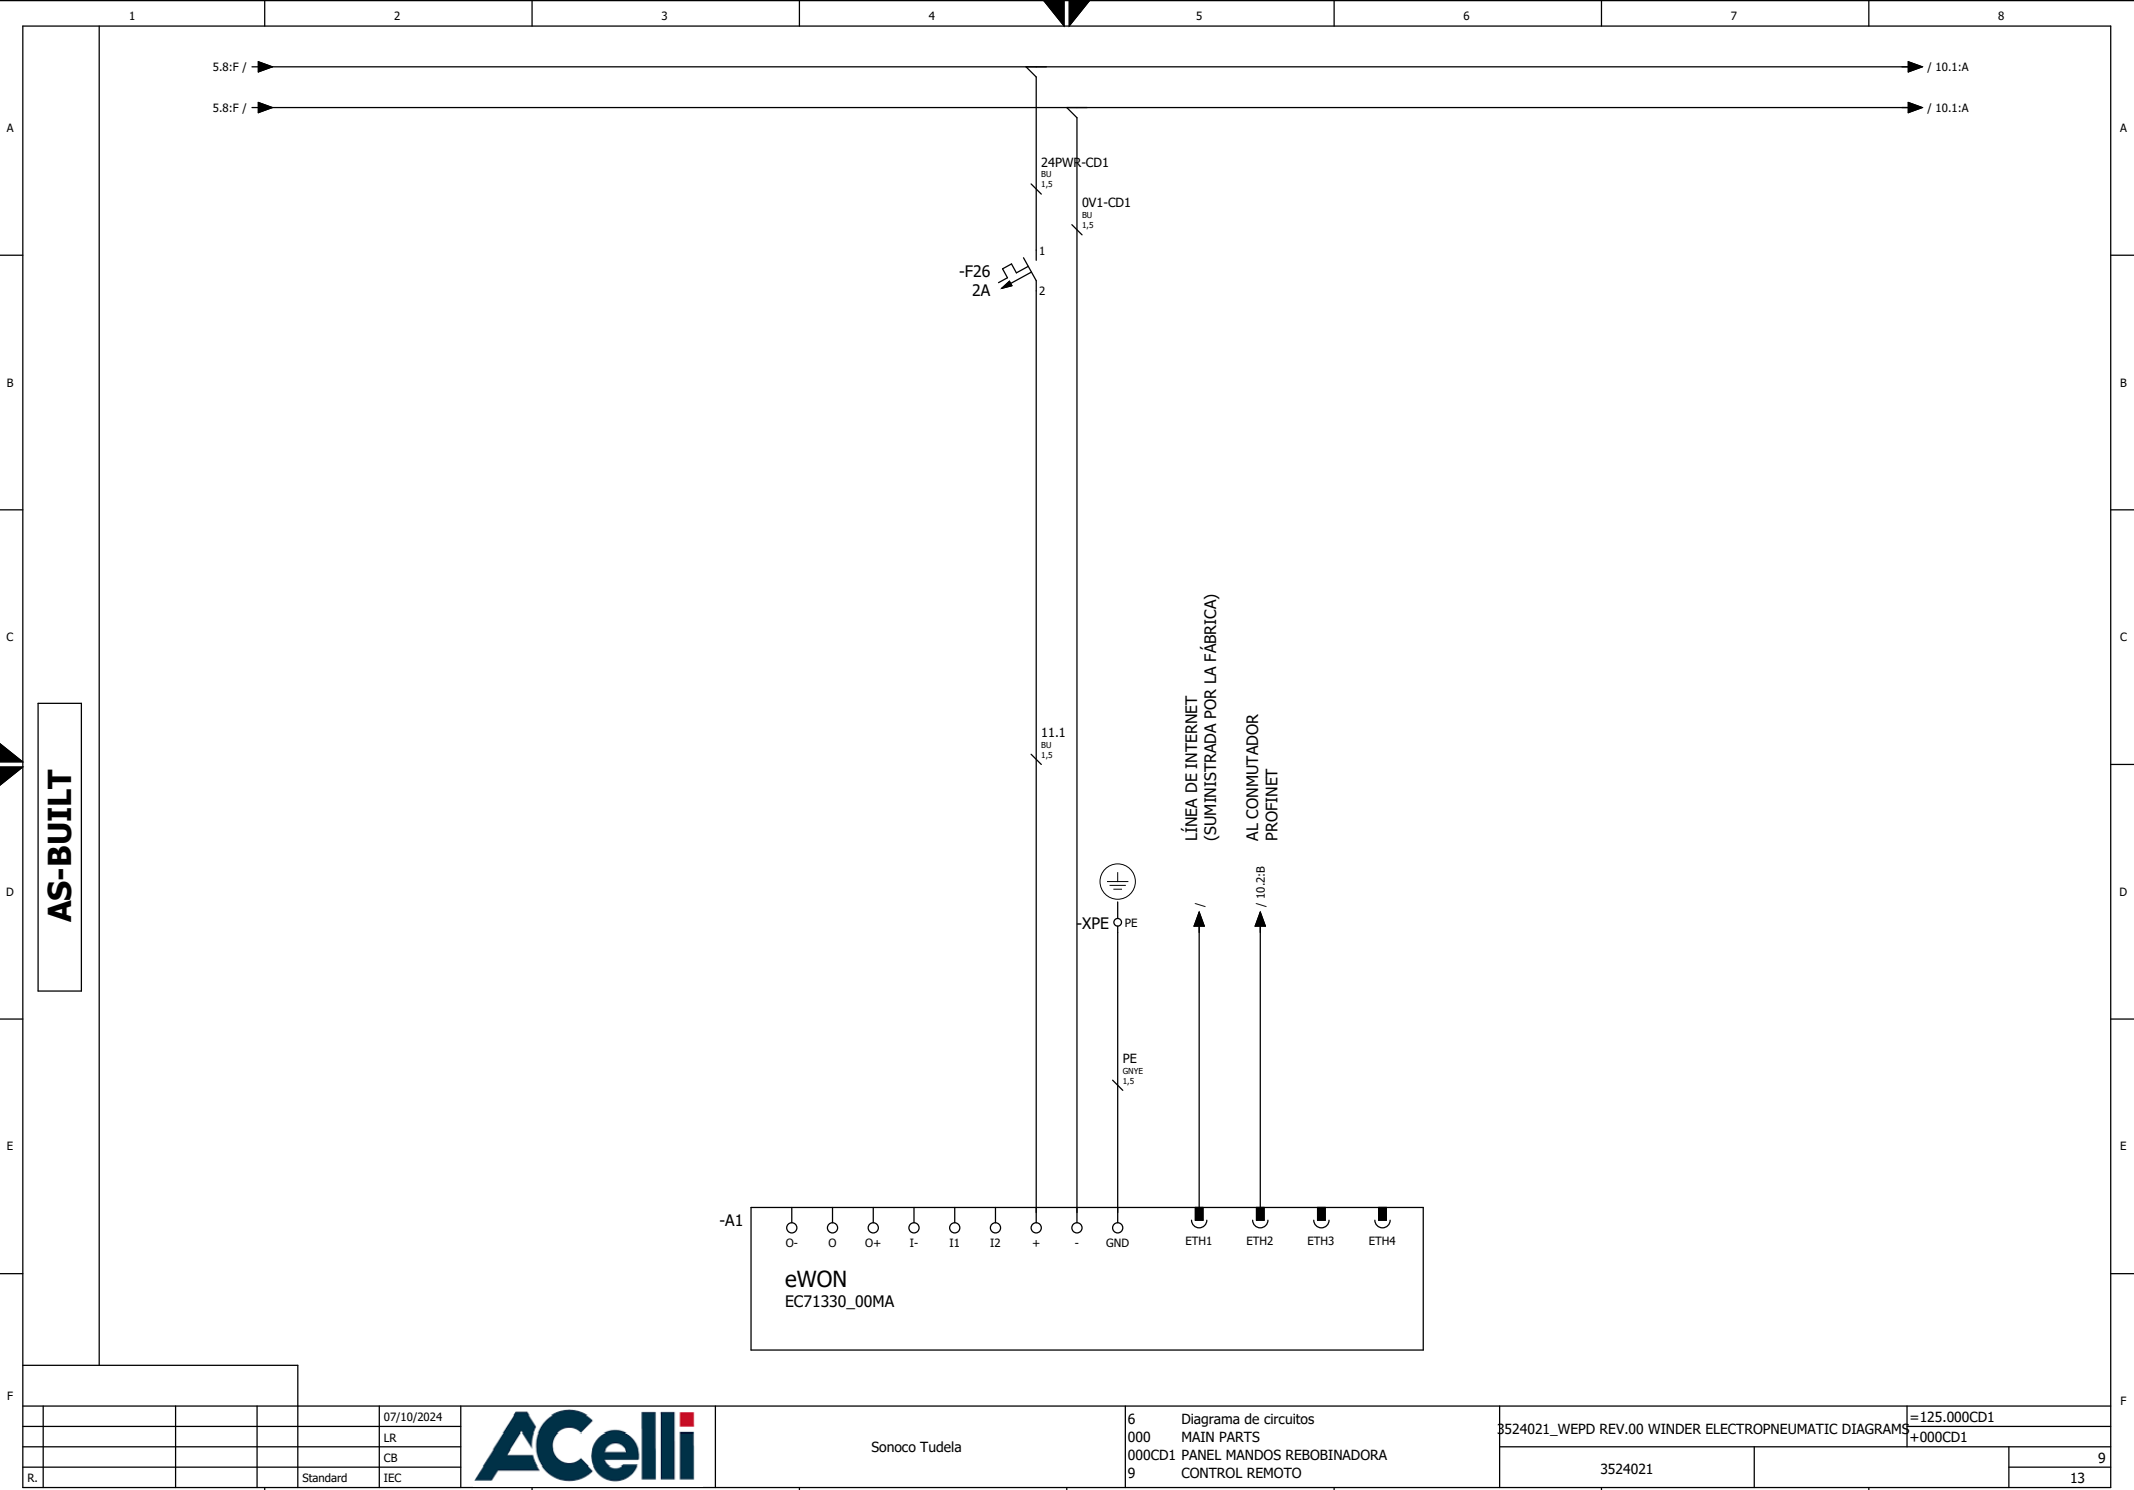

AS-BUILT

				07/10/2024
				LR
				CB
R.			Standard	IEC


ACelli

Sonoco Tudela

6
000
000CD1
9
Diagrama de circuitos
MAIN PARTS
PANEL MANDOS REBOBINADORA
CONTROL REMOTO


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=125.000CD1
+000CD1
9
13

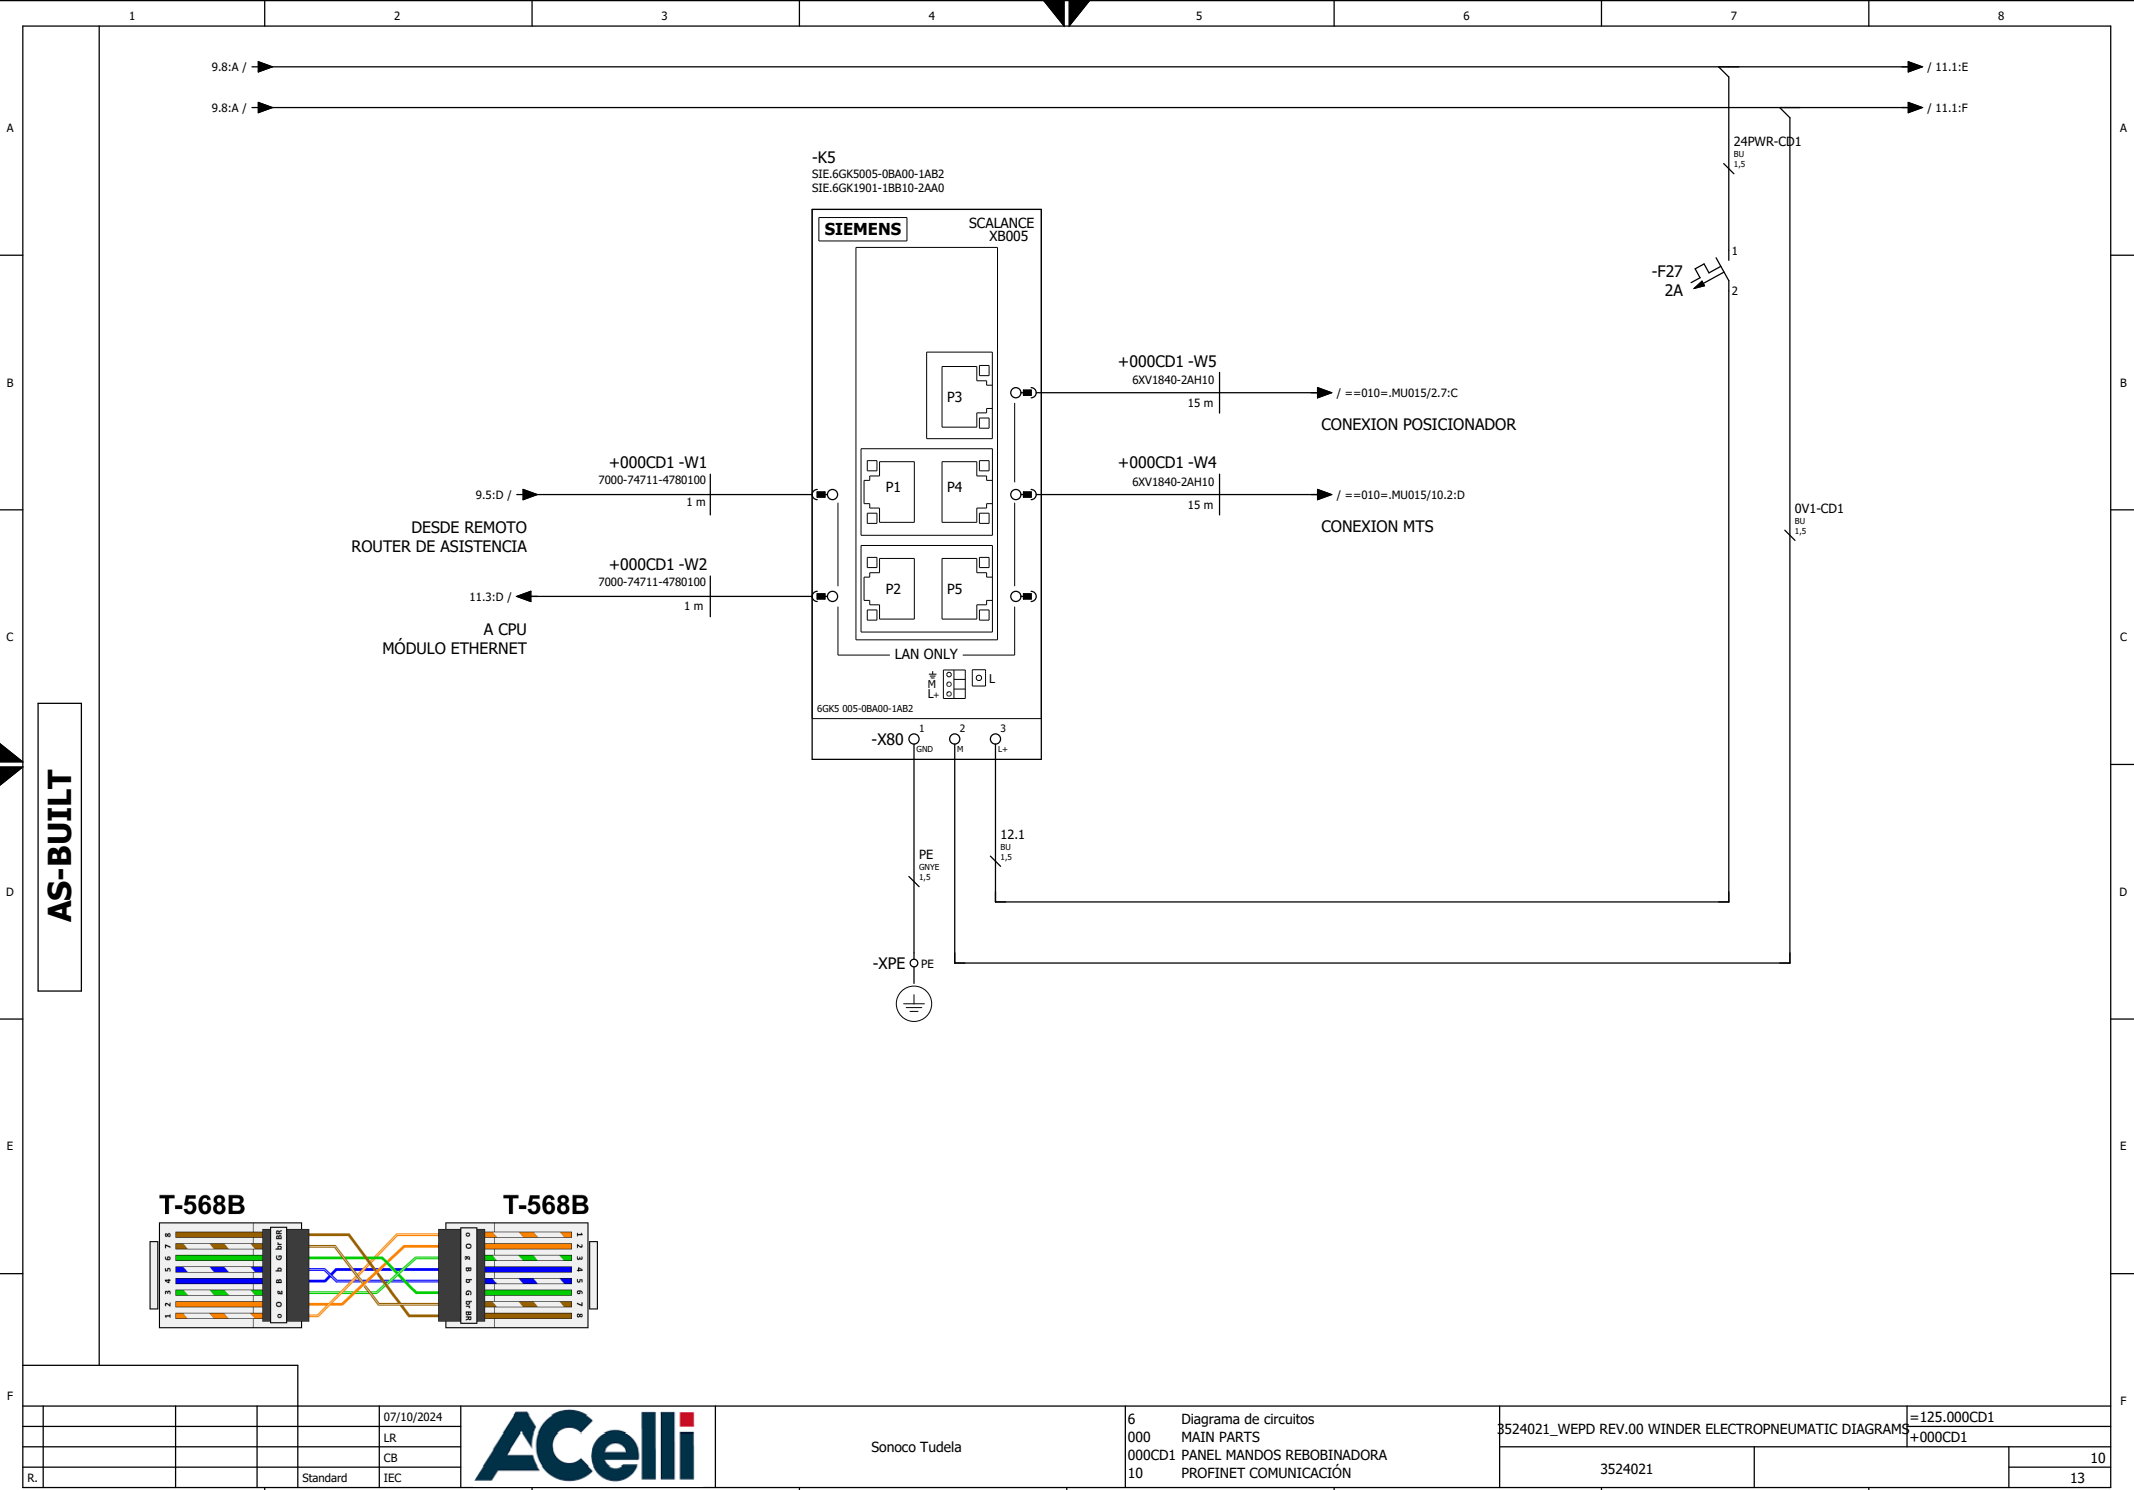


AS-BUILT

				07/10/2024		Sonoco Tudela	6 000 000CD1 10	Diagrama de circuitos MAIN PARTS PANEL MANDOS REBOBINADORA PROFINET COMUNICACIÓN	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.000CD1 +000CD1				
				LR										
				CB										
				IEC										
R.			Standard						3524021			10	13	

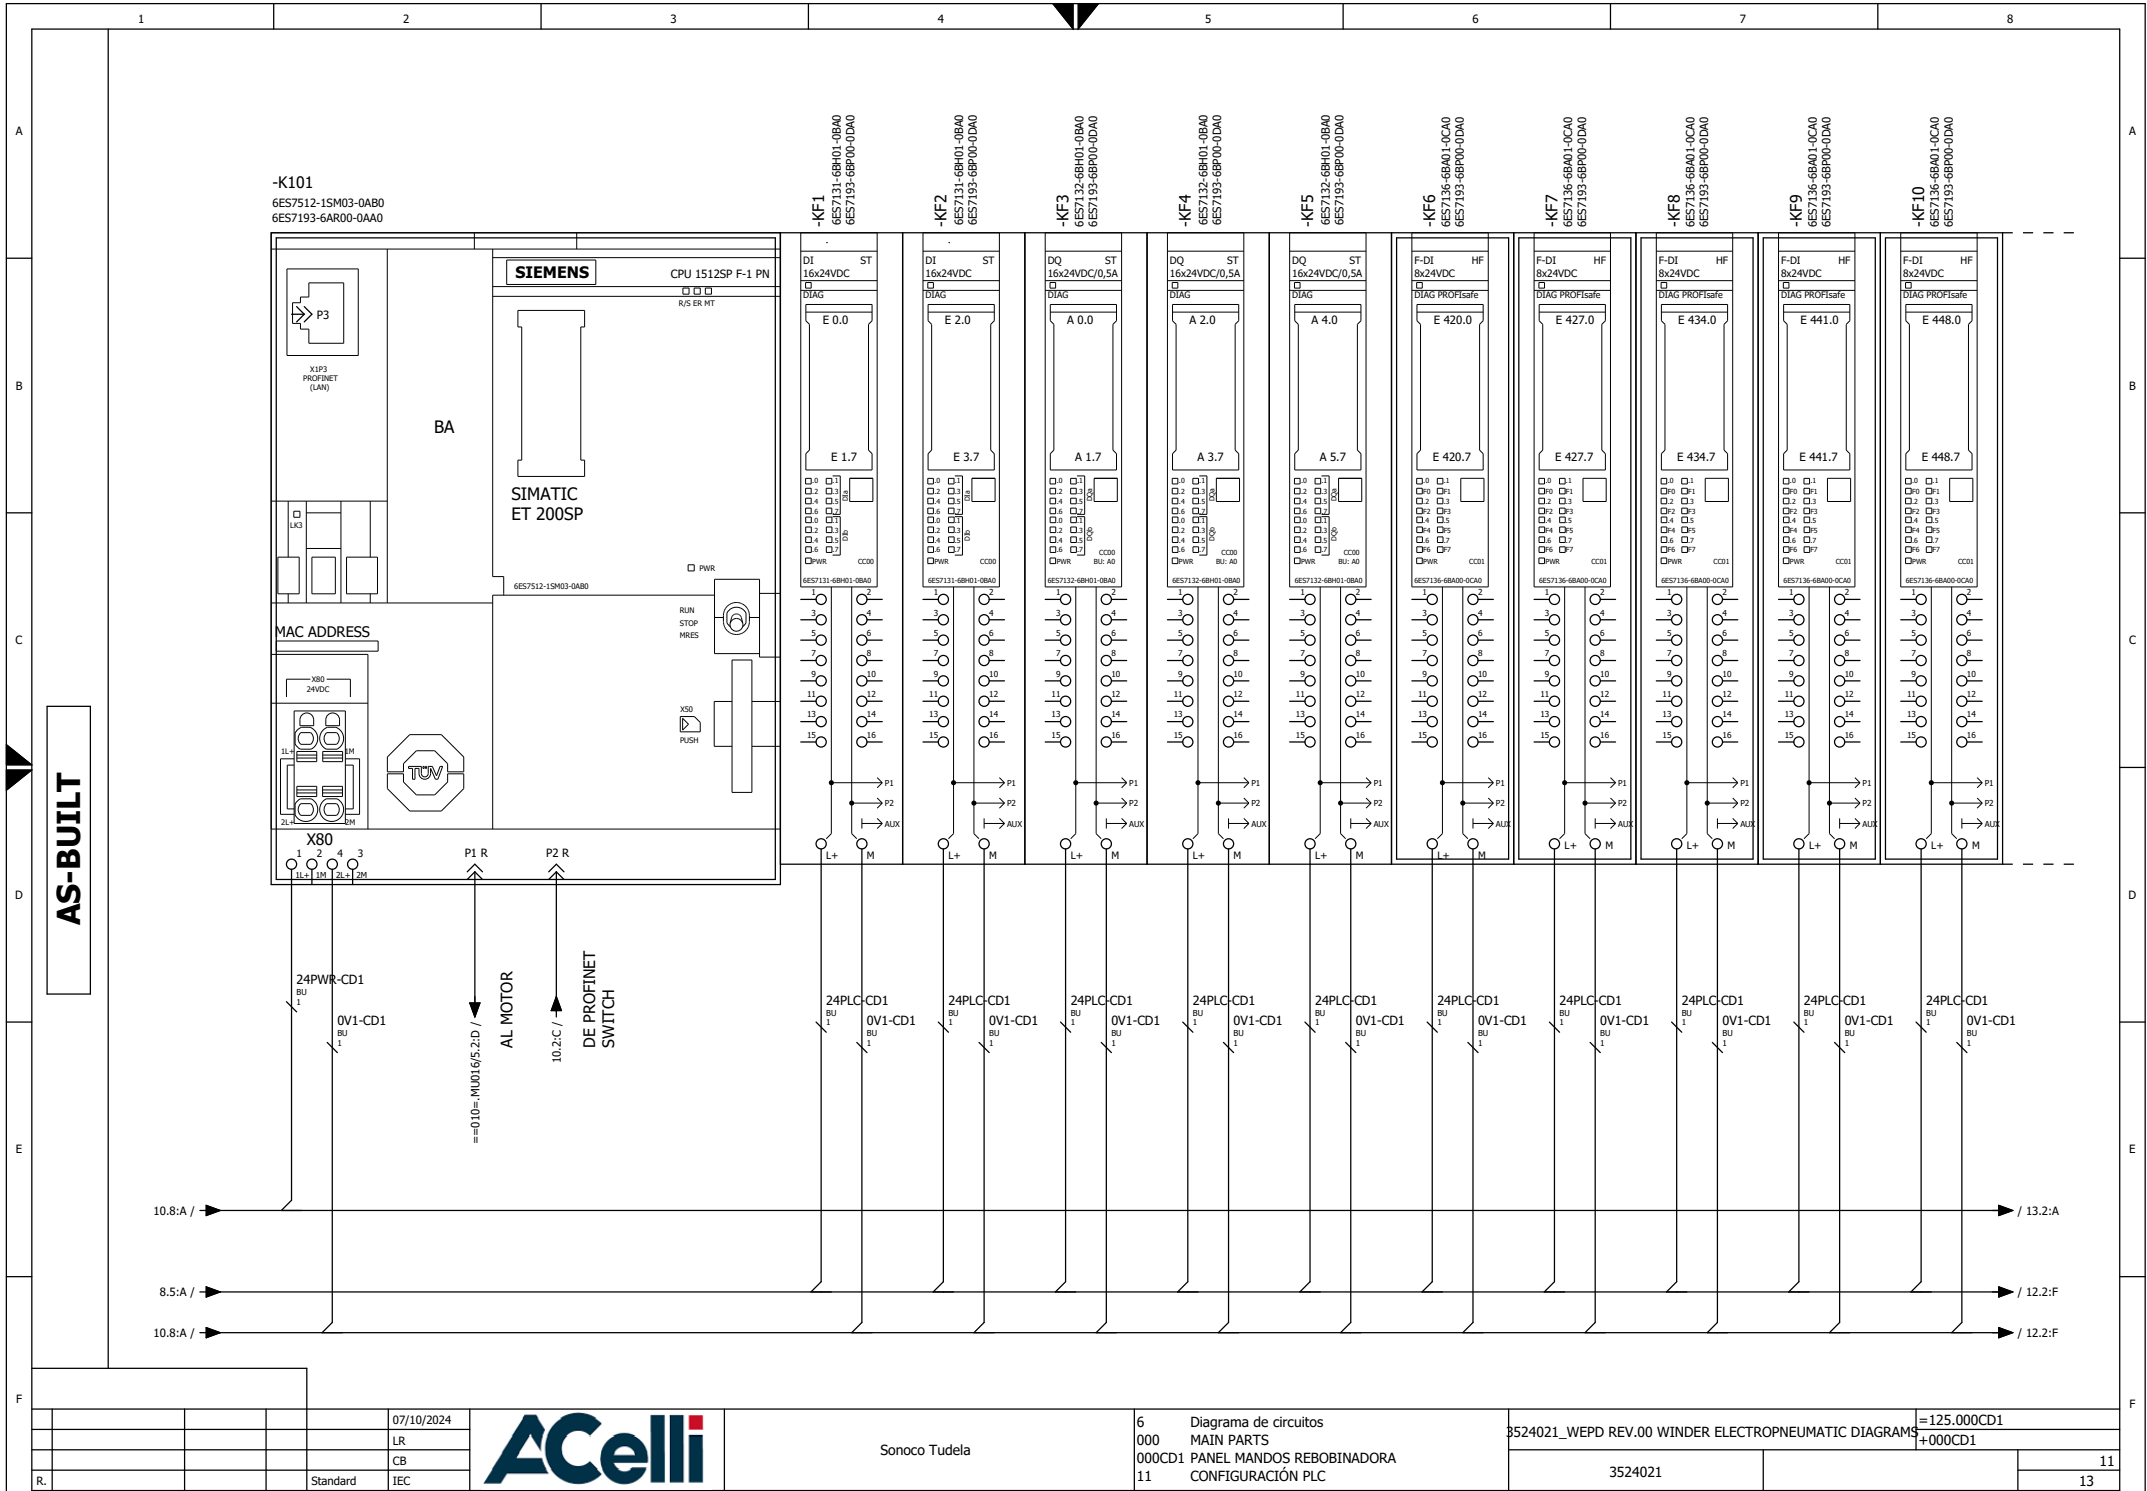

AS-BUILT

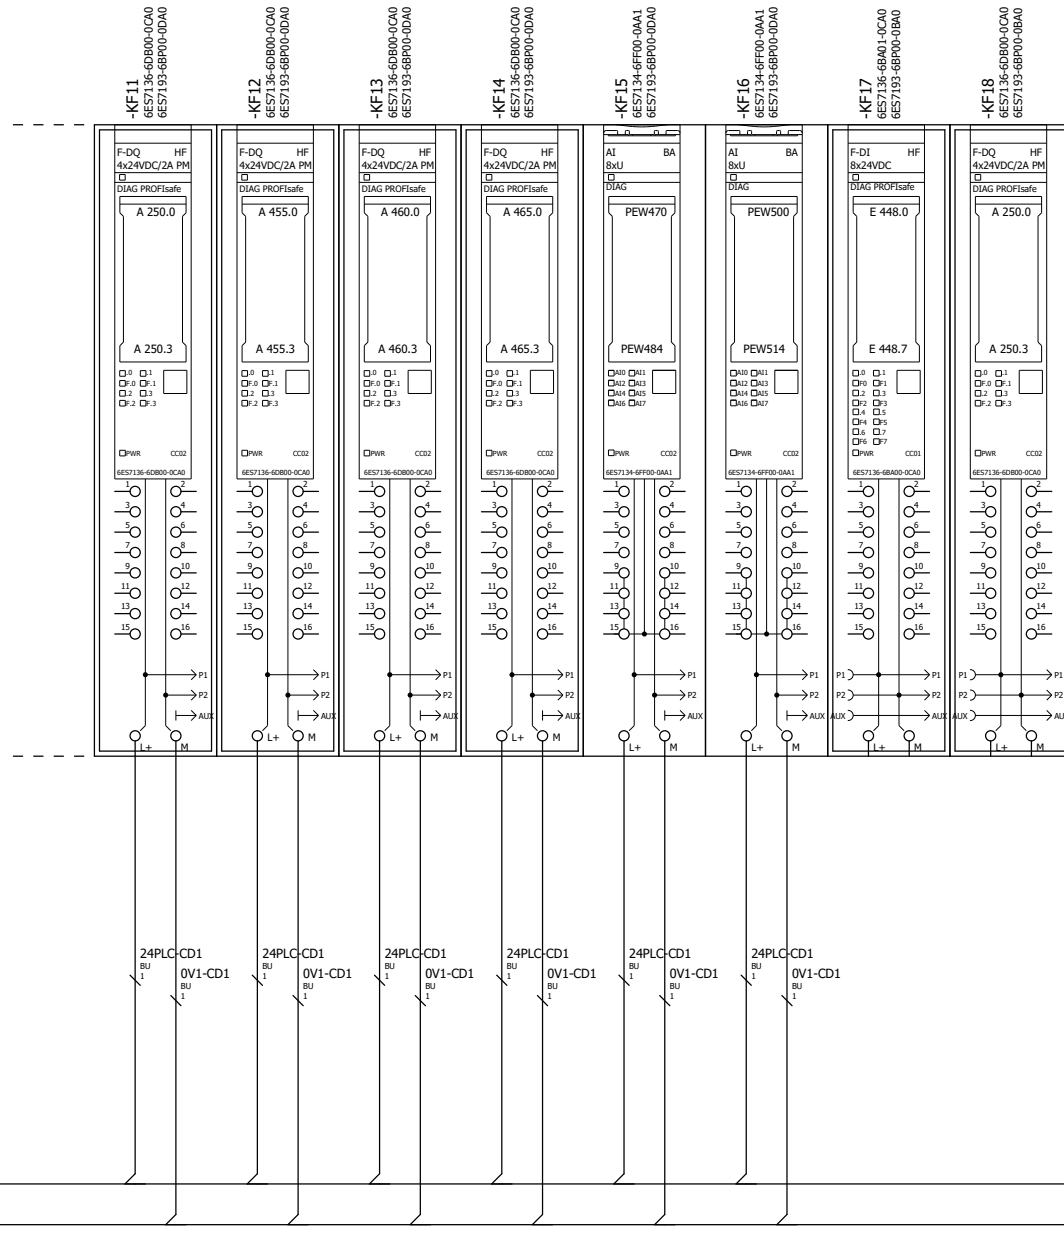


11.8:F /

11.8:F /


/

/ 13.2:A

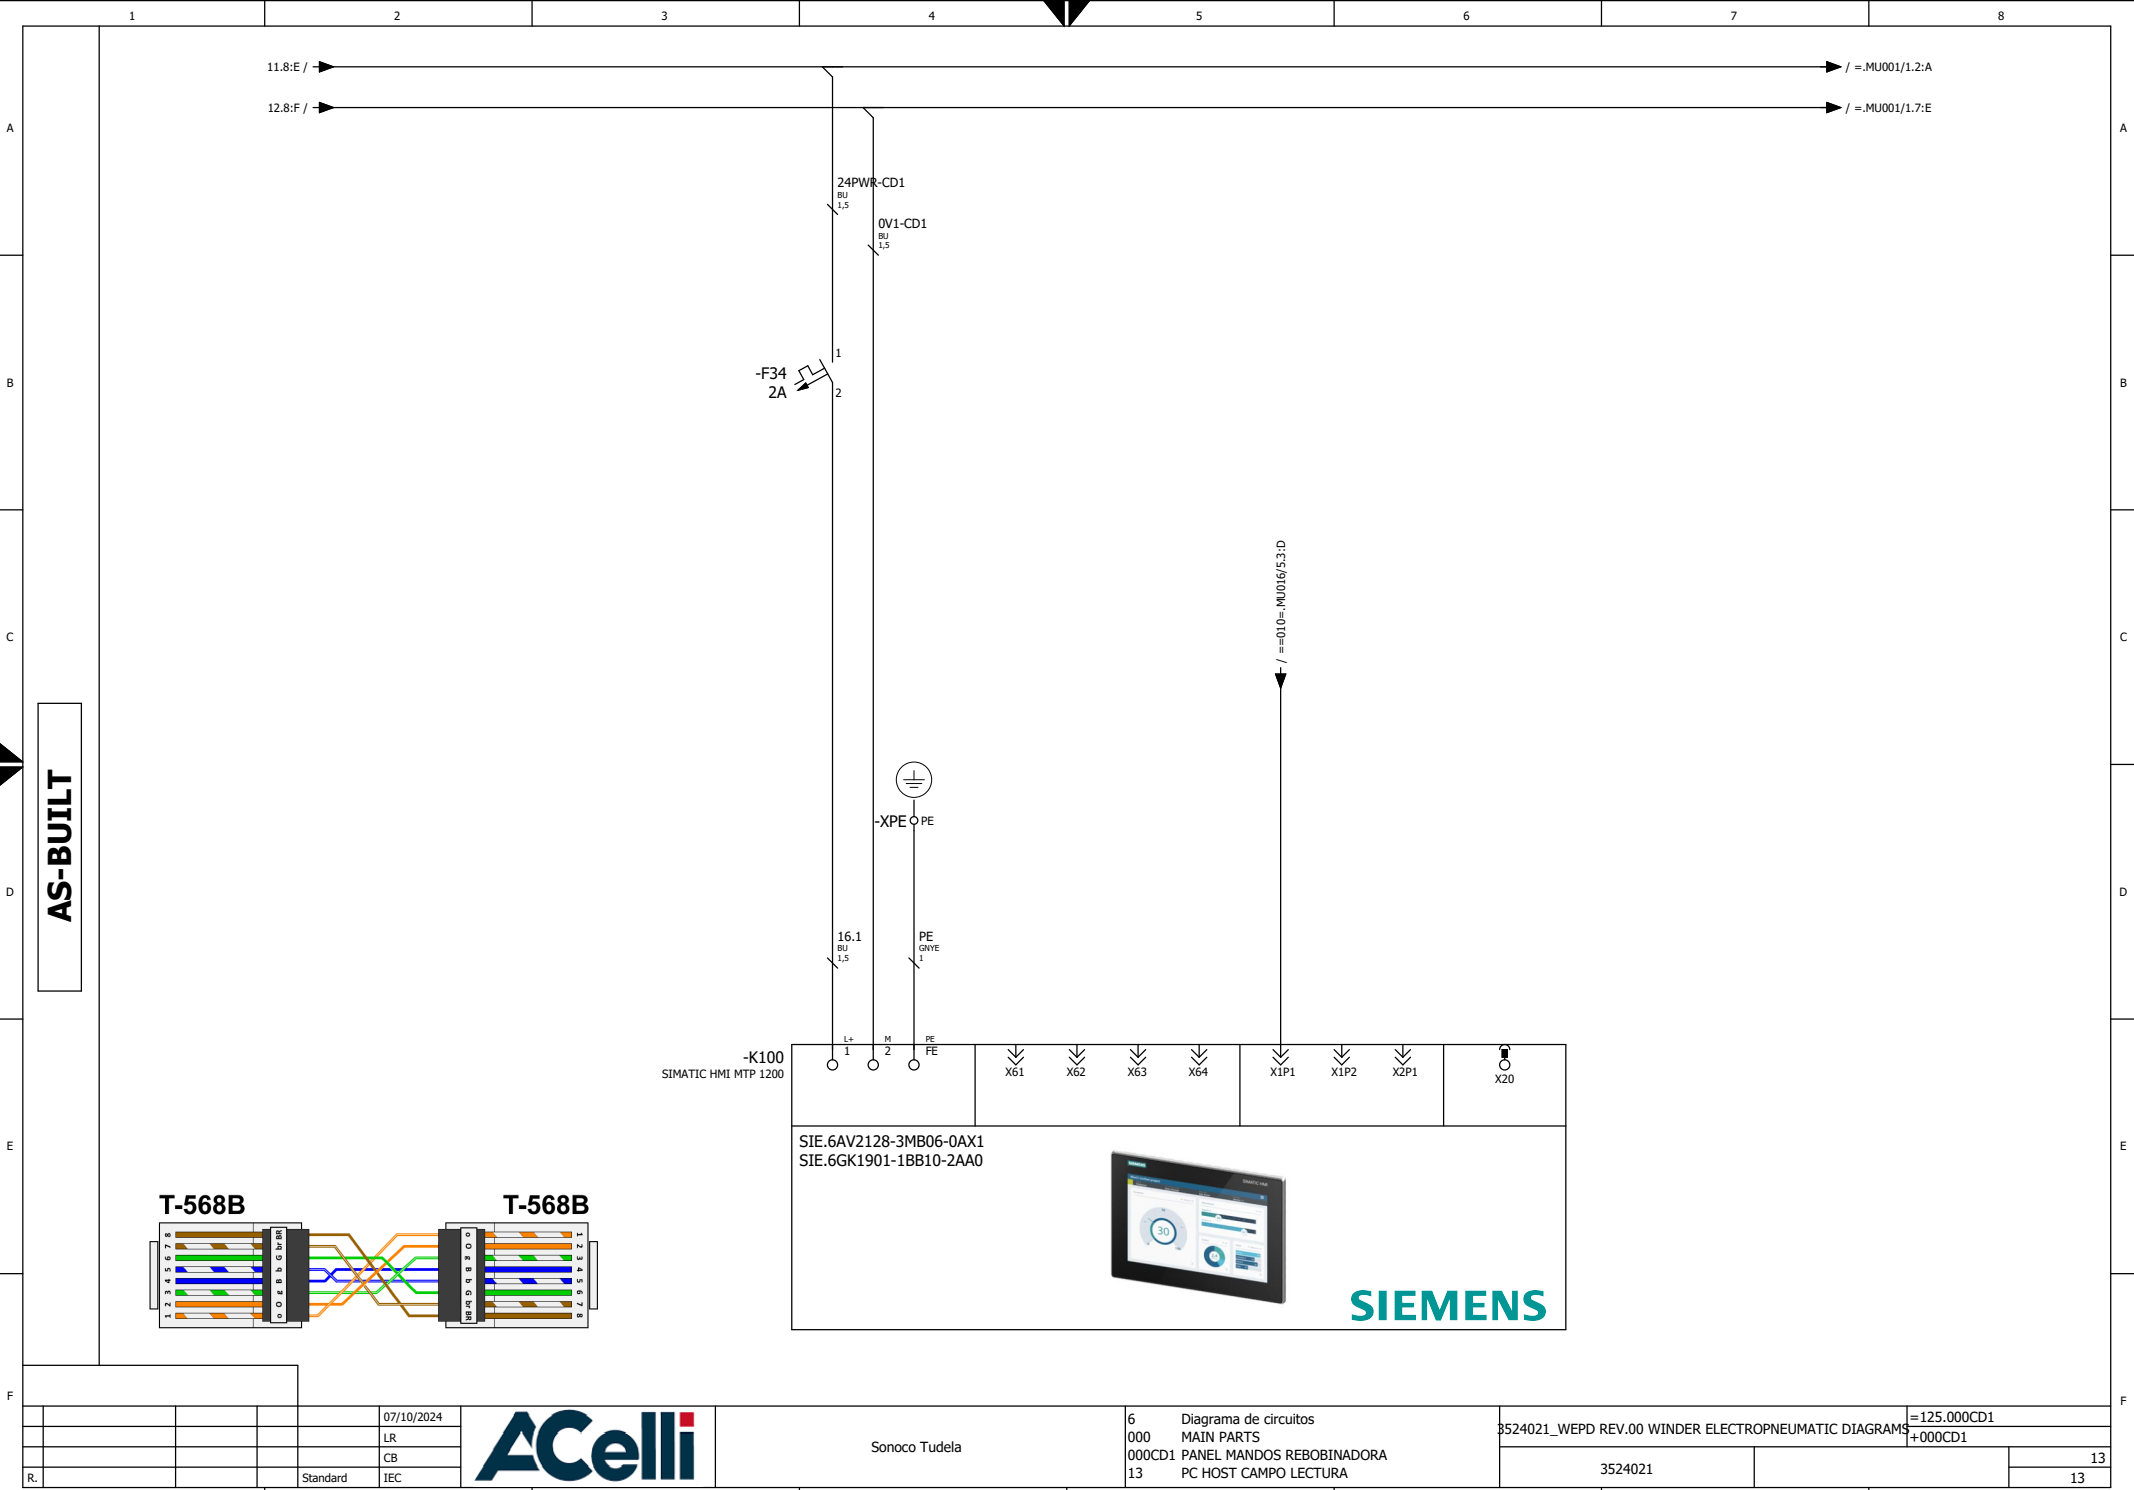


AS-BUILT

T-568B



T-568B



-K100
SIMATIC HMI MTP 1200

SIE.6AV2128-3MB06-0AX1
SIE.6GK1901-1BB10-2AA0



SIEMENS

				07/10/2024	ACelli	Sonoco Tudela	6 000 000CD1 13	Diagrama de circuitos MAIN PARTS PANEL MANDOS REBOBINADORA PC HOST CAMPO LECTURA	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.000CD1 +000CD1		13 13
				LR								
				CB								
R.				Standard	IEC				3524021			


Descripción

PARADA EMERGENCIA

Disposición

MU001

AS-BUILT

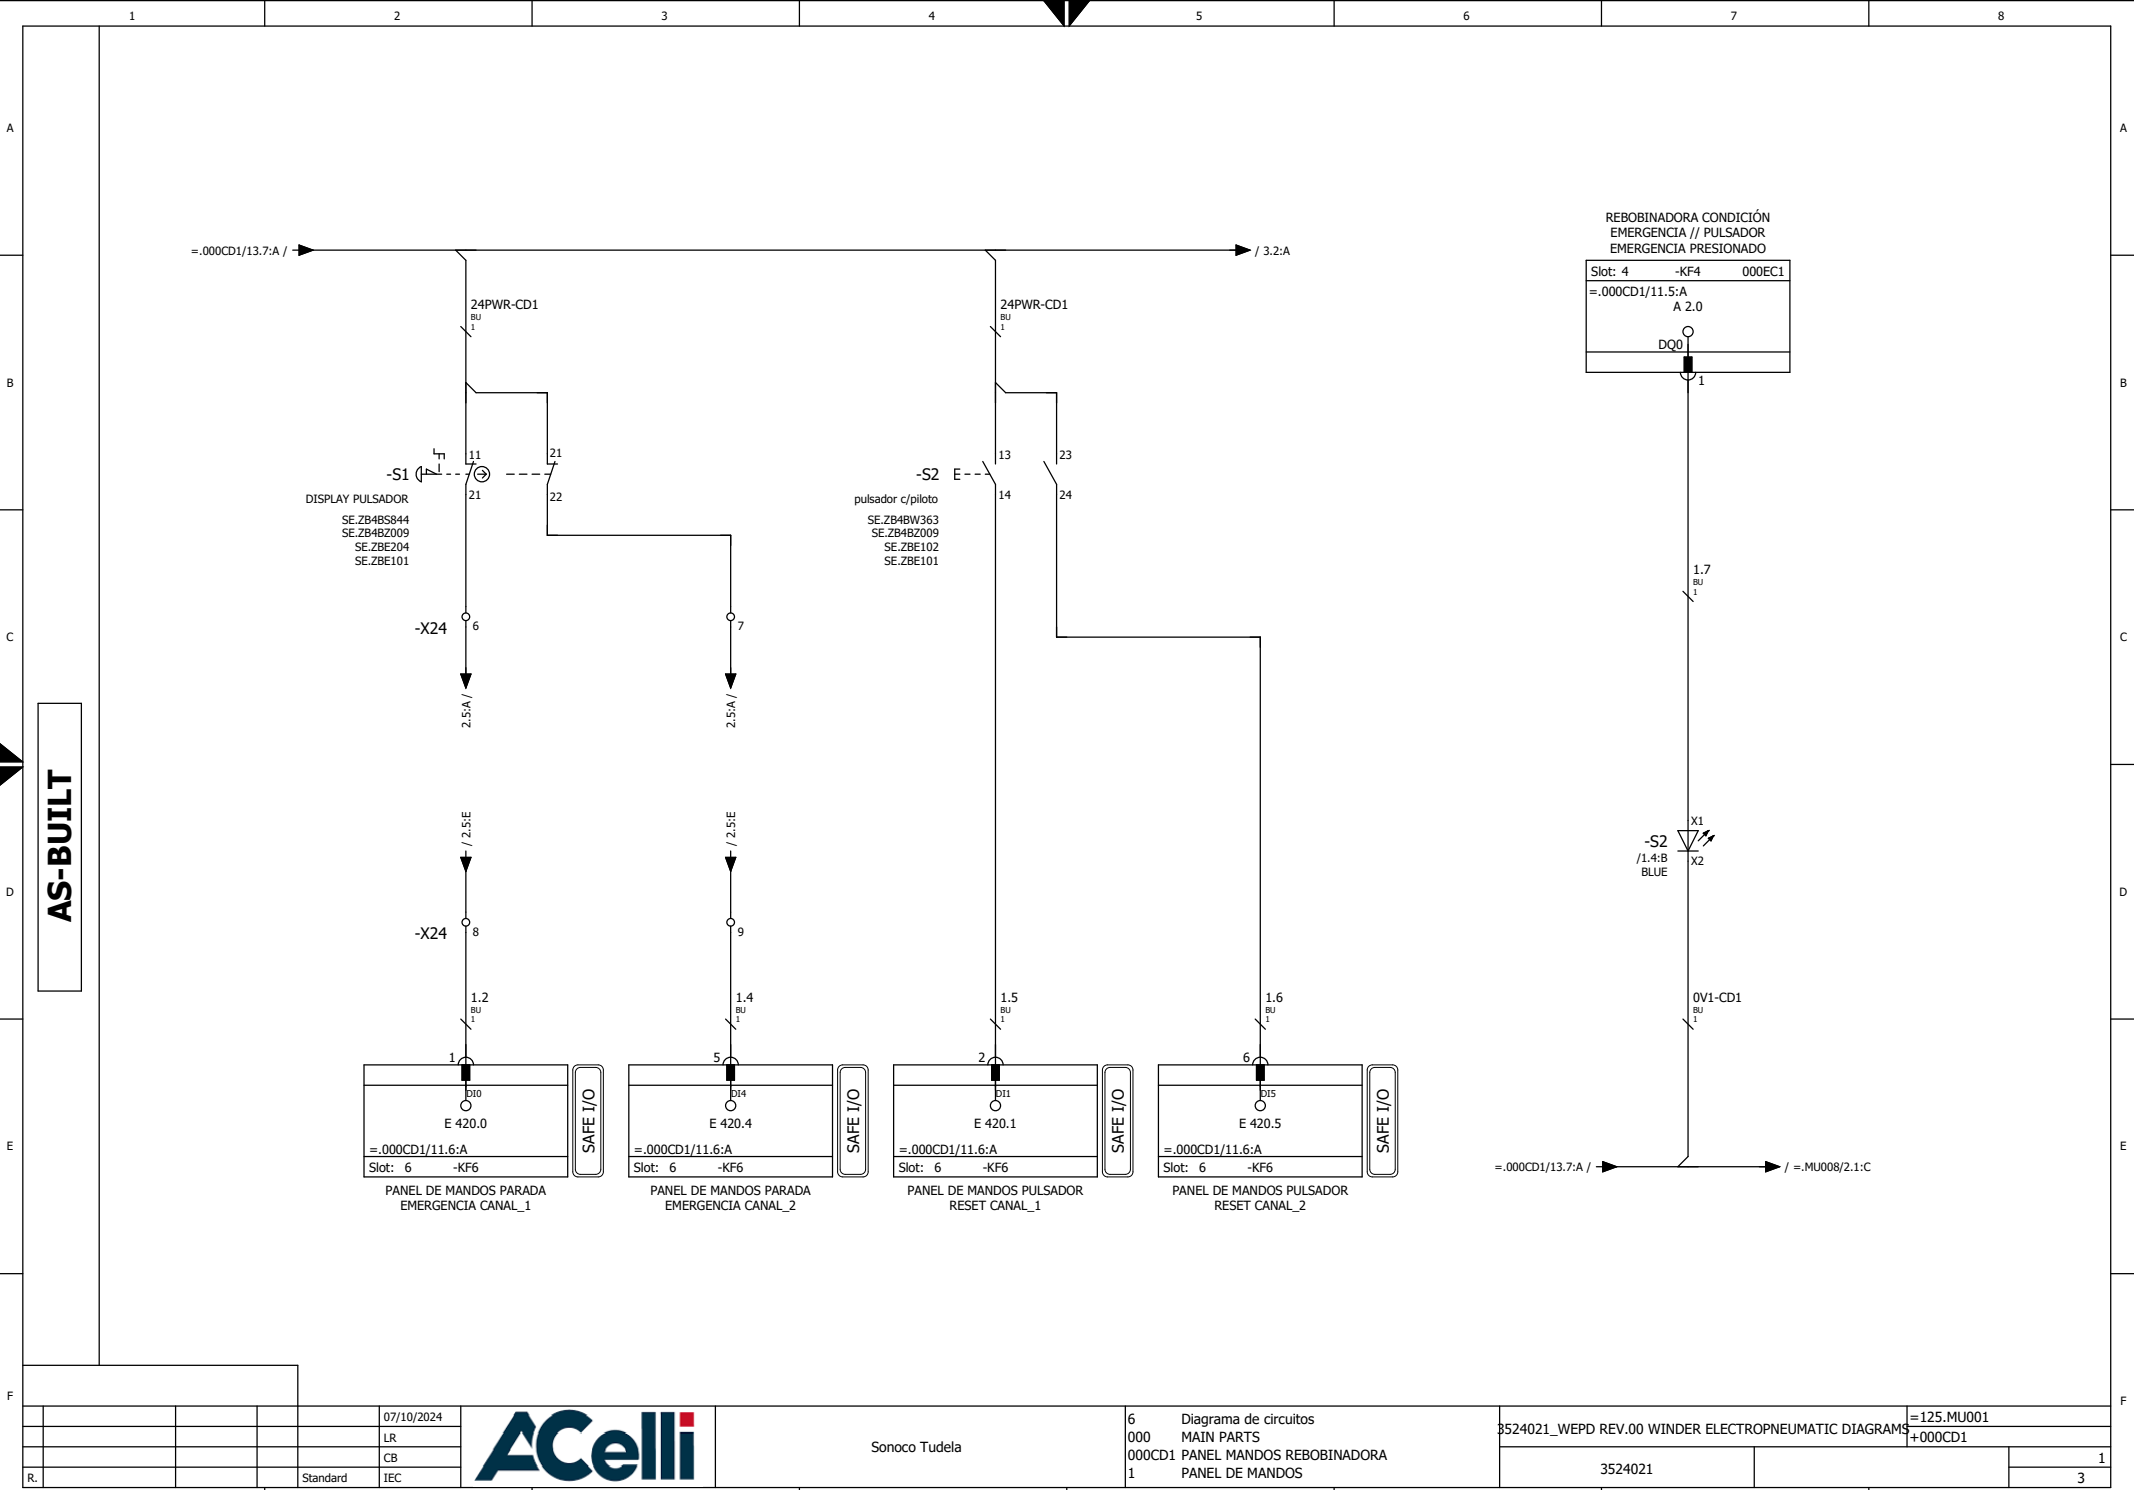

AS-BUILT





Sonoco Tudela

6 Diagrama de circuitos
000 MAIN PARTS
000CD1 PANEL MANDOS REBOBINADORA
1 PANEL DE MANDOS

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=125.MU001
+000CD1
1
3

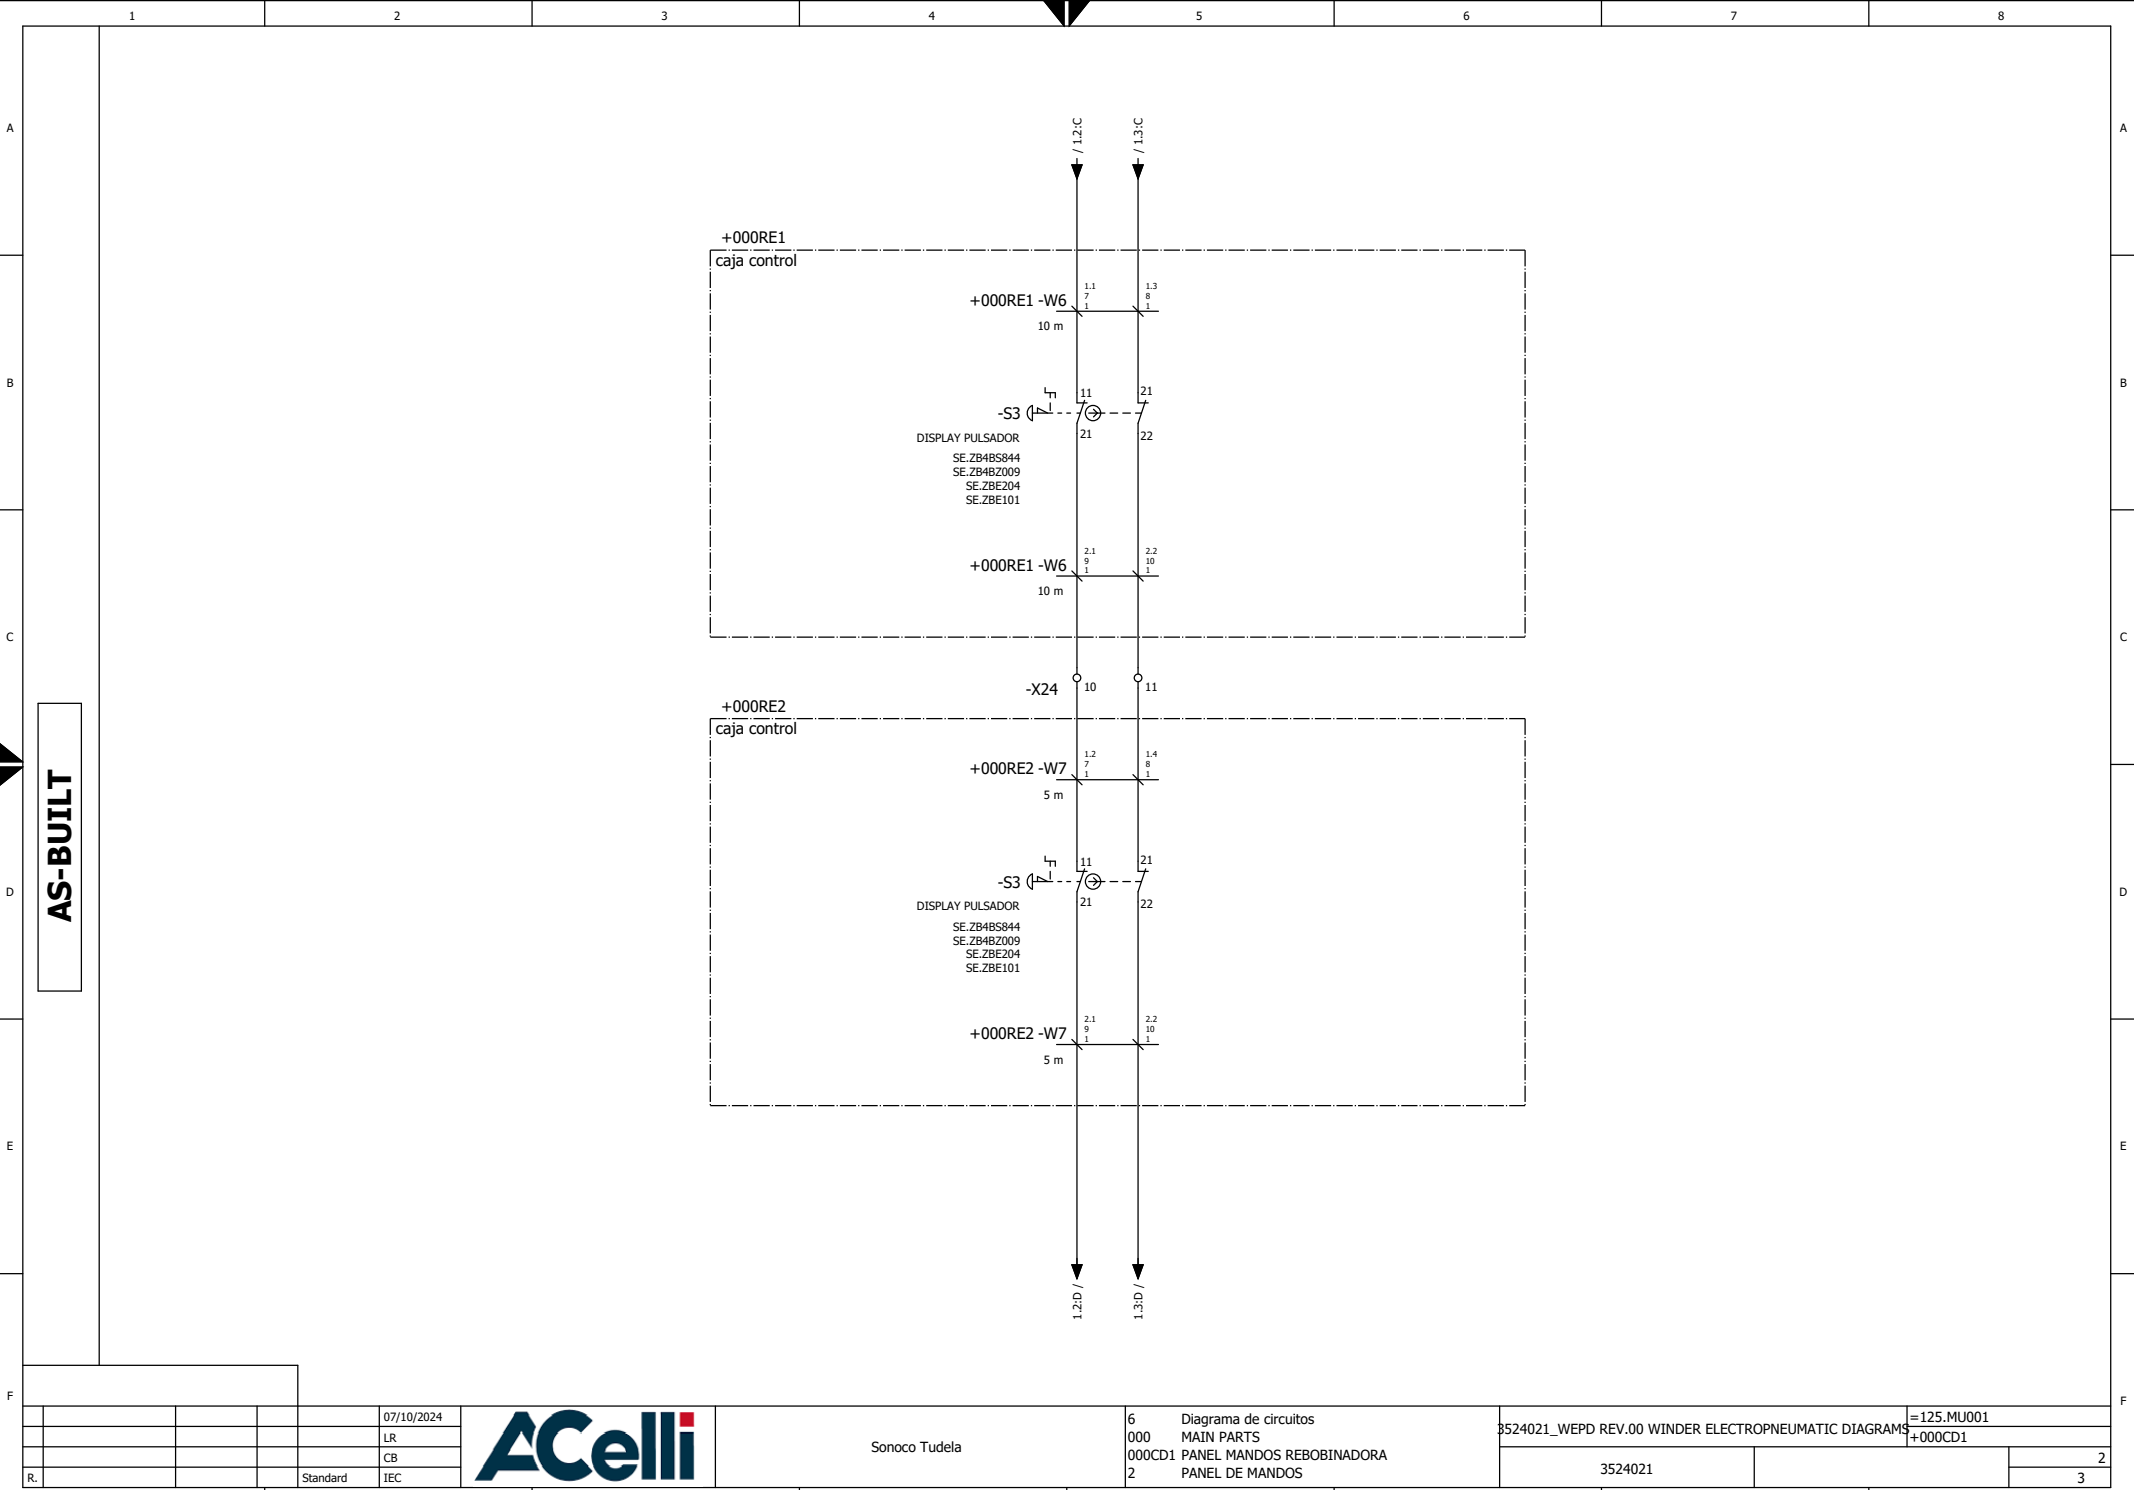

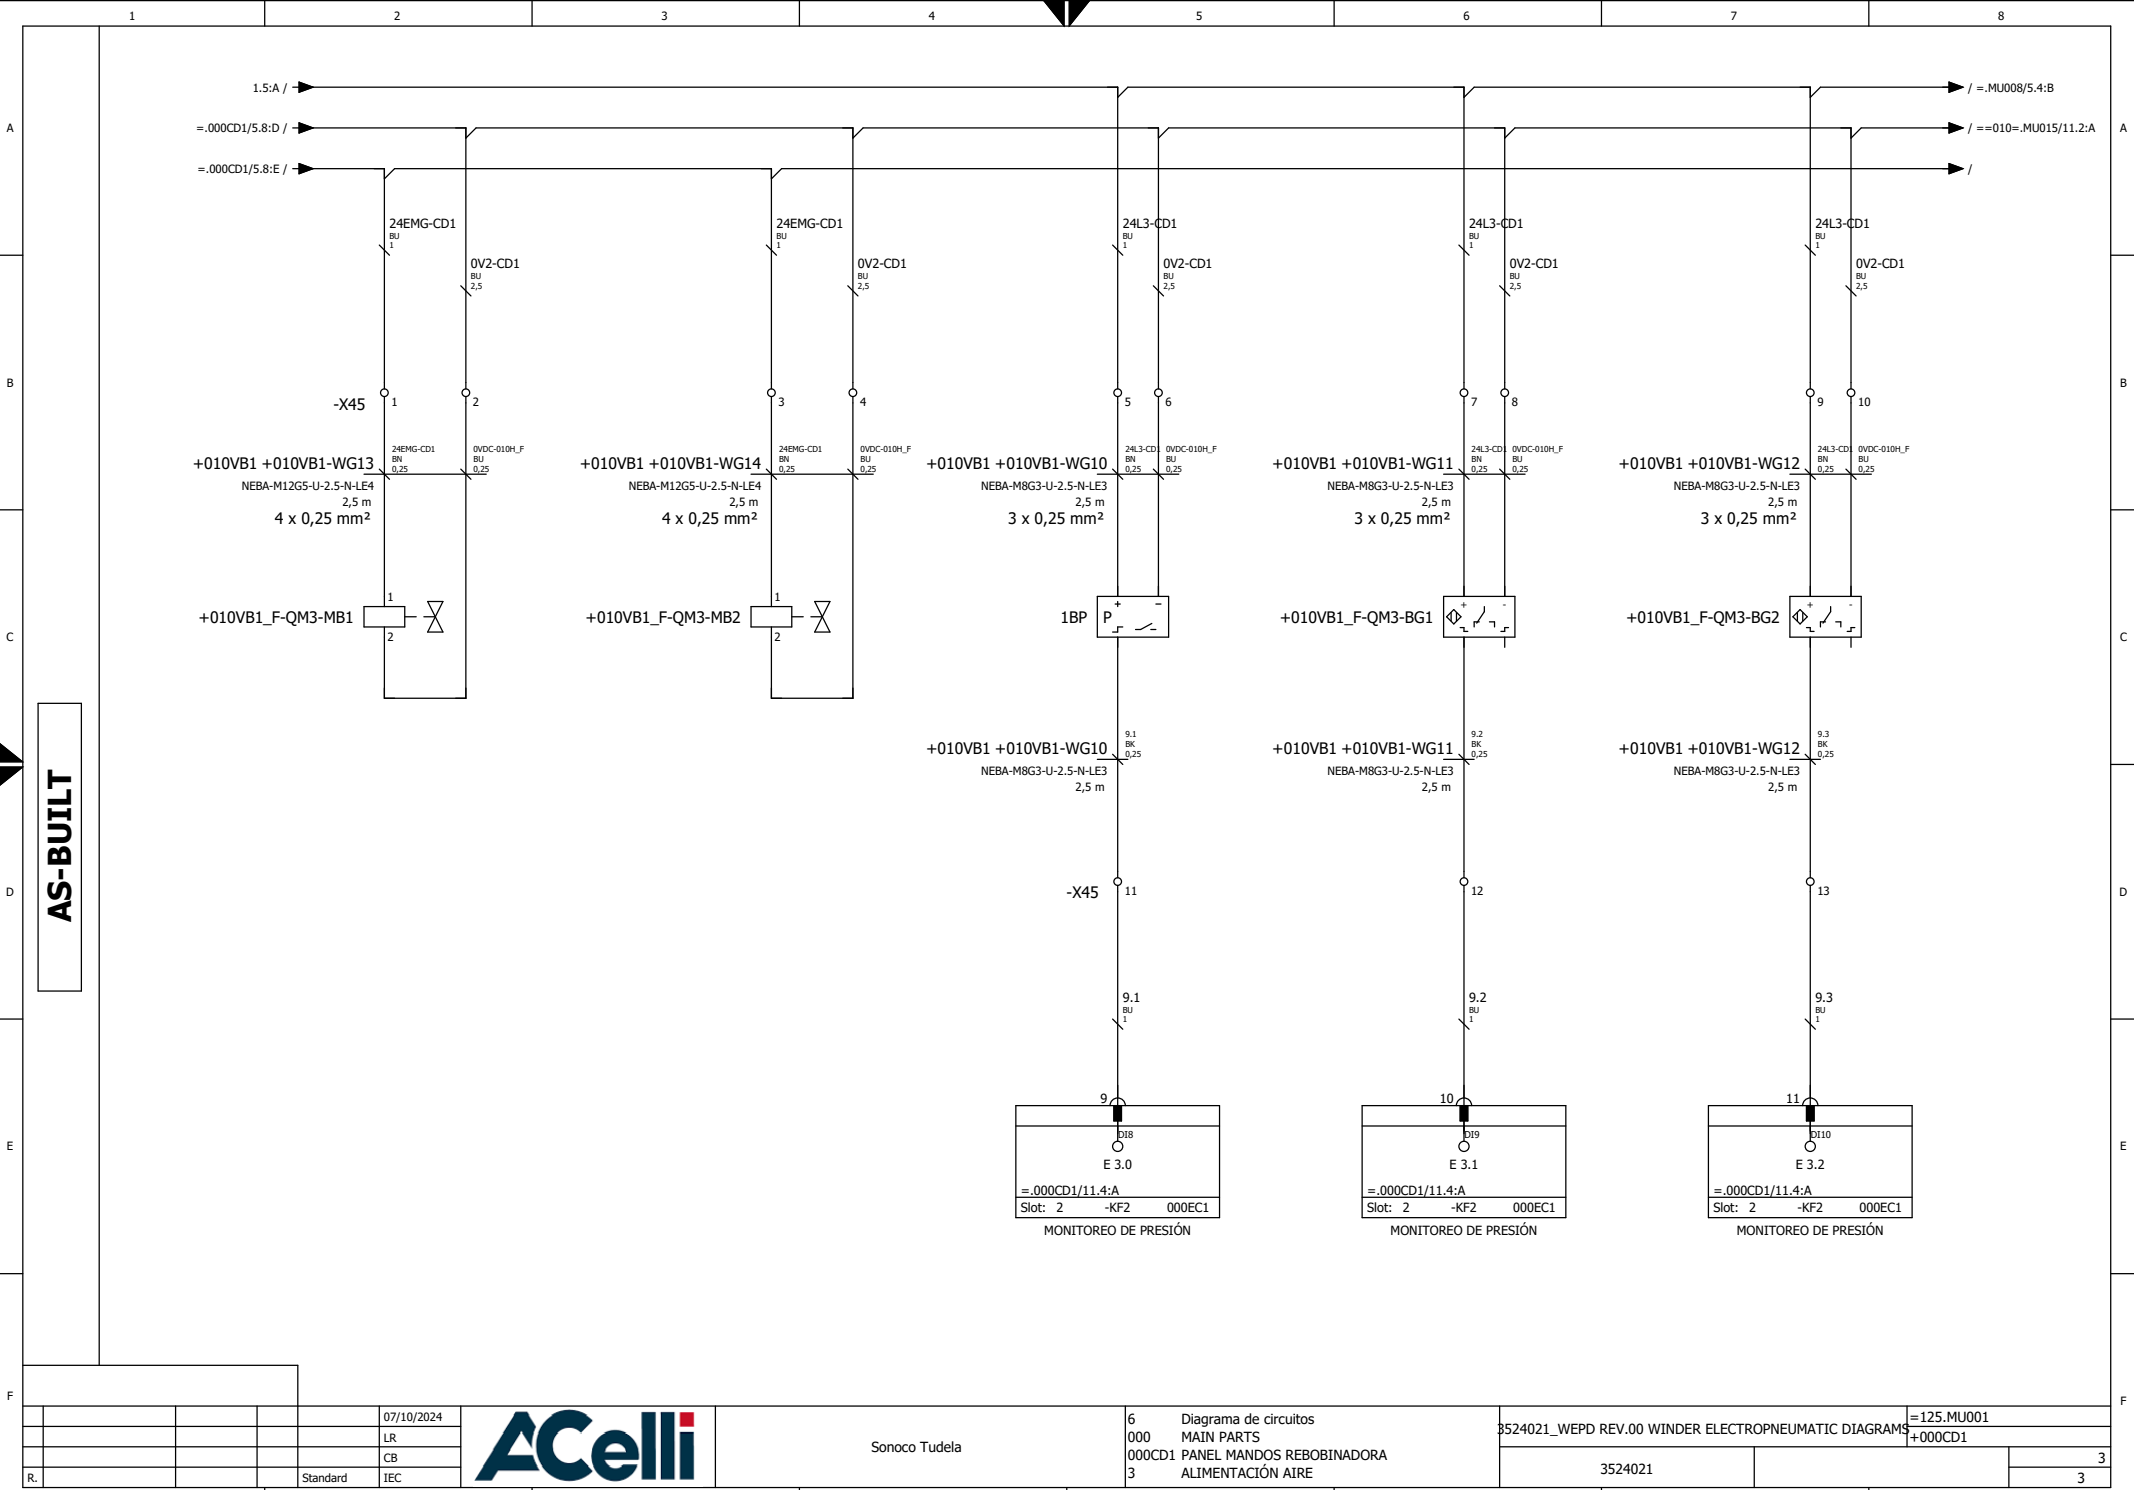

AS-BUILT

				07/10/2024		Sonoco Tudela	6 000 000CD1 3	Diagrama de circuitos MAIN PARTS PANEL MANDOS REBOBINADORA ALIMENTACIÓN AIRE	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU001 +000CD1	3 3
				LR							
				CB							
R.				Standard	IEC				3524021		3

Descripción


INTERCAMBIO DATOS


Disposición

MU008

AS-BUILT

6

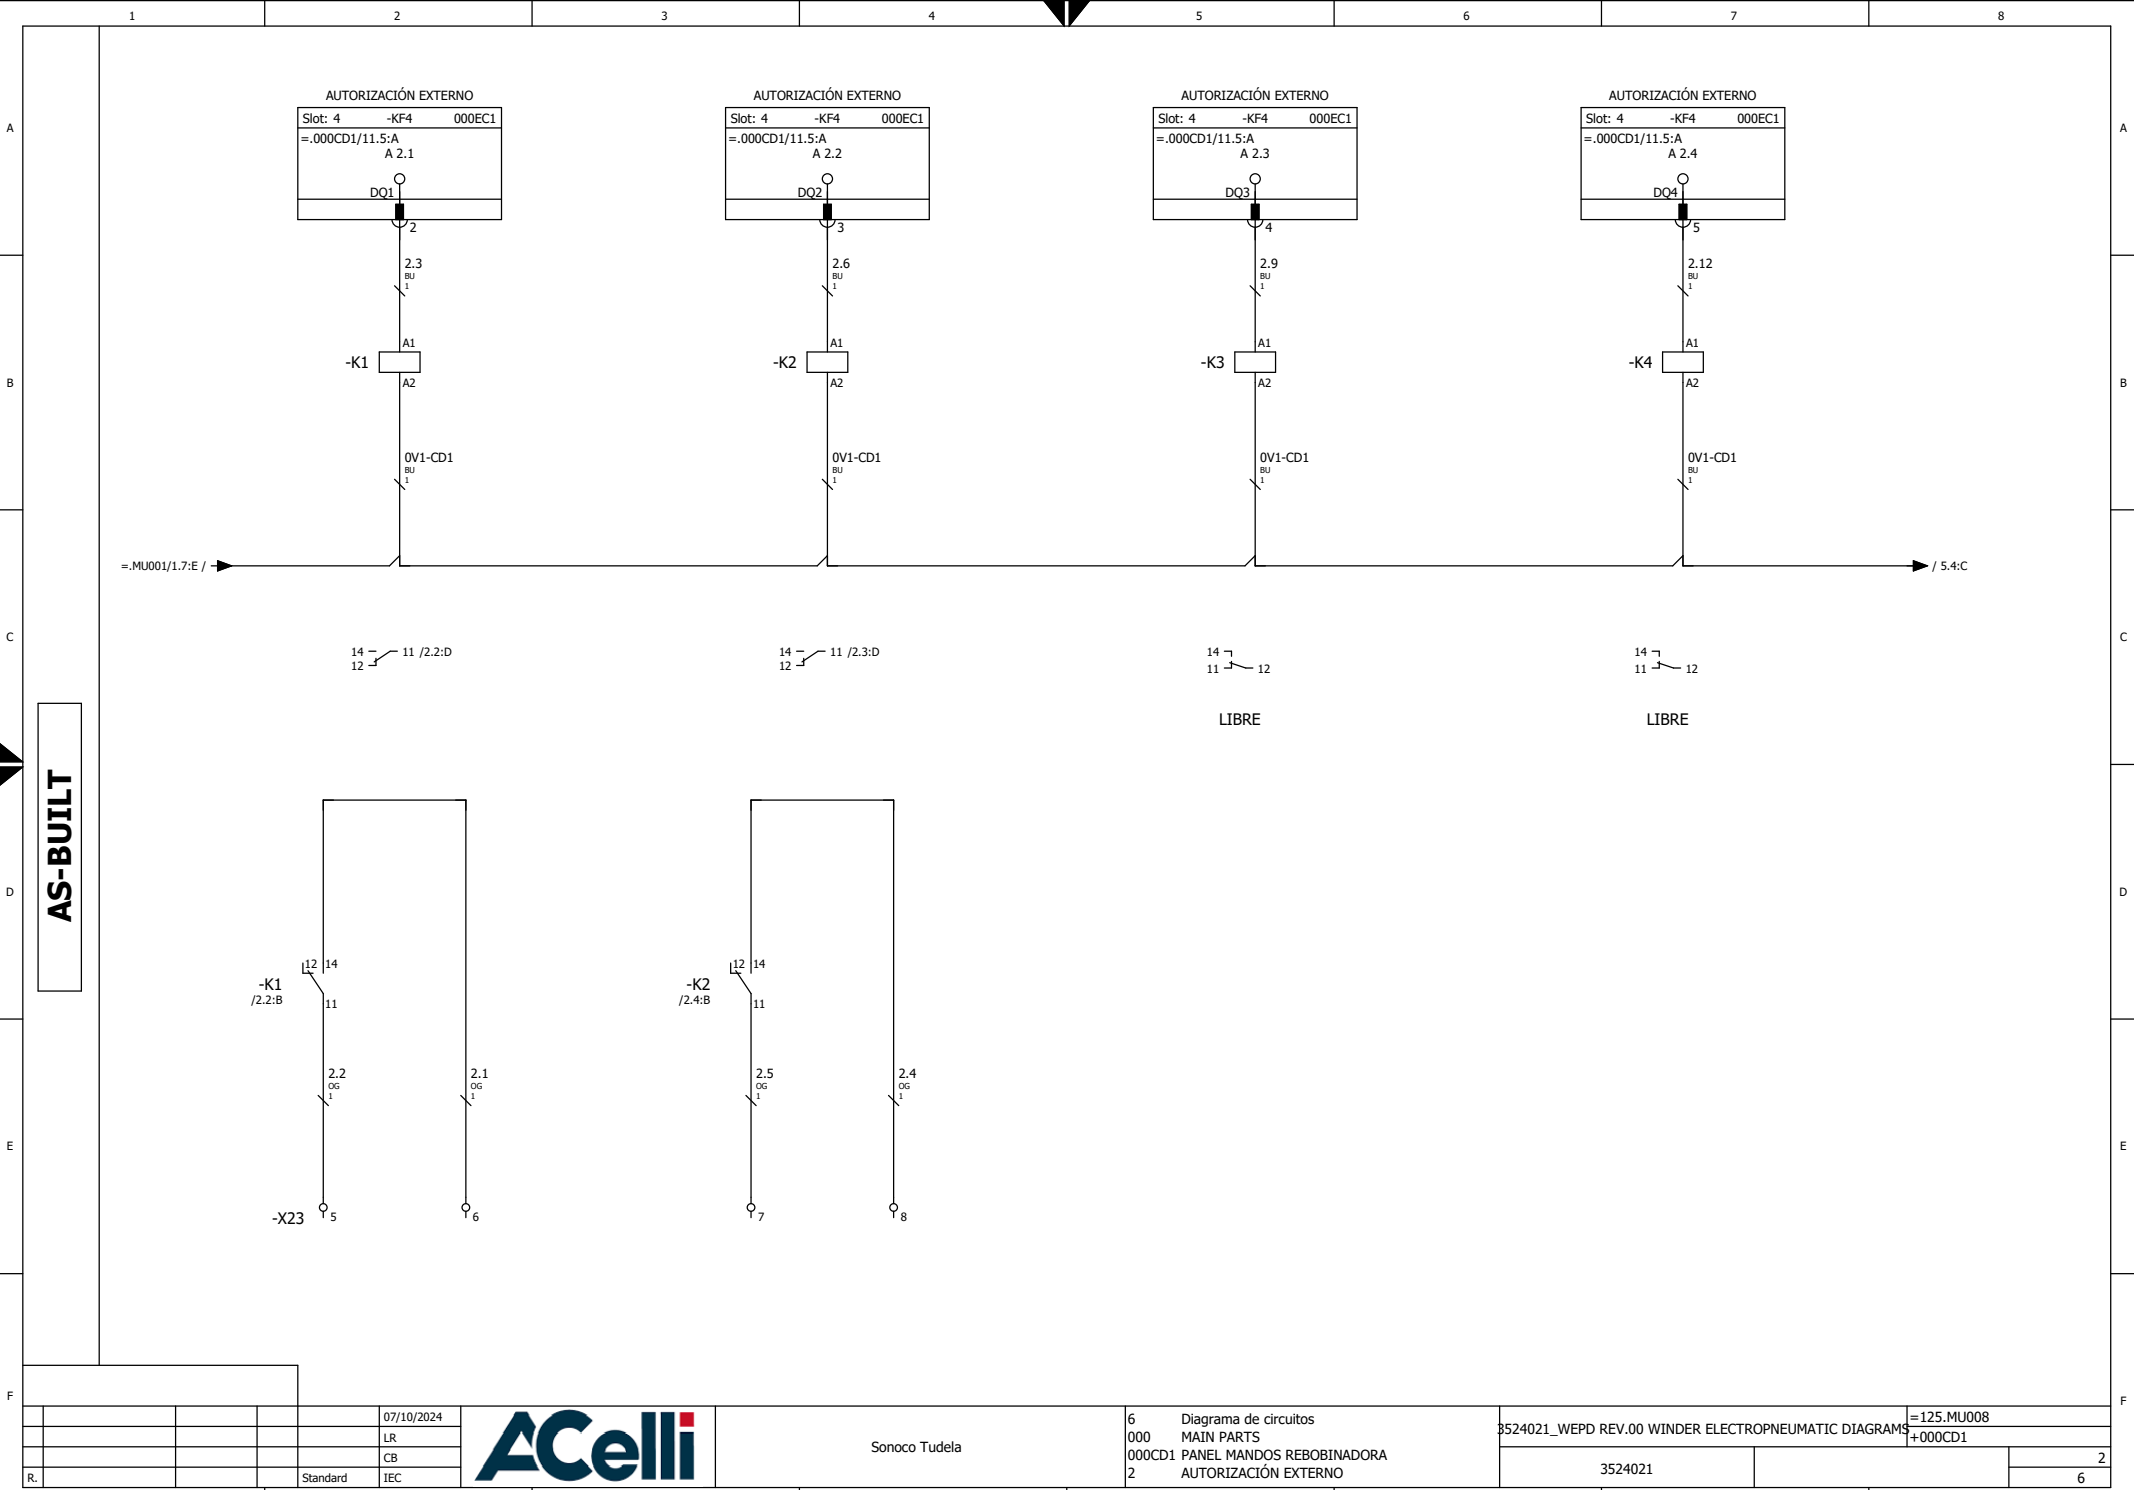

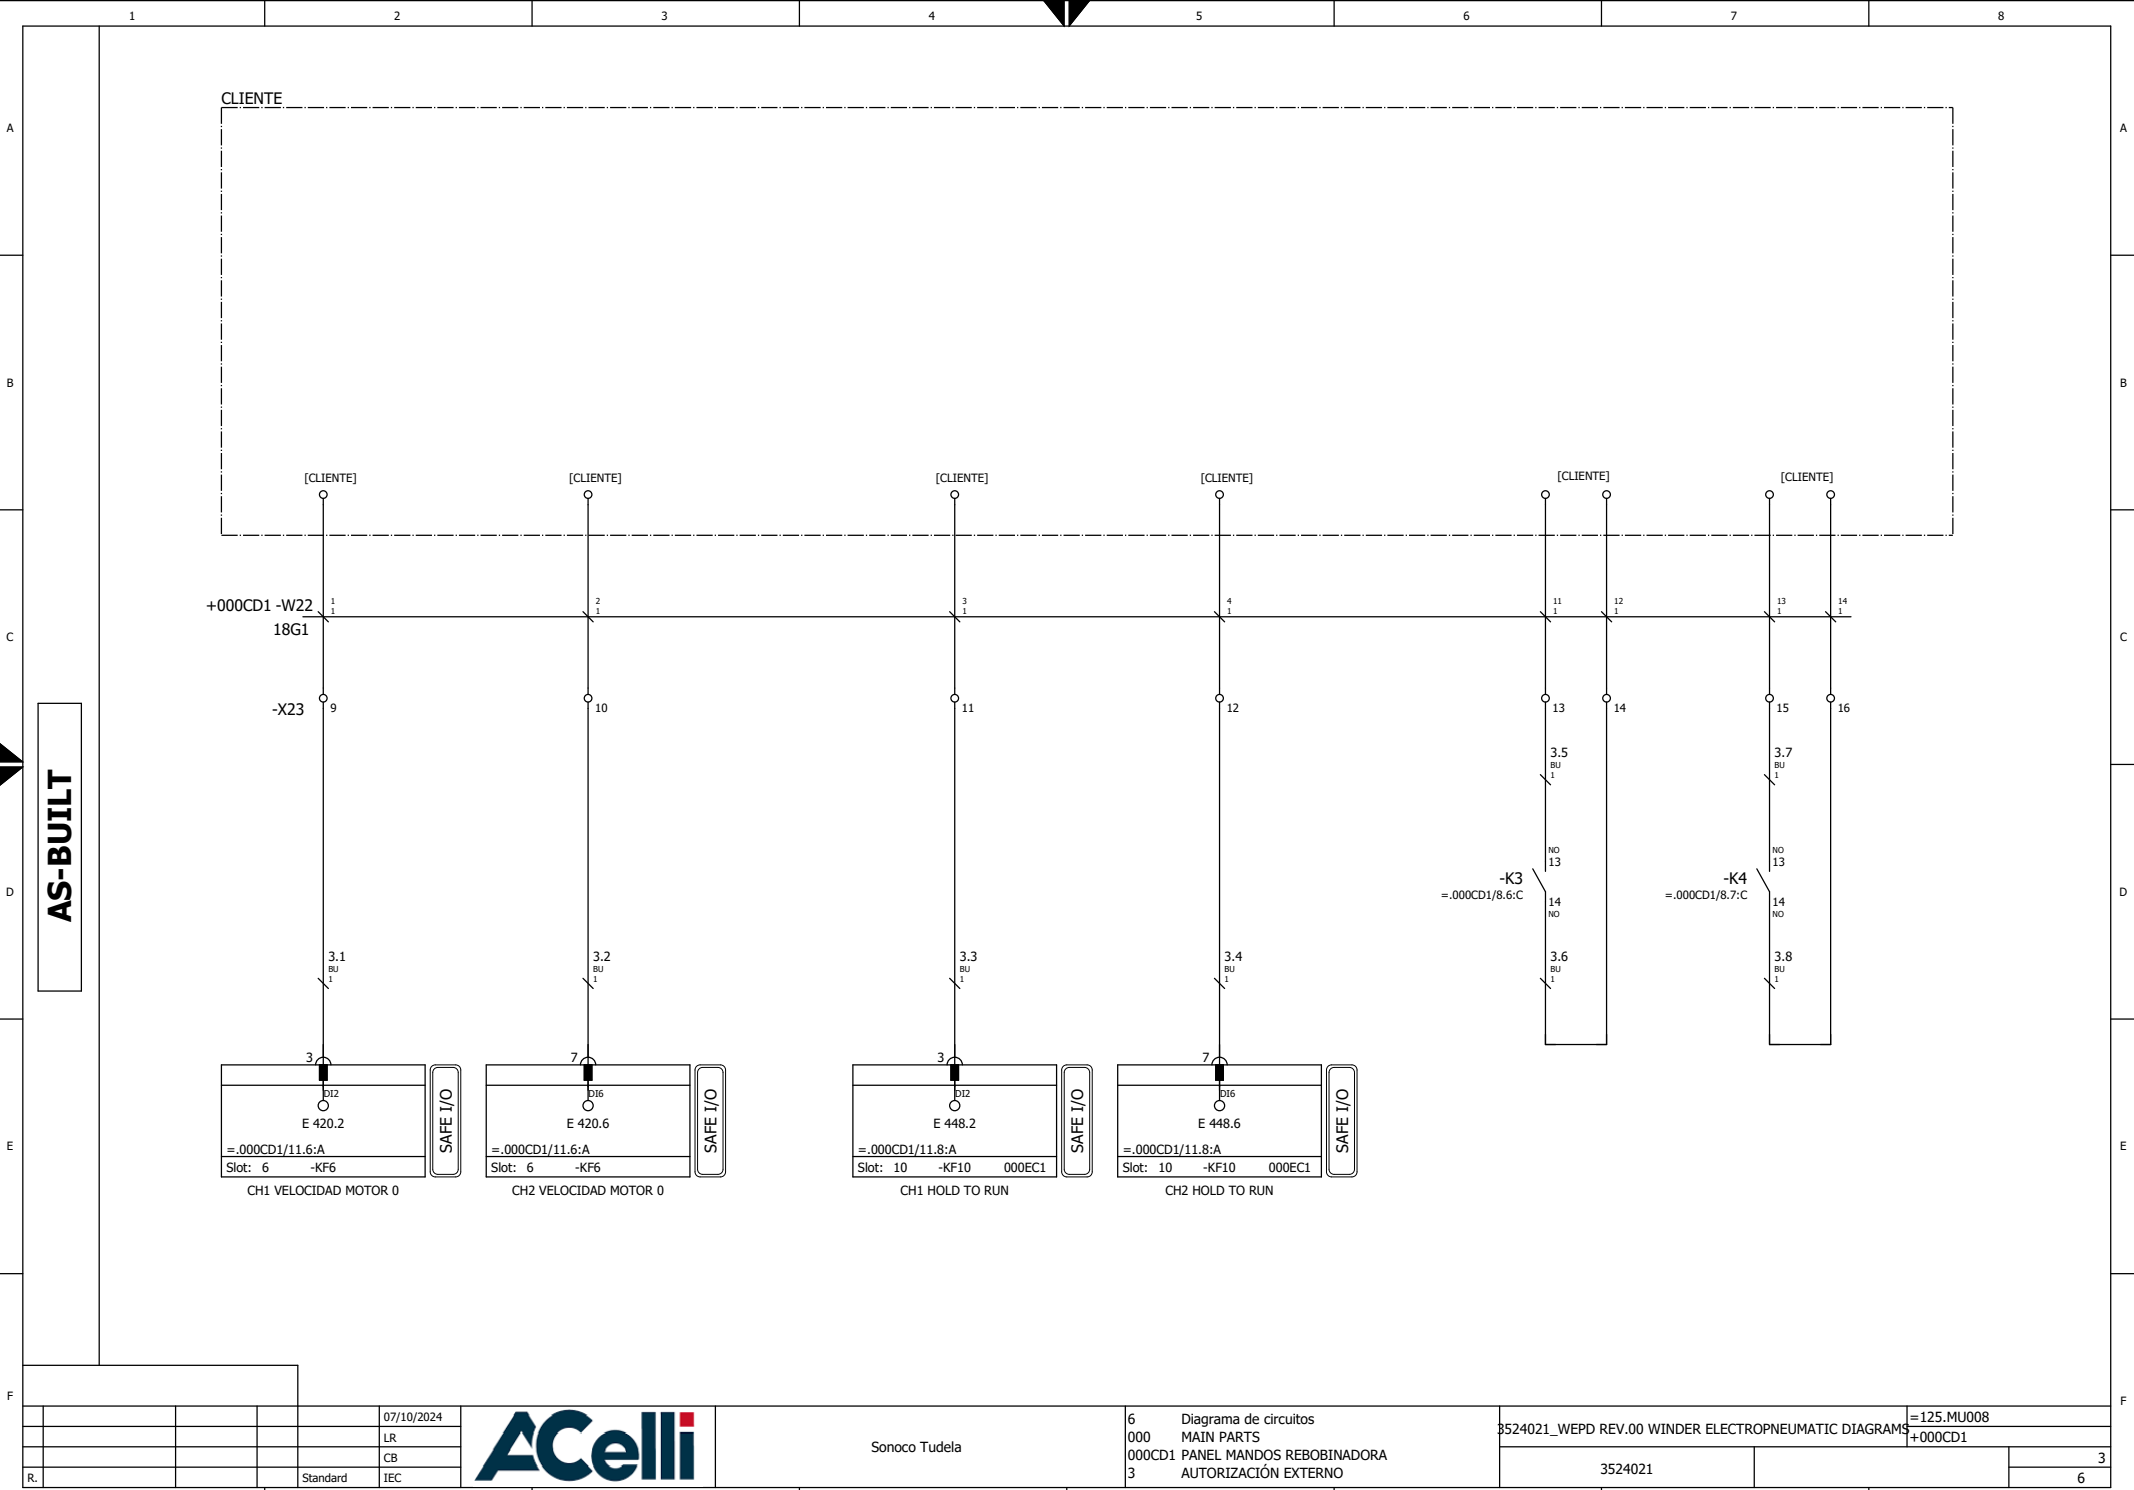

AS-BUILT

				07/10/2024
				LR
				CB
R.			Standard	IEC





Sonoco Tudela


6 Diagrama de circuitos
000 MAIN PARTS
000CD1 PANEL MANDOS REBOBINADORA
3 AUTORIZACIÓN EXTERNO

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=125.MU008
+000CD1
3
6

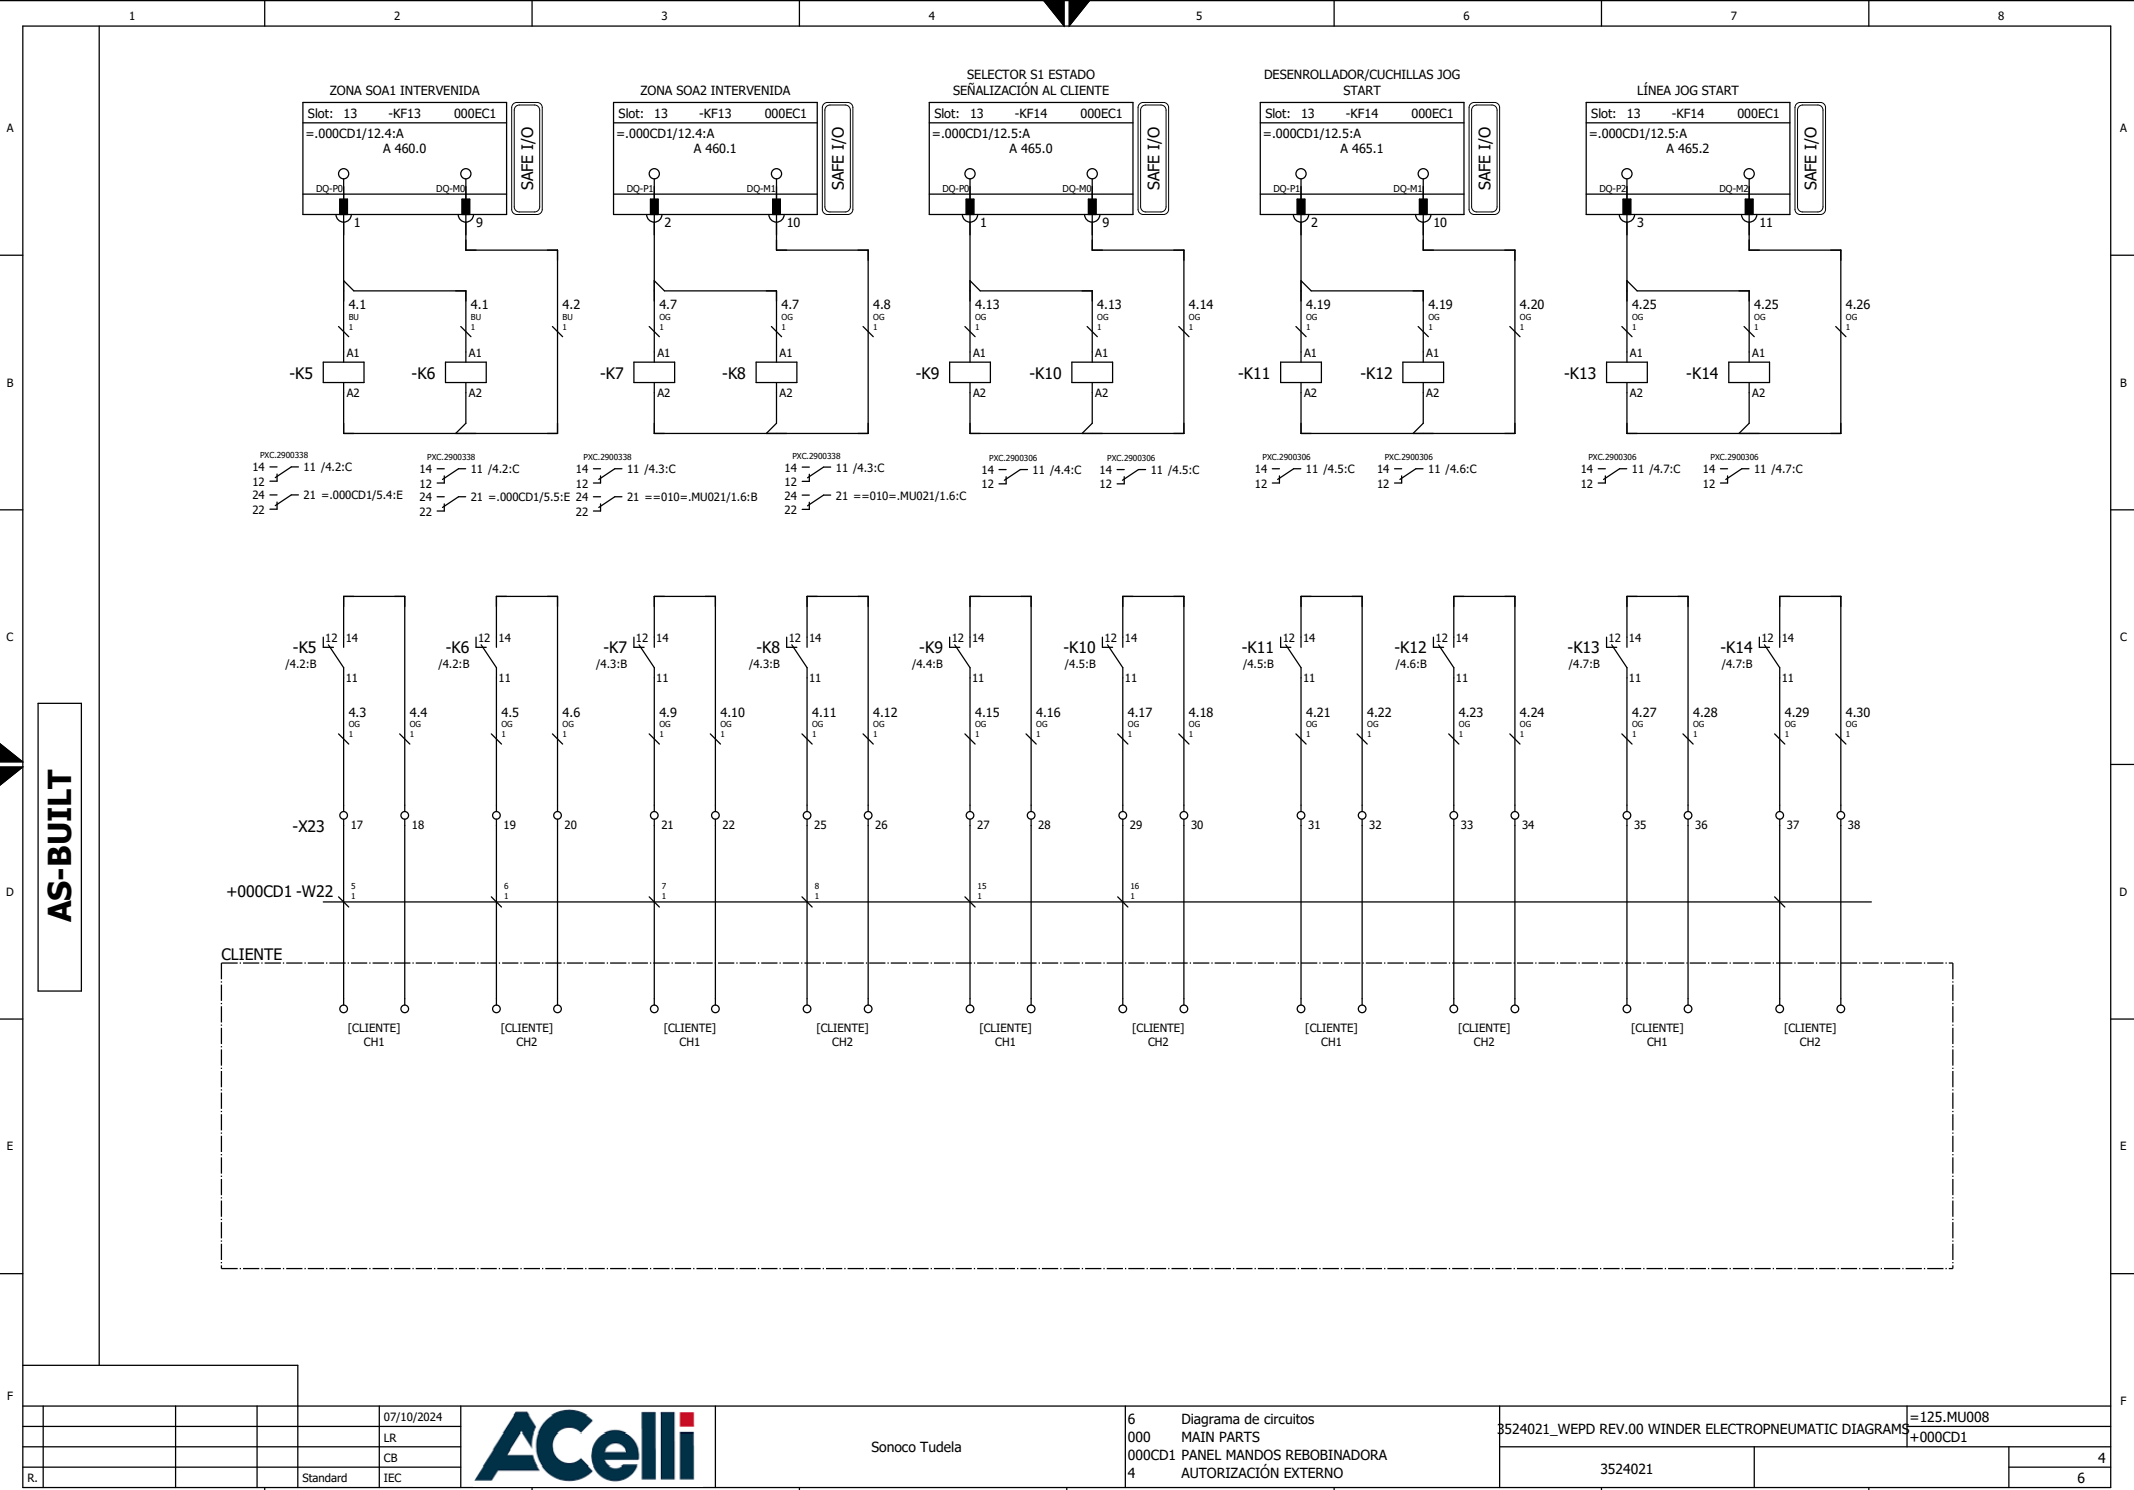

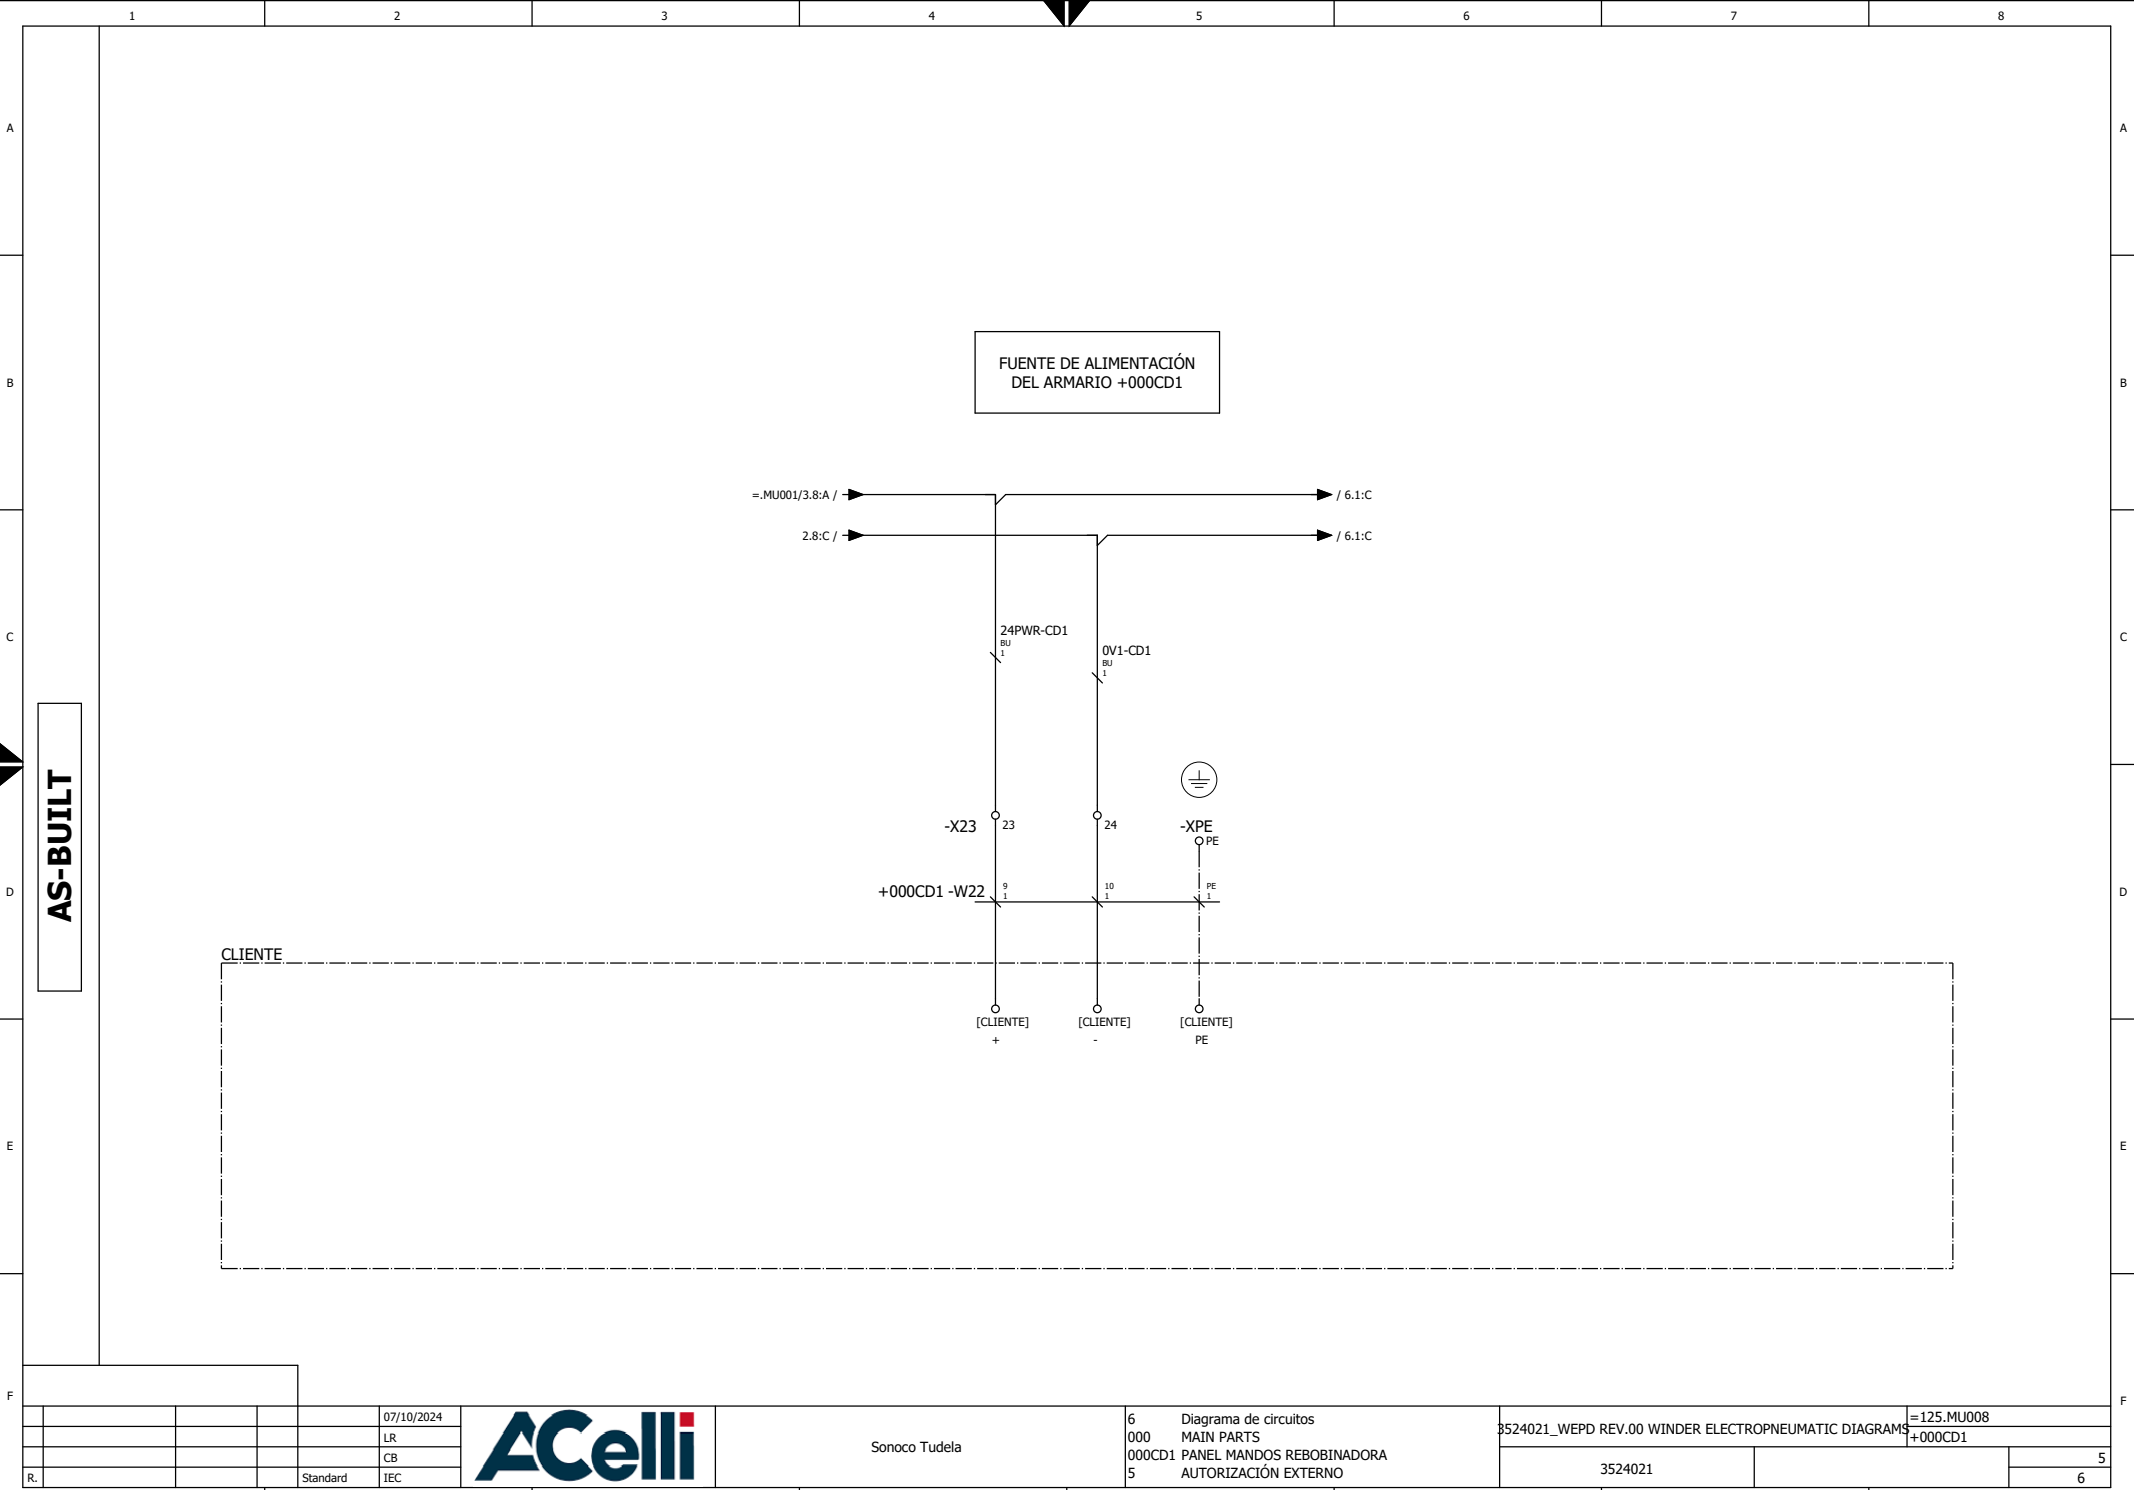

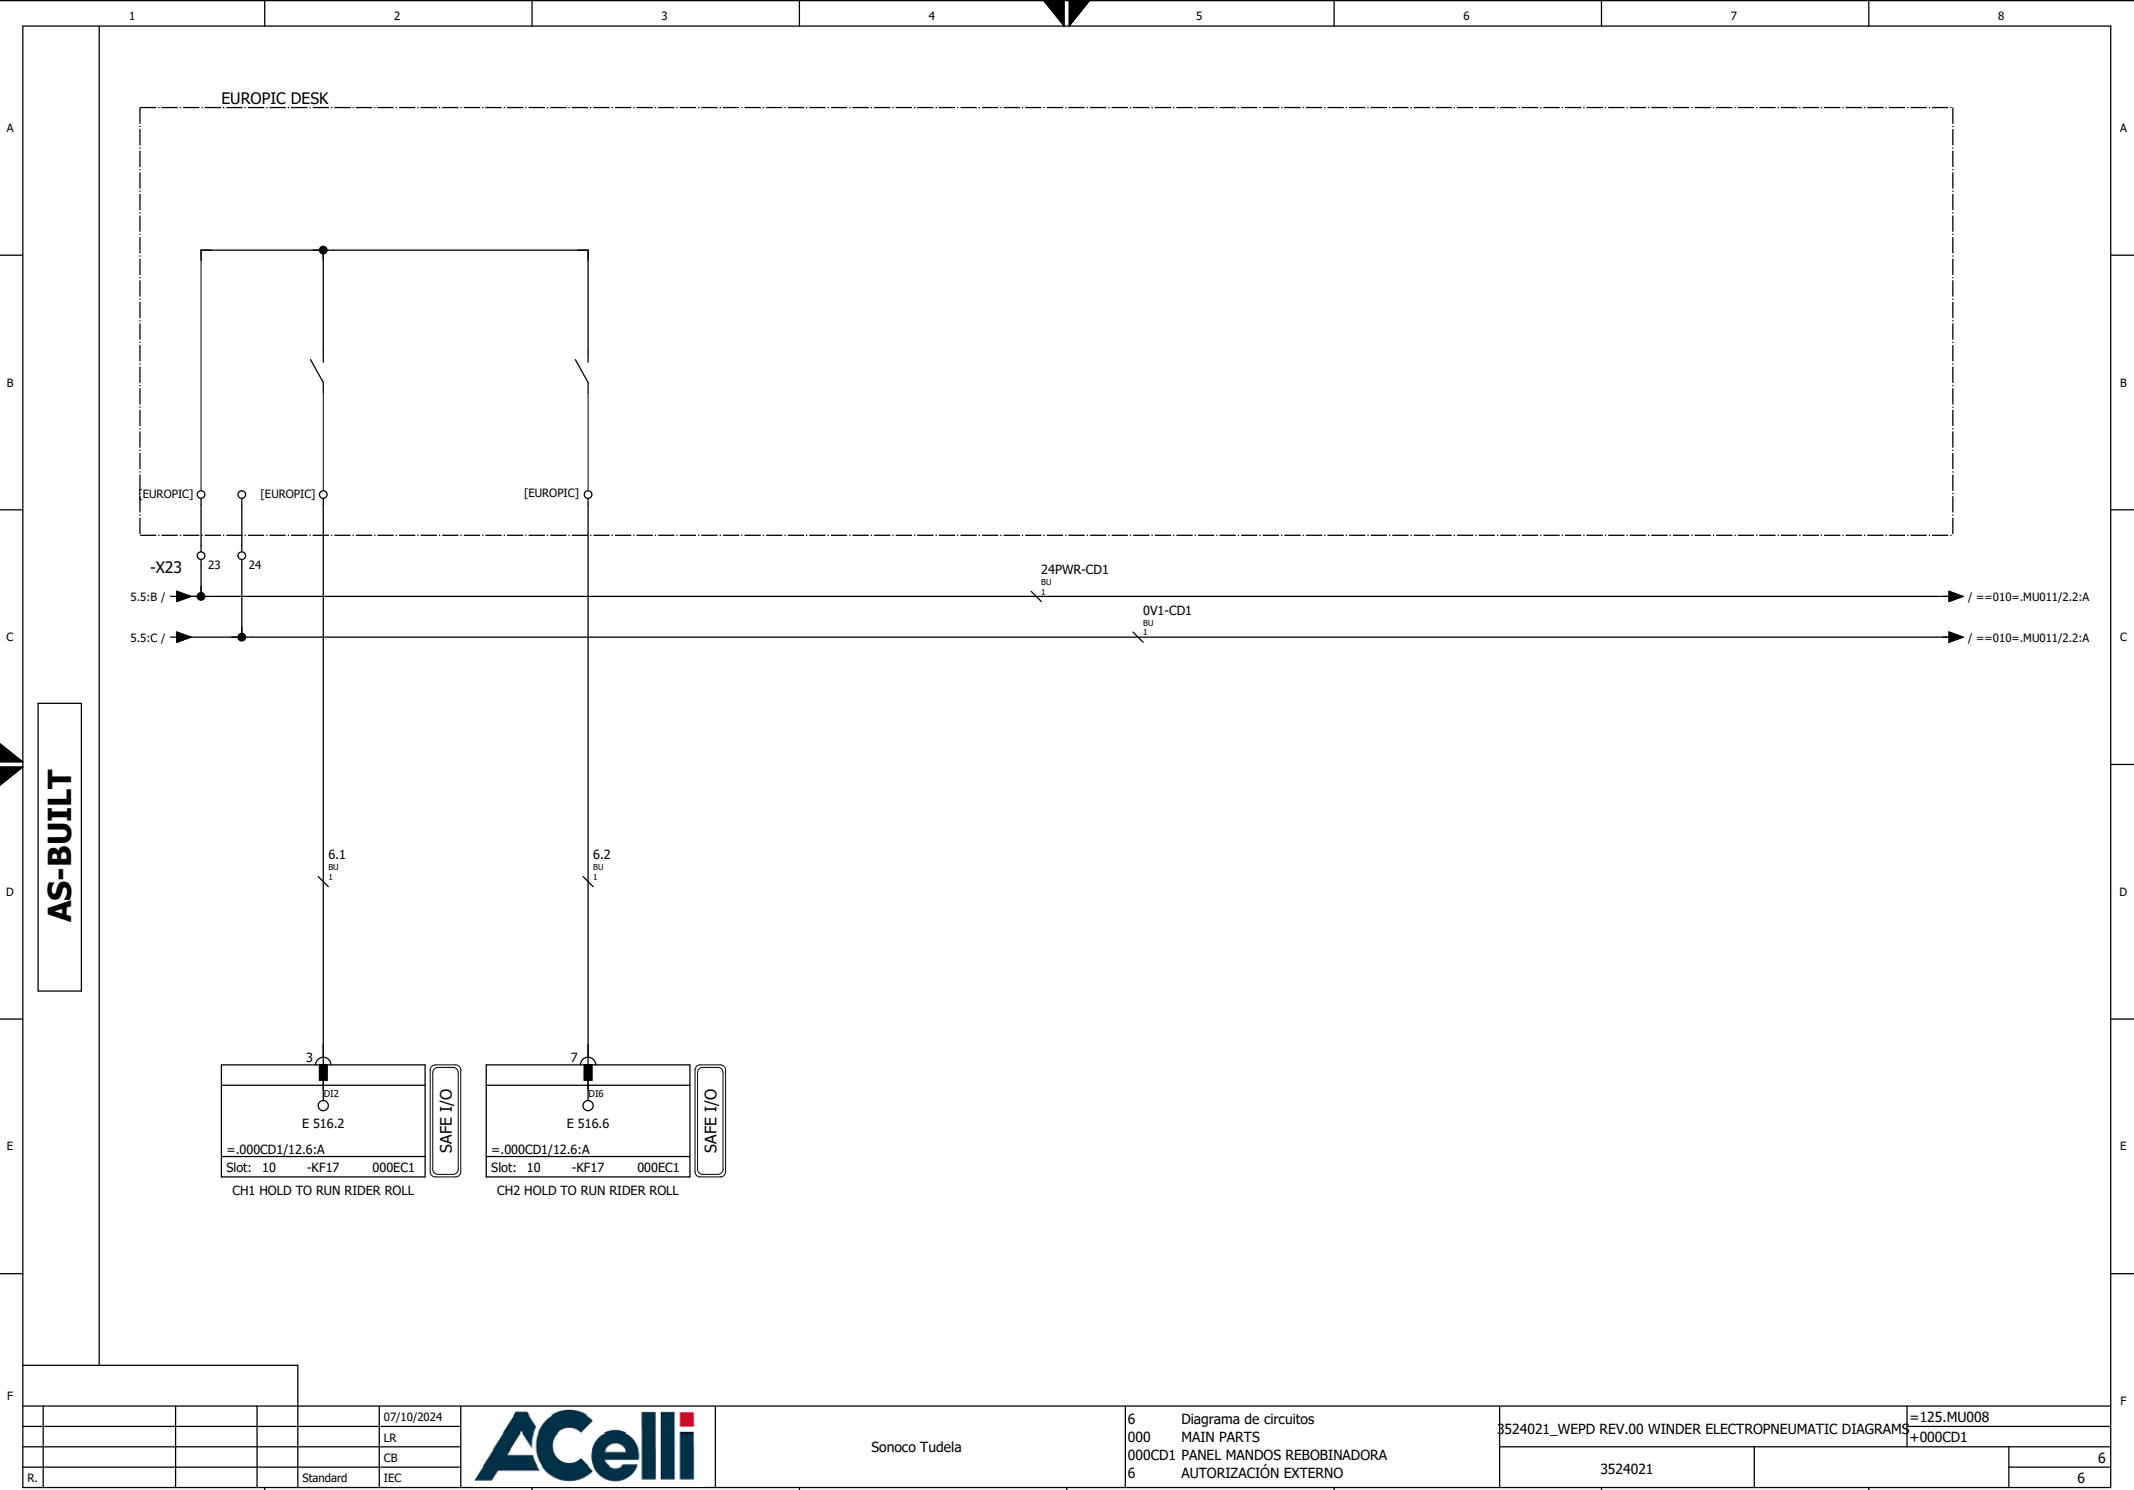


Descripción

PUERTAS DE SEGURIDAD

Disposición

MU011

AS-BUILT

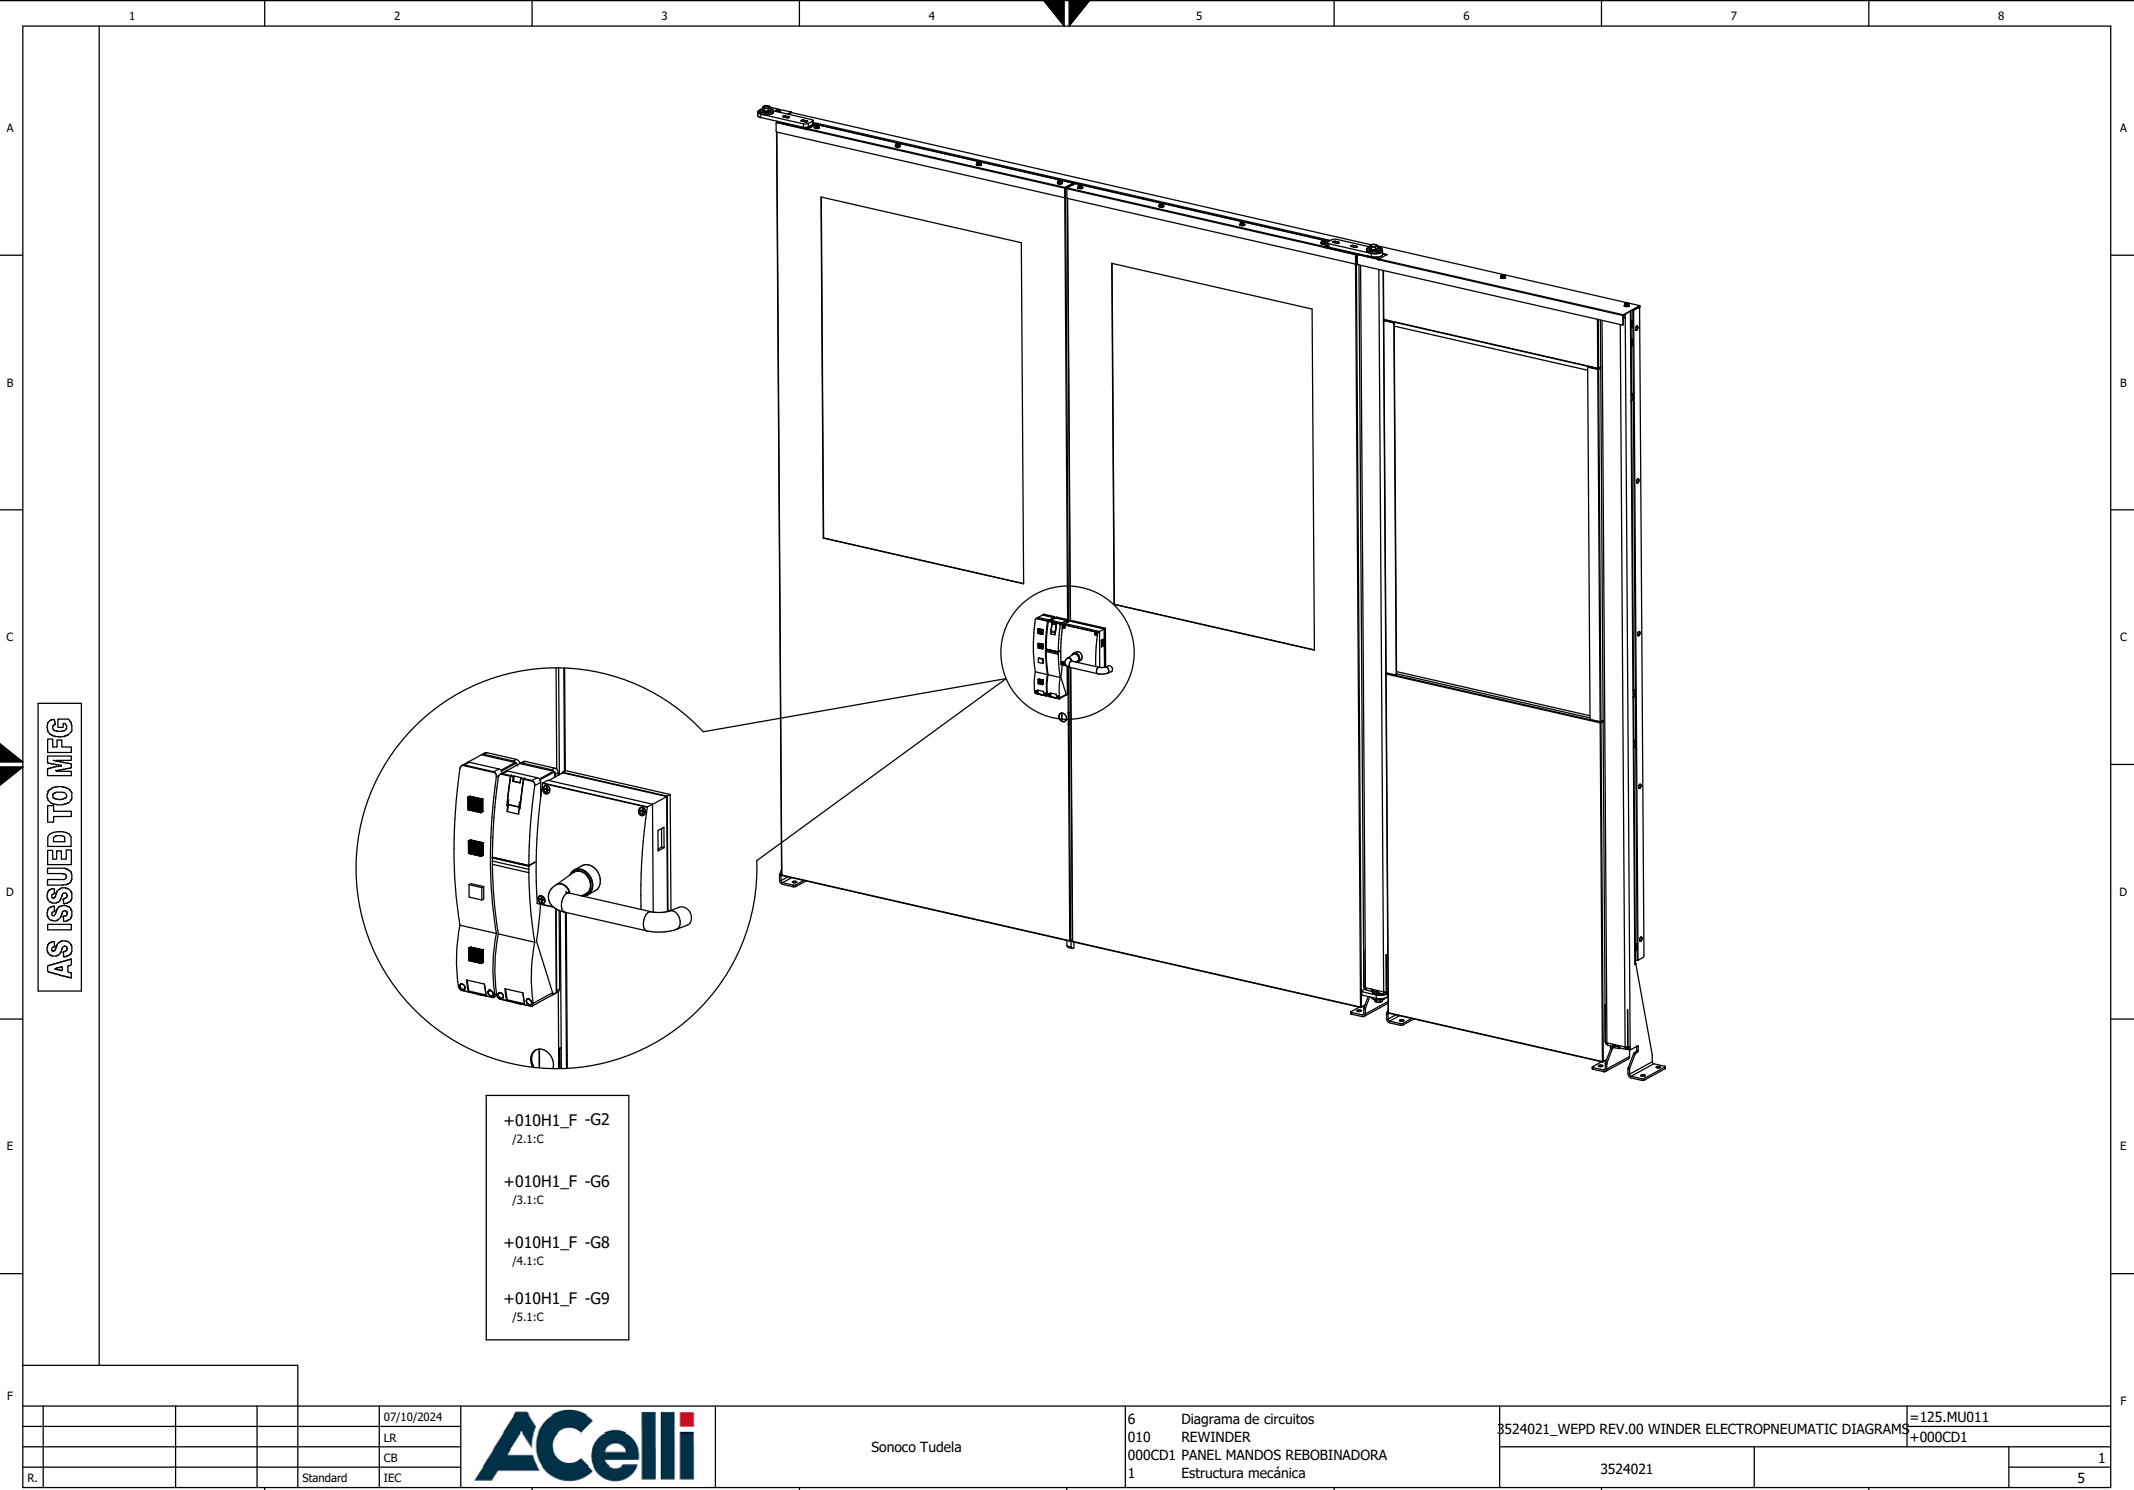

AS ISSUED TO MFG

- +010H1_F -G2
/2.1:C
- +010H1_F -G6
/3.1:C
- +010H1_F -G8
/4.1:C
- +010H1_F -G9
/5.1:C

				07/10/2024
				LR
				CB
R.			Standard	IEC




Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
1 Estructura mecánica

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAM
3524021

=125.MU011
+000CD1
1
5

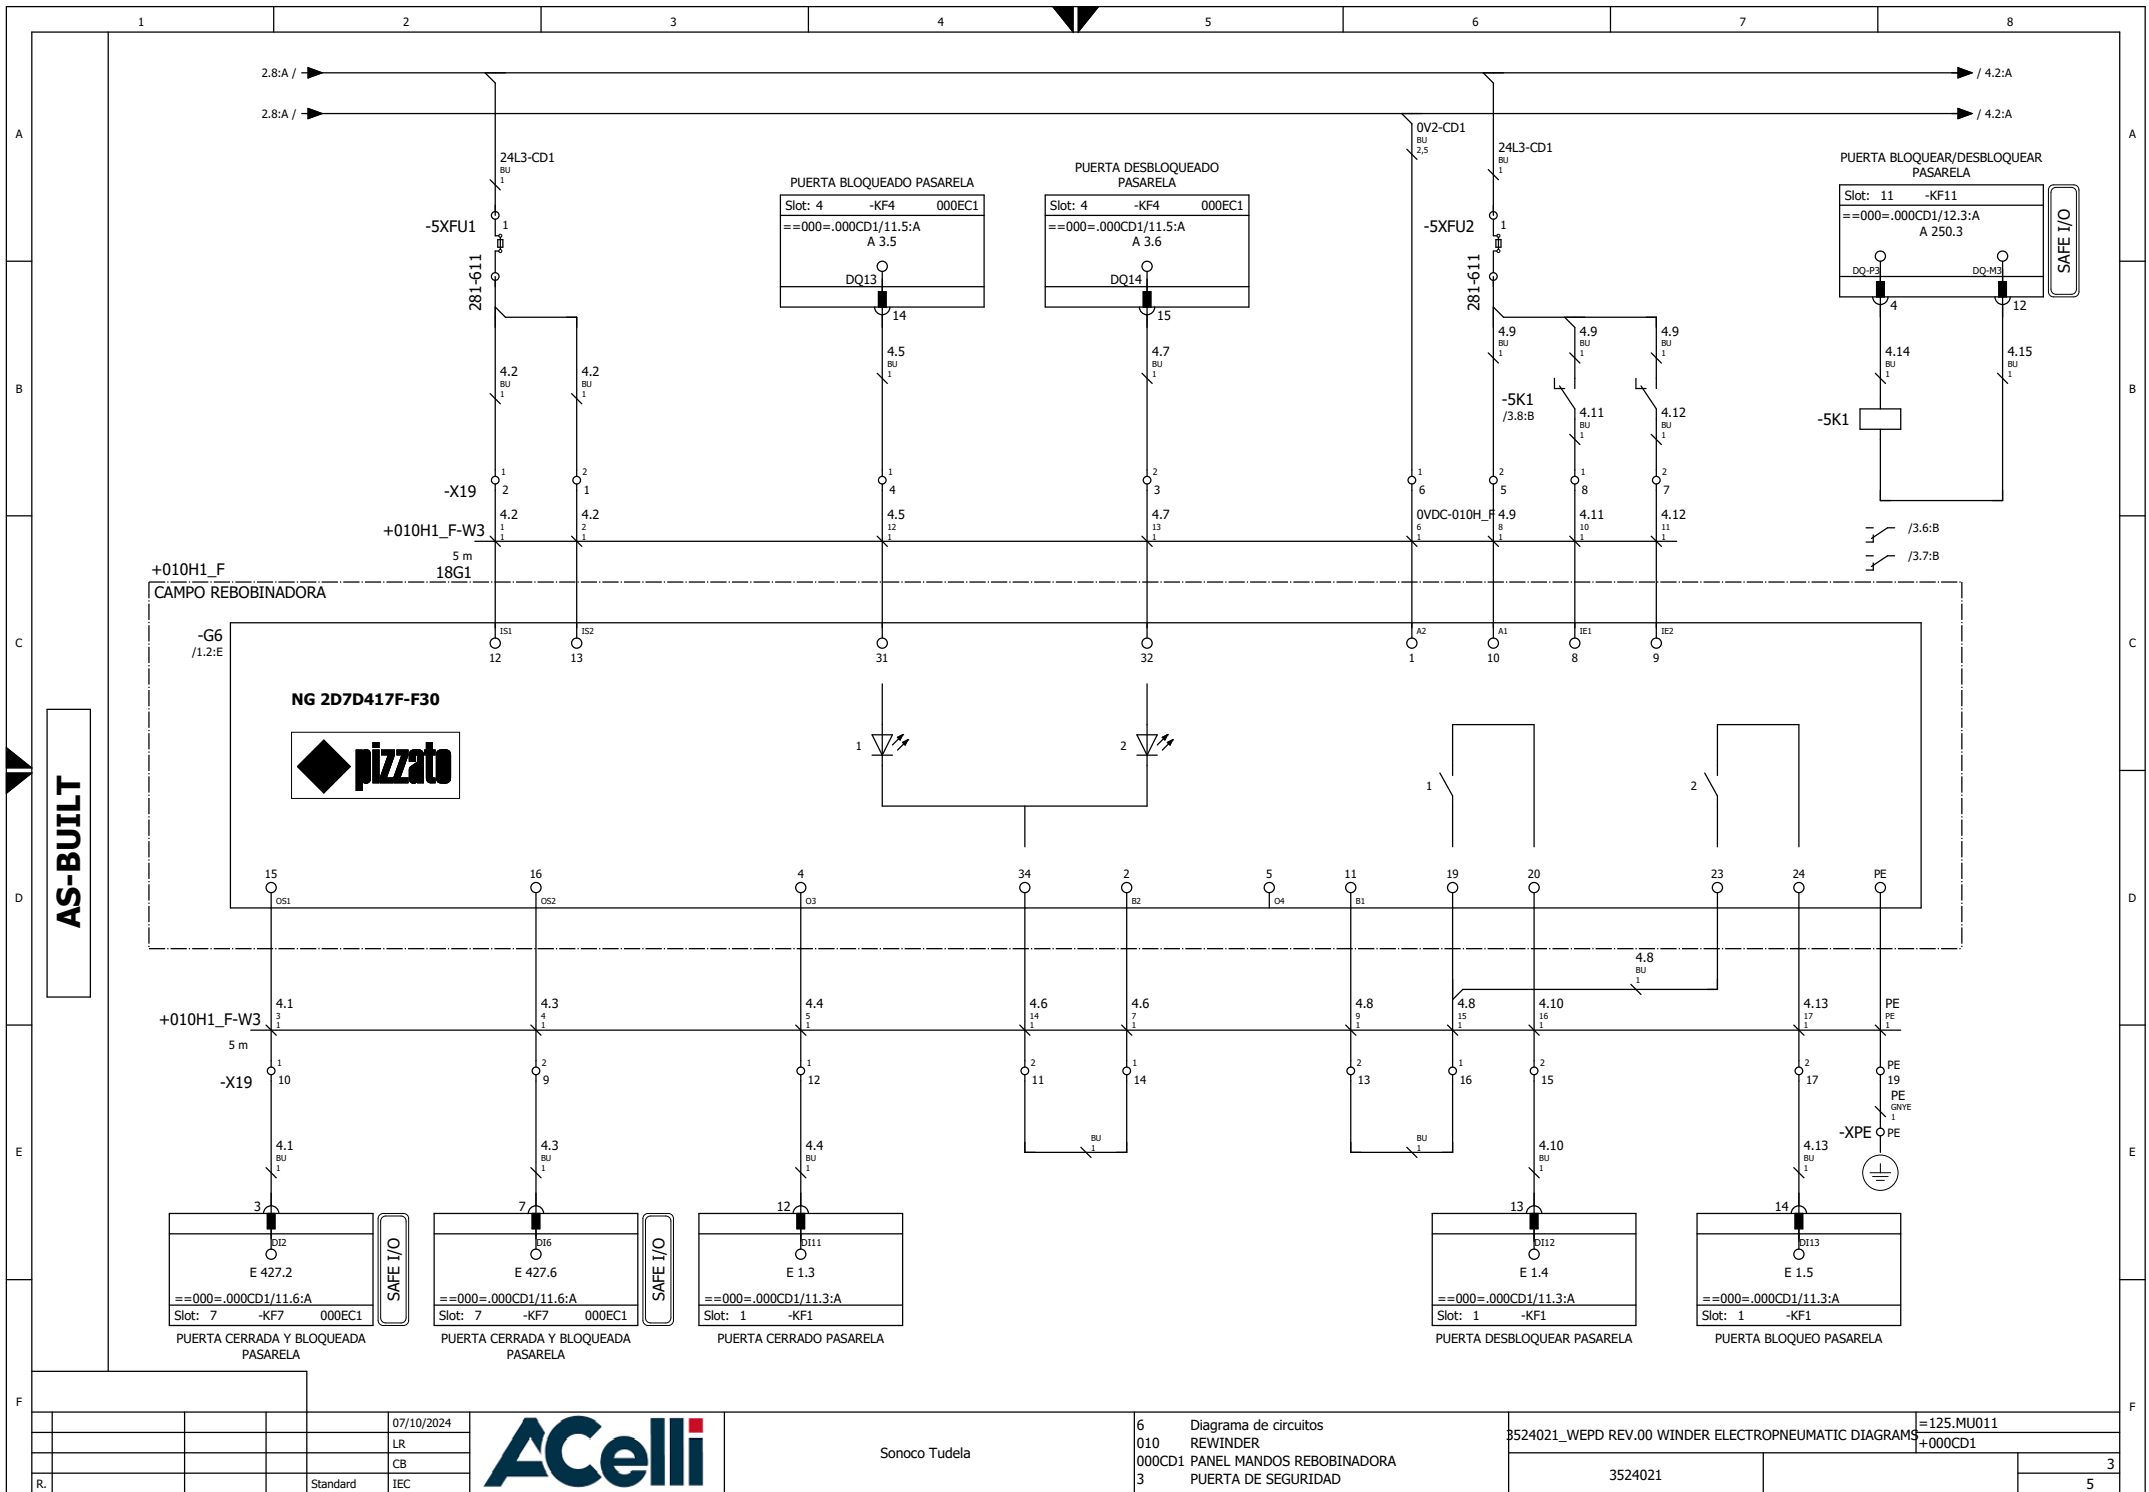

07/10/2024

LR

CB

IEC

ACelli

Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
3 PUERTA DE SEGURIDAD


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

3524021

=125.MU011
+000CD1

3

5

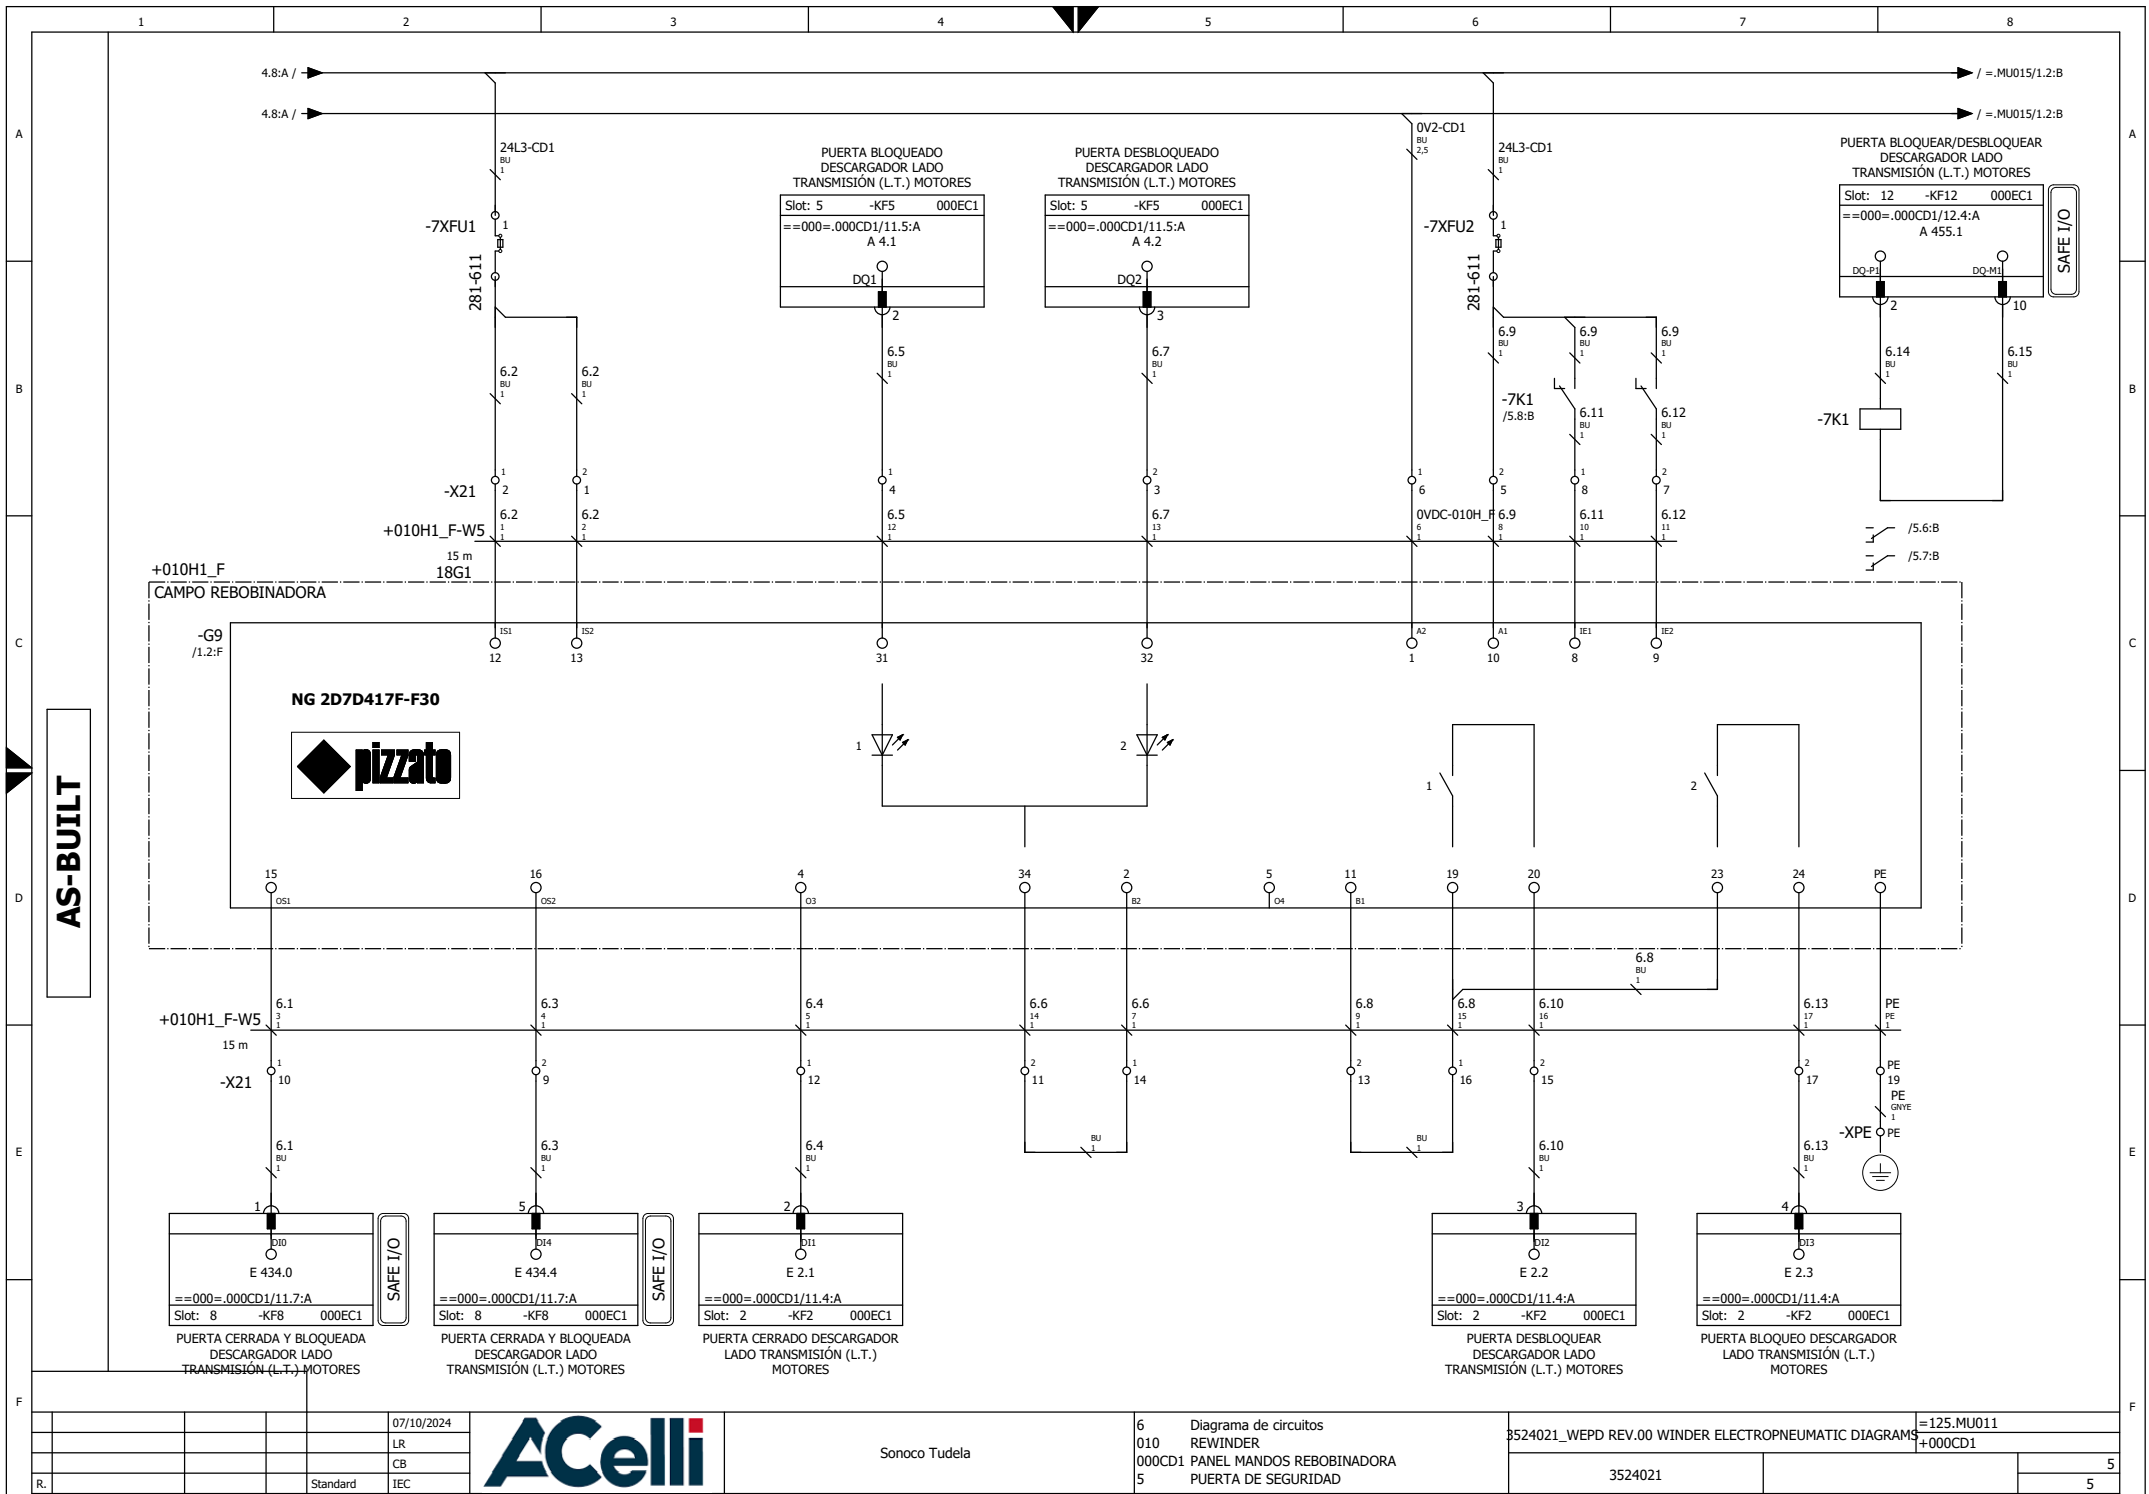

07/10/2024

LR

CB

IEC

ACelli

Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
5 PUERTA DE SEGURIDAD

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

=125.MU011
+000CD1

3524021

5

5


Descripción


Automatic spreading device

Disposición

MU015

AS-BUILT

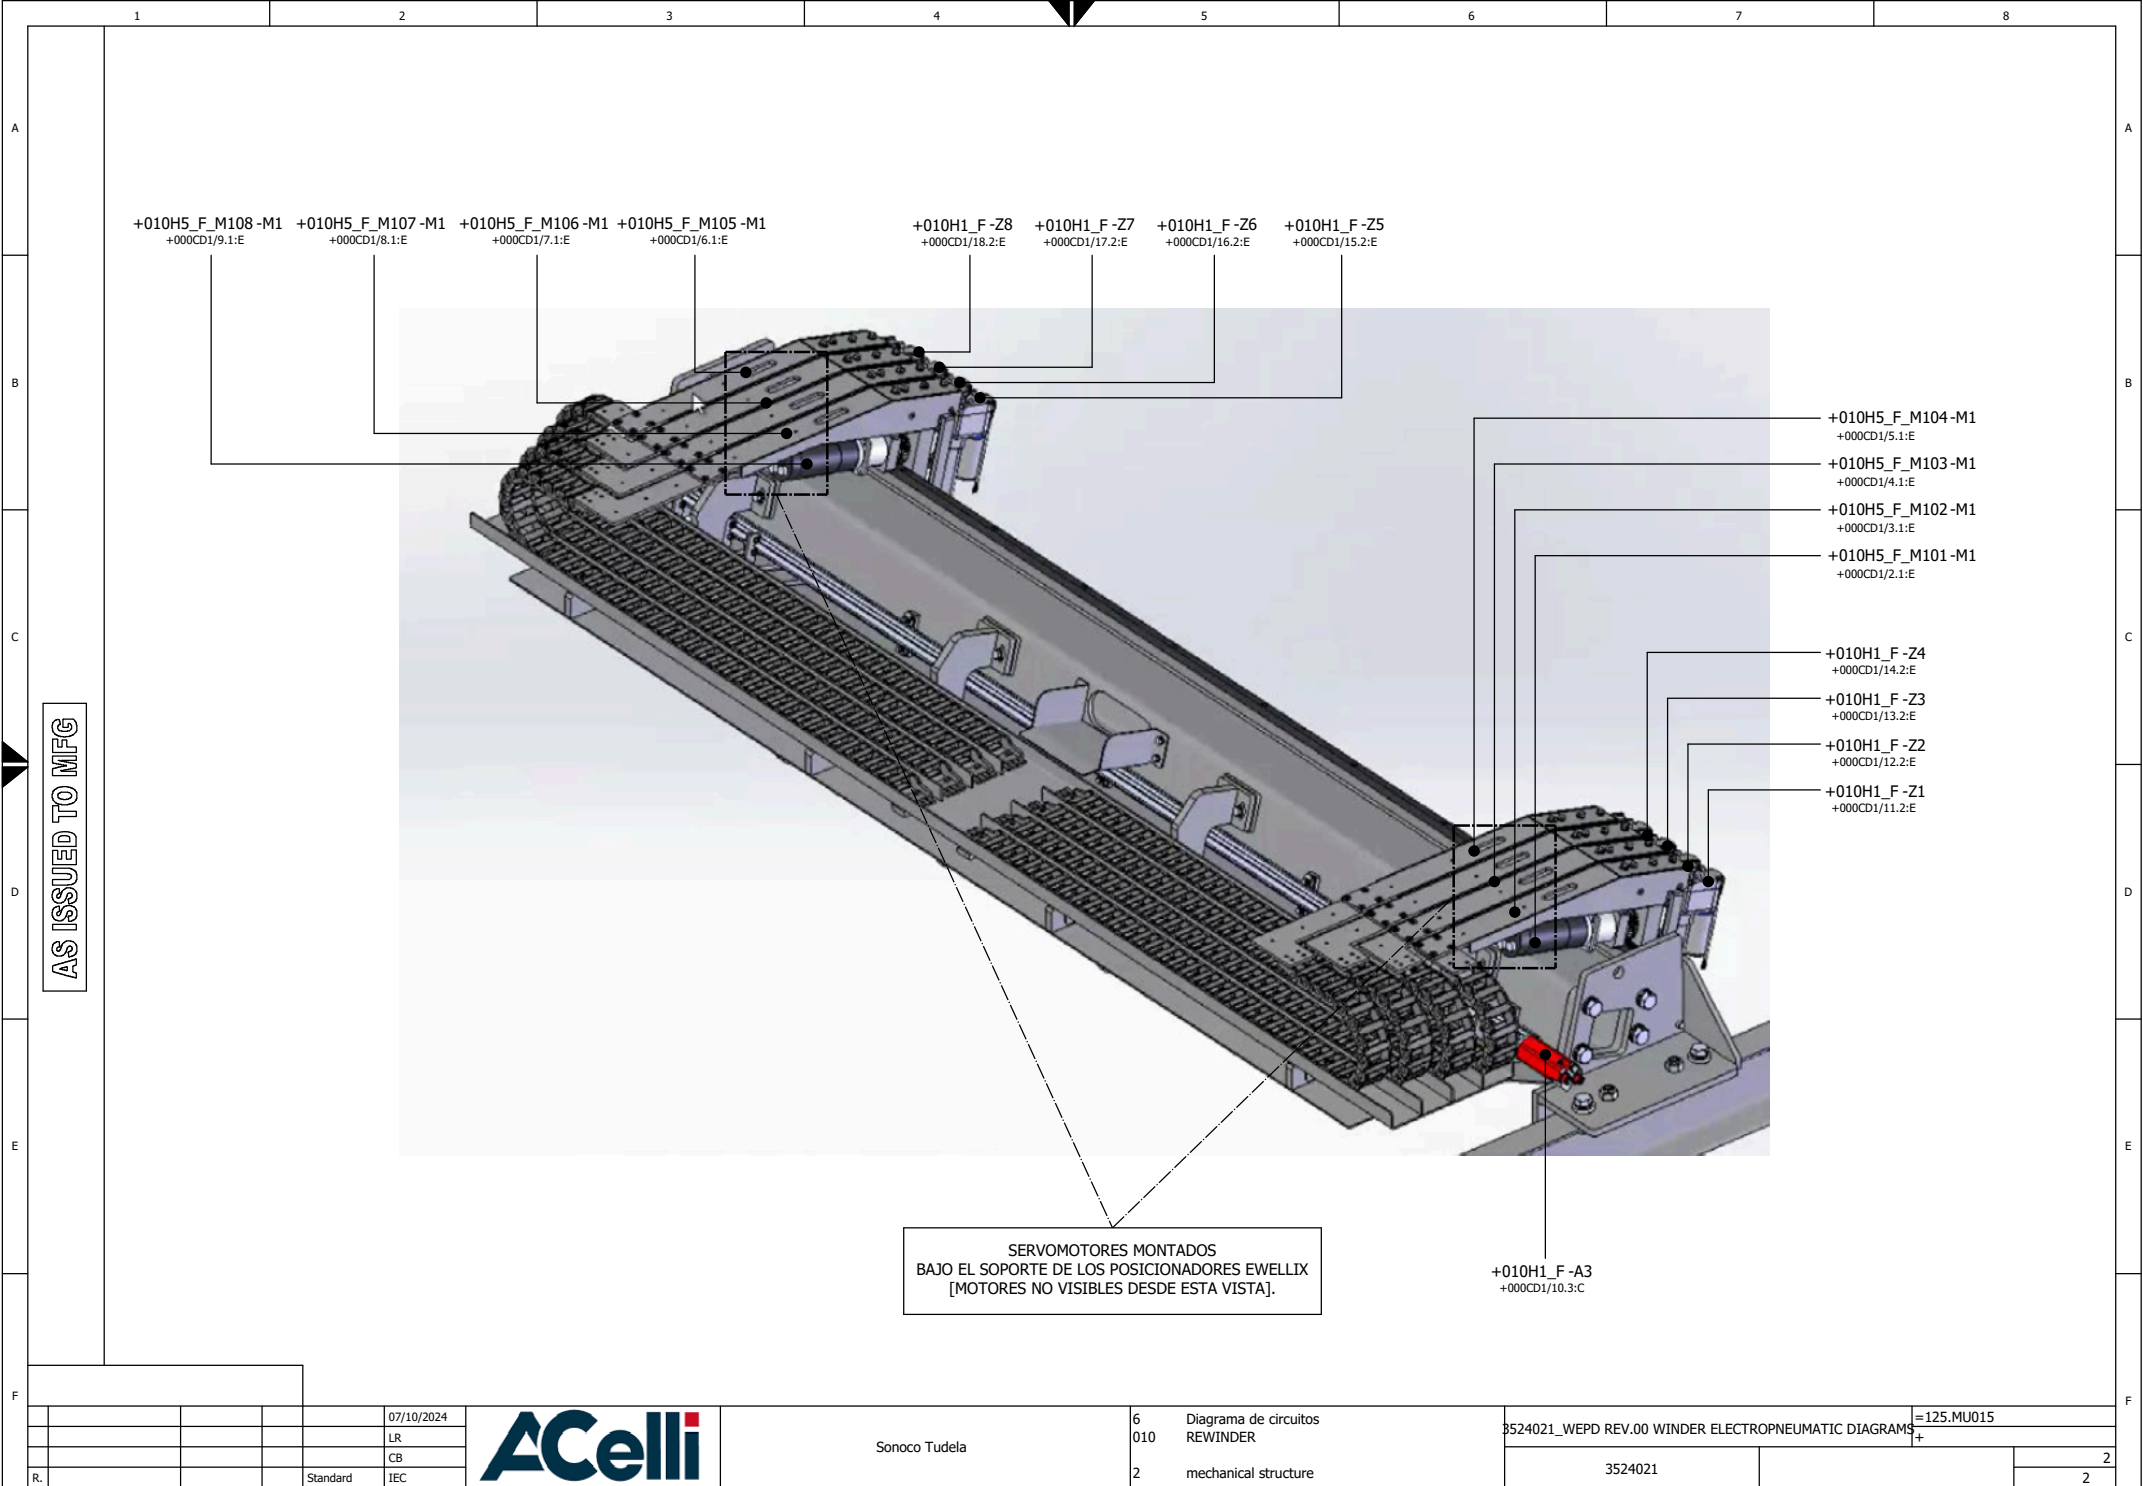

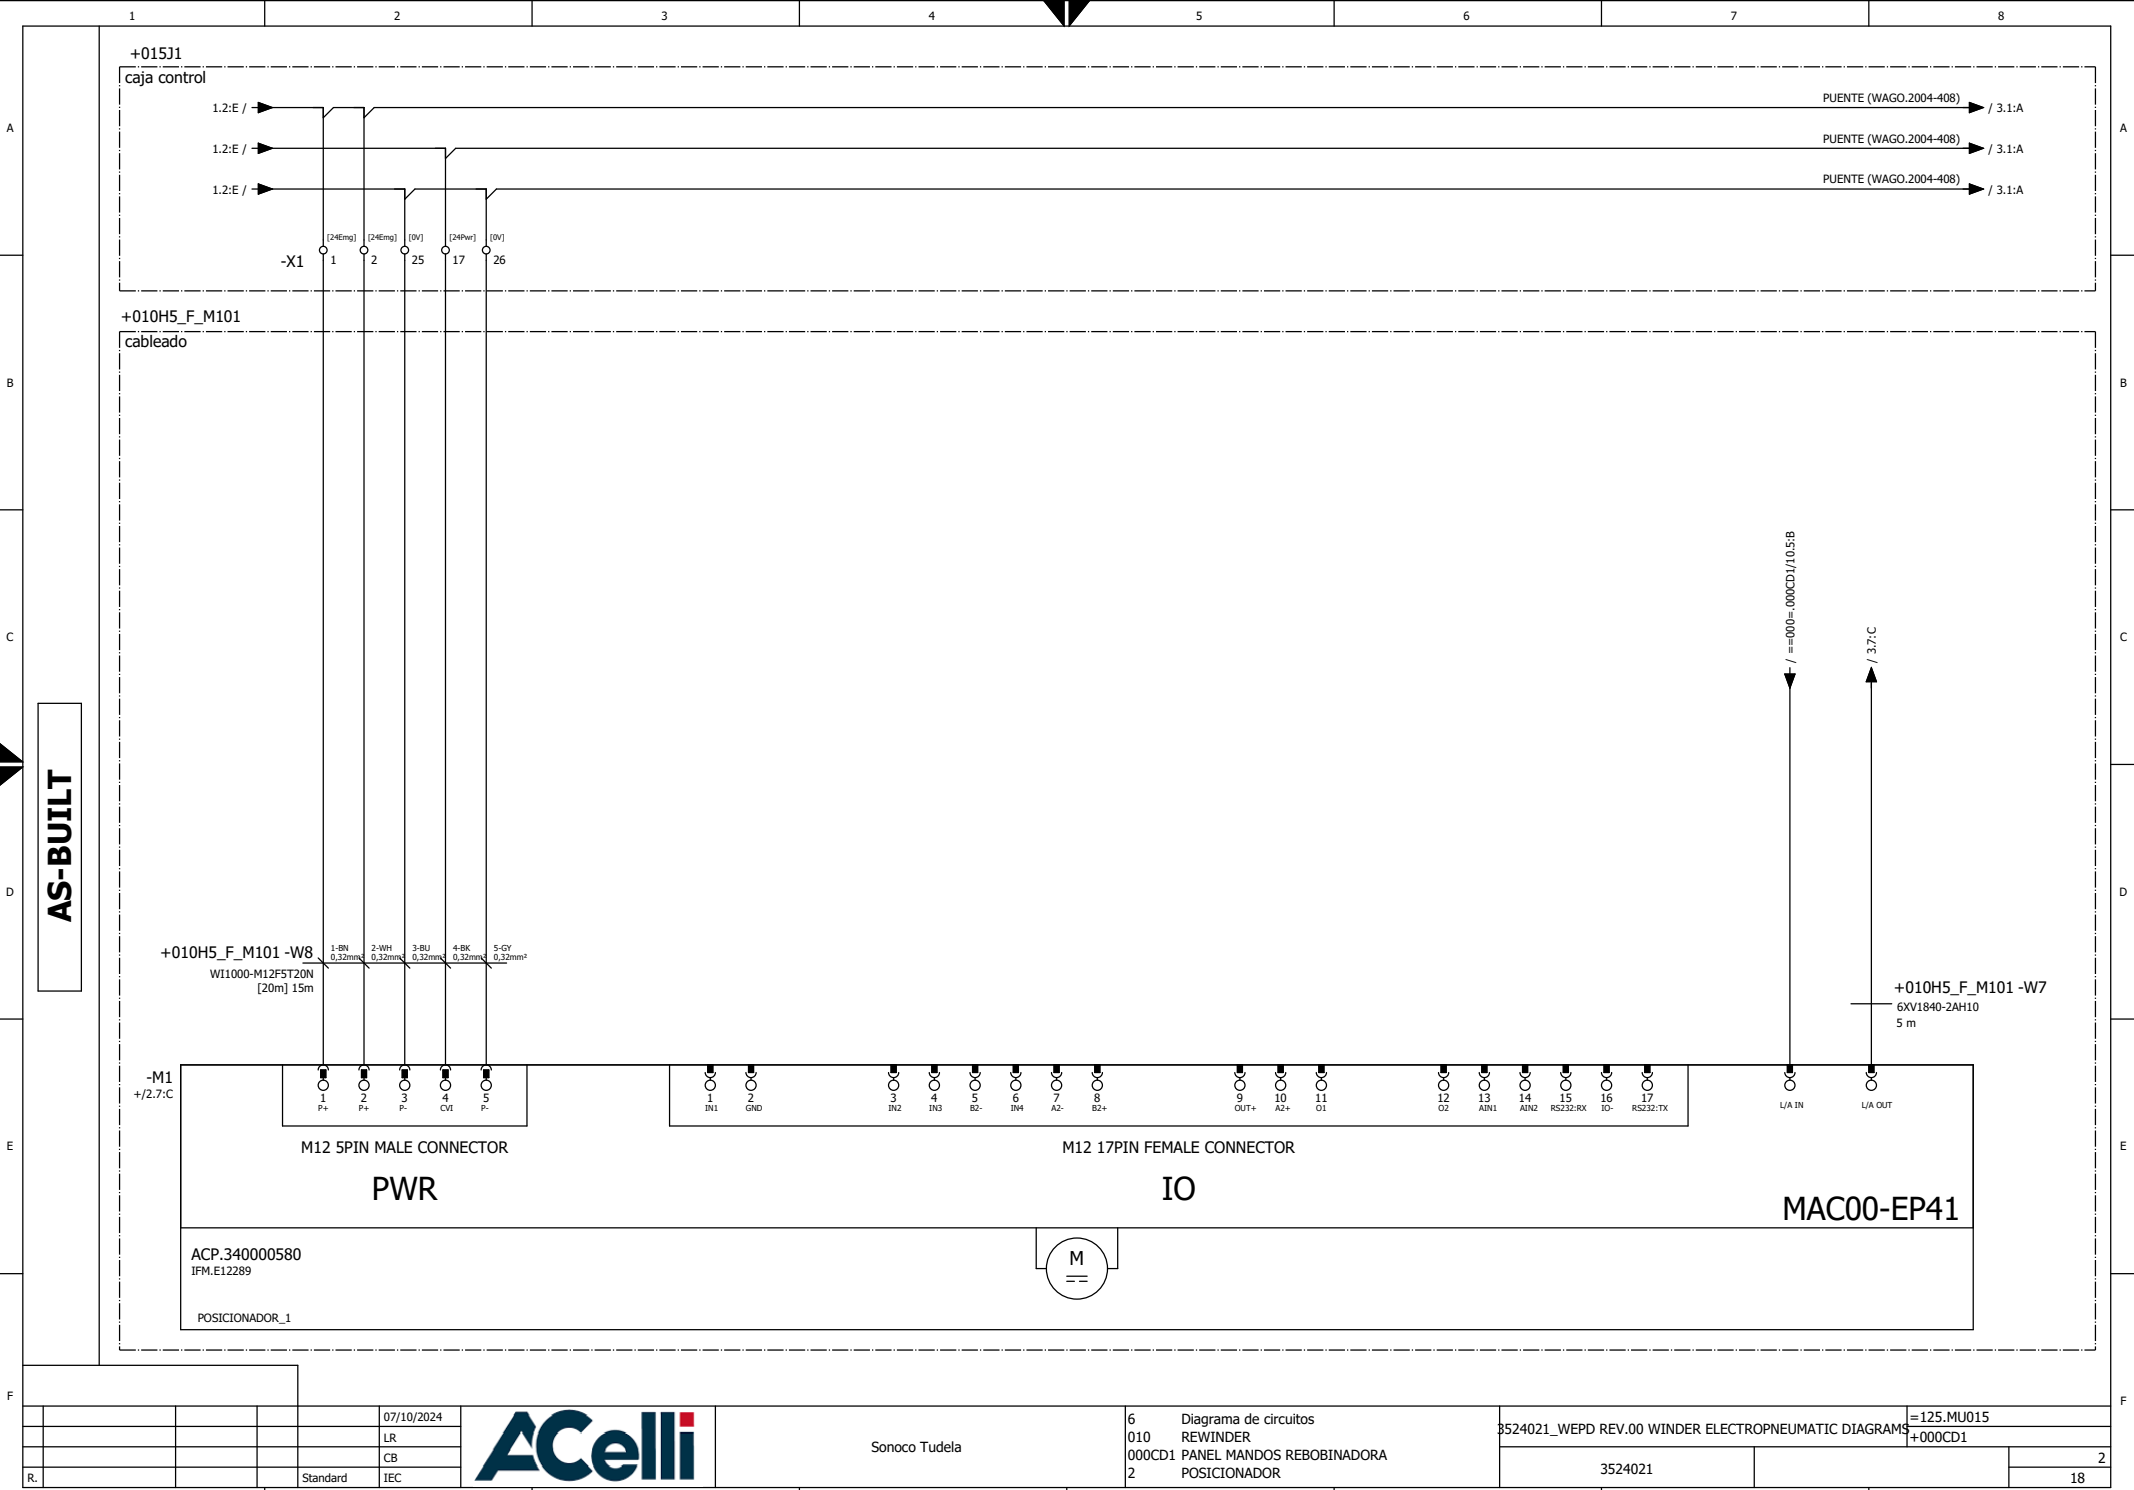

AS-BUILT



Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
2 POSICIONADOR


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS


=125.MU015
+000CD1


3524021


2

18

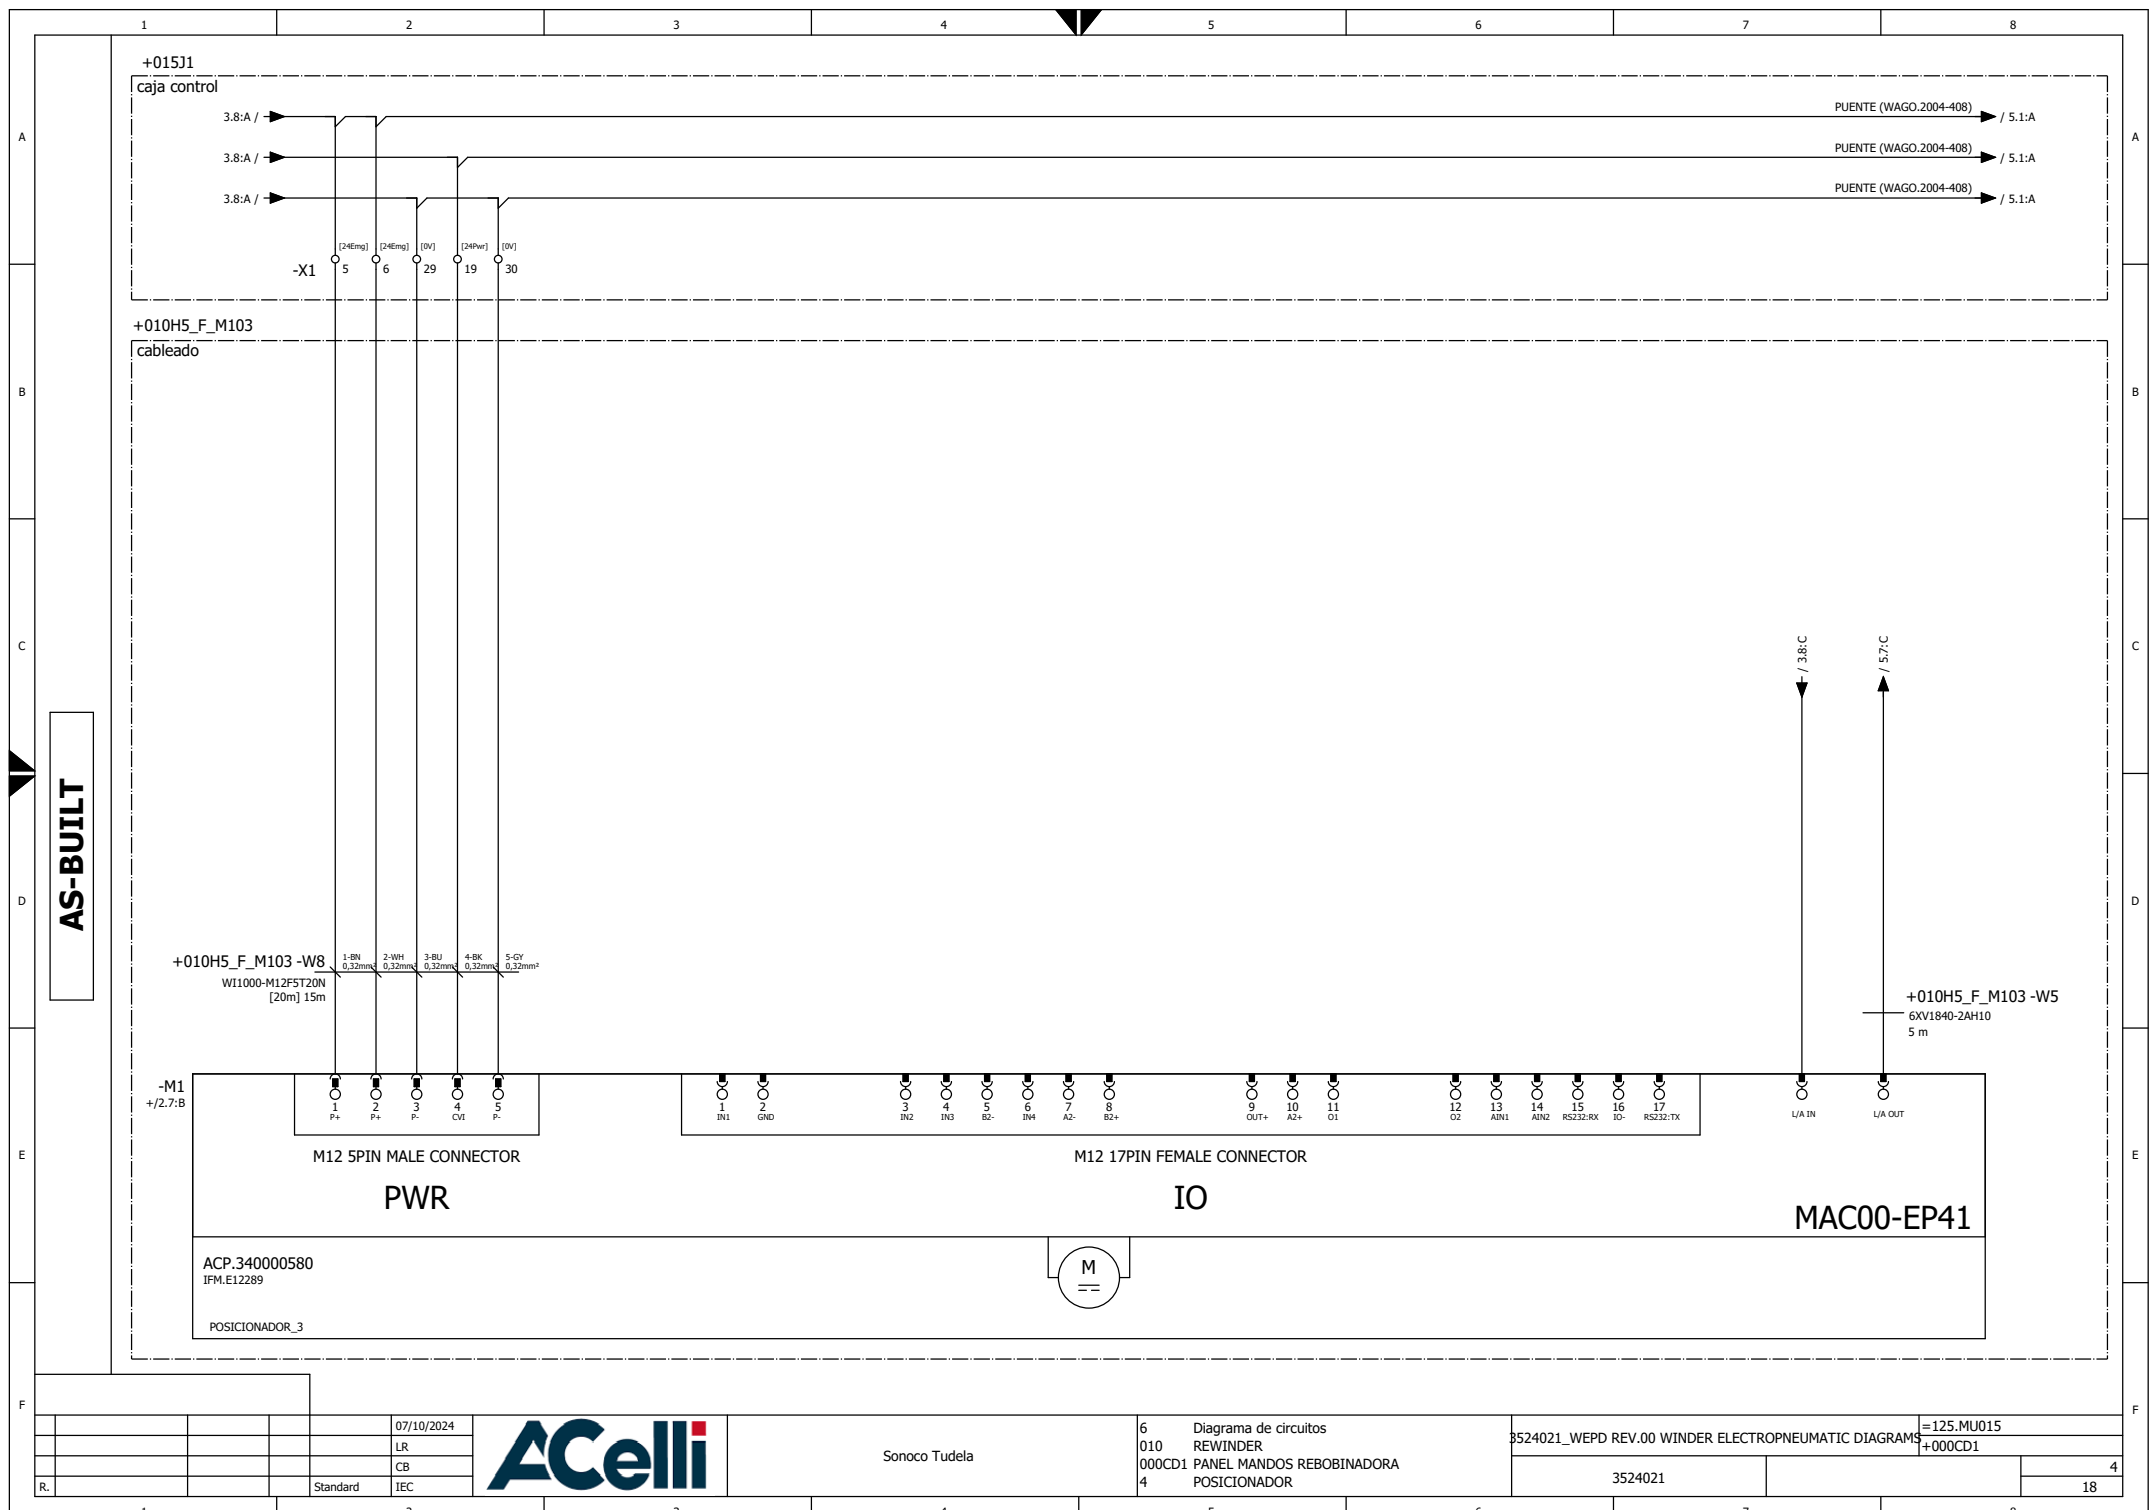

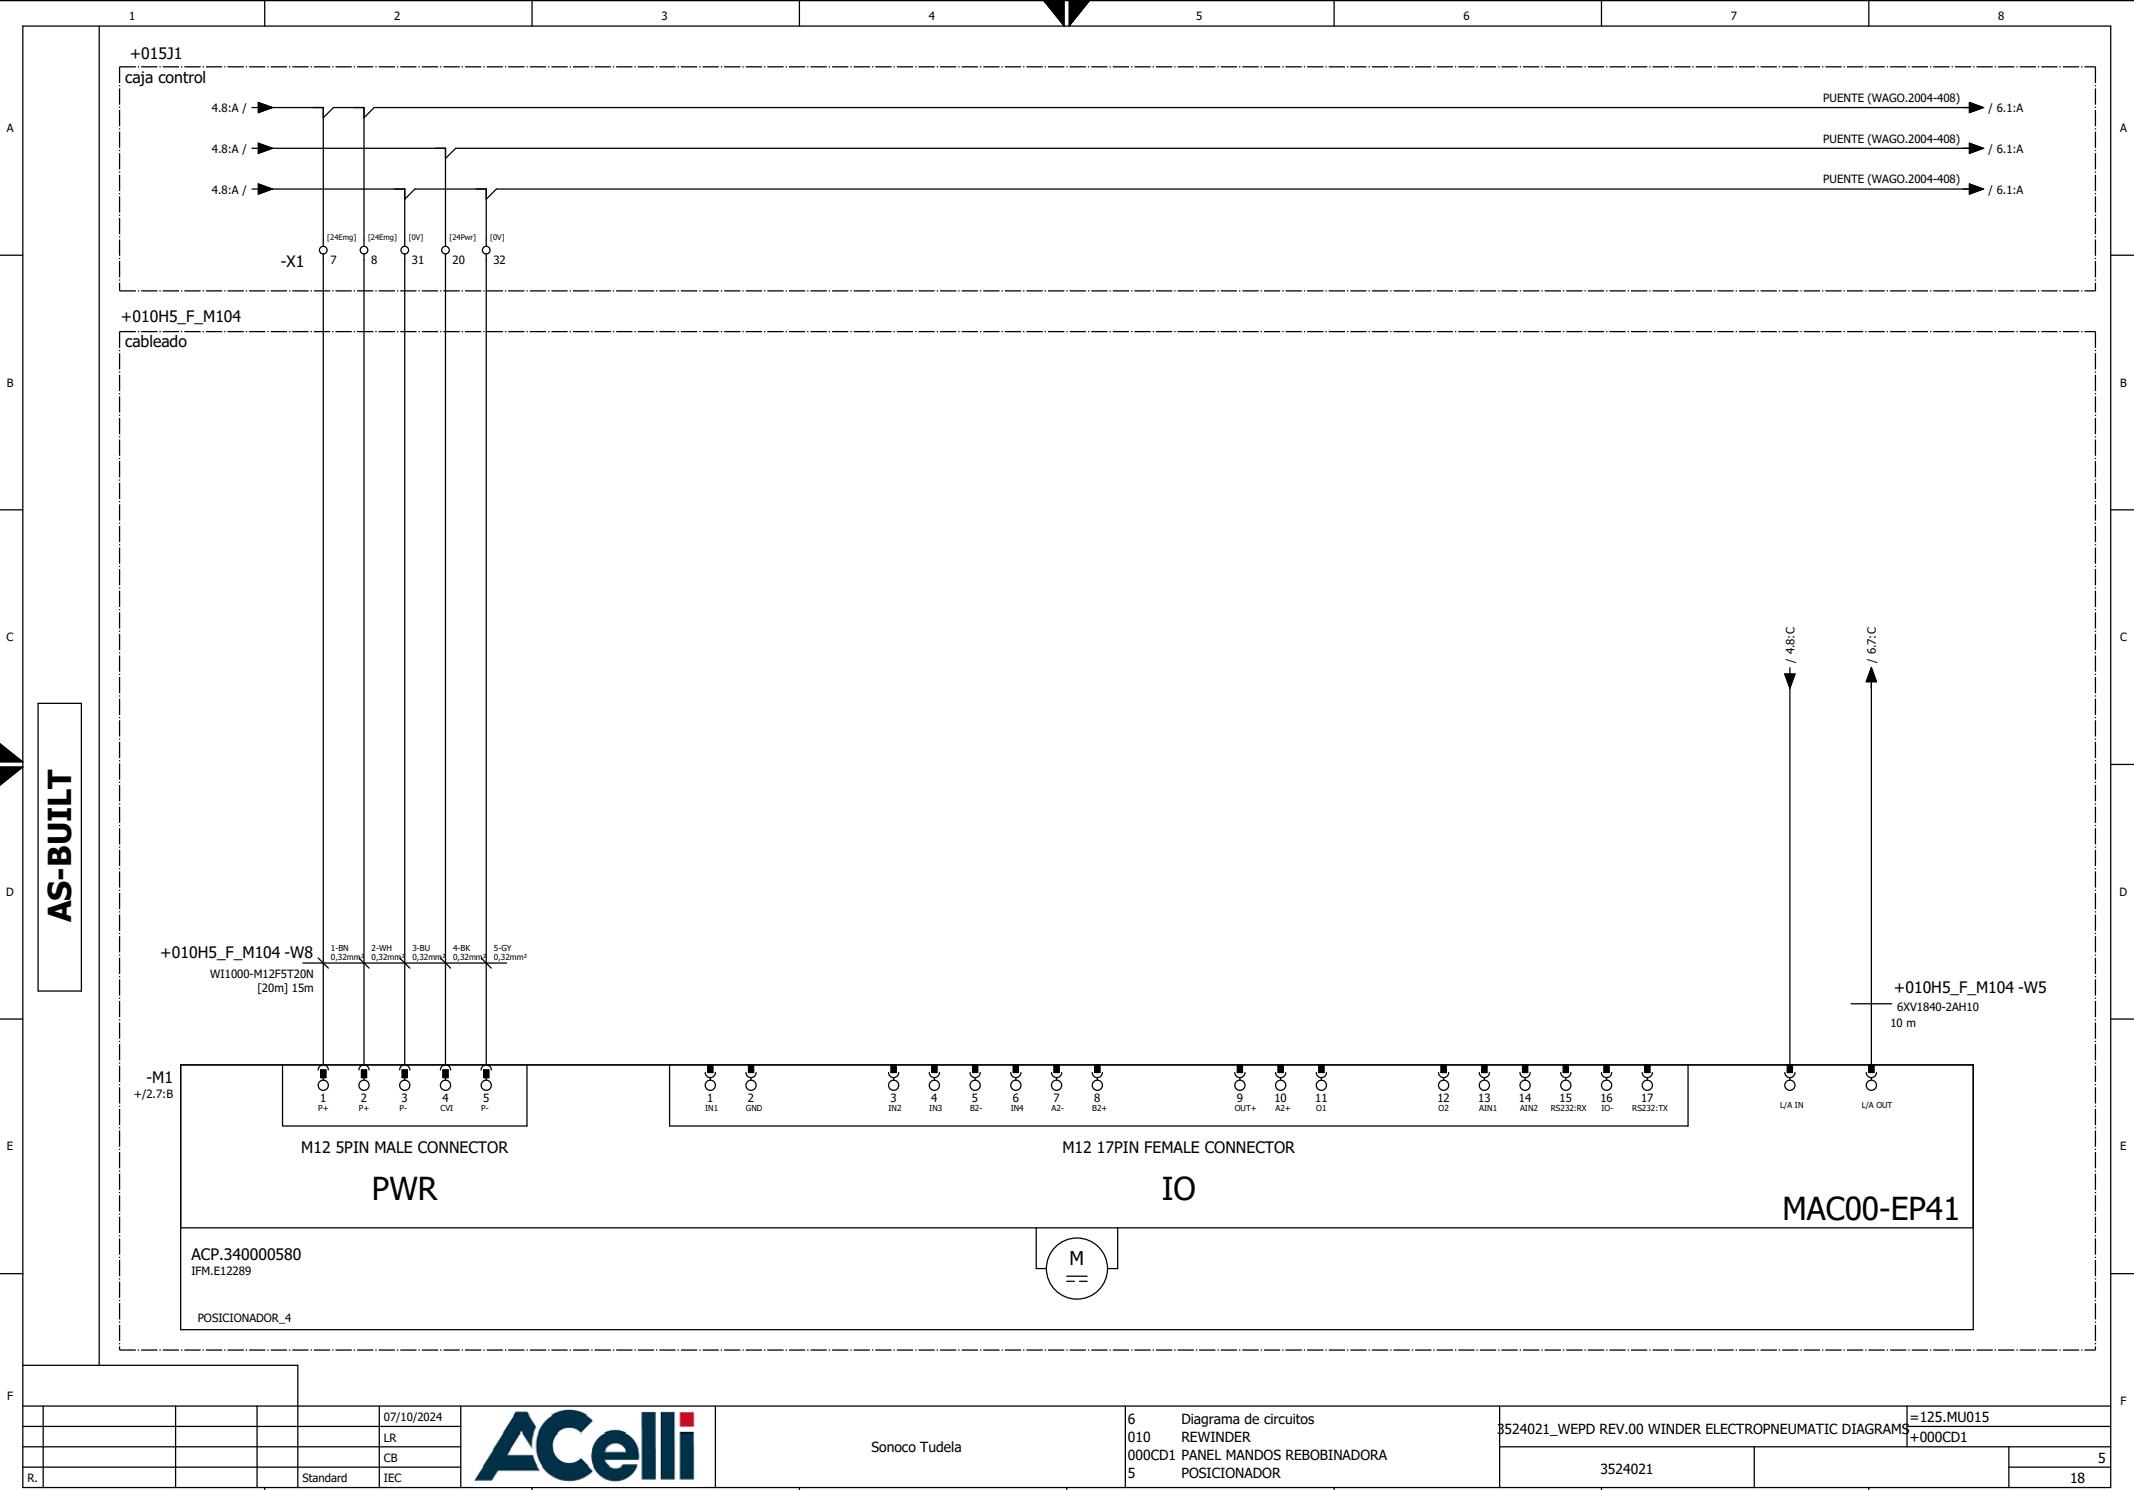

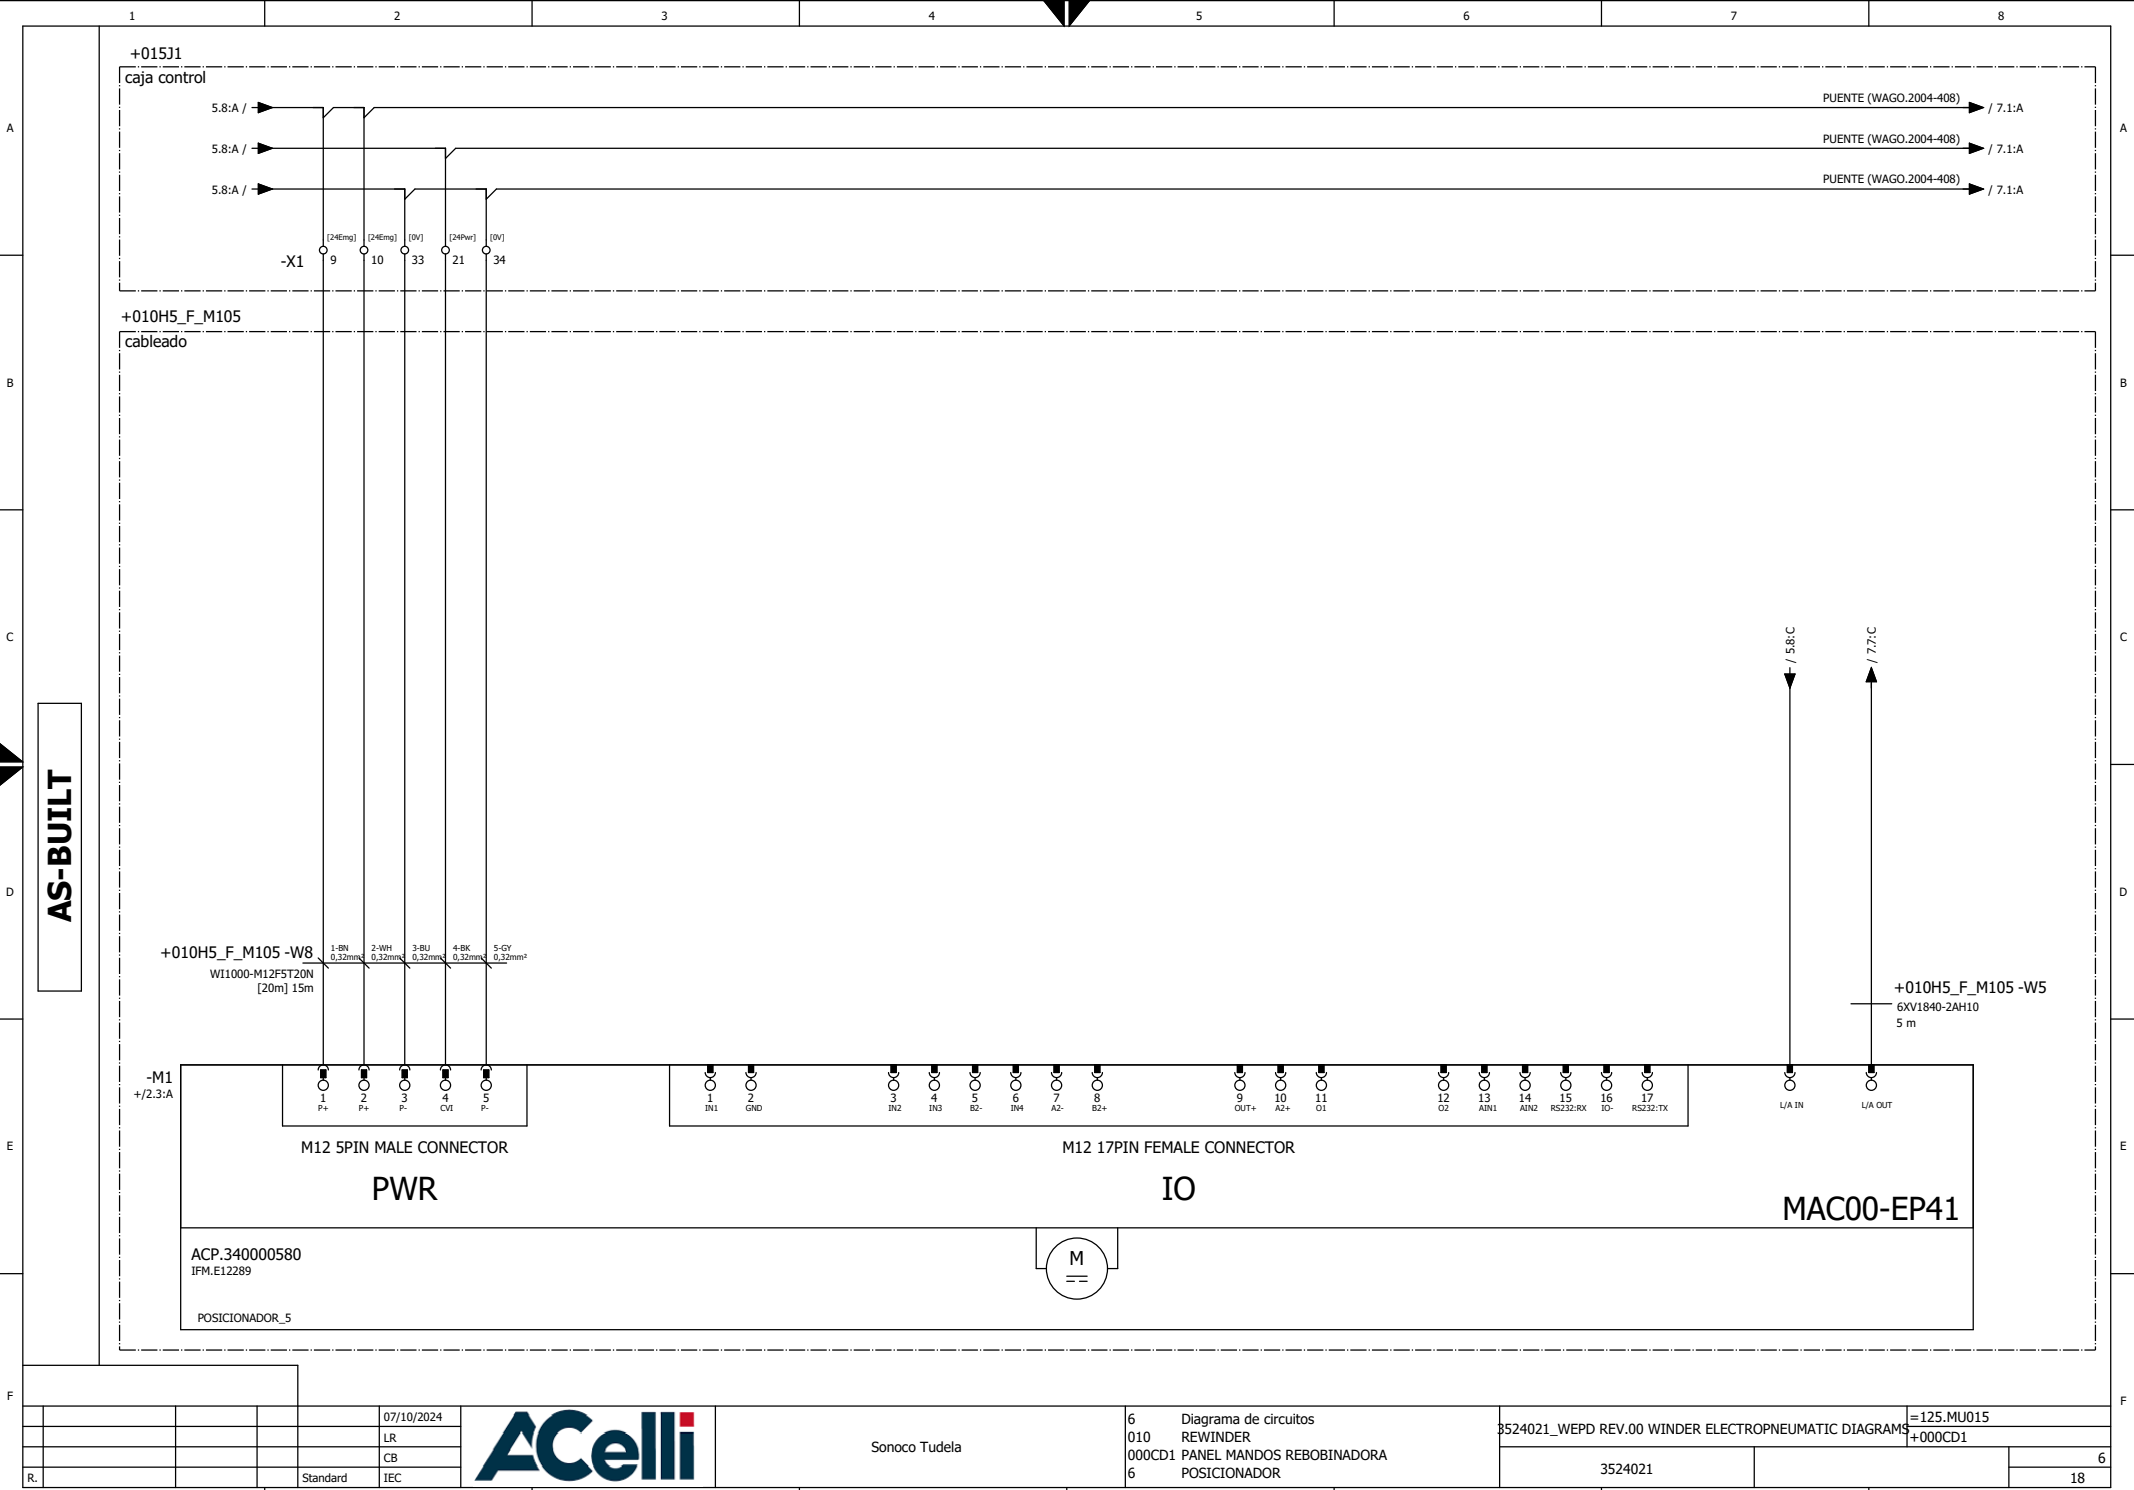

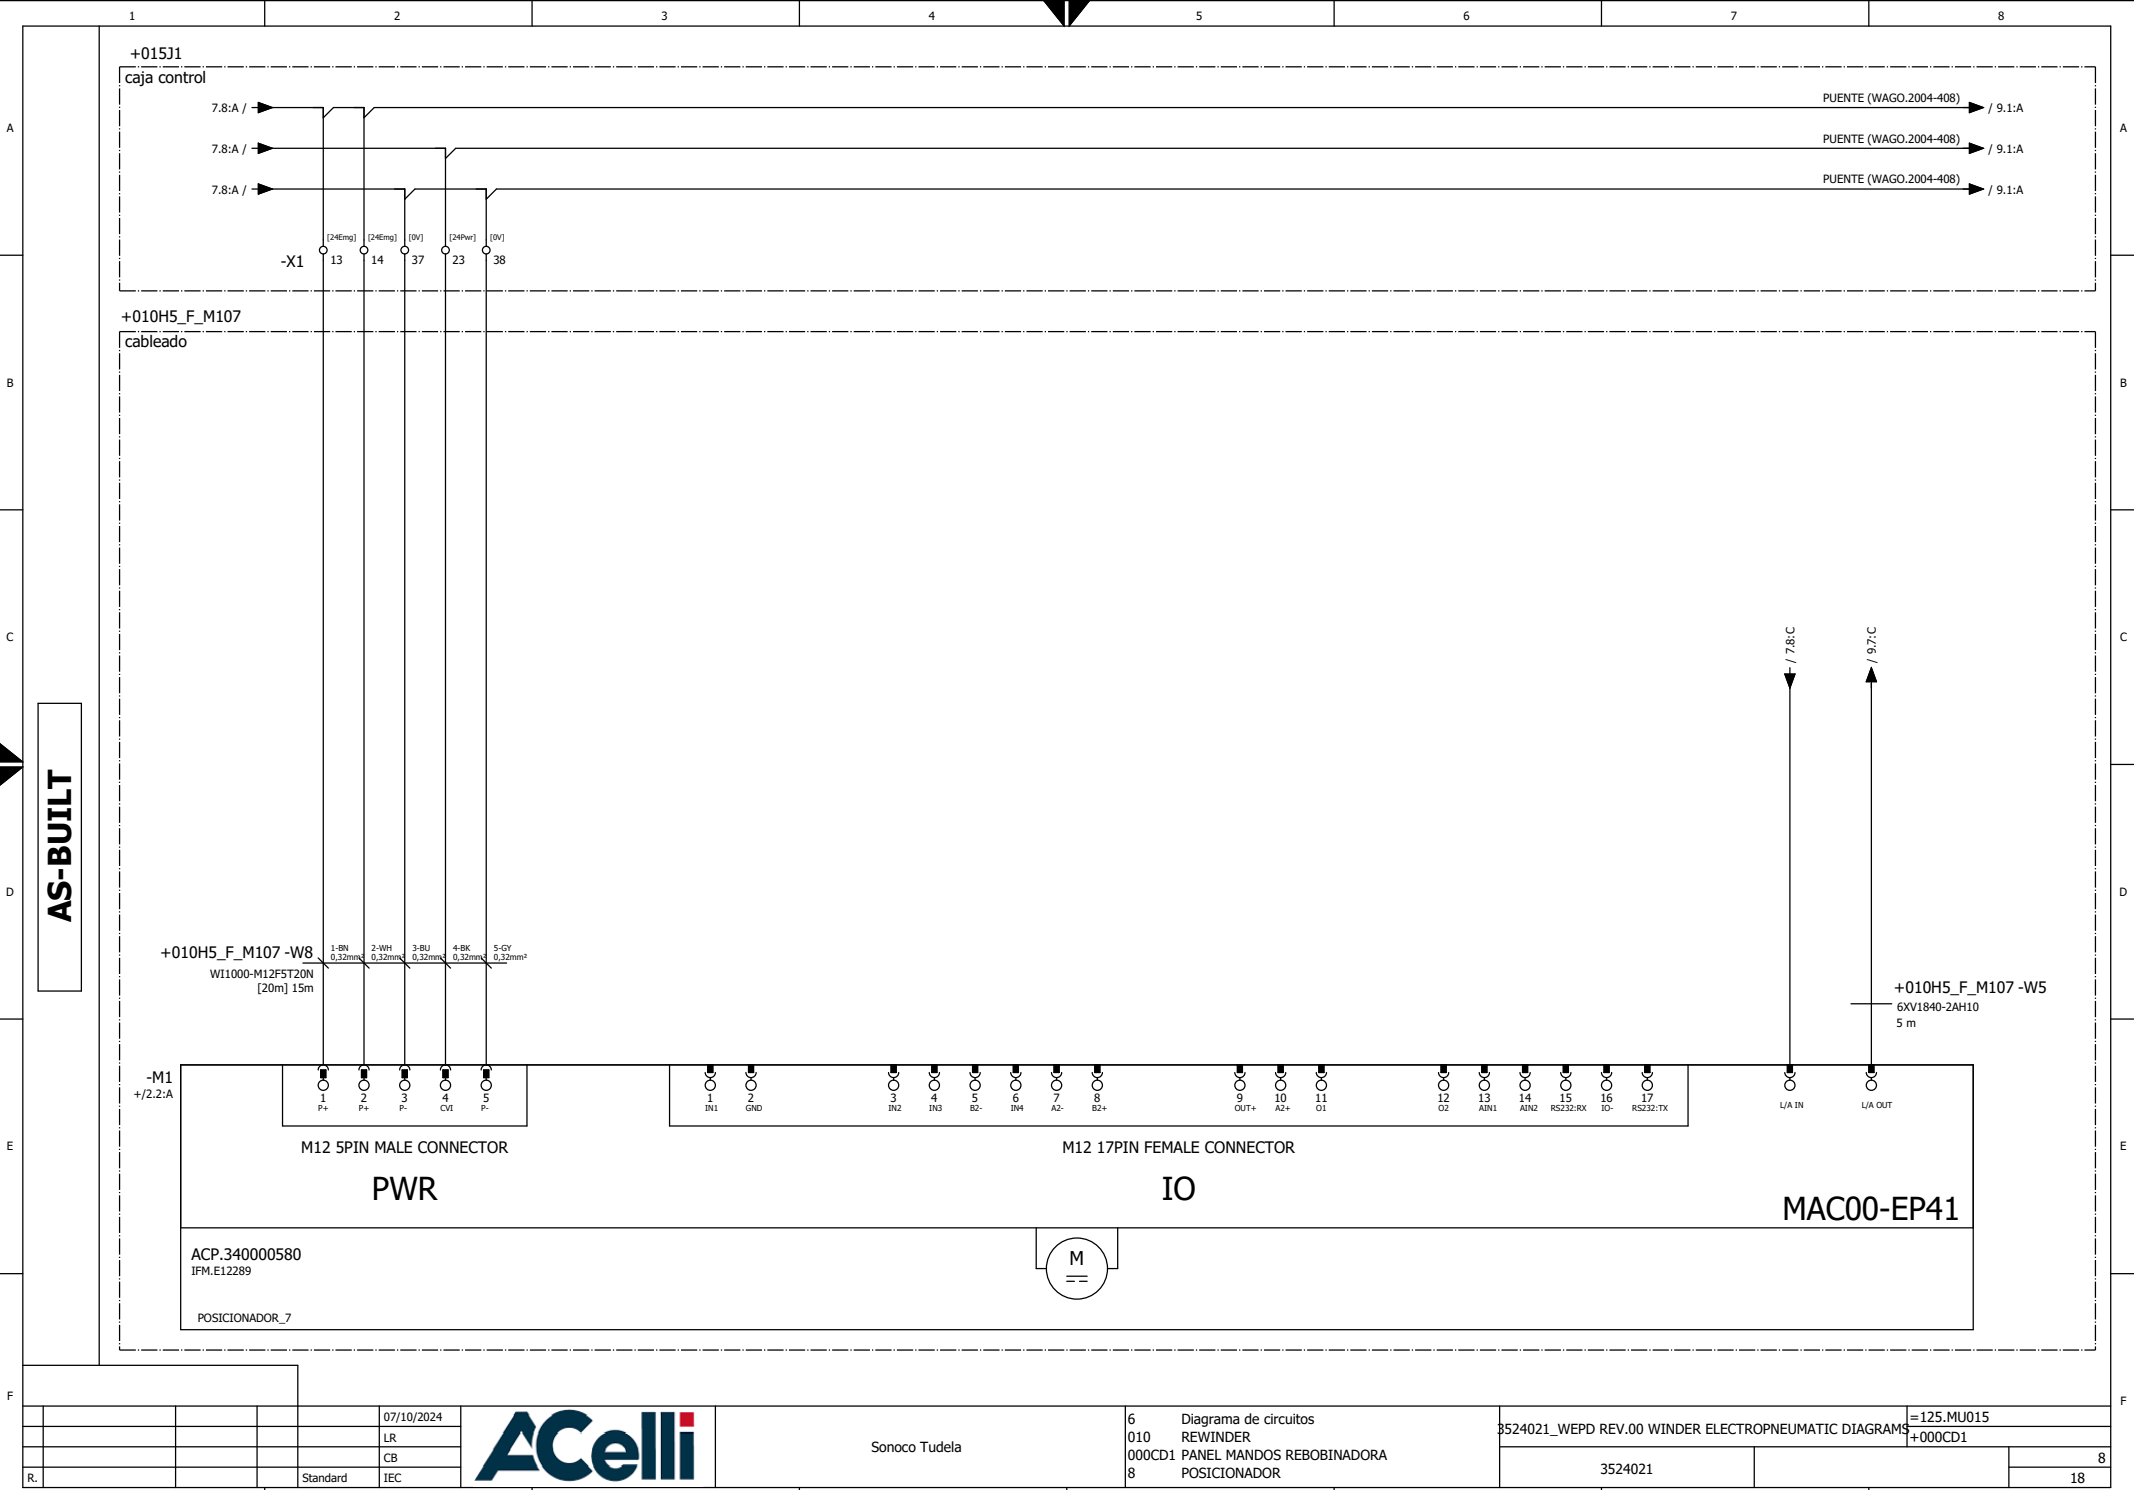

AS-BUILT



Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
8 POSICIONADOR


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS


3524021


=125.MU015
+000CD1


8

18

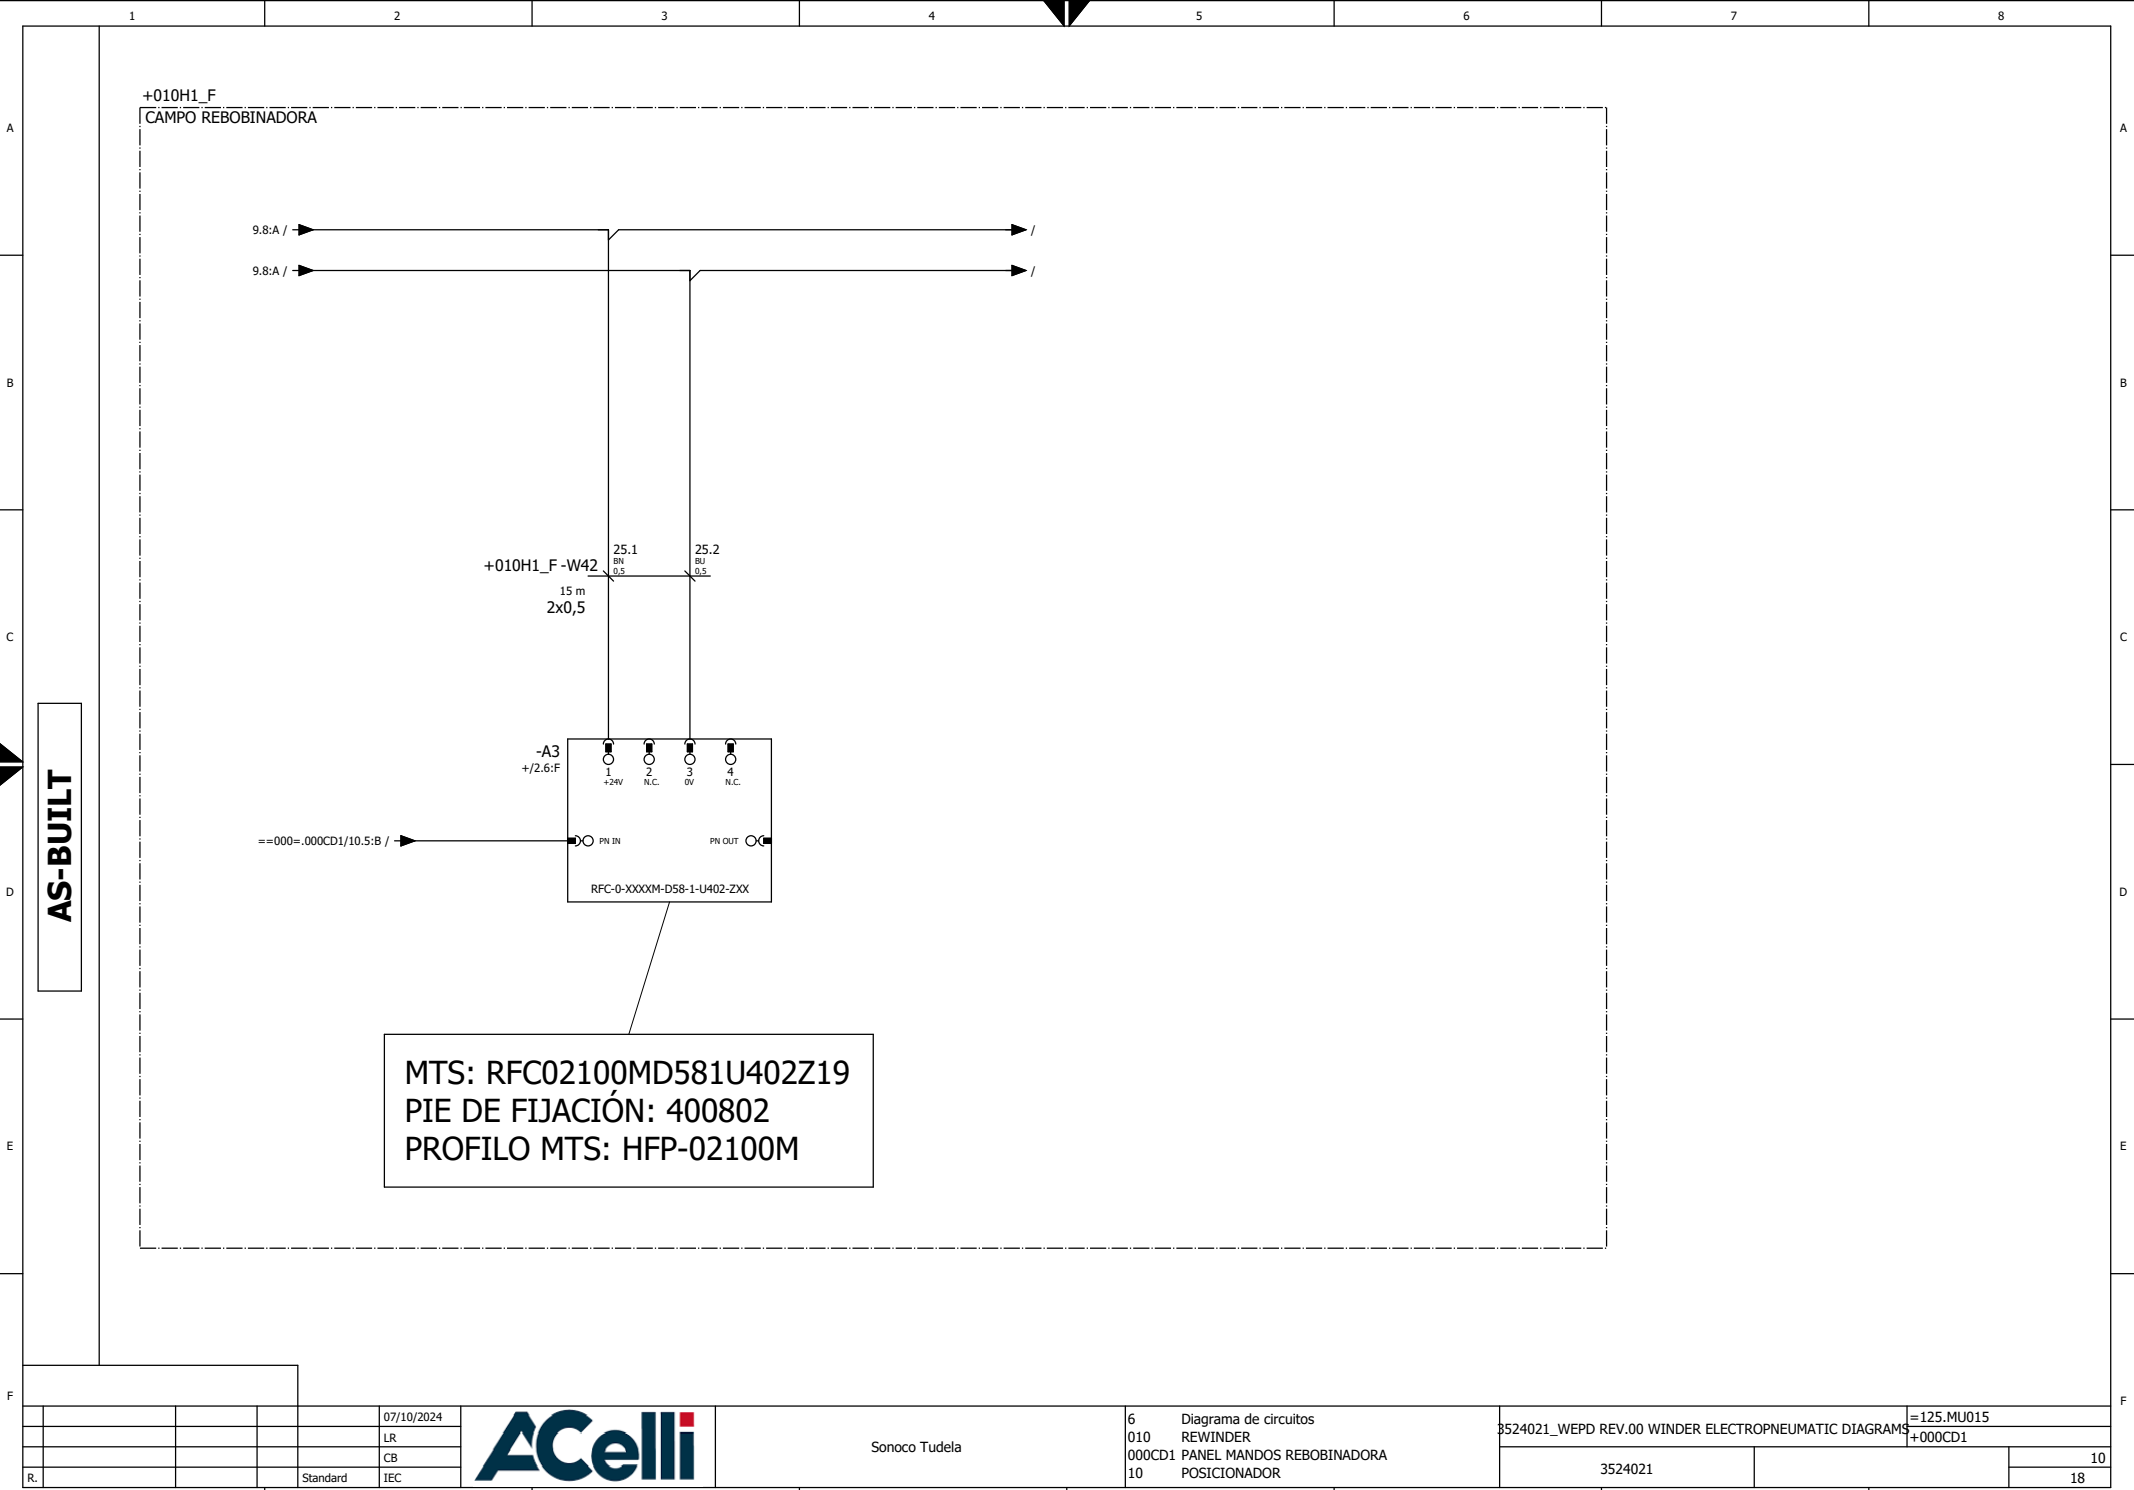

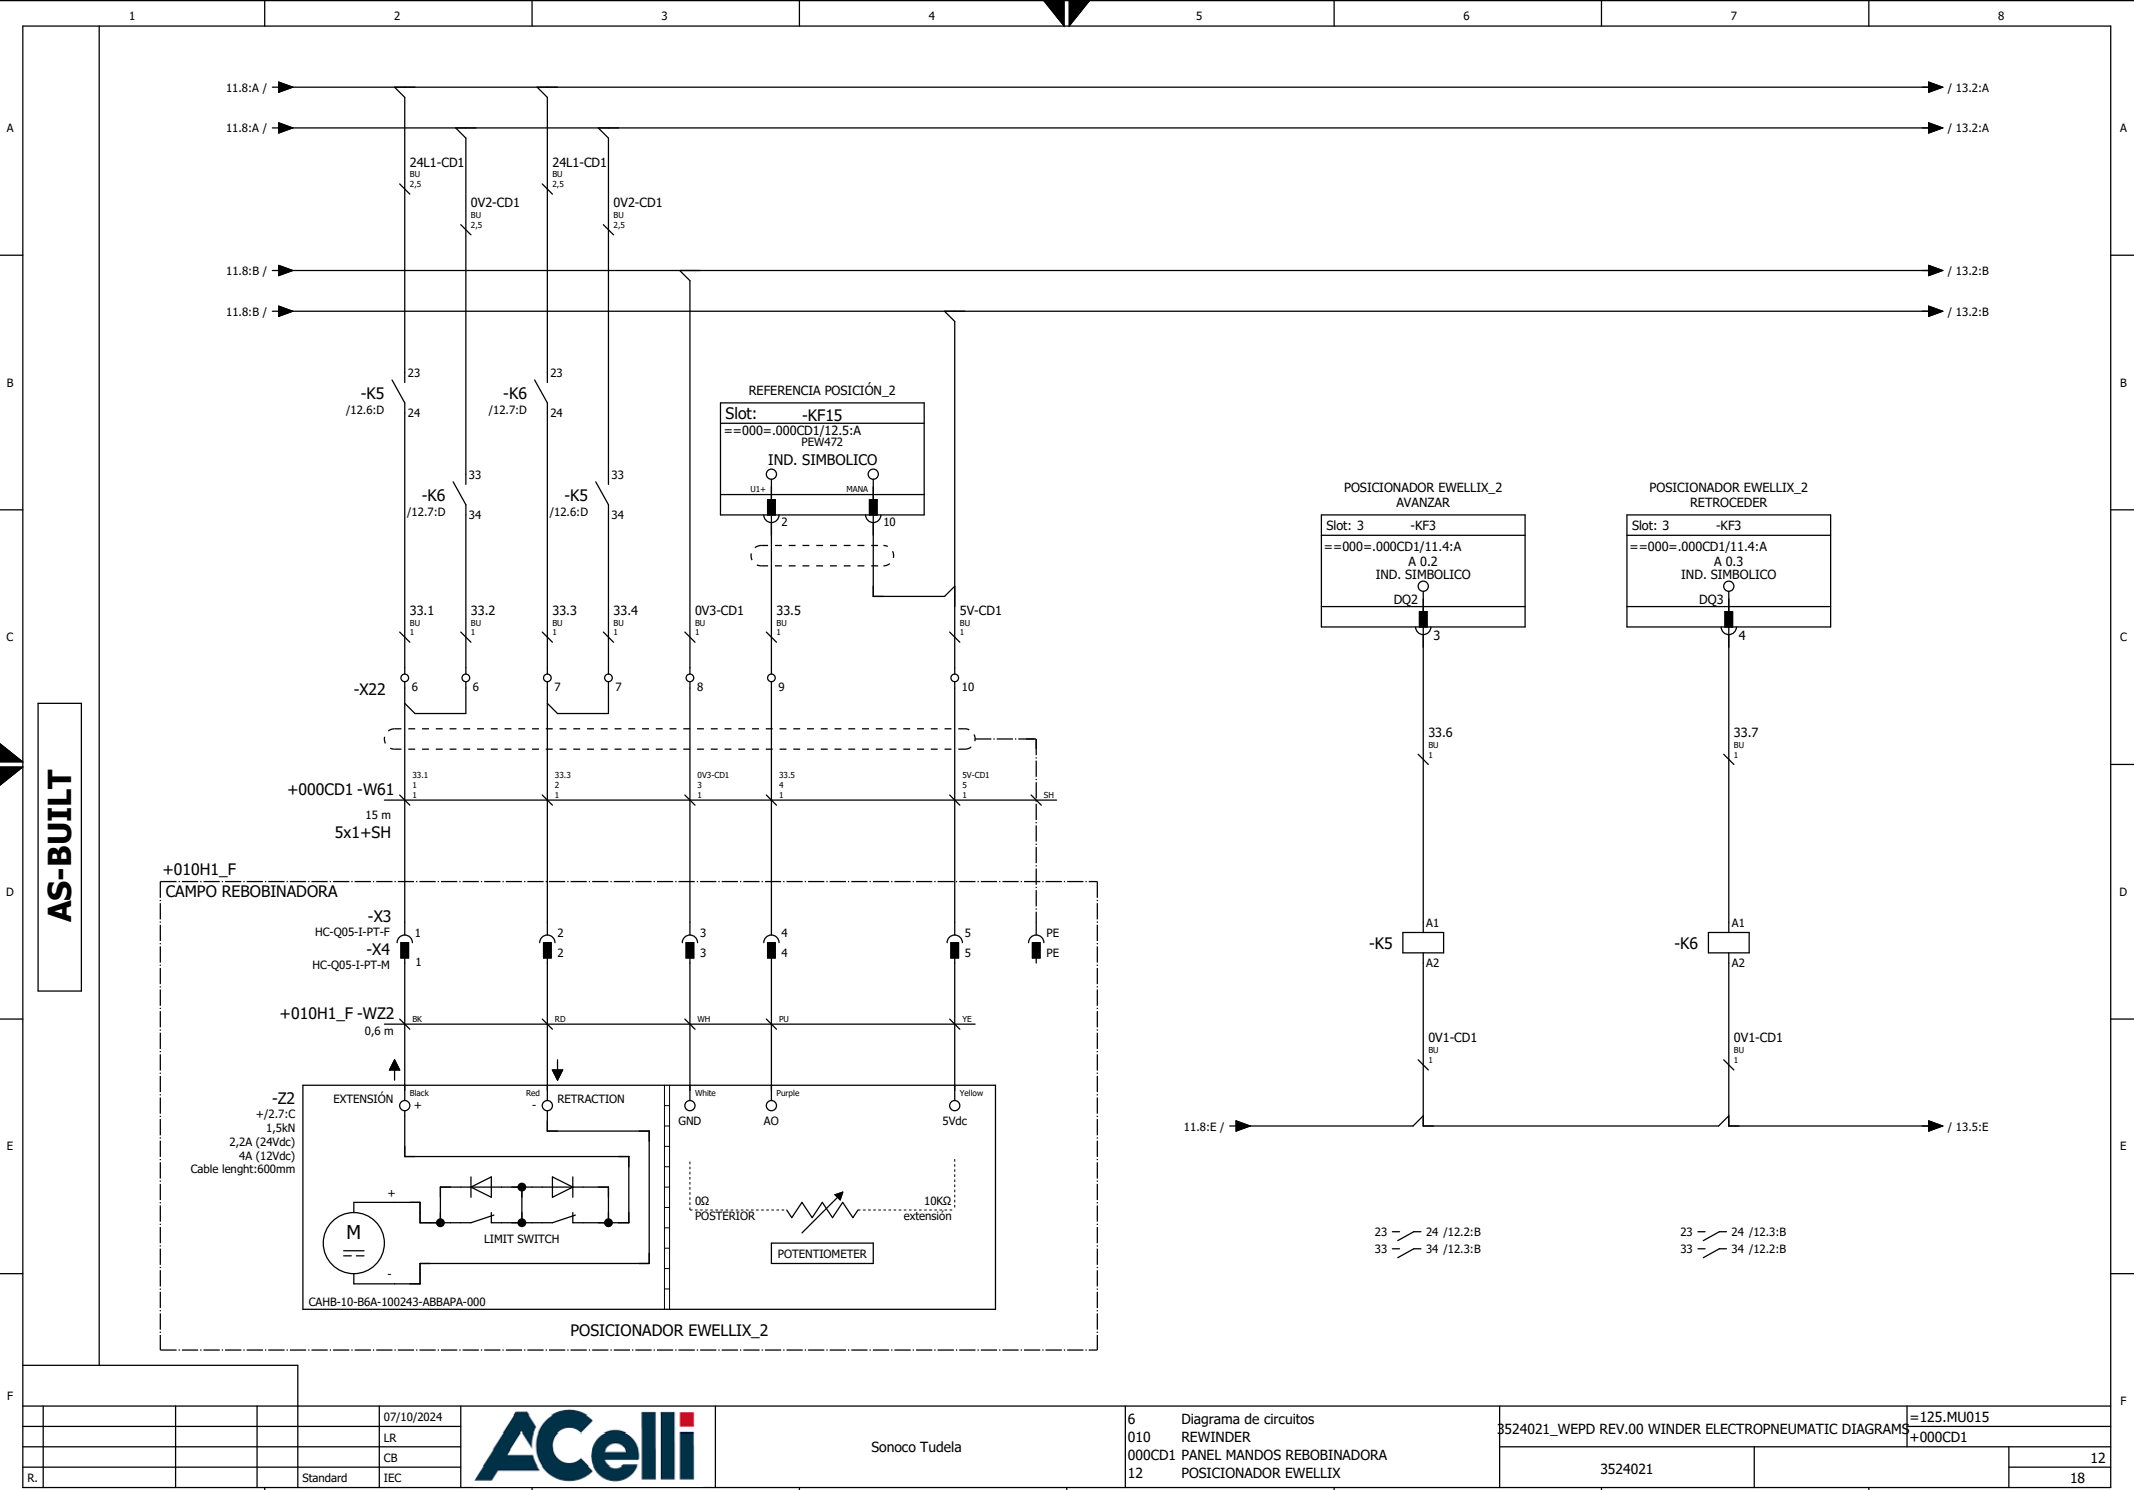

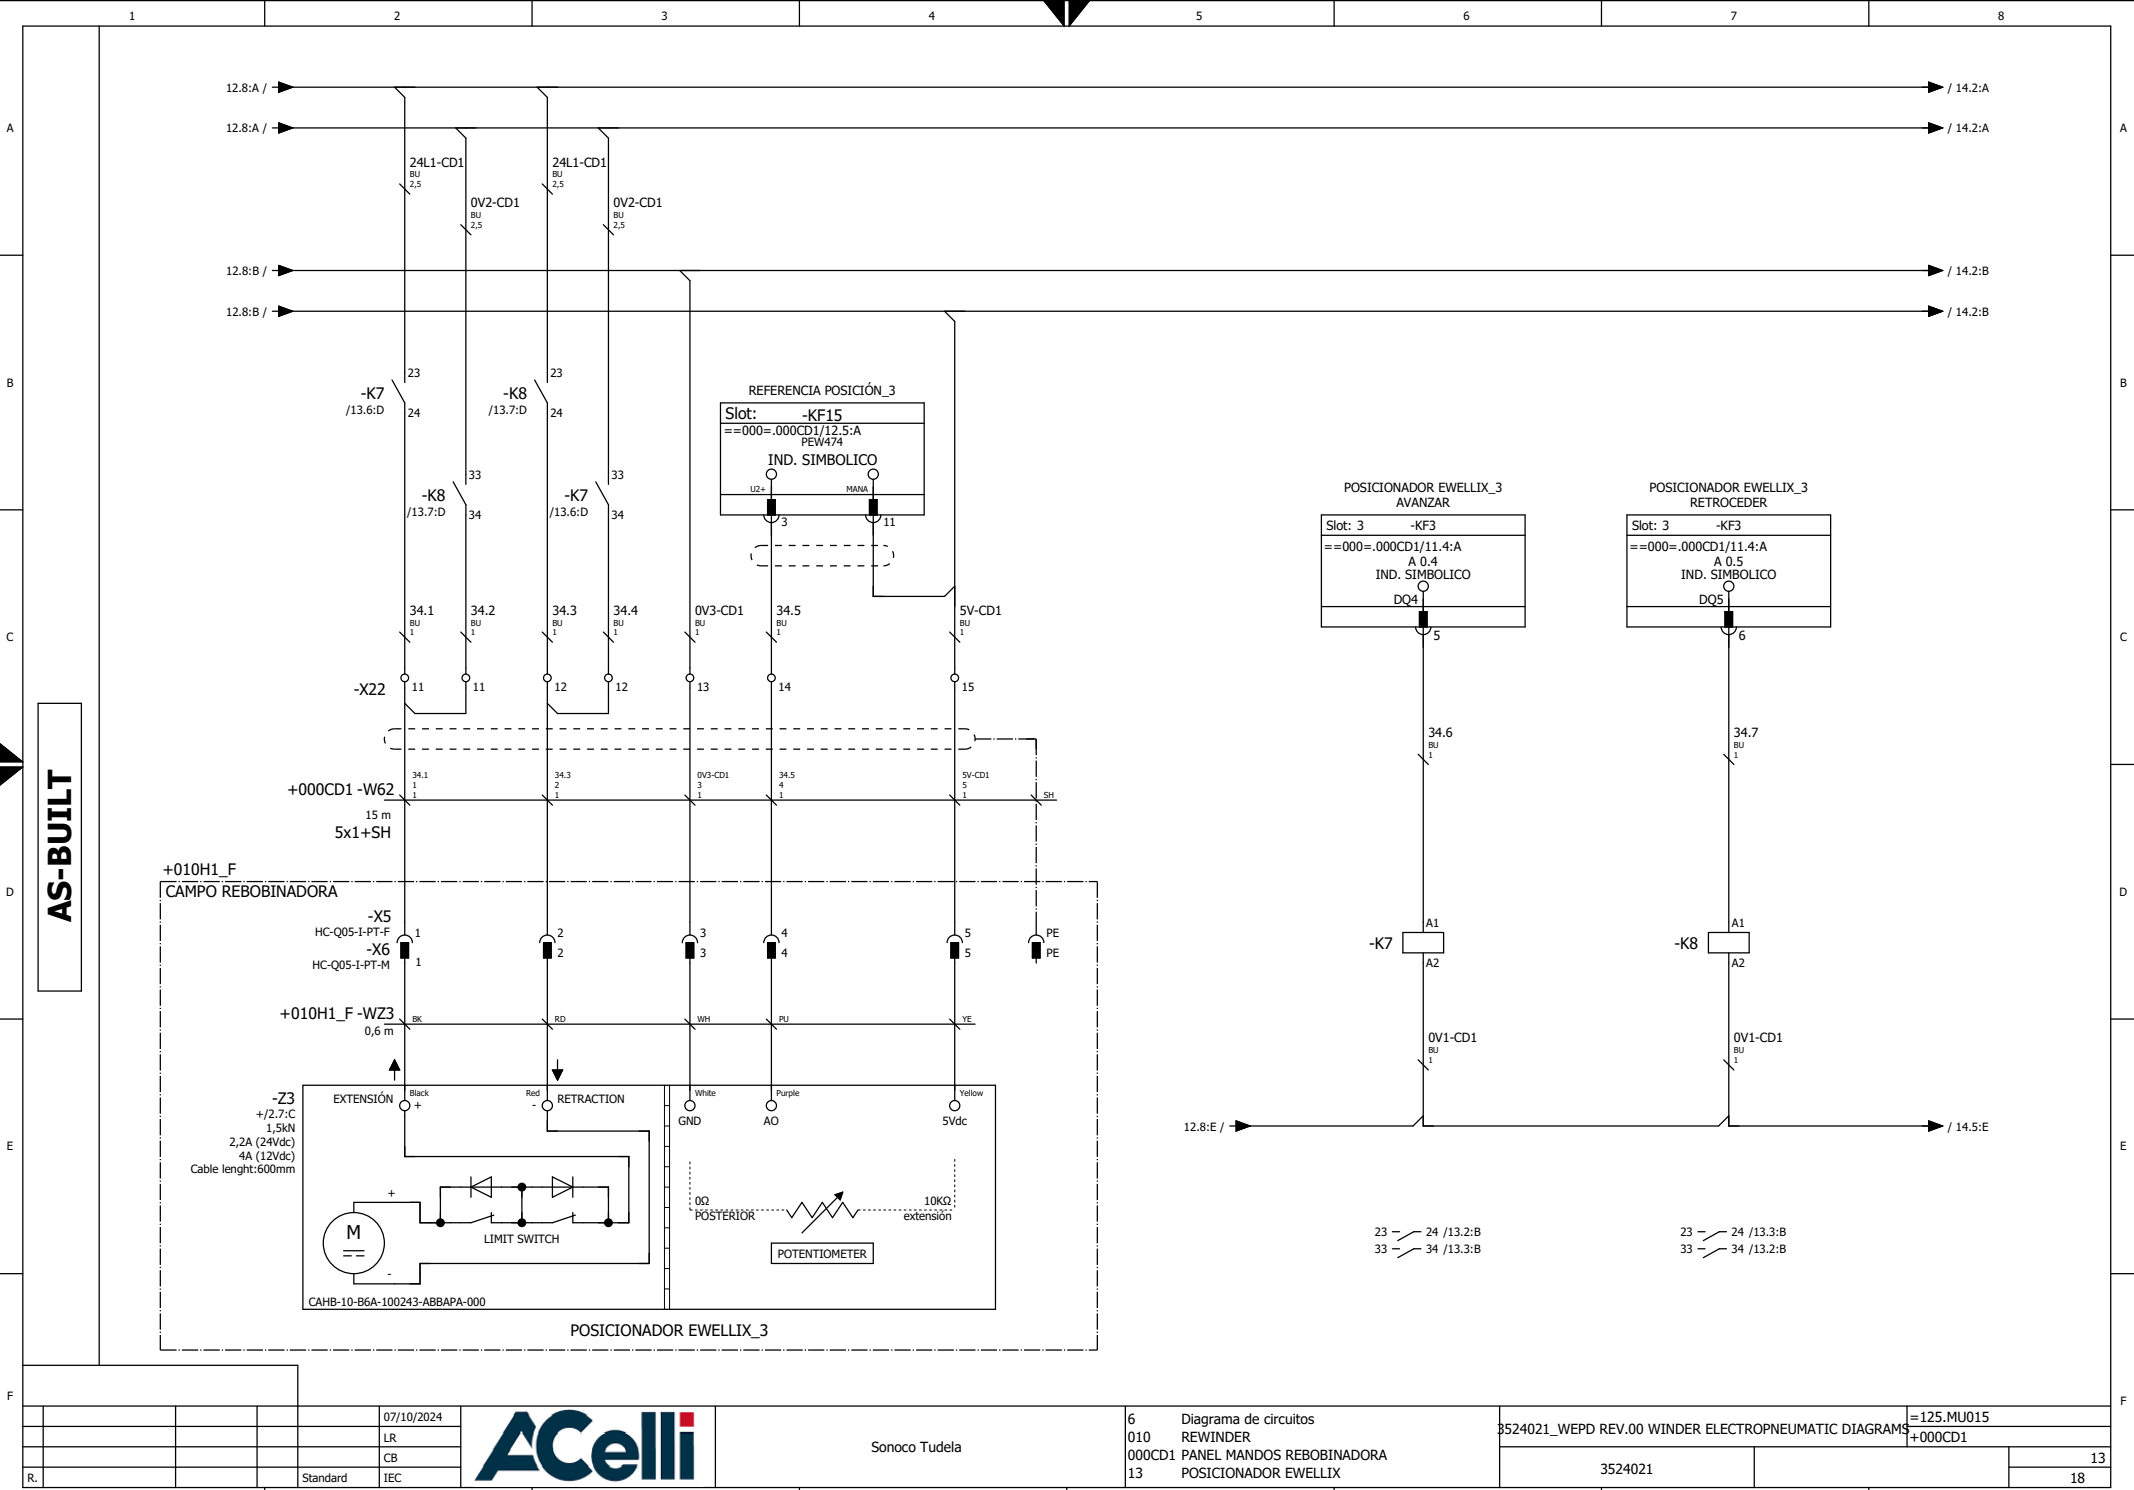

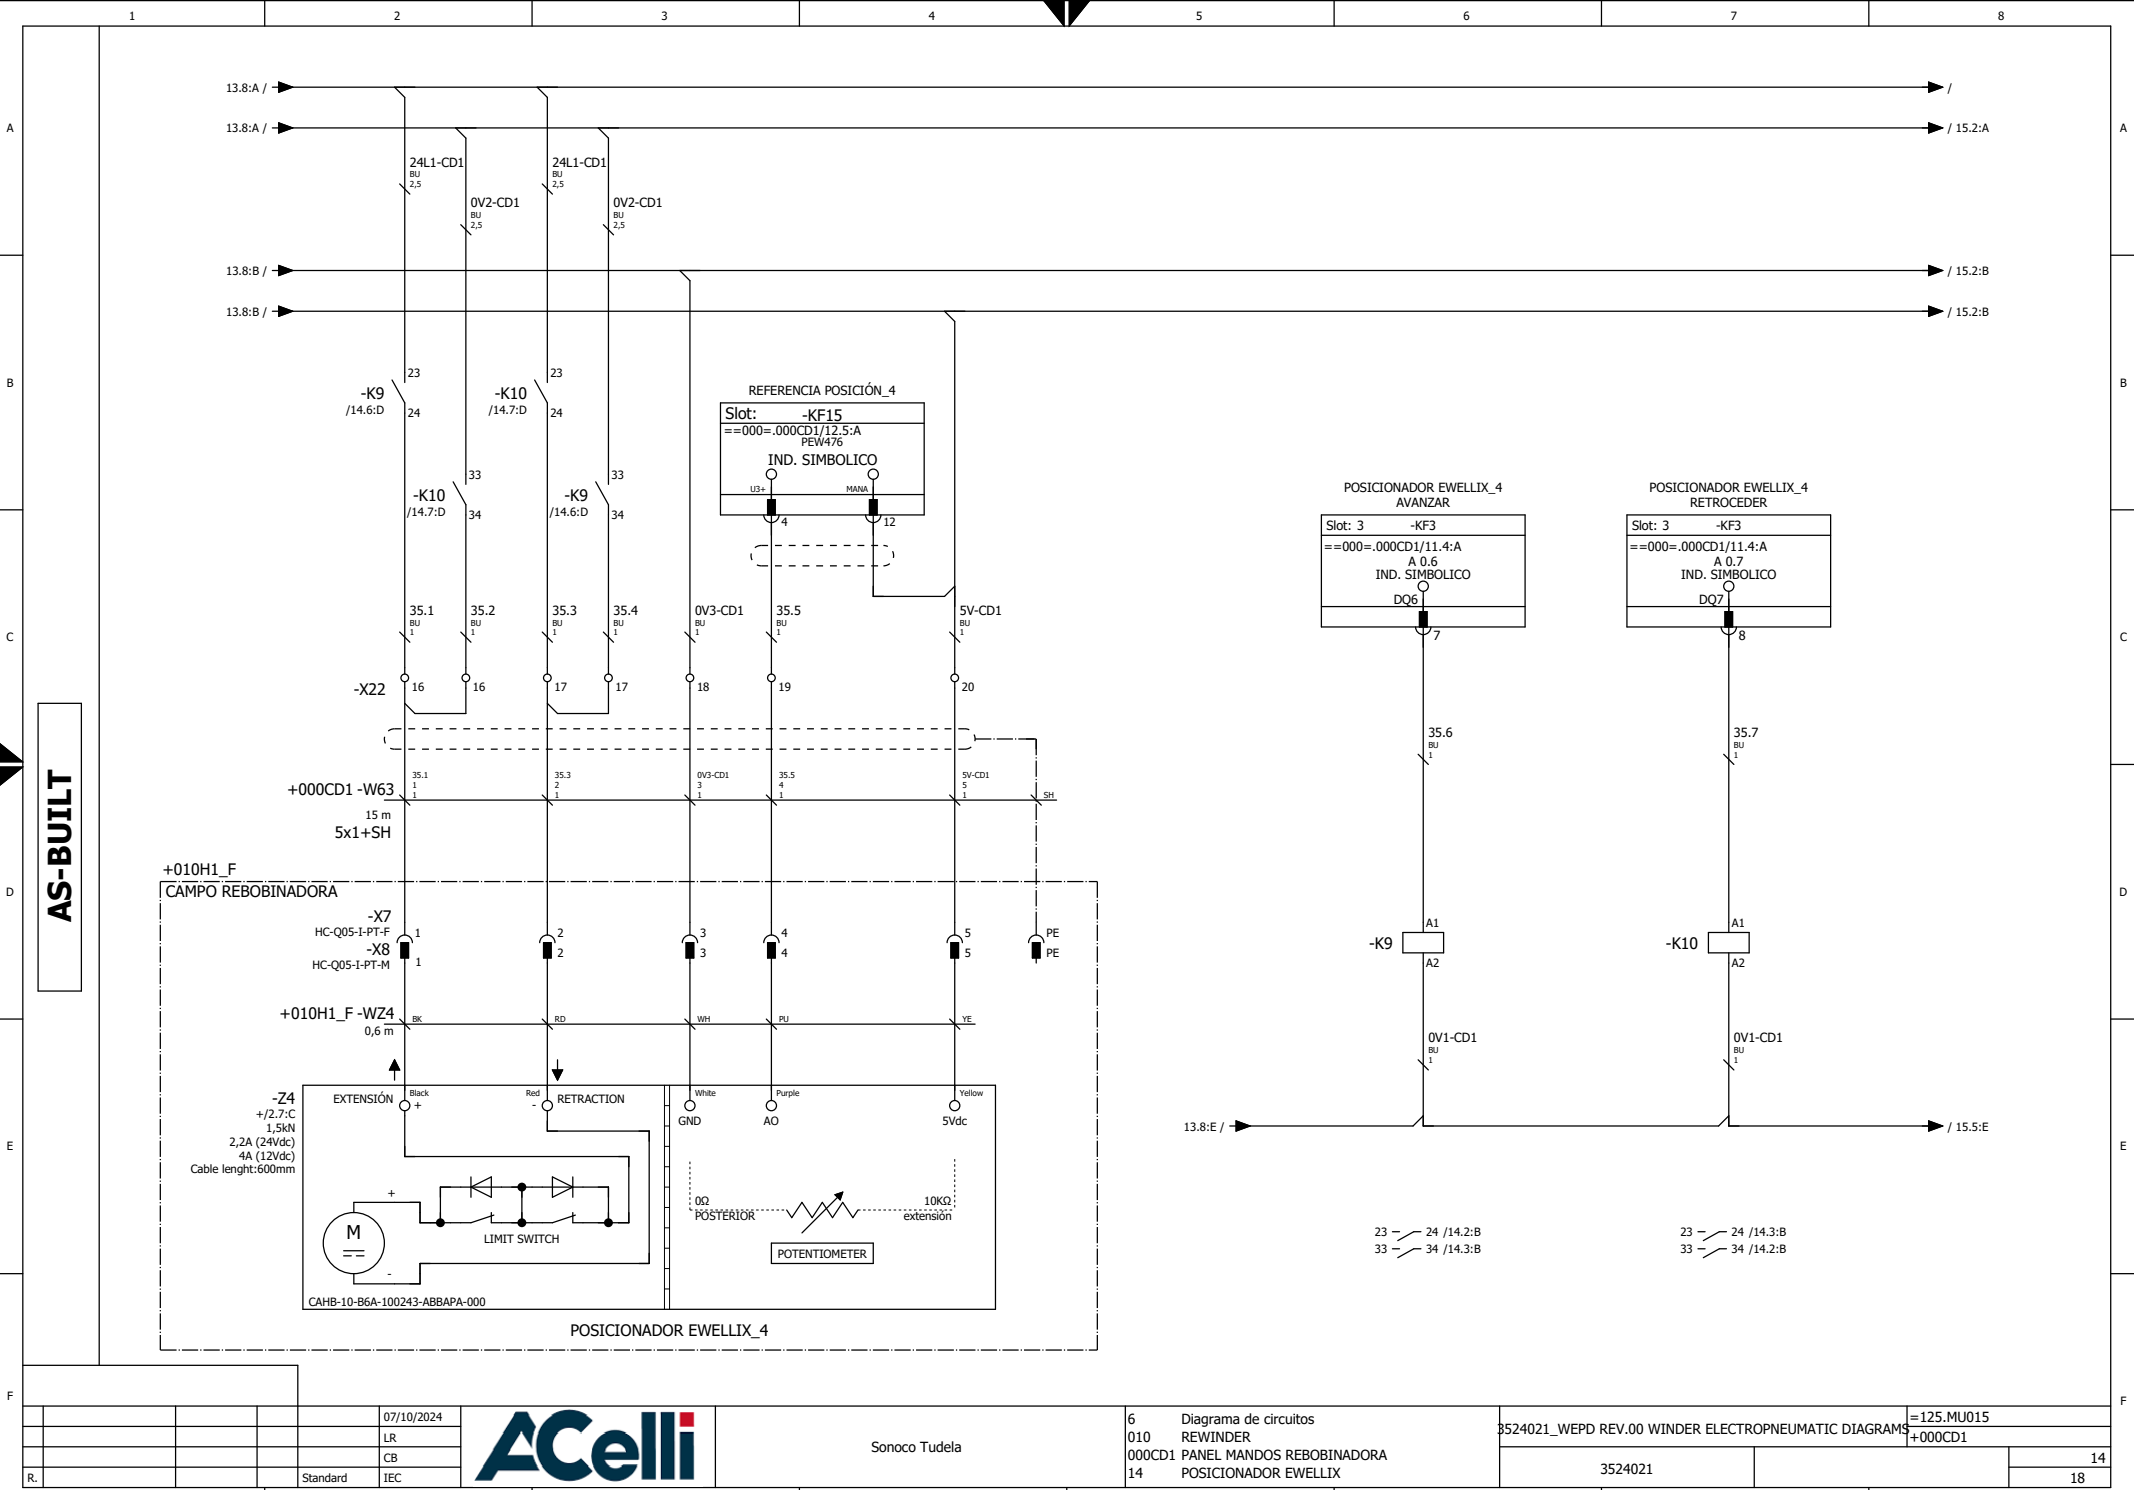

				07/10/2024
				LR
				CB
R.			Standard	IEC




Sonoco Tudela


6	Diagrama de circuitos
010	REWINDER
000CD1	PANEL MANDOS REBOBINADORA
14	POSICIONADOR EWELLIX


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU015
3524021	+000CD1

14
18

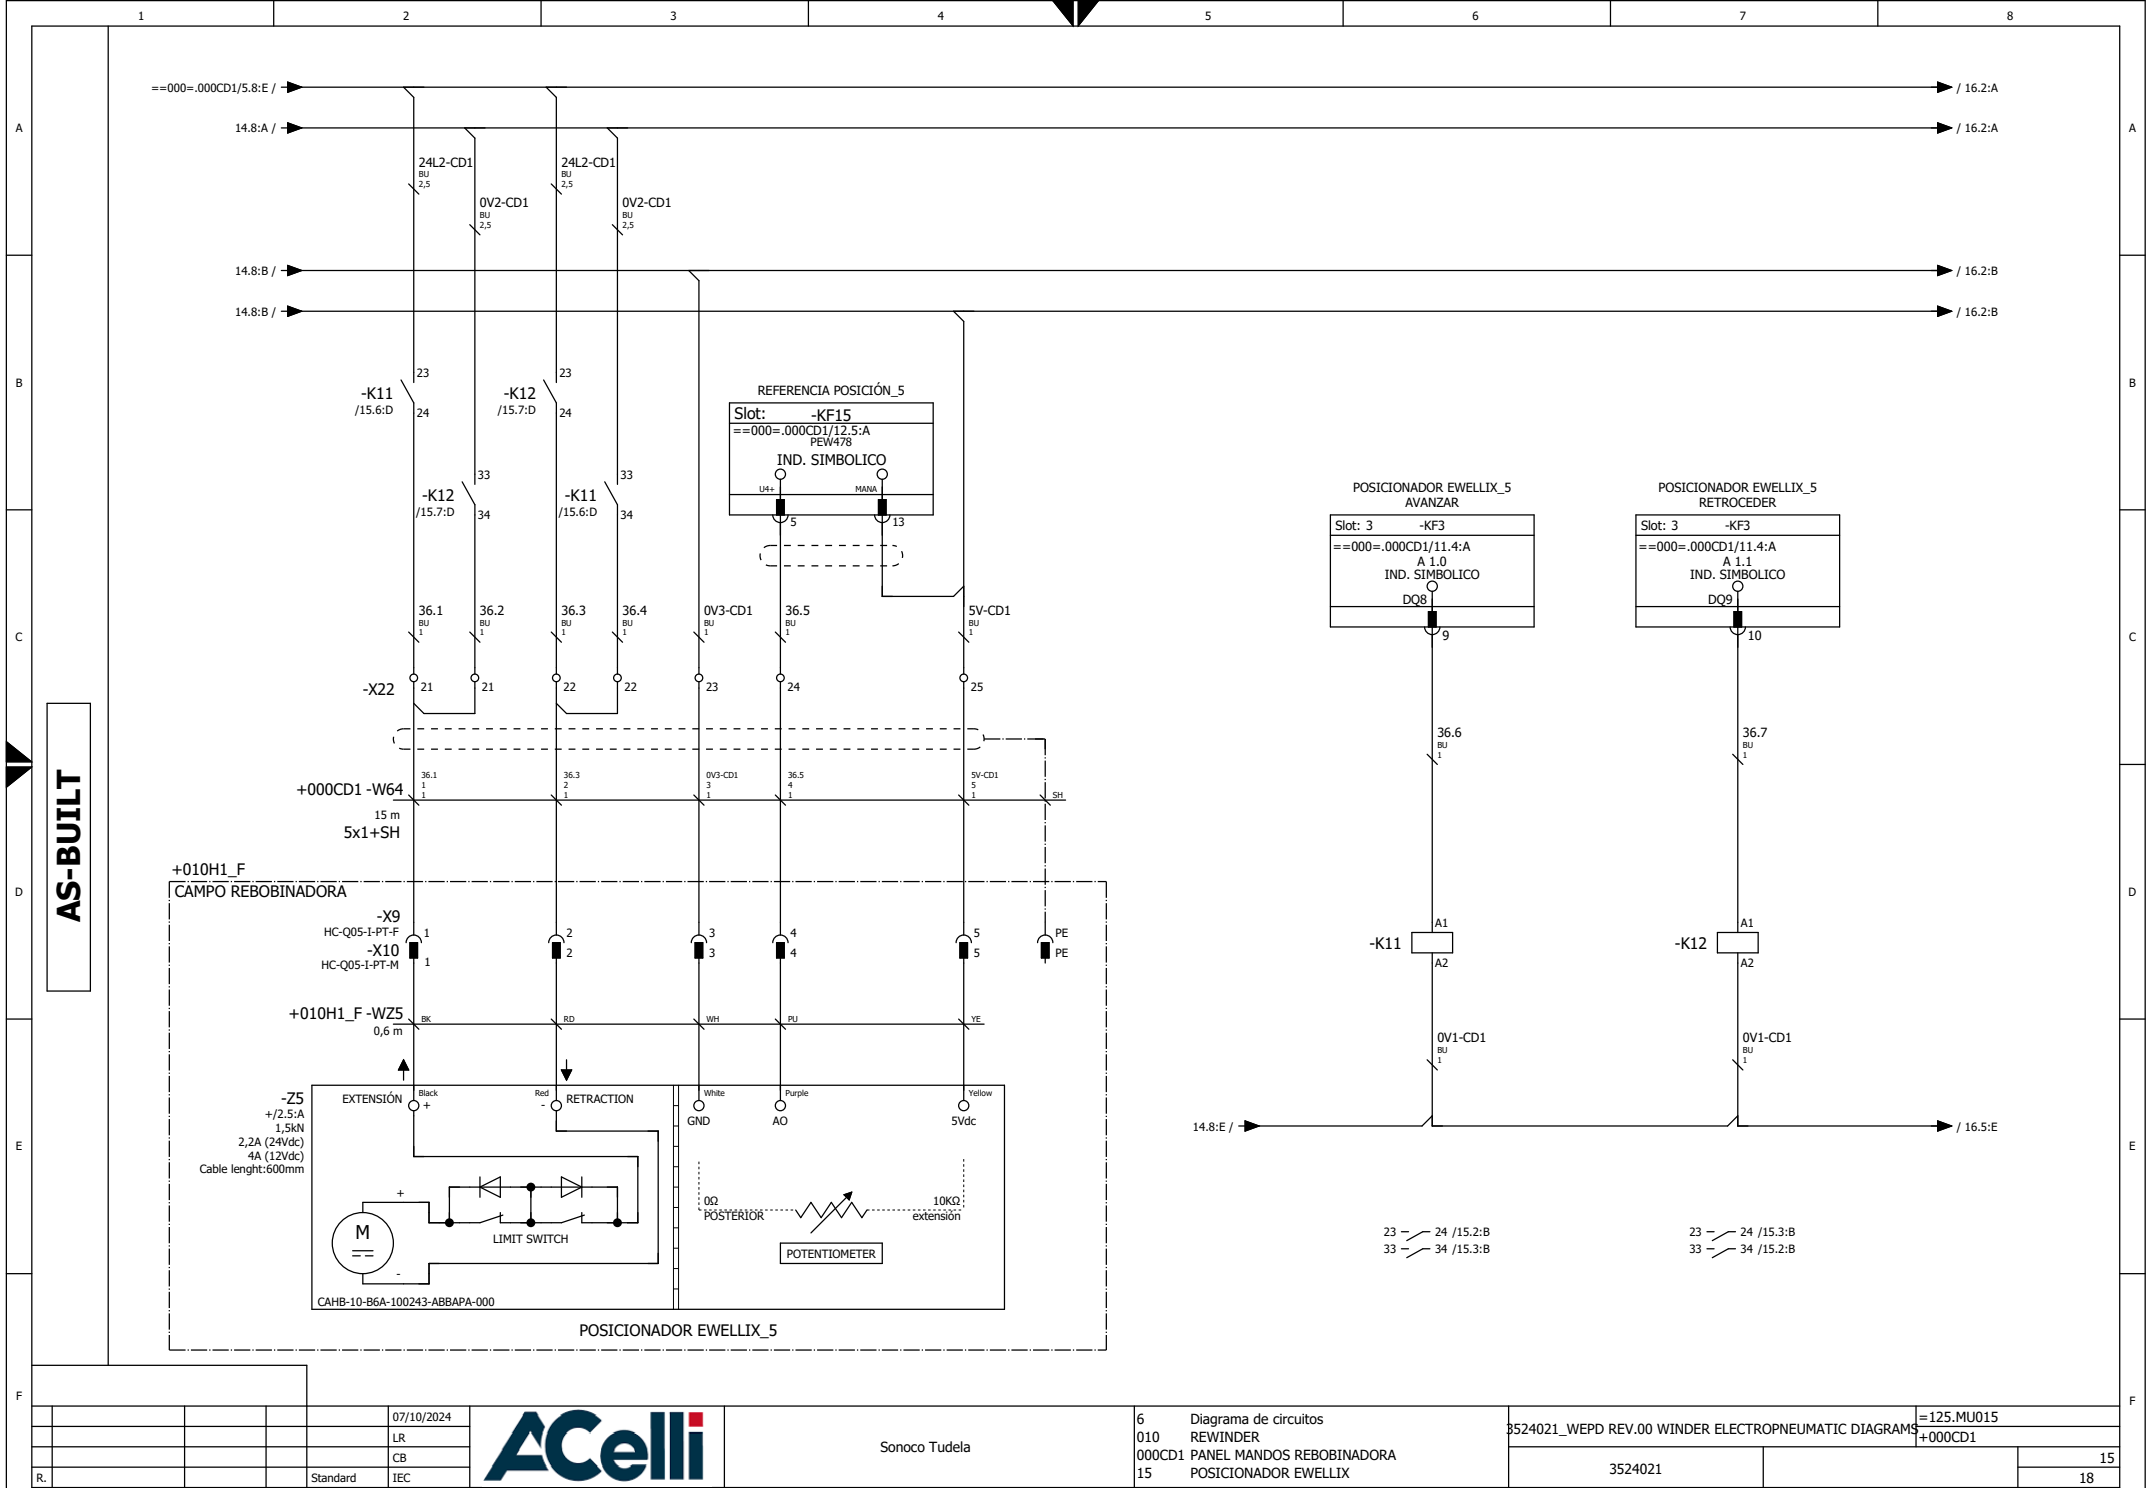




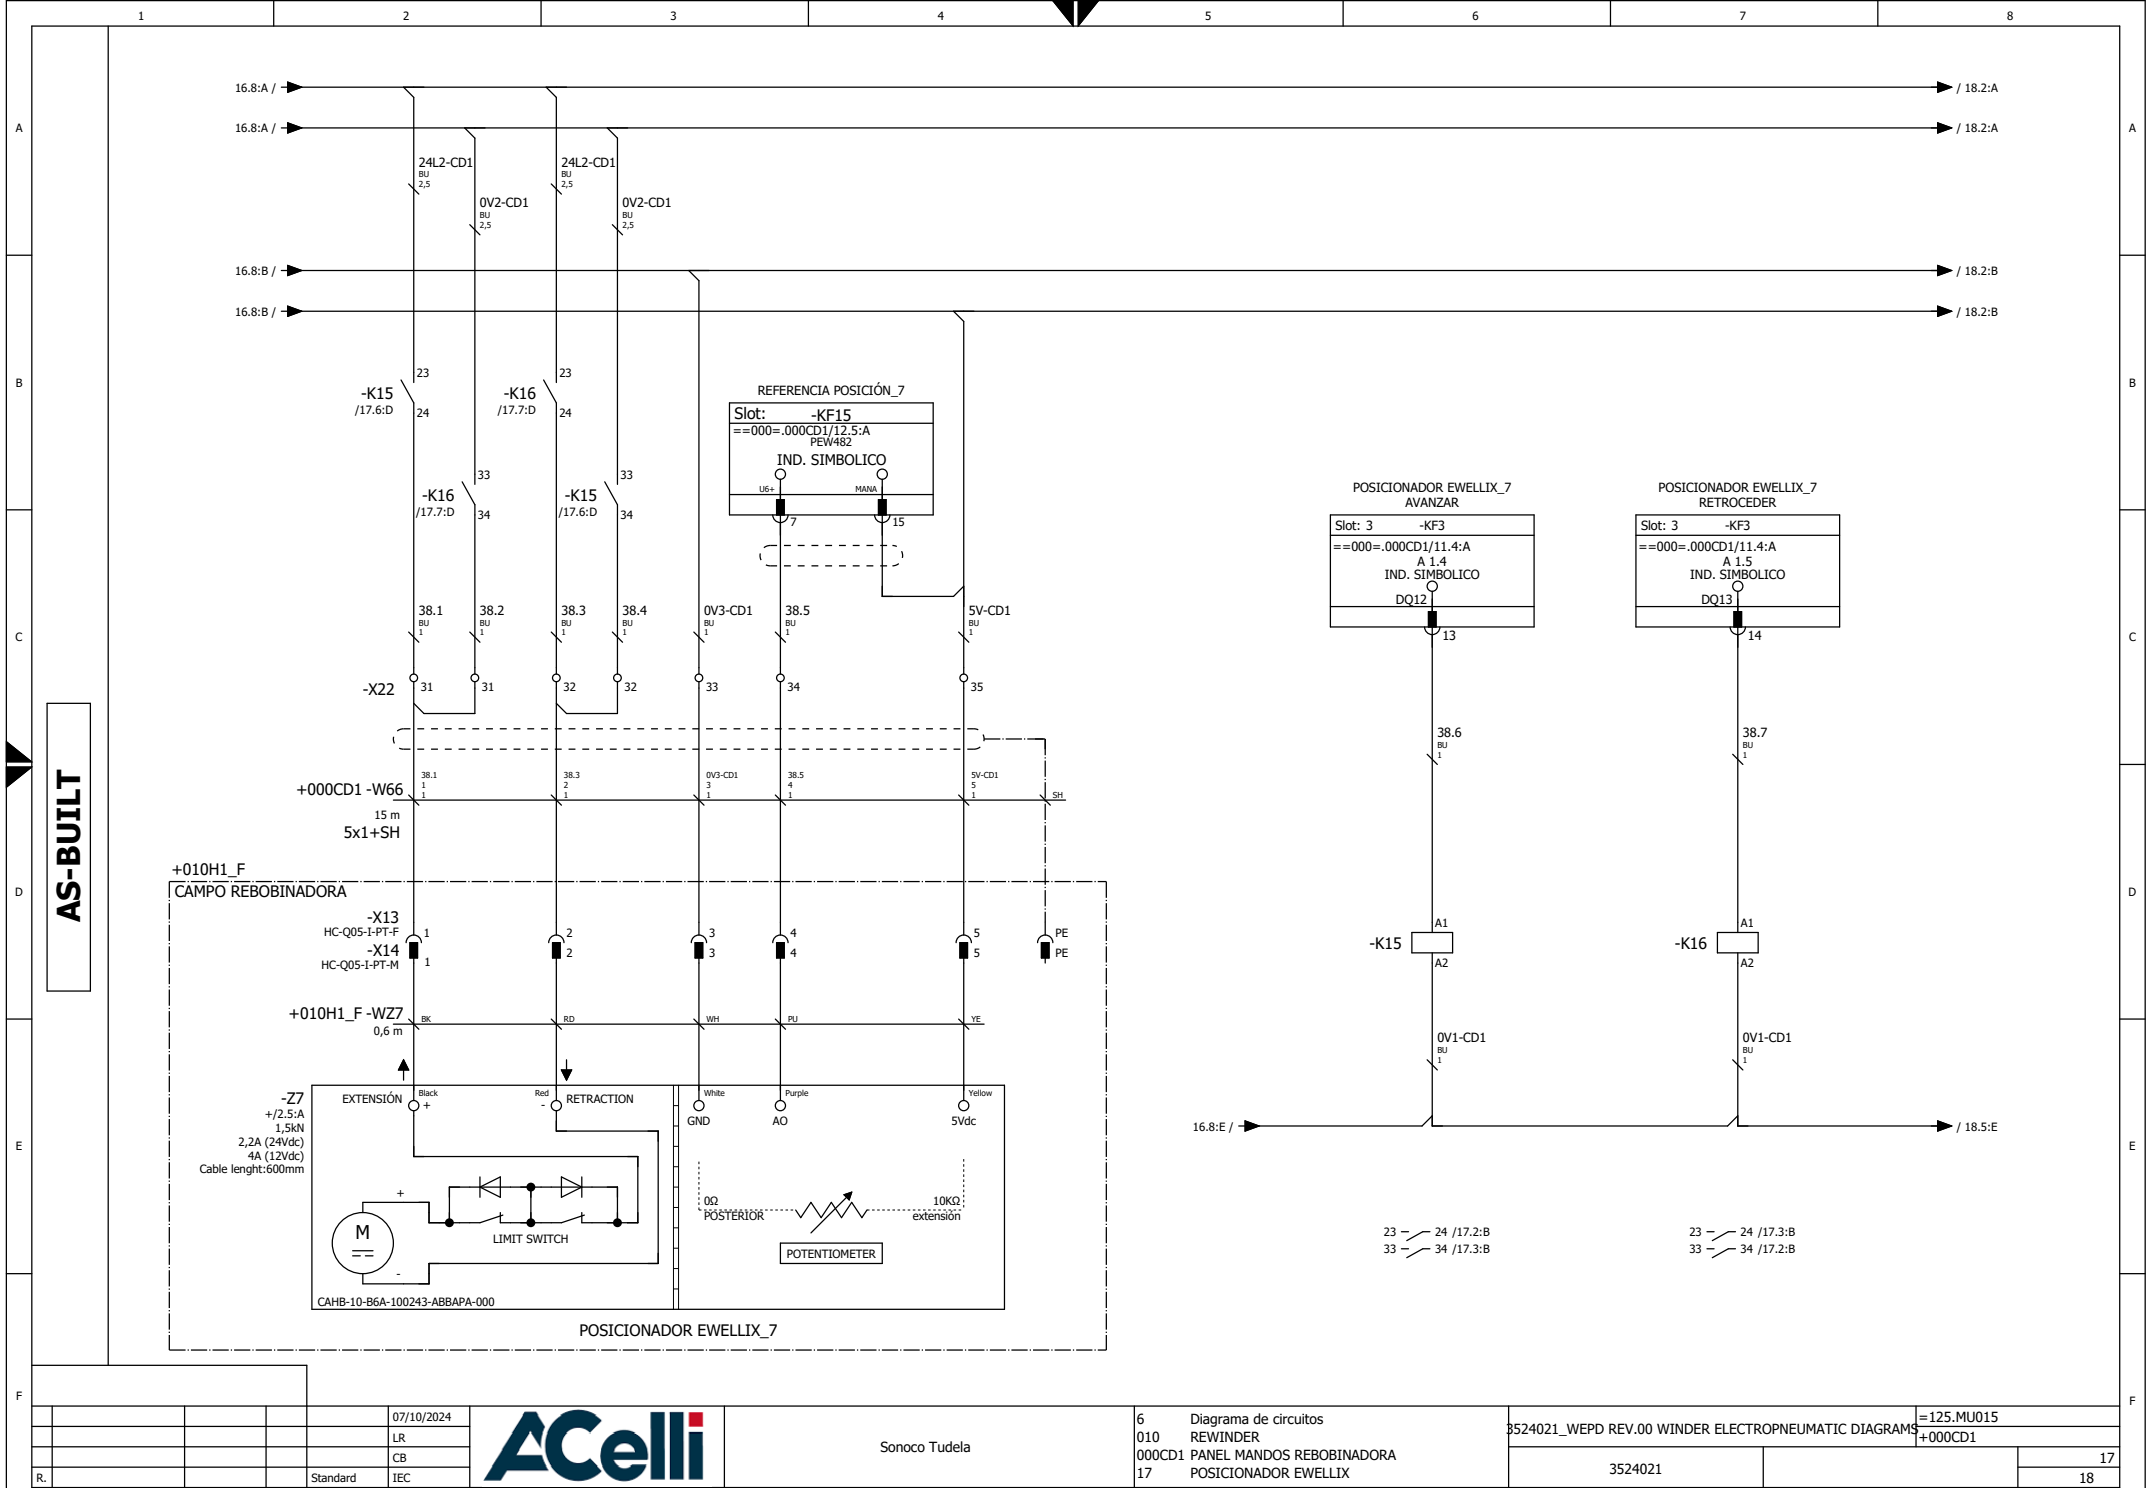

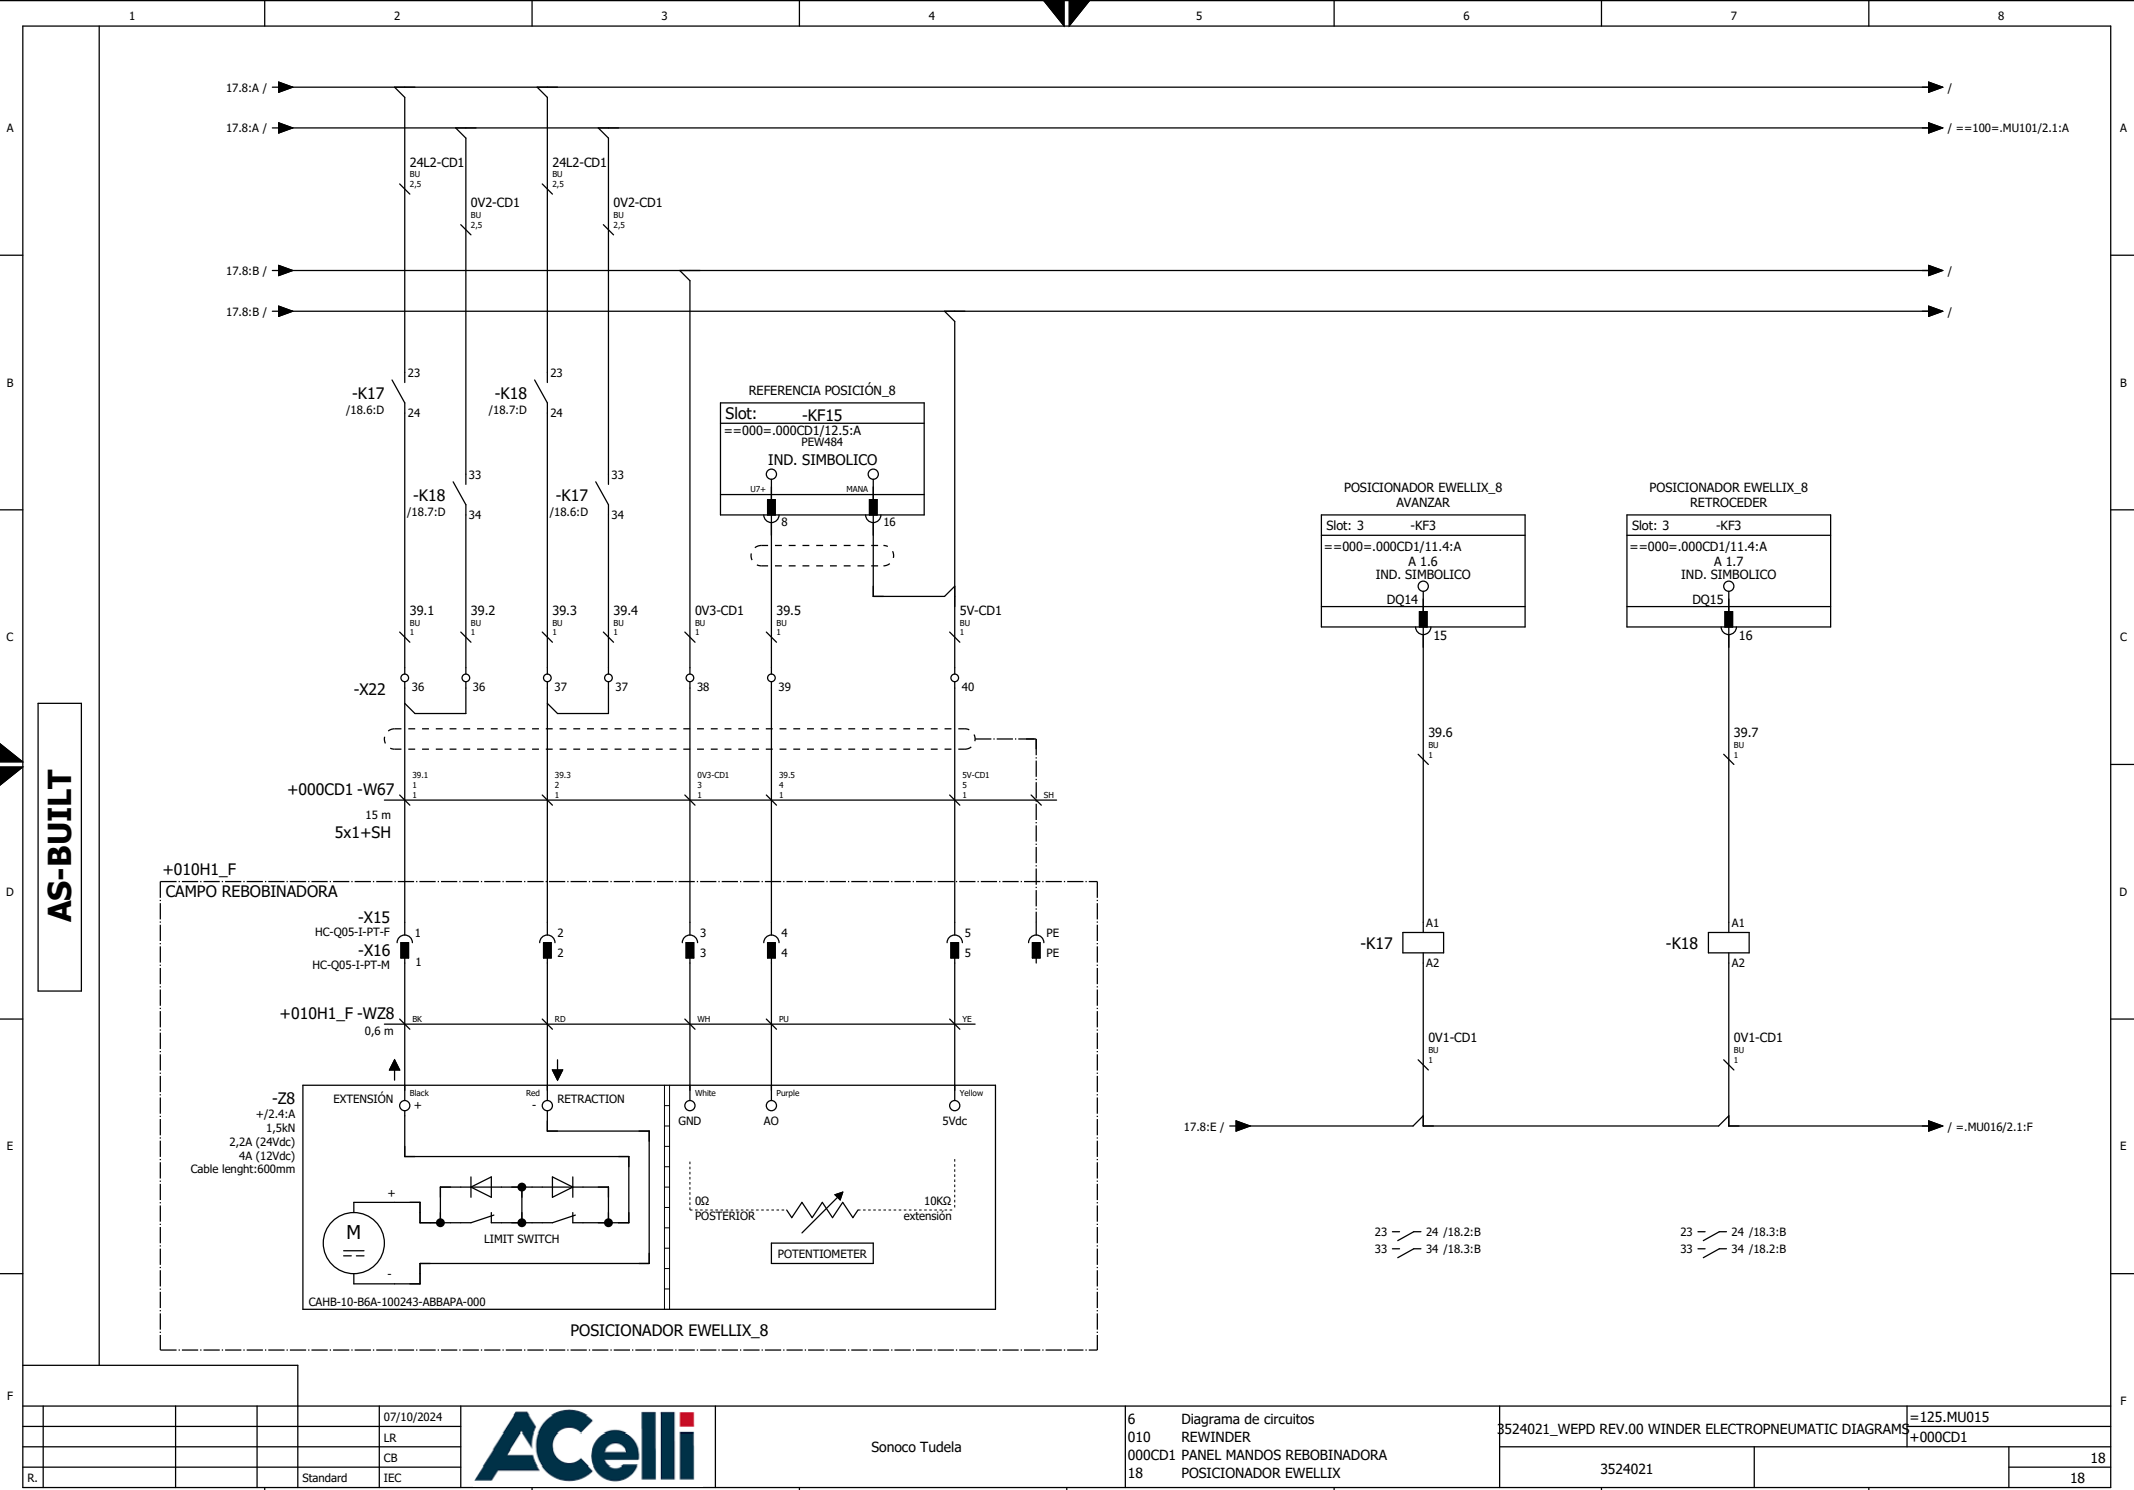

				07/10/2024		Sonoco Tudela	6	Diagrama de circuitos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU015	
				LR			010	REWINDER		+000CD1	
				CB			000CD1	PANEL MANDOS REBOBINADORA			
R.			Standard	IEC			18	POSICIONADOR EWELLIX		3524021	

		1	2	3	4	5	6	7	8																															
A																																								
B	Descripción																																							
C	PAPER THREADING																																							
D	Disposición																																							
E	MU016																																							
F	<table><tr><td colspan="2"></td><td>07/10/2024</td><td rowspan="4"></td><td rowspan="4">Sonoco Tudela</td><td>6</td><td>Diagrama de circuitos</td><td rowspan="4">3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS</td><td>=125.MU016</td></tr><tr><td></td><td></td><td></td><td>LR</td><td>010</td><td>REWINDER</td><td></td></tr><tr><td></td><td></td><td></td><td>CB</td><td>1</td><td>PORTADA</td><td></td></tr><tr><td>R.</td><td></td><td>Standard</td><td>IEC</td><td></td><td></td><td>3524021</td><td>1</td></tr></table>											07/10/2024		Sonoco Tudela	6	Diagrama de circuitos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU016				LR	010	REWINDER					CB	1	PORTADA		R.		Standard	IEC			3524021	1
		07/10/2024		Sonoco Tudela	6	Diagrama de circuitos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU016																																
					LR	010		REWINDER																																
					CB	1		PORTADA																																
R.		Standard			IEC				3524021	1																														
	1	2	3	4	5	6	7	8																																

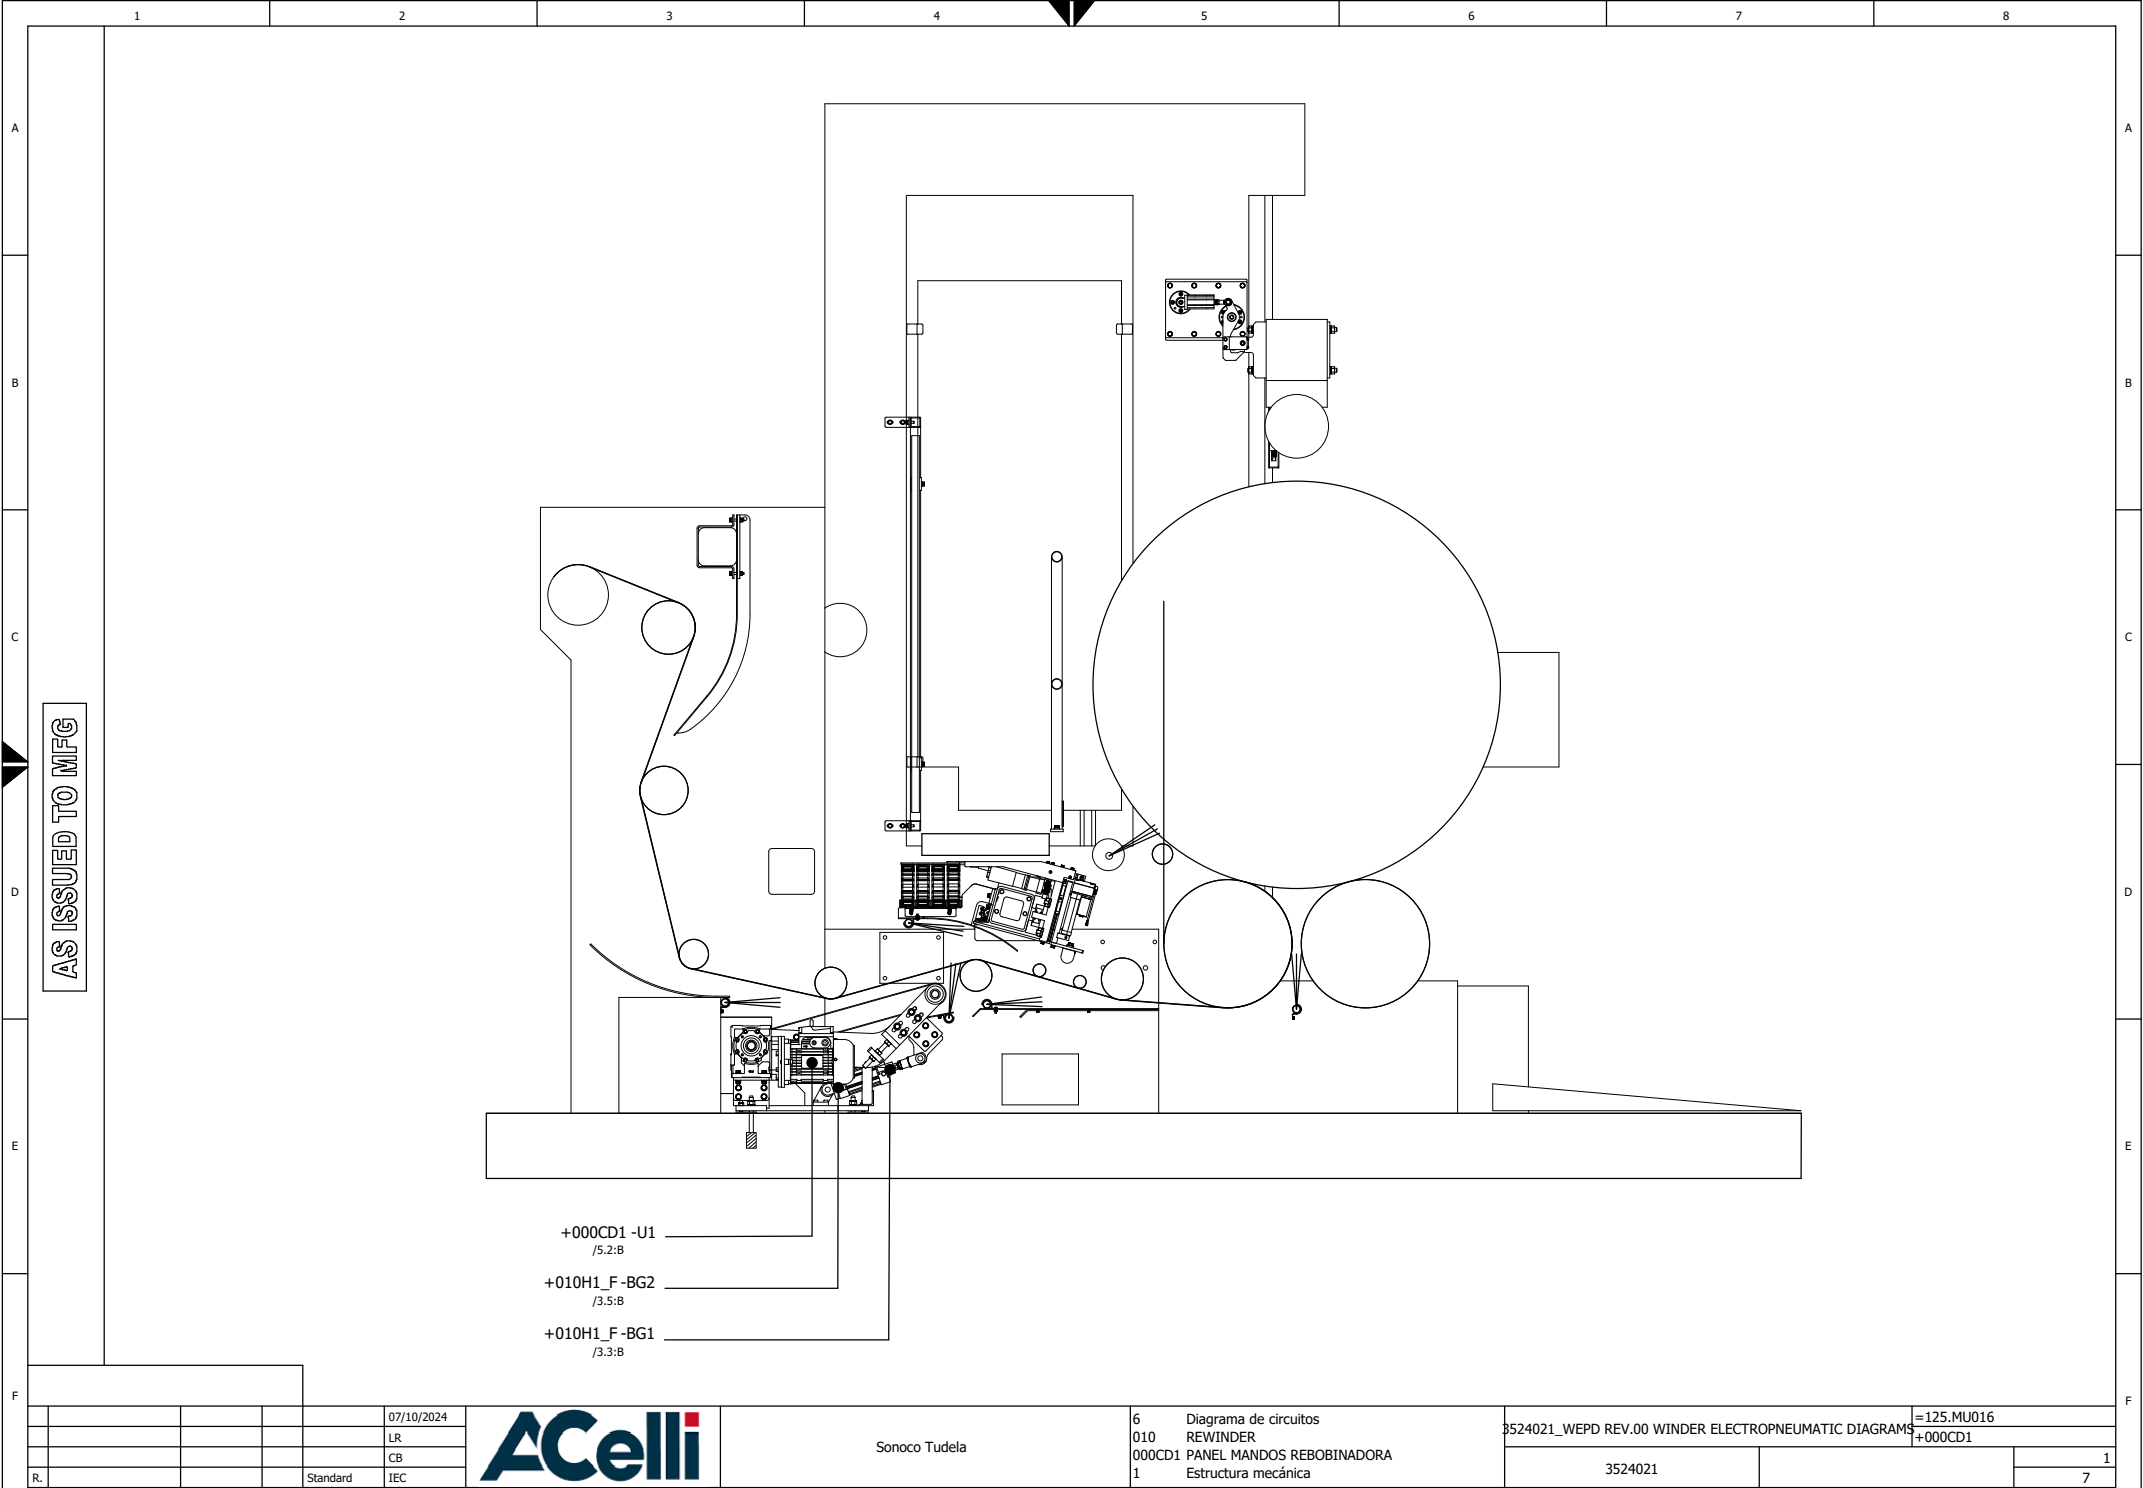

AS ISSUED TO MFG

+000CD1 -U1
/5.2:B
+010H1_F-BG2
/3.5:B
+010H1_F-BG1
/3.3:B

					07/10/2024
					LR
					CB
R.				Standard	IEC




Sonoco Tudela


6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
1 Estructura mecánica


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=125.MU016
+000CD1
1
7

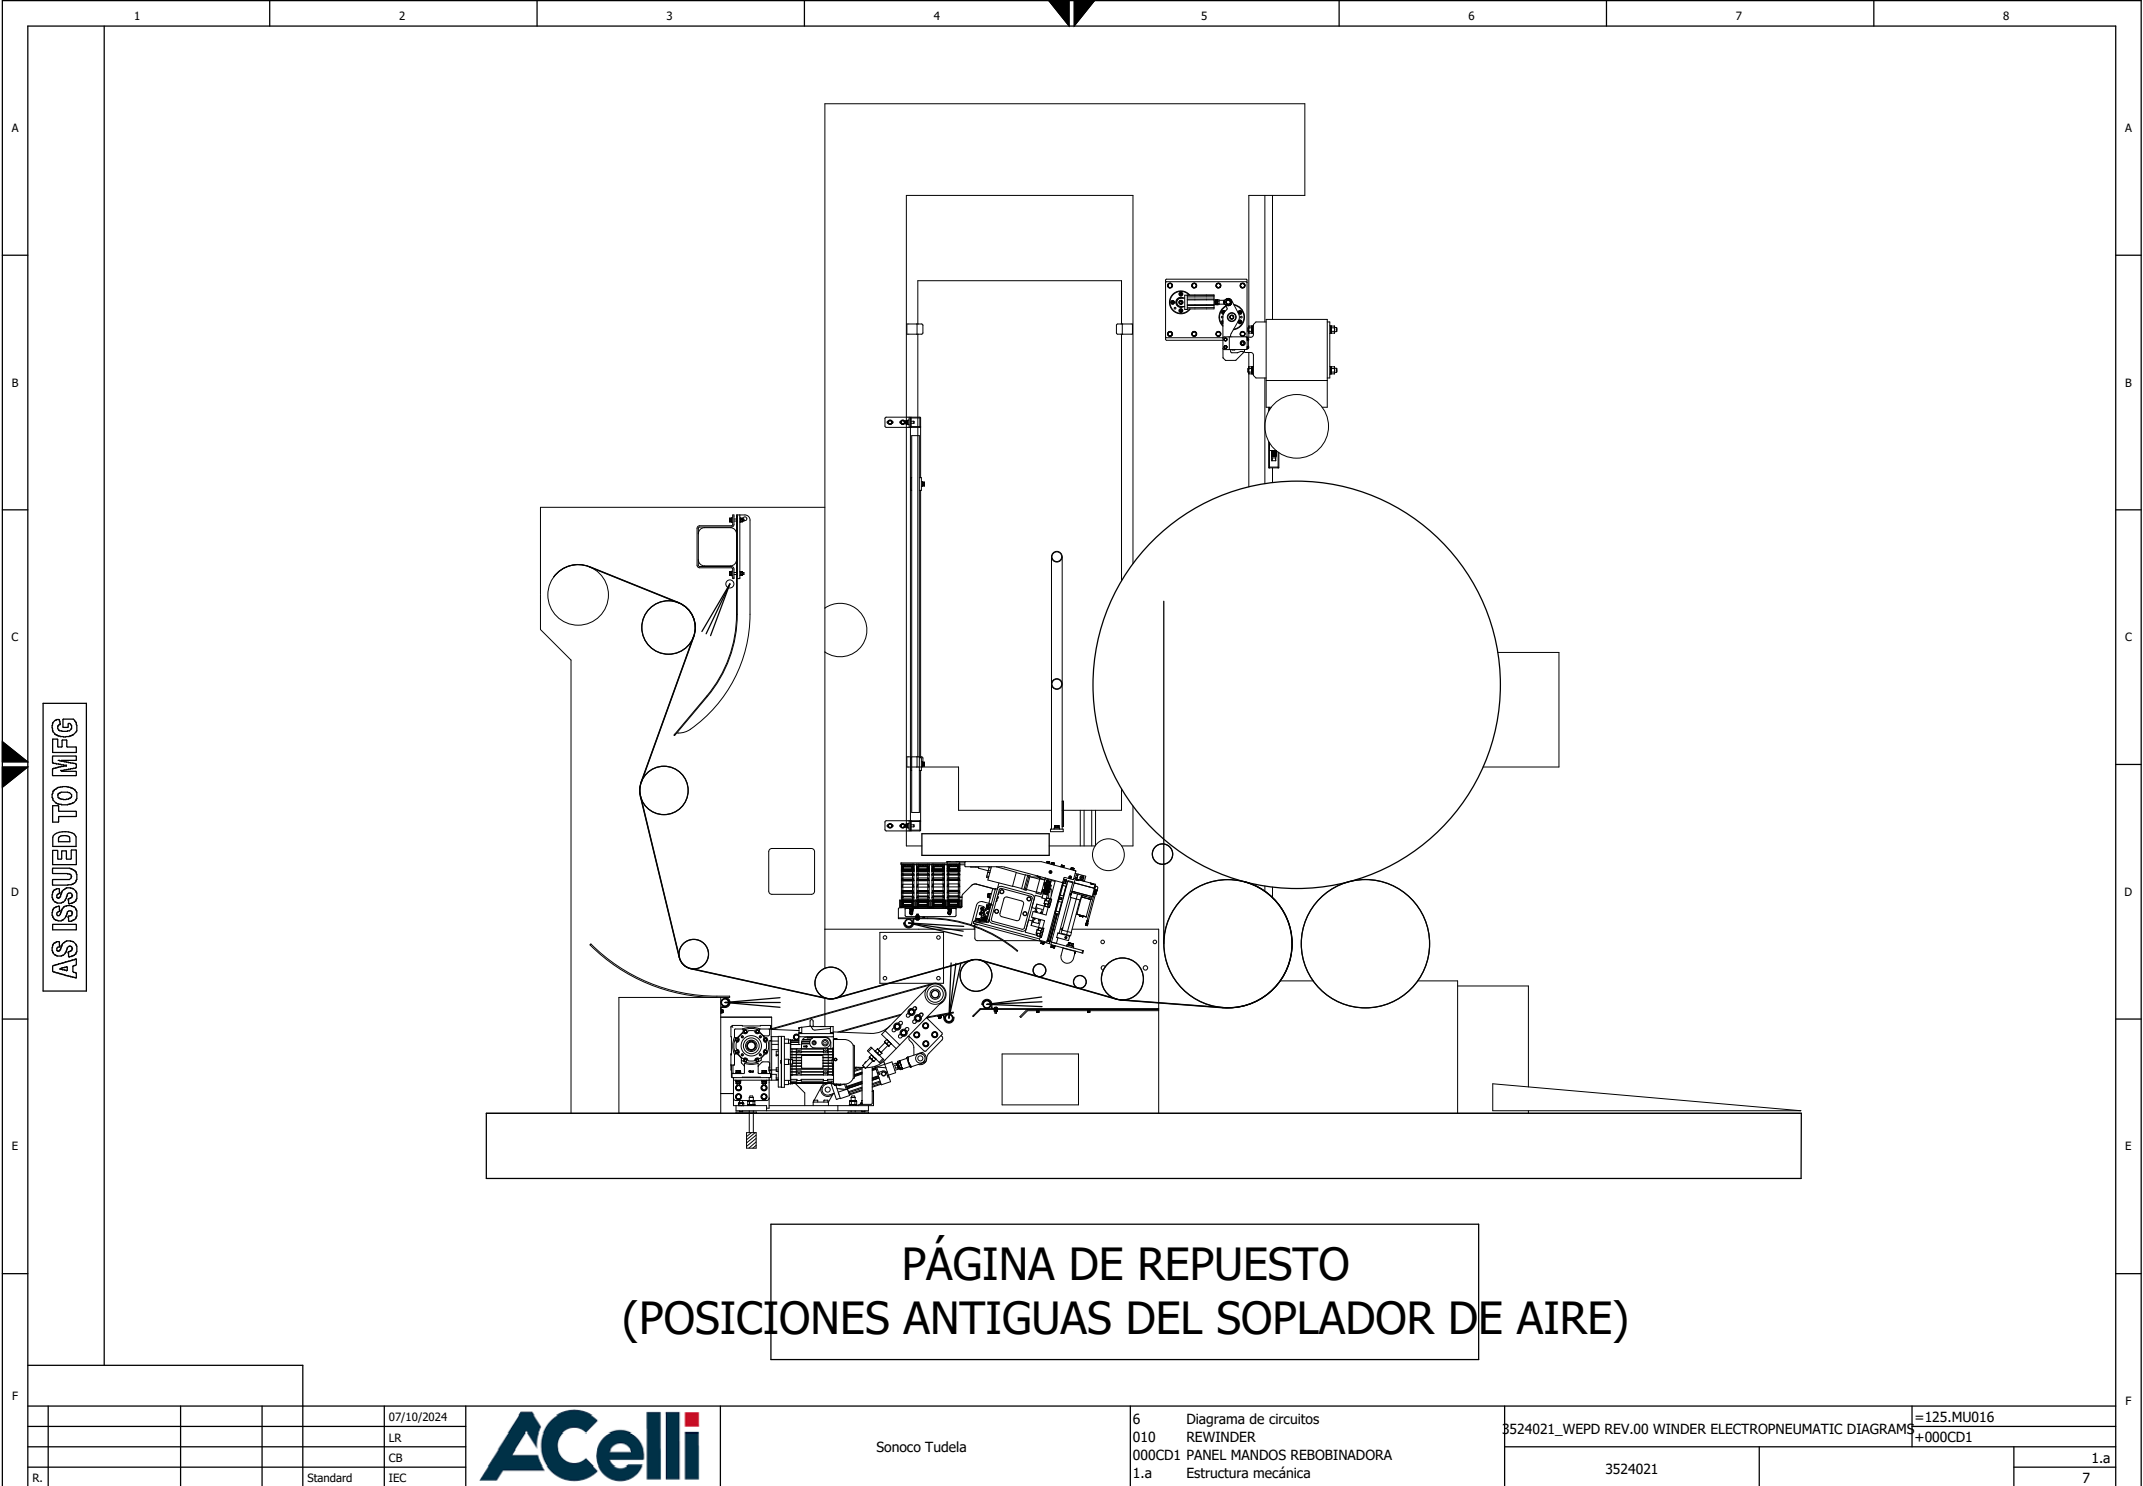


				07/10/2024		Sonoco Tudela	6 010 000CD1 1.a	Diagrama de circuitos REWINDER PANEL MANDOS REBOBINADORA Estructura mecánica	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU016 +000CD1	1.a 7
				LR							
				CB							
R.				Standard	IEC						

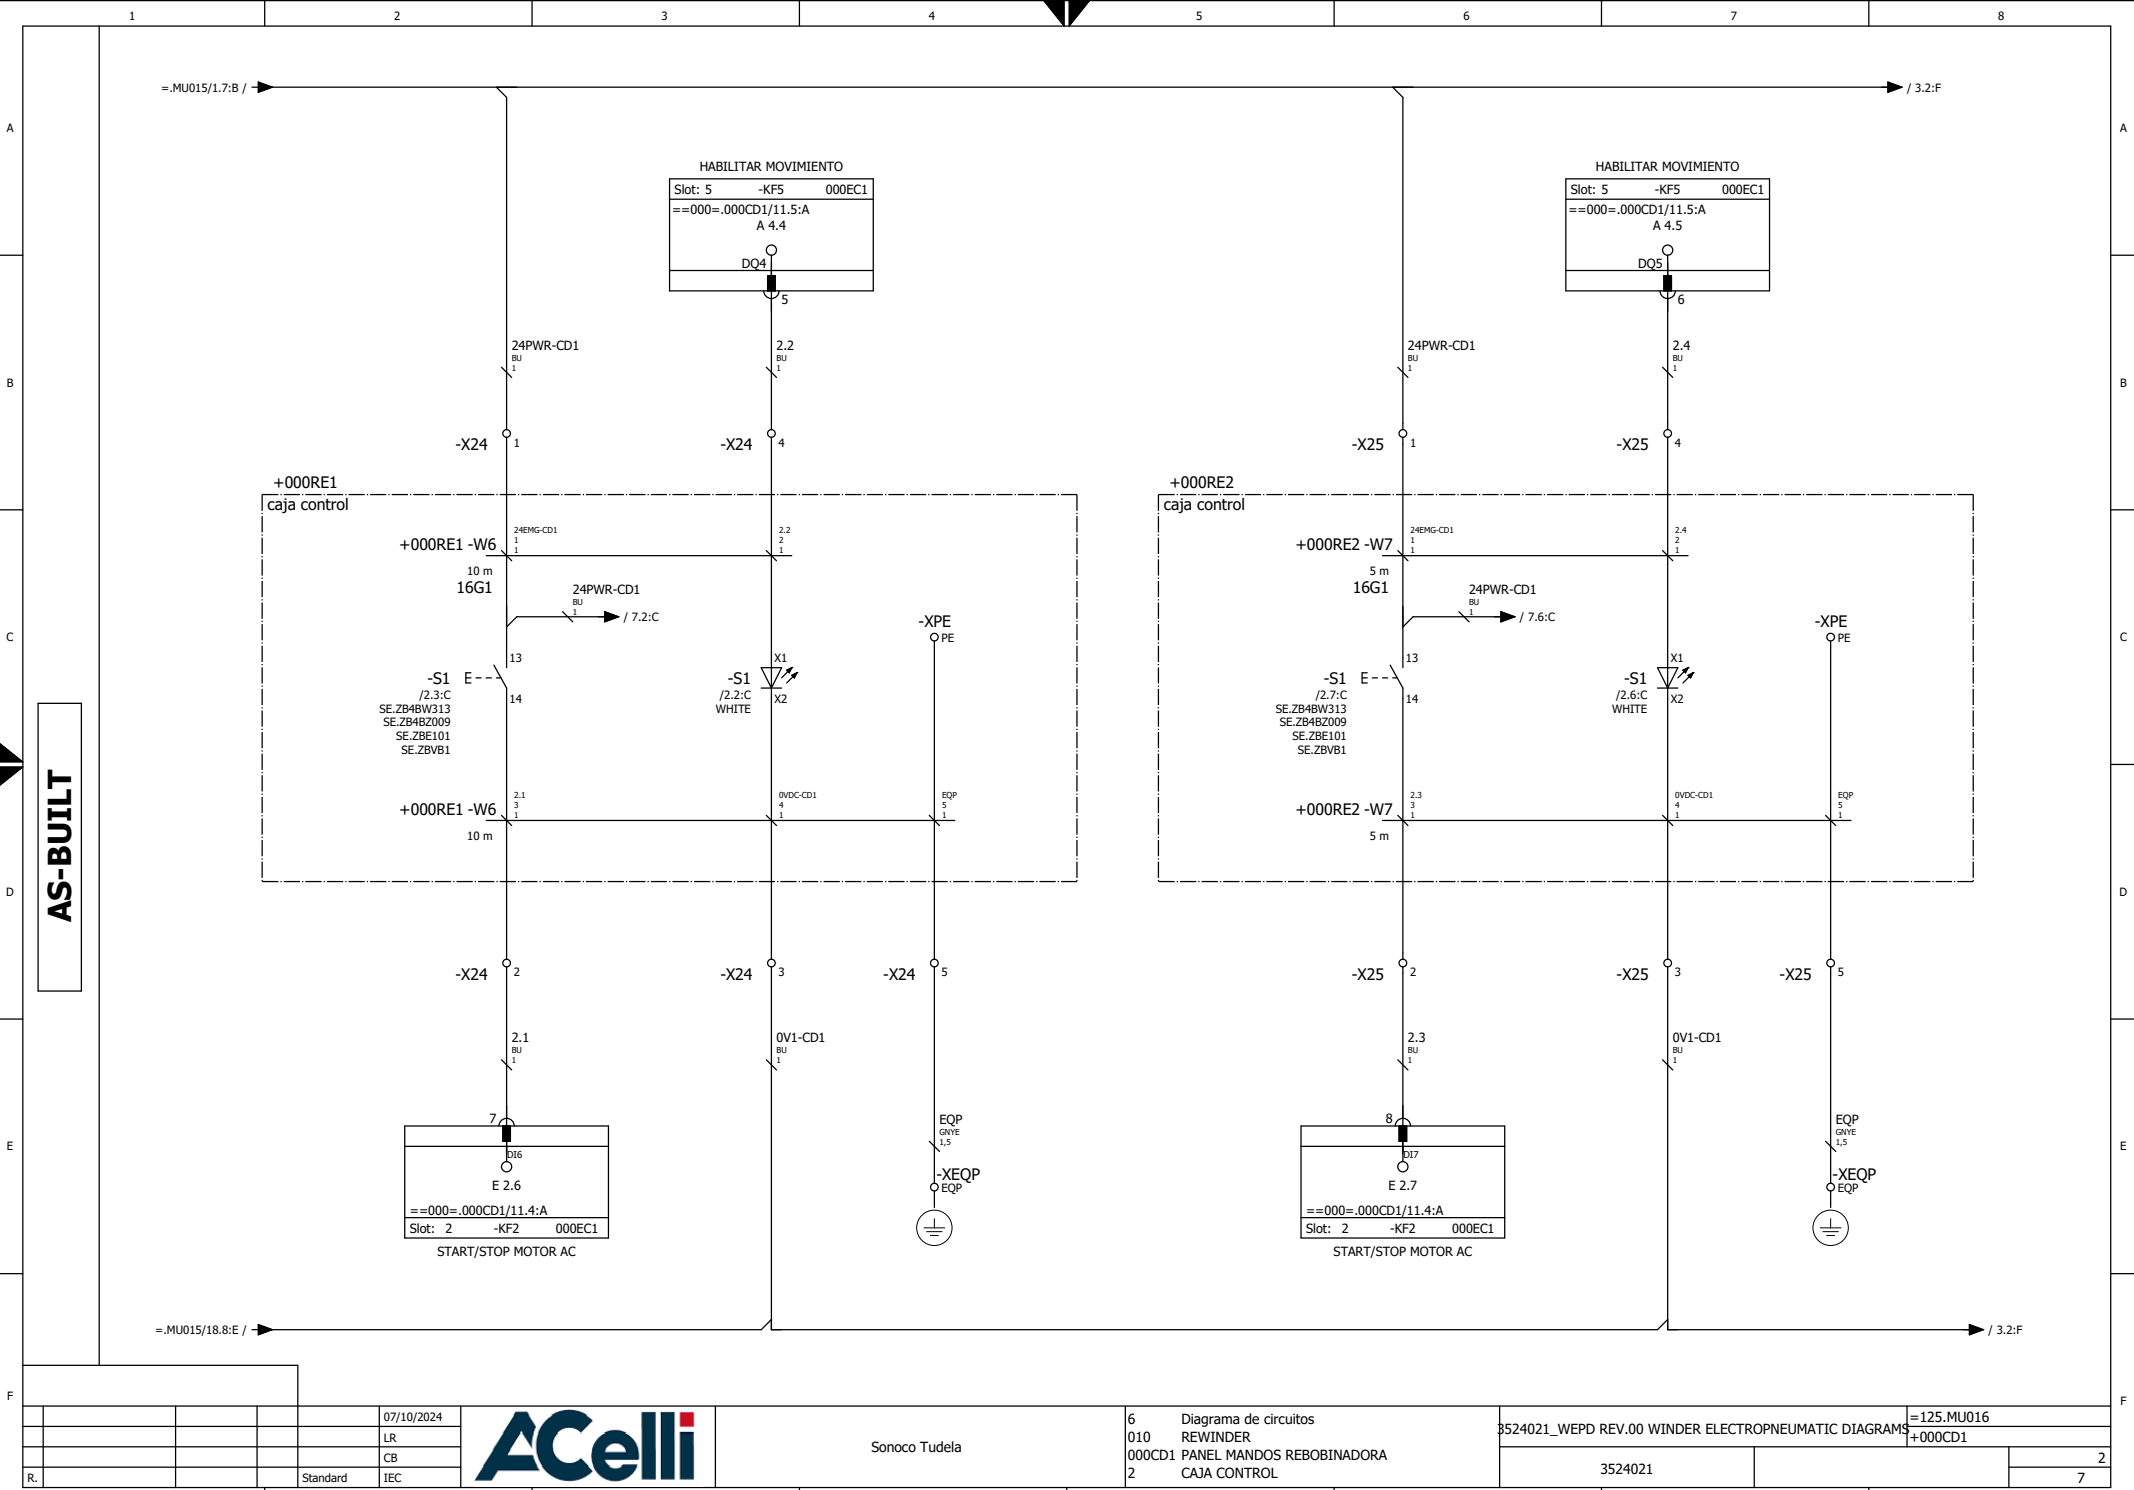


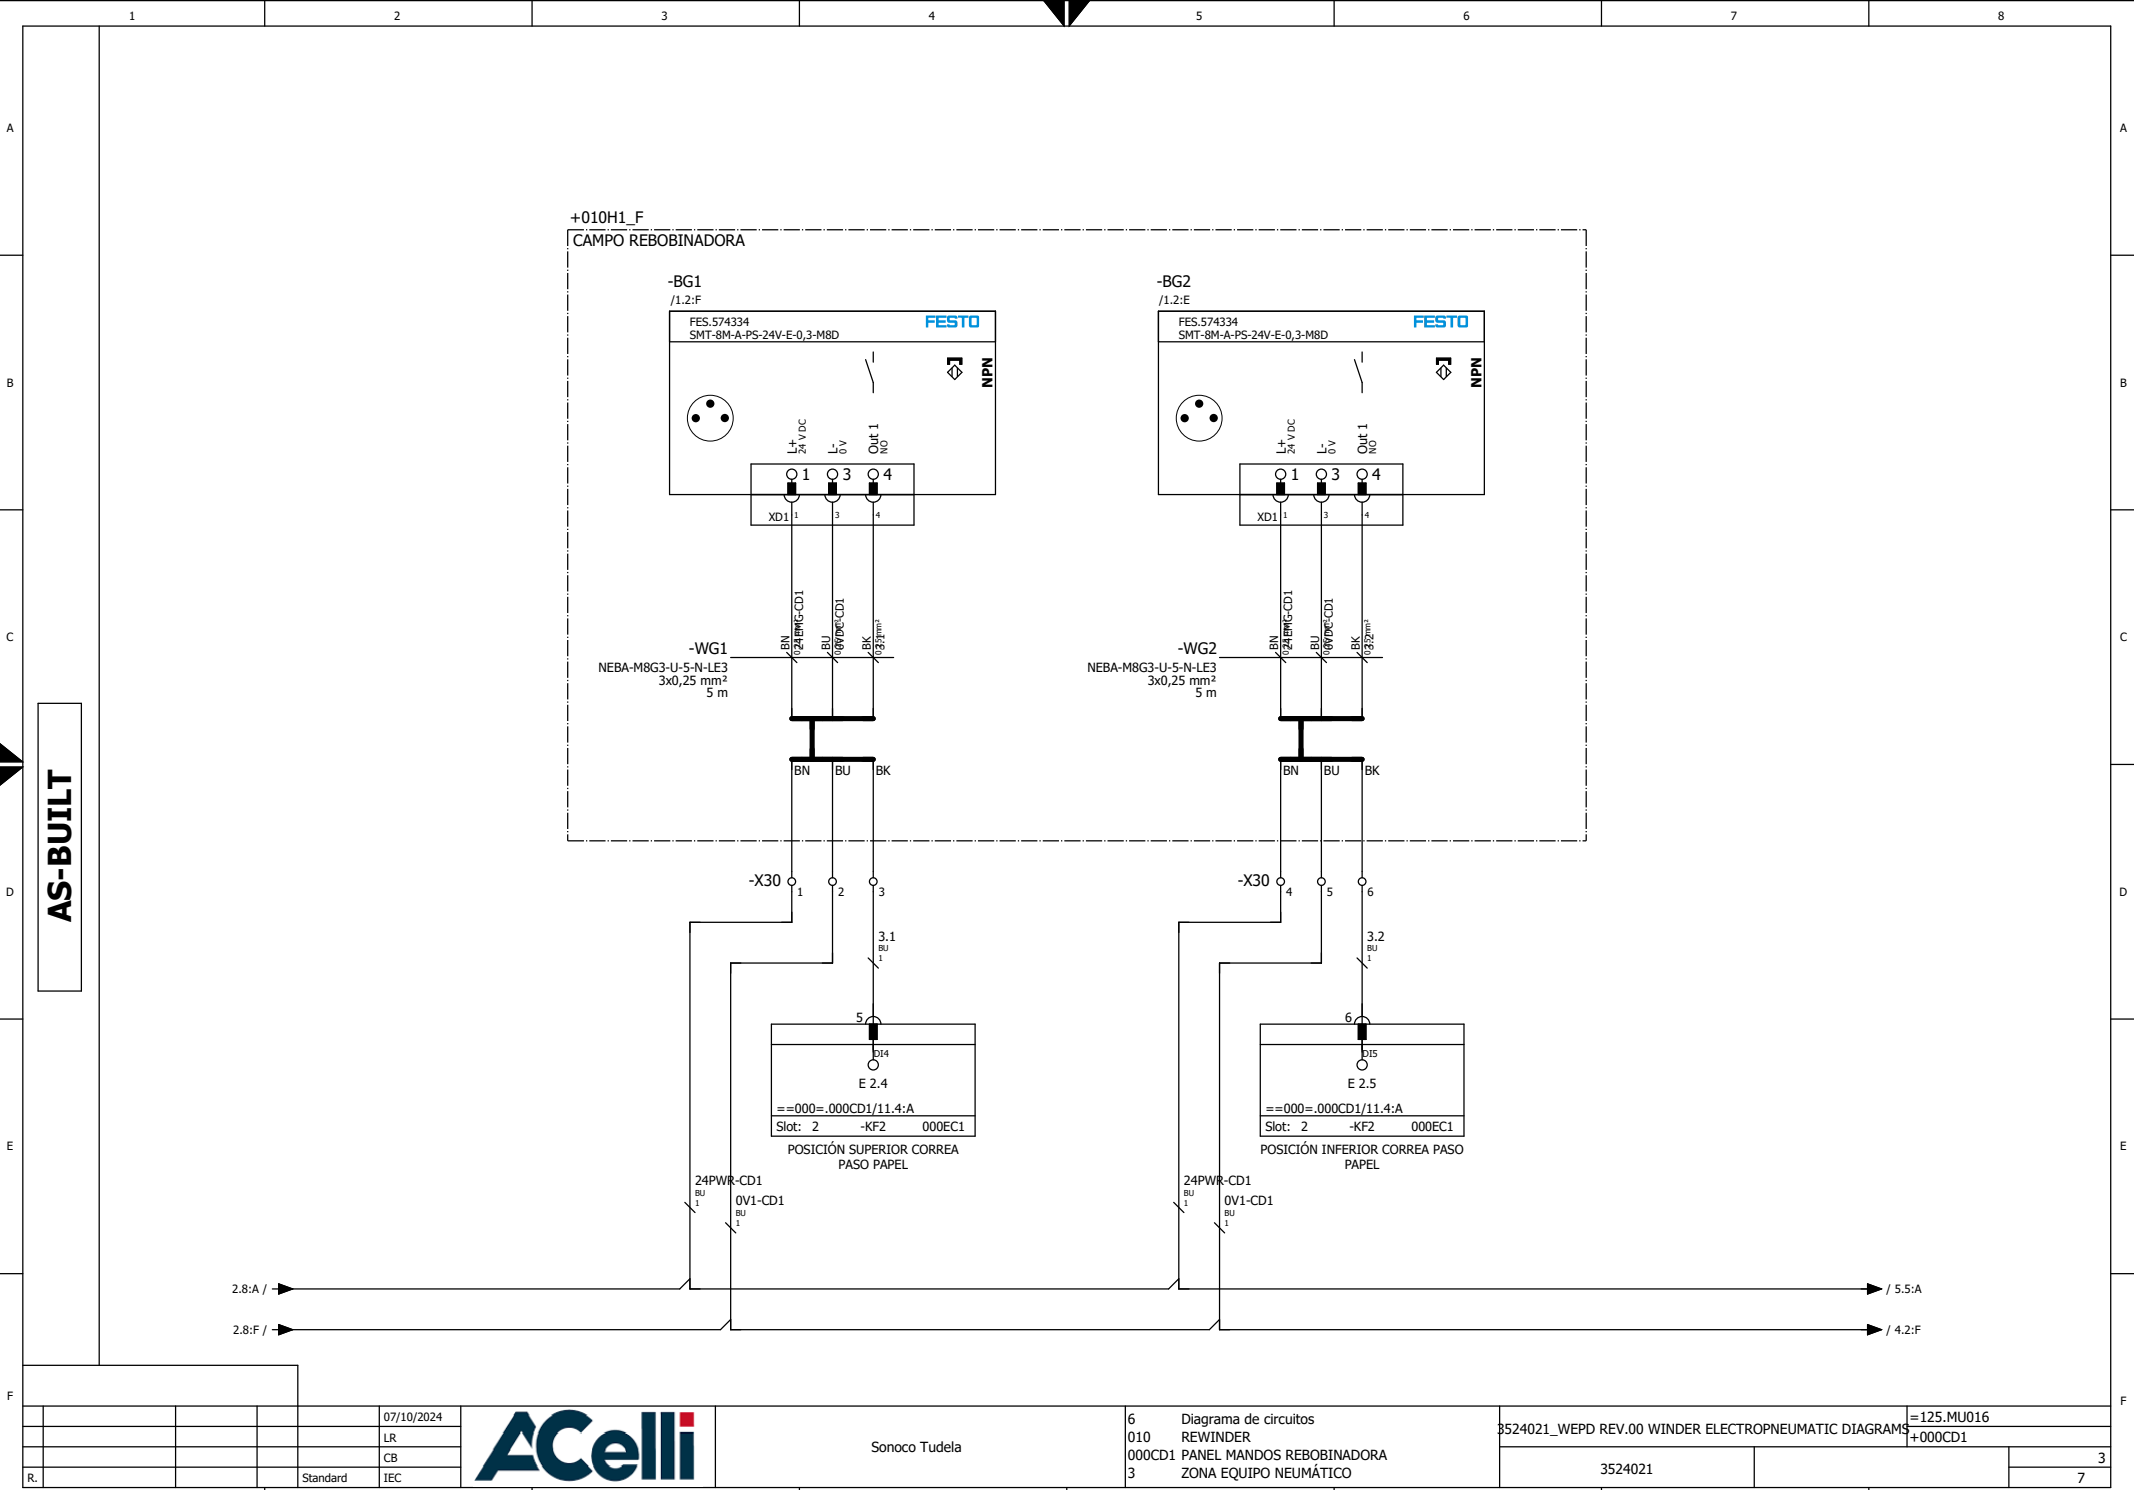

AS-BUILT

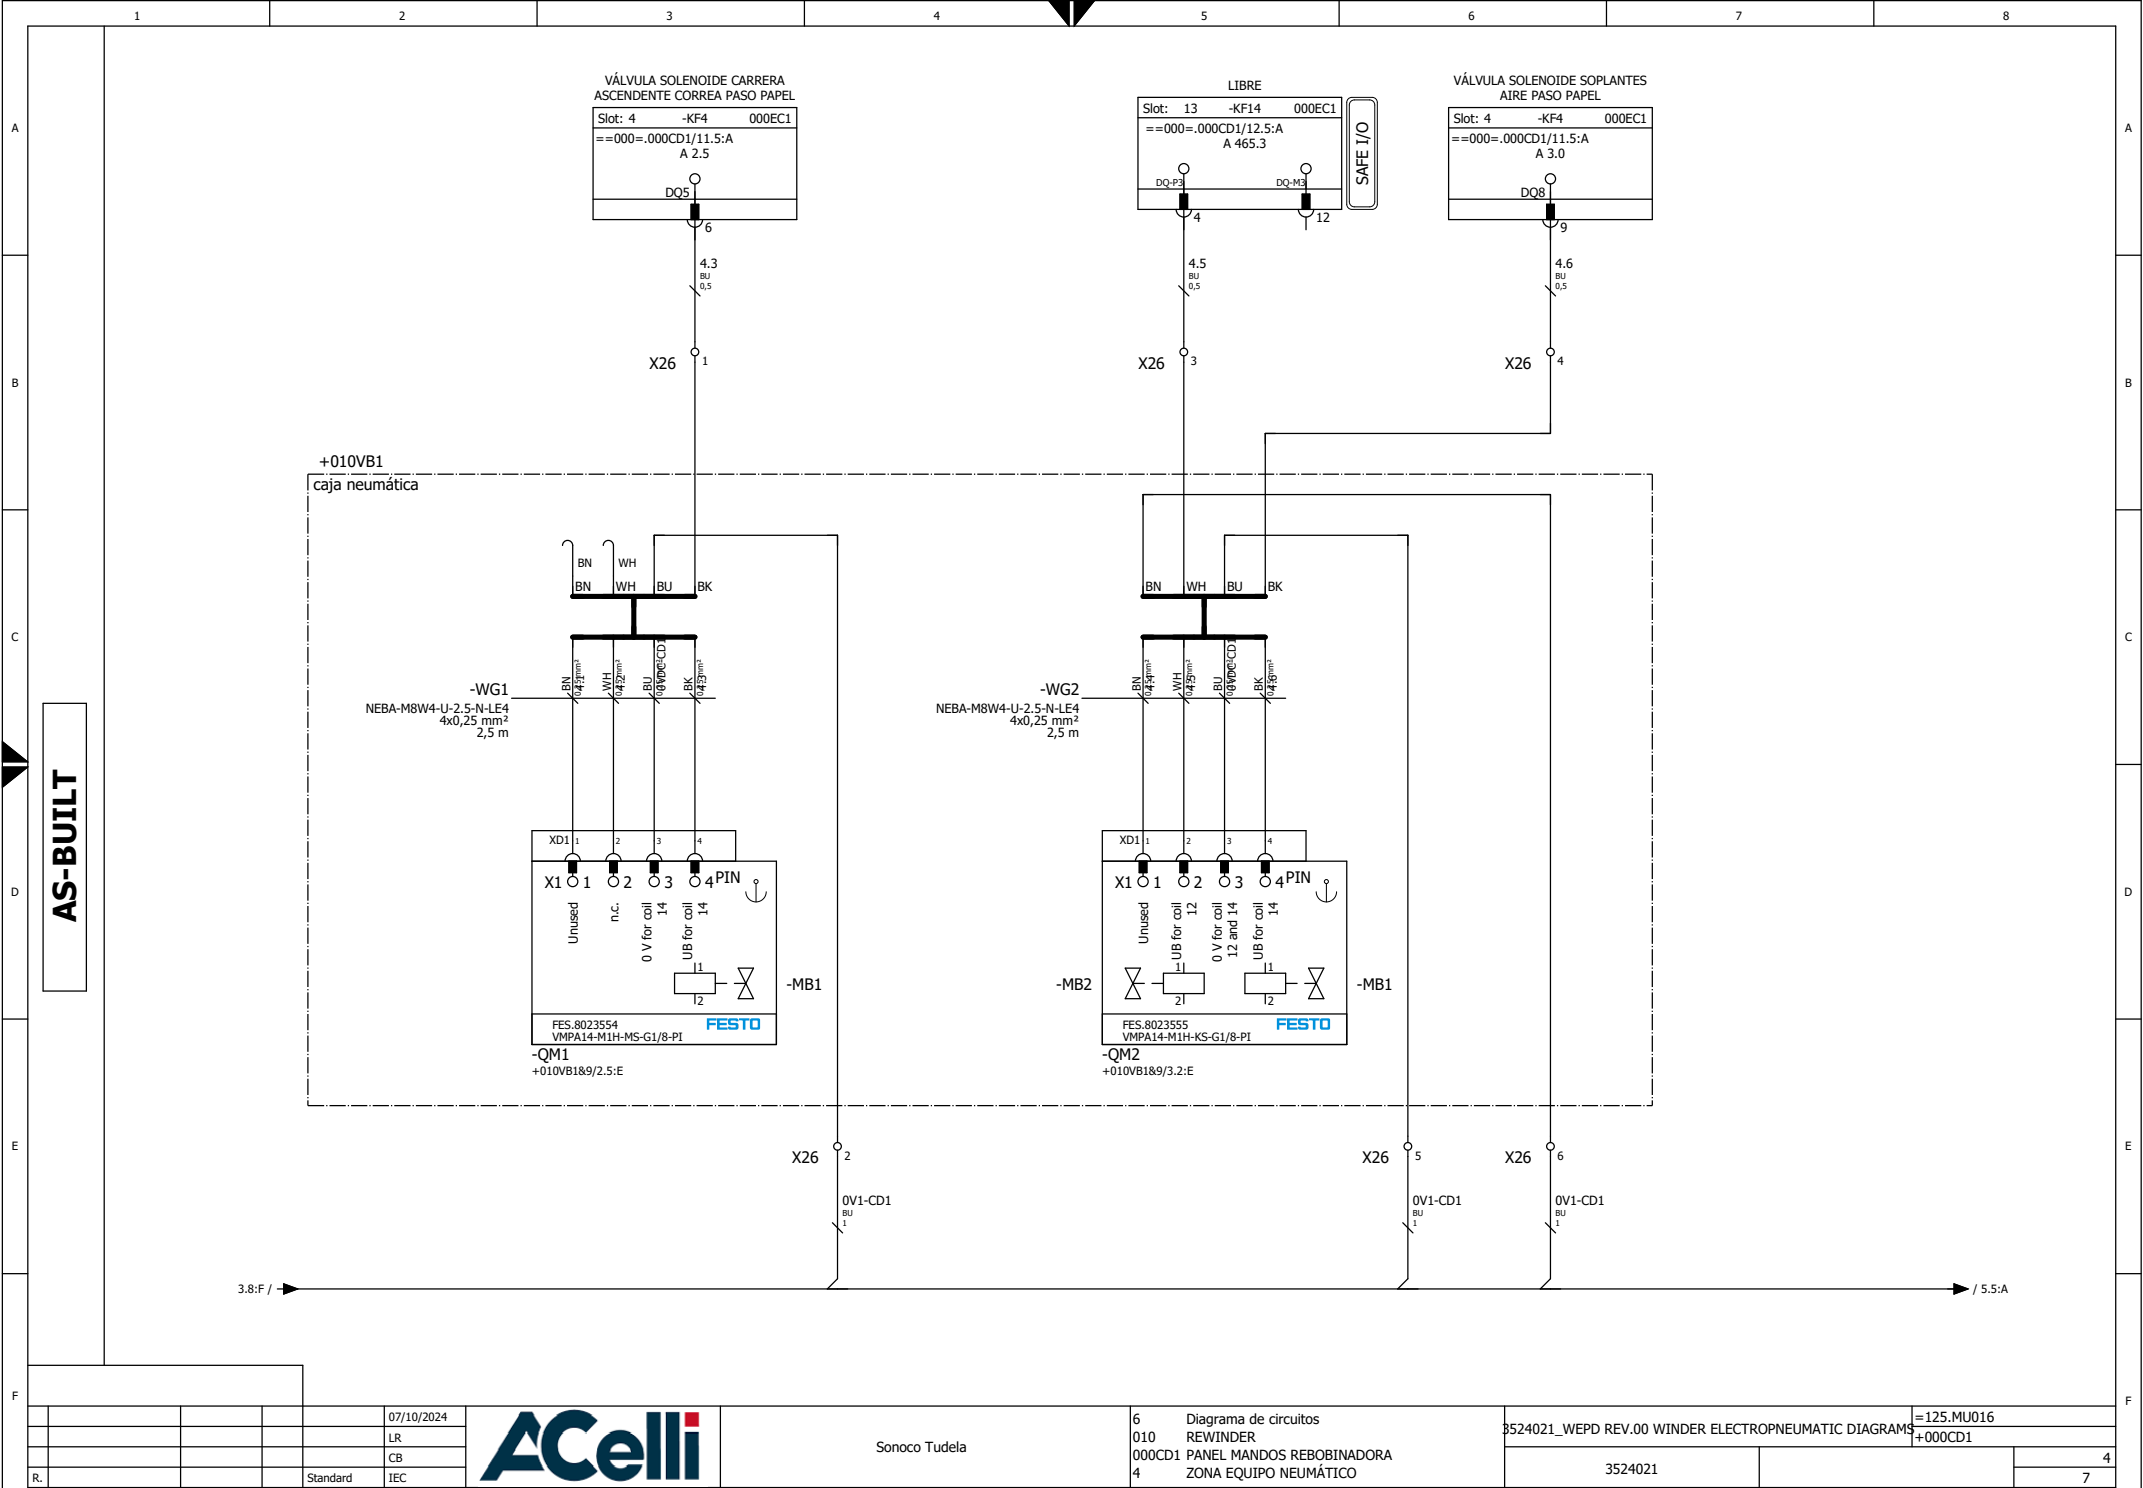

AS-BUILT

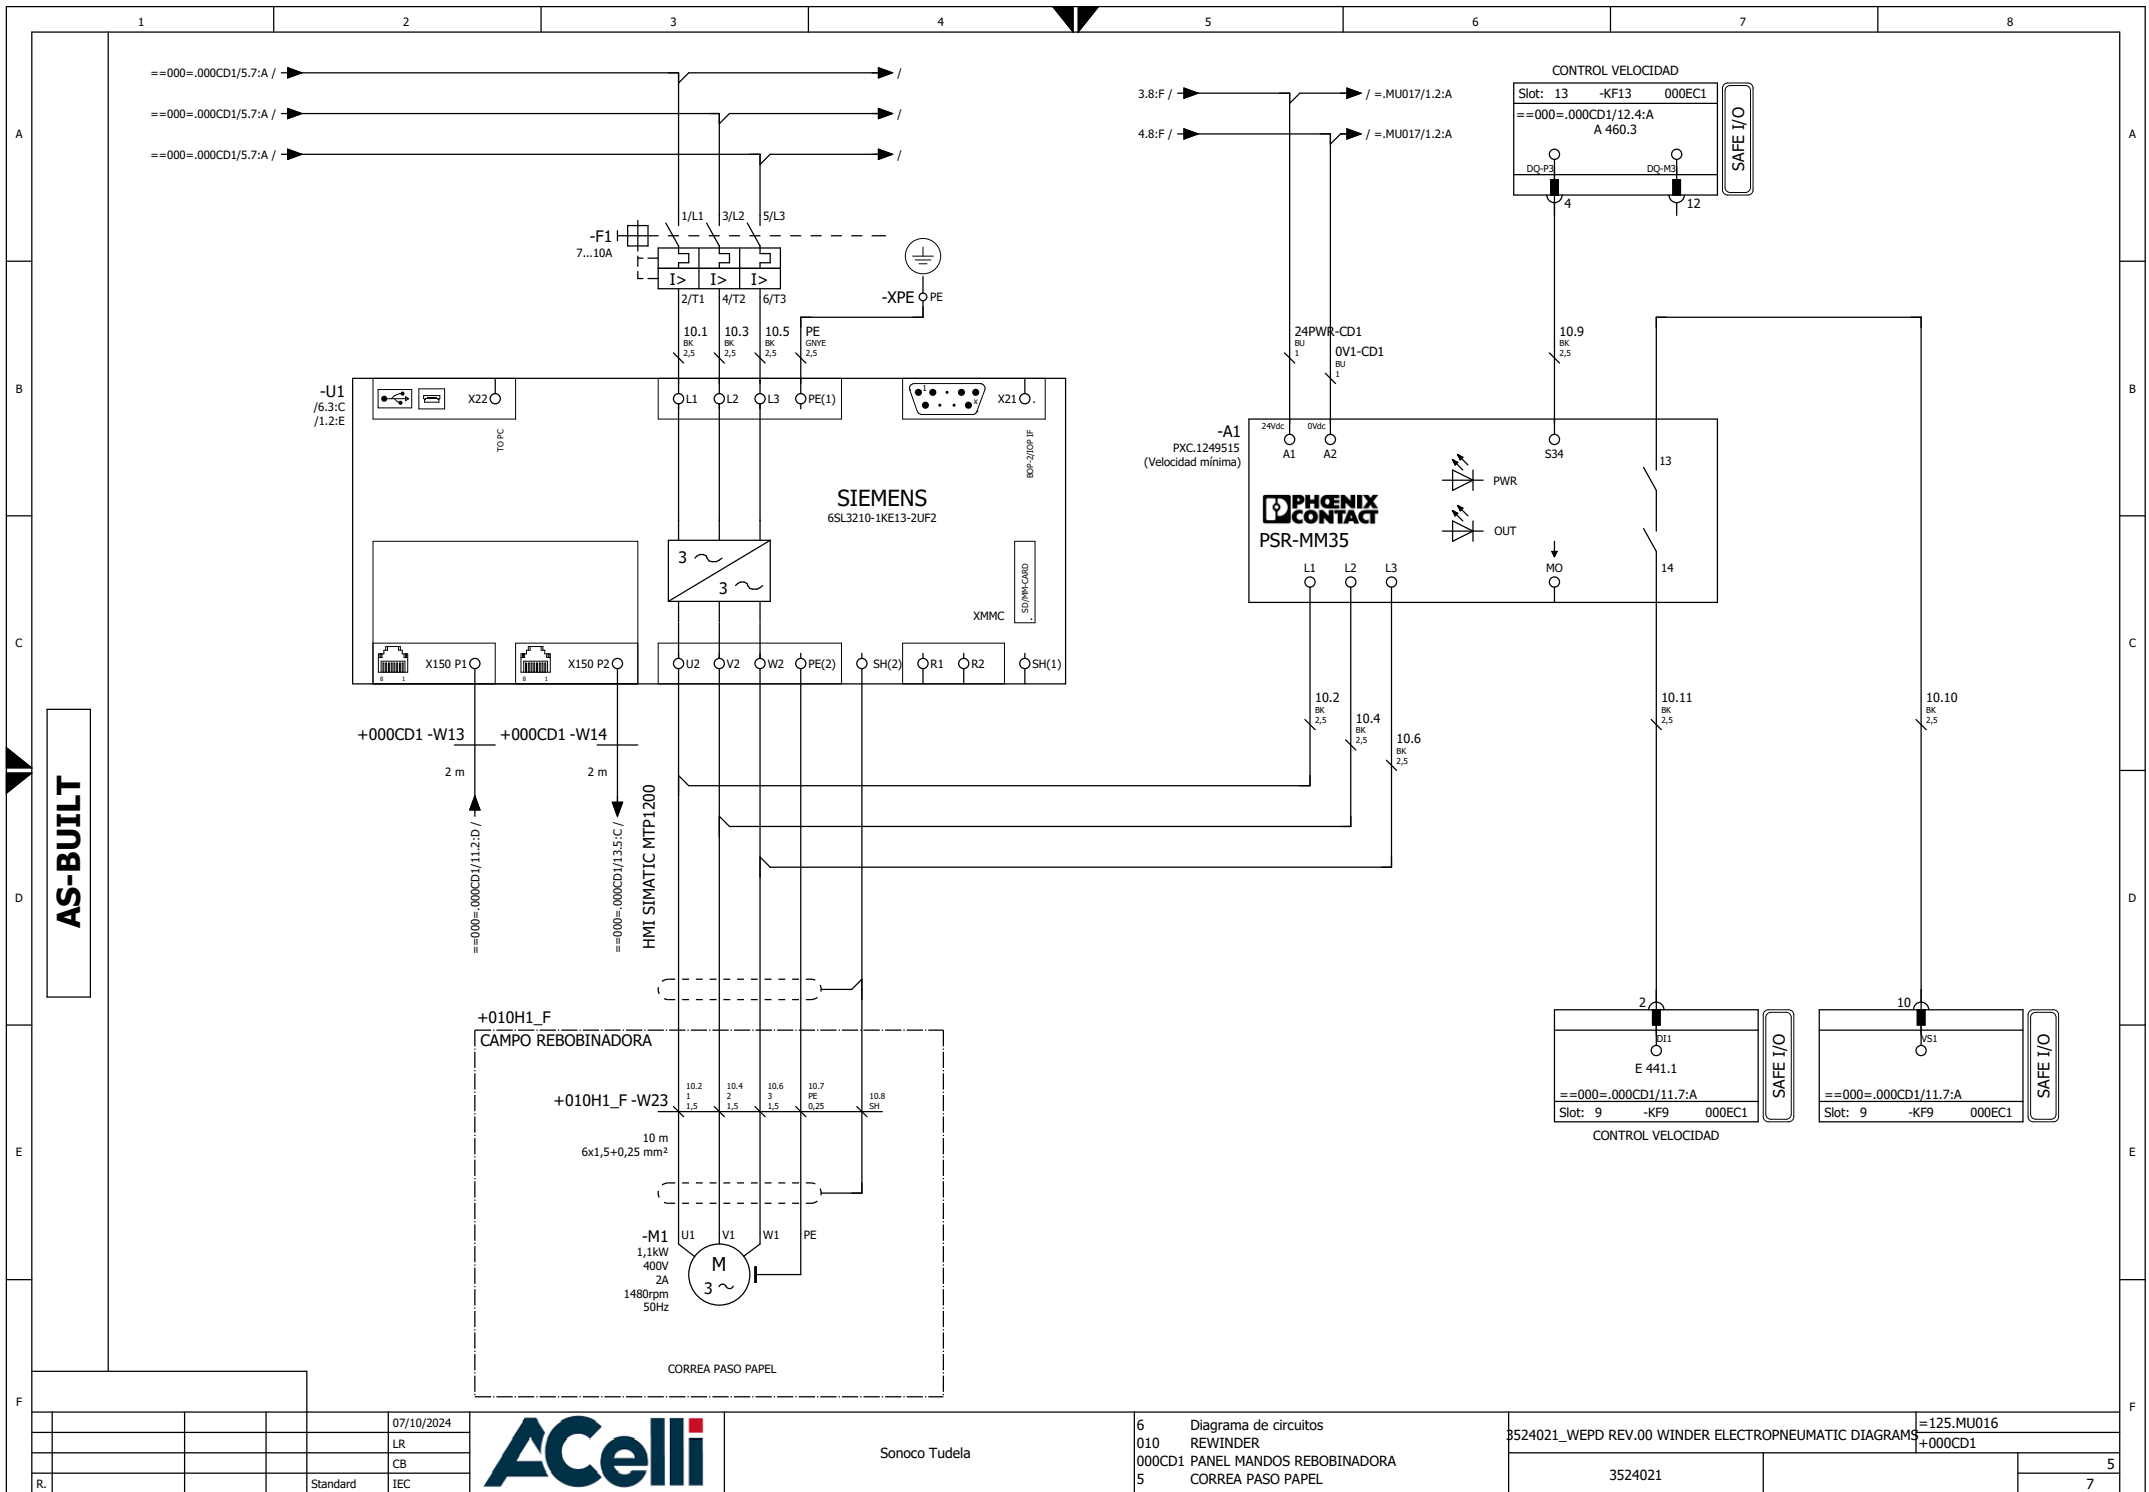

			07/10/2024
			LR
			CB
R.		Standard	IEC

ACelli

Sonoco Tudela

6	Diagrama de circuitos
010	REWINDER
000CD1	PANEL MANDOS REBOBINADORA
5	CORREA PASO PAPEL

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=125.MU016
+000CD1
5
7


Descripción

EXPULSOR

Function

MU017

AS-BUILT

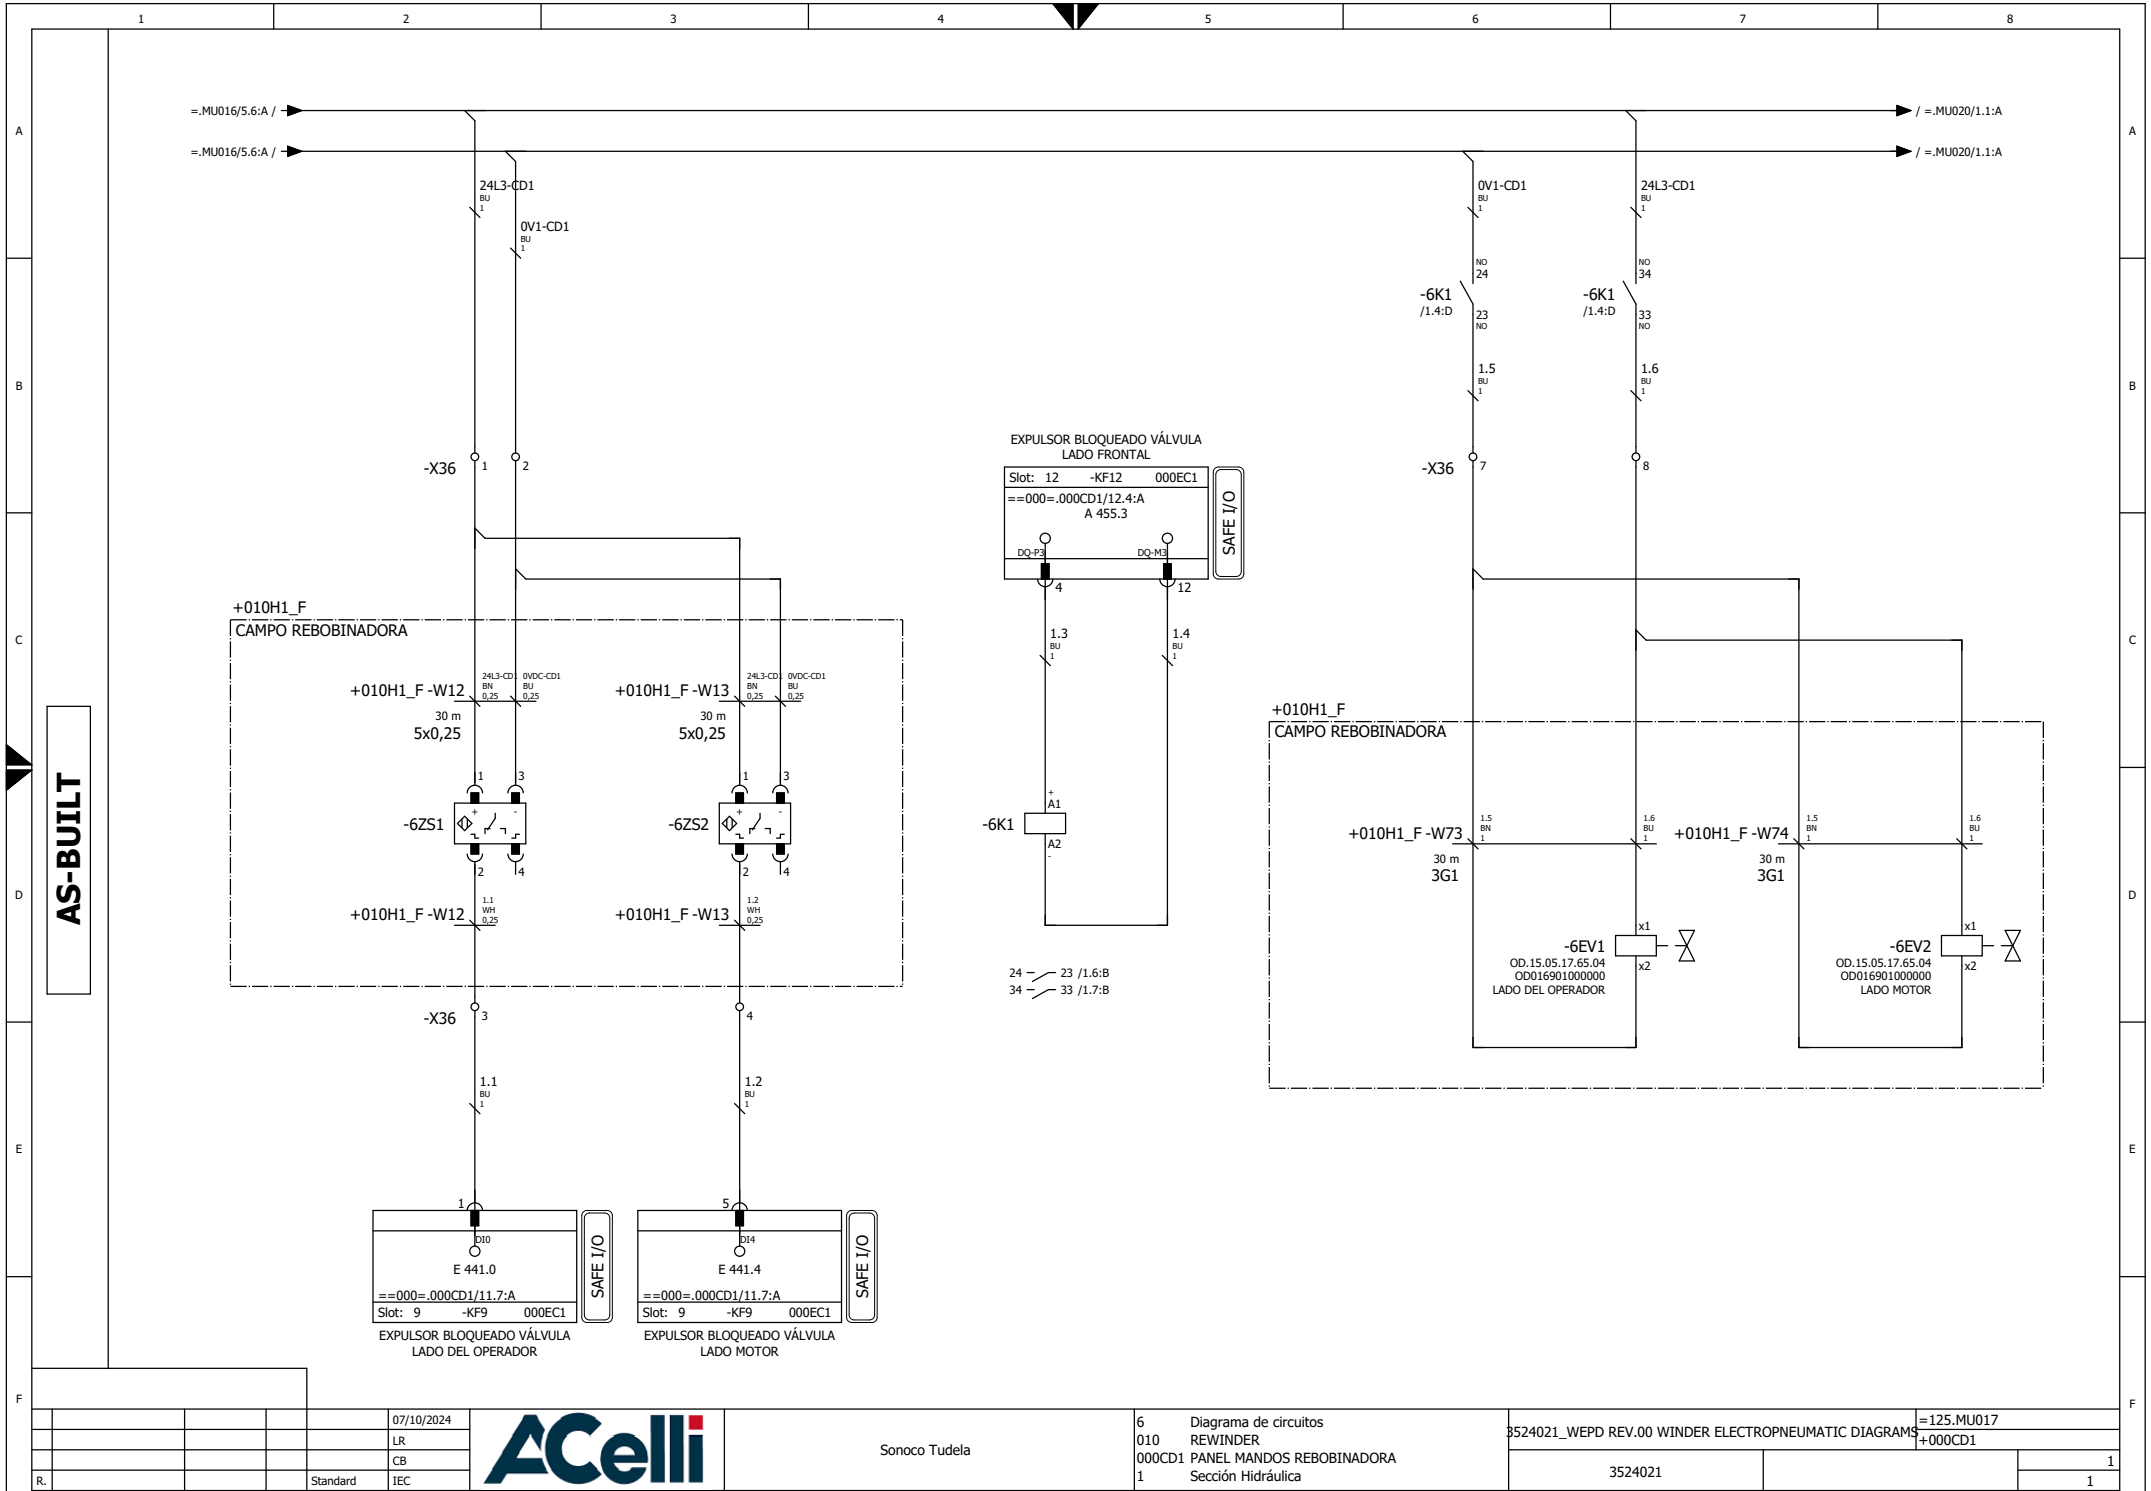

07/10/2024

LR

CB

IEC

ACelli

Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
1 Sección Hidráulica

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

3524021

=125.MU017
+000CD1

1

1


Descripción

CABEZALES RETENCIÓN

Function

MU020

AS-BUILT

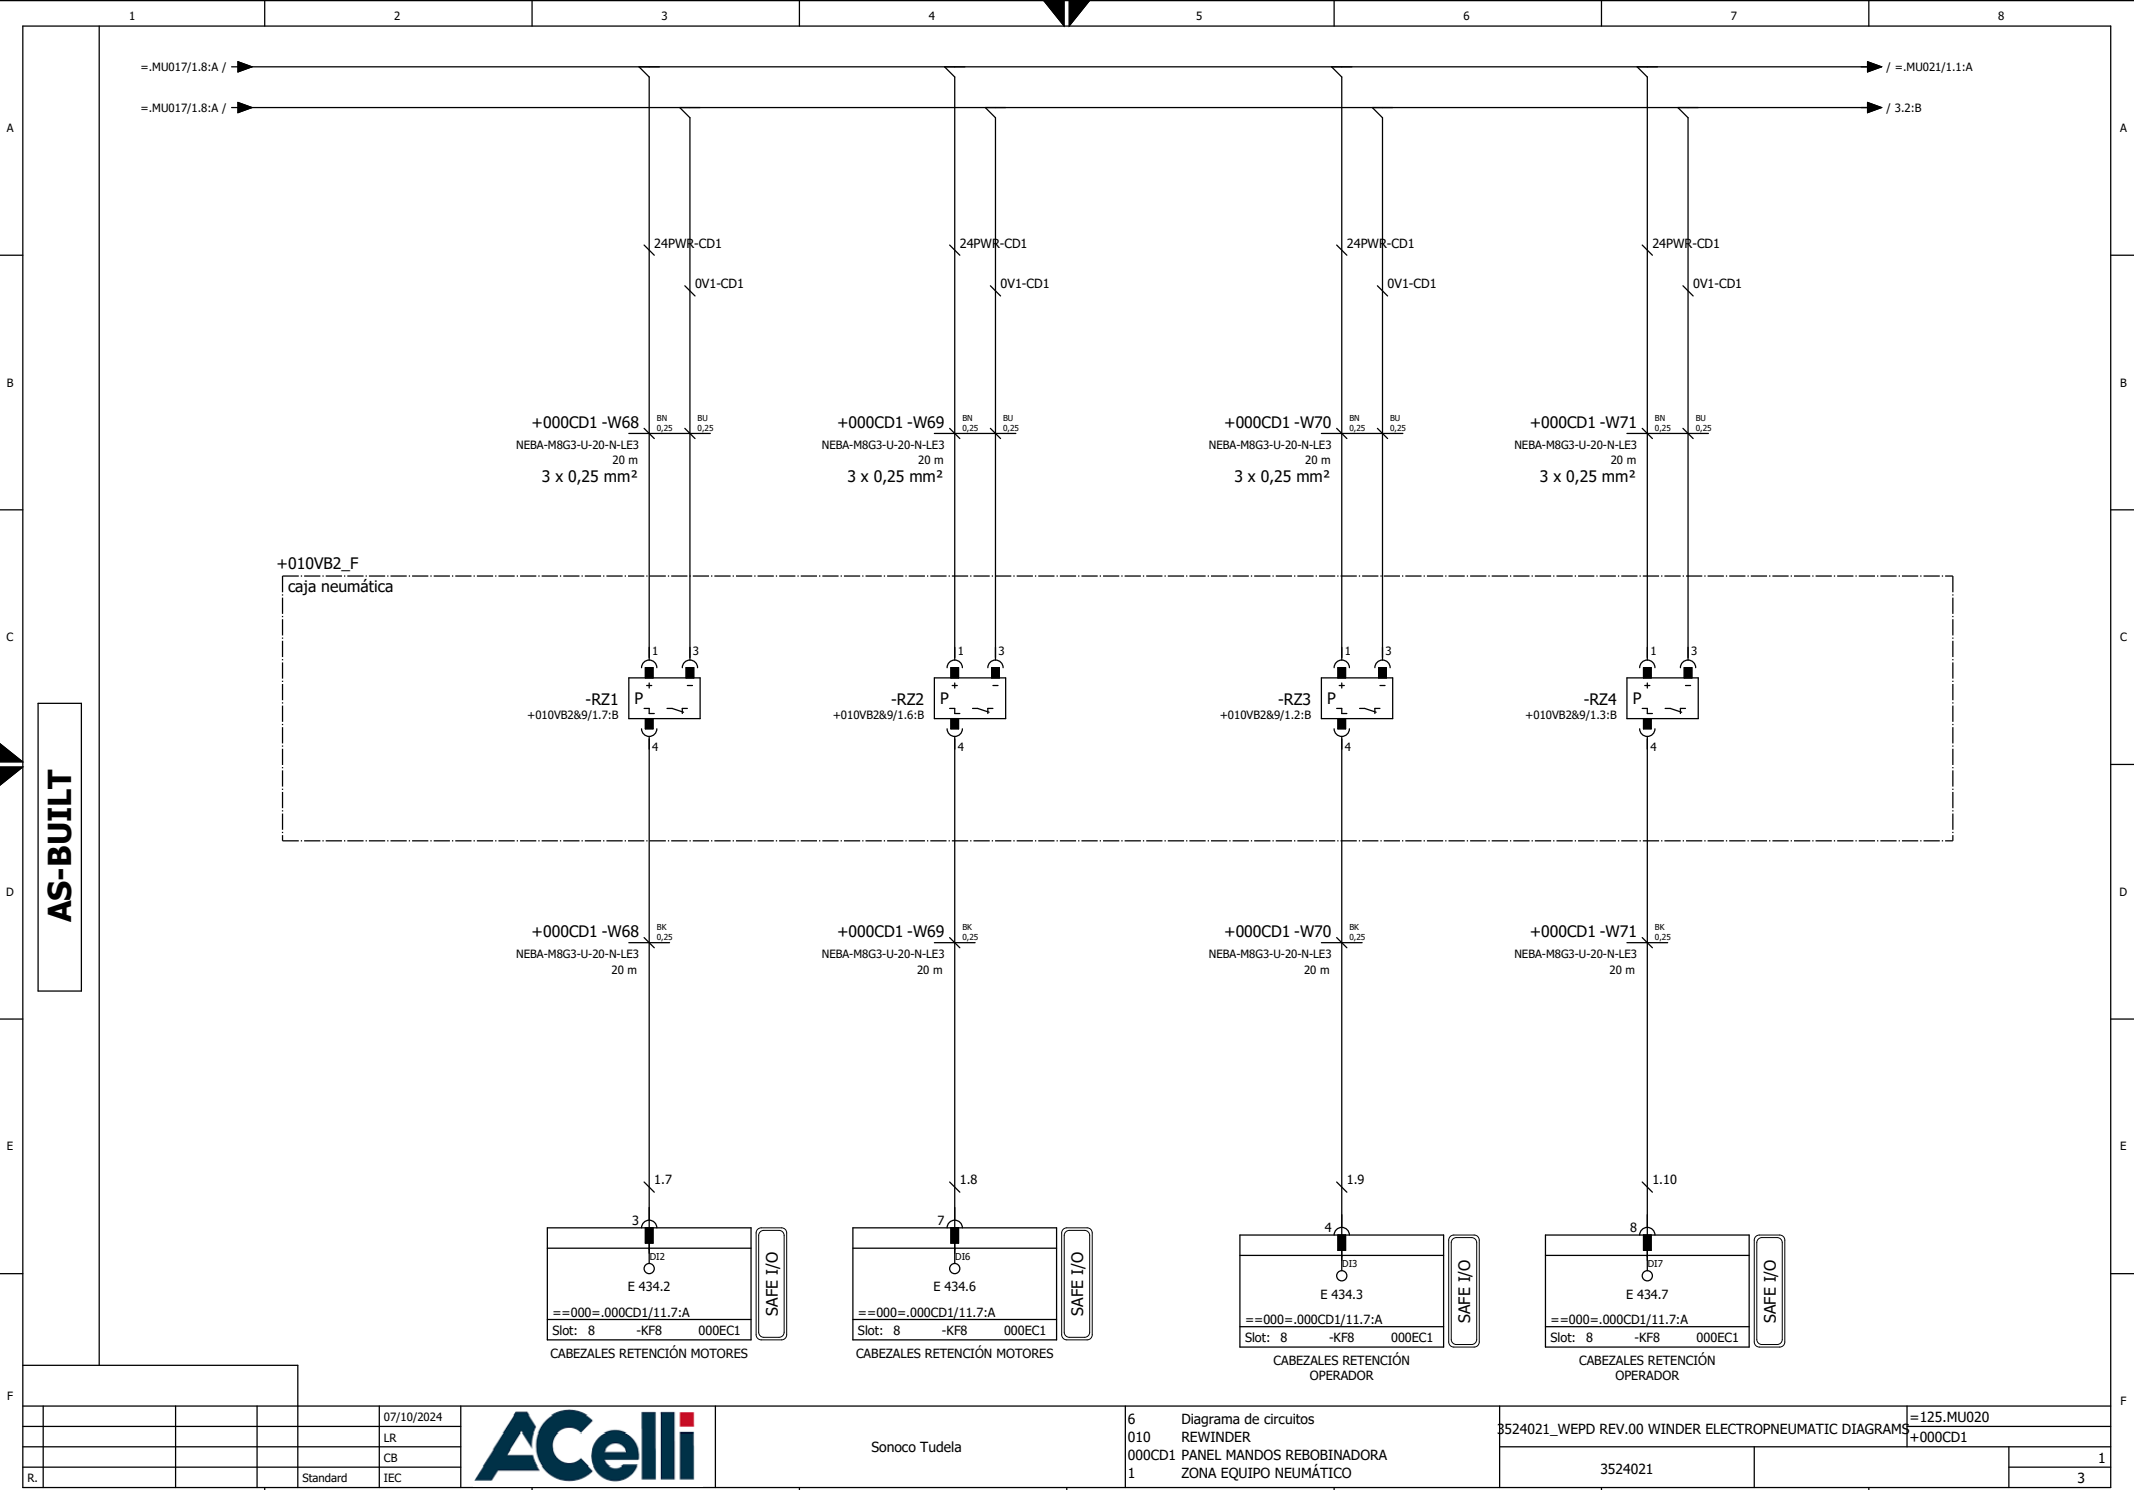

				07/10/2024
				LR
				CB
R.			Standard	IEC




Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
1 ZONA EQUIPO NEUMÁTICO

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=125.MU020
+000CD1
1
3

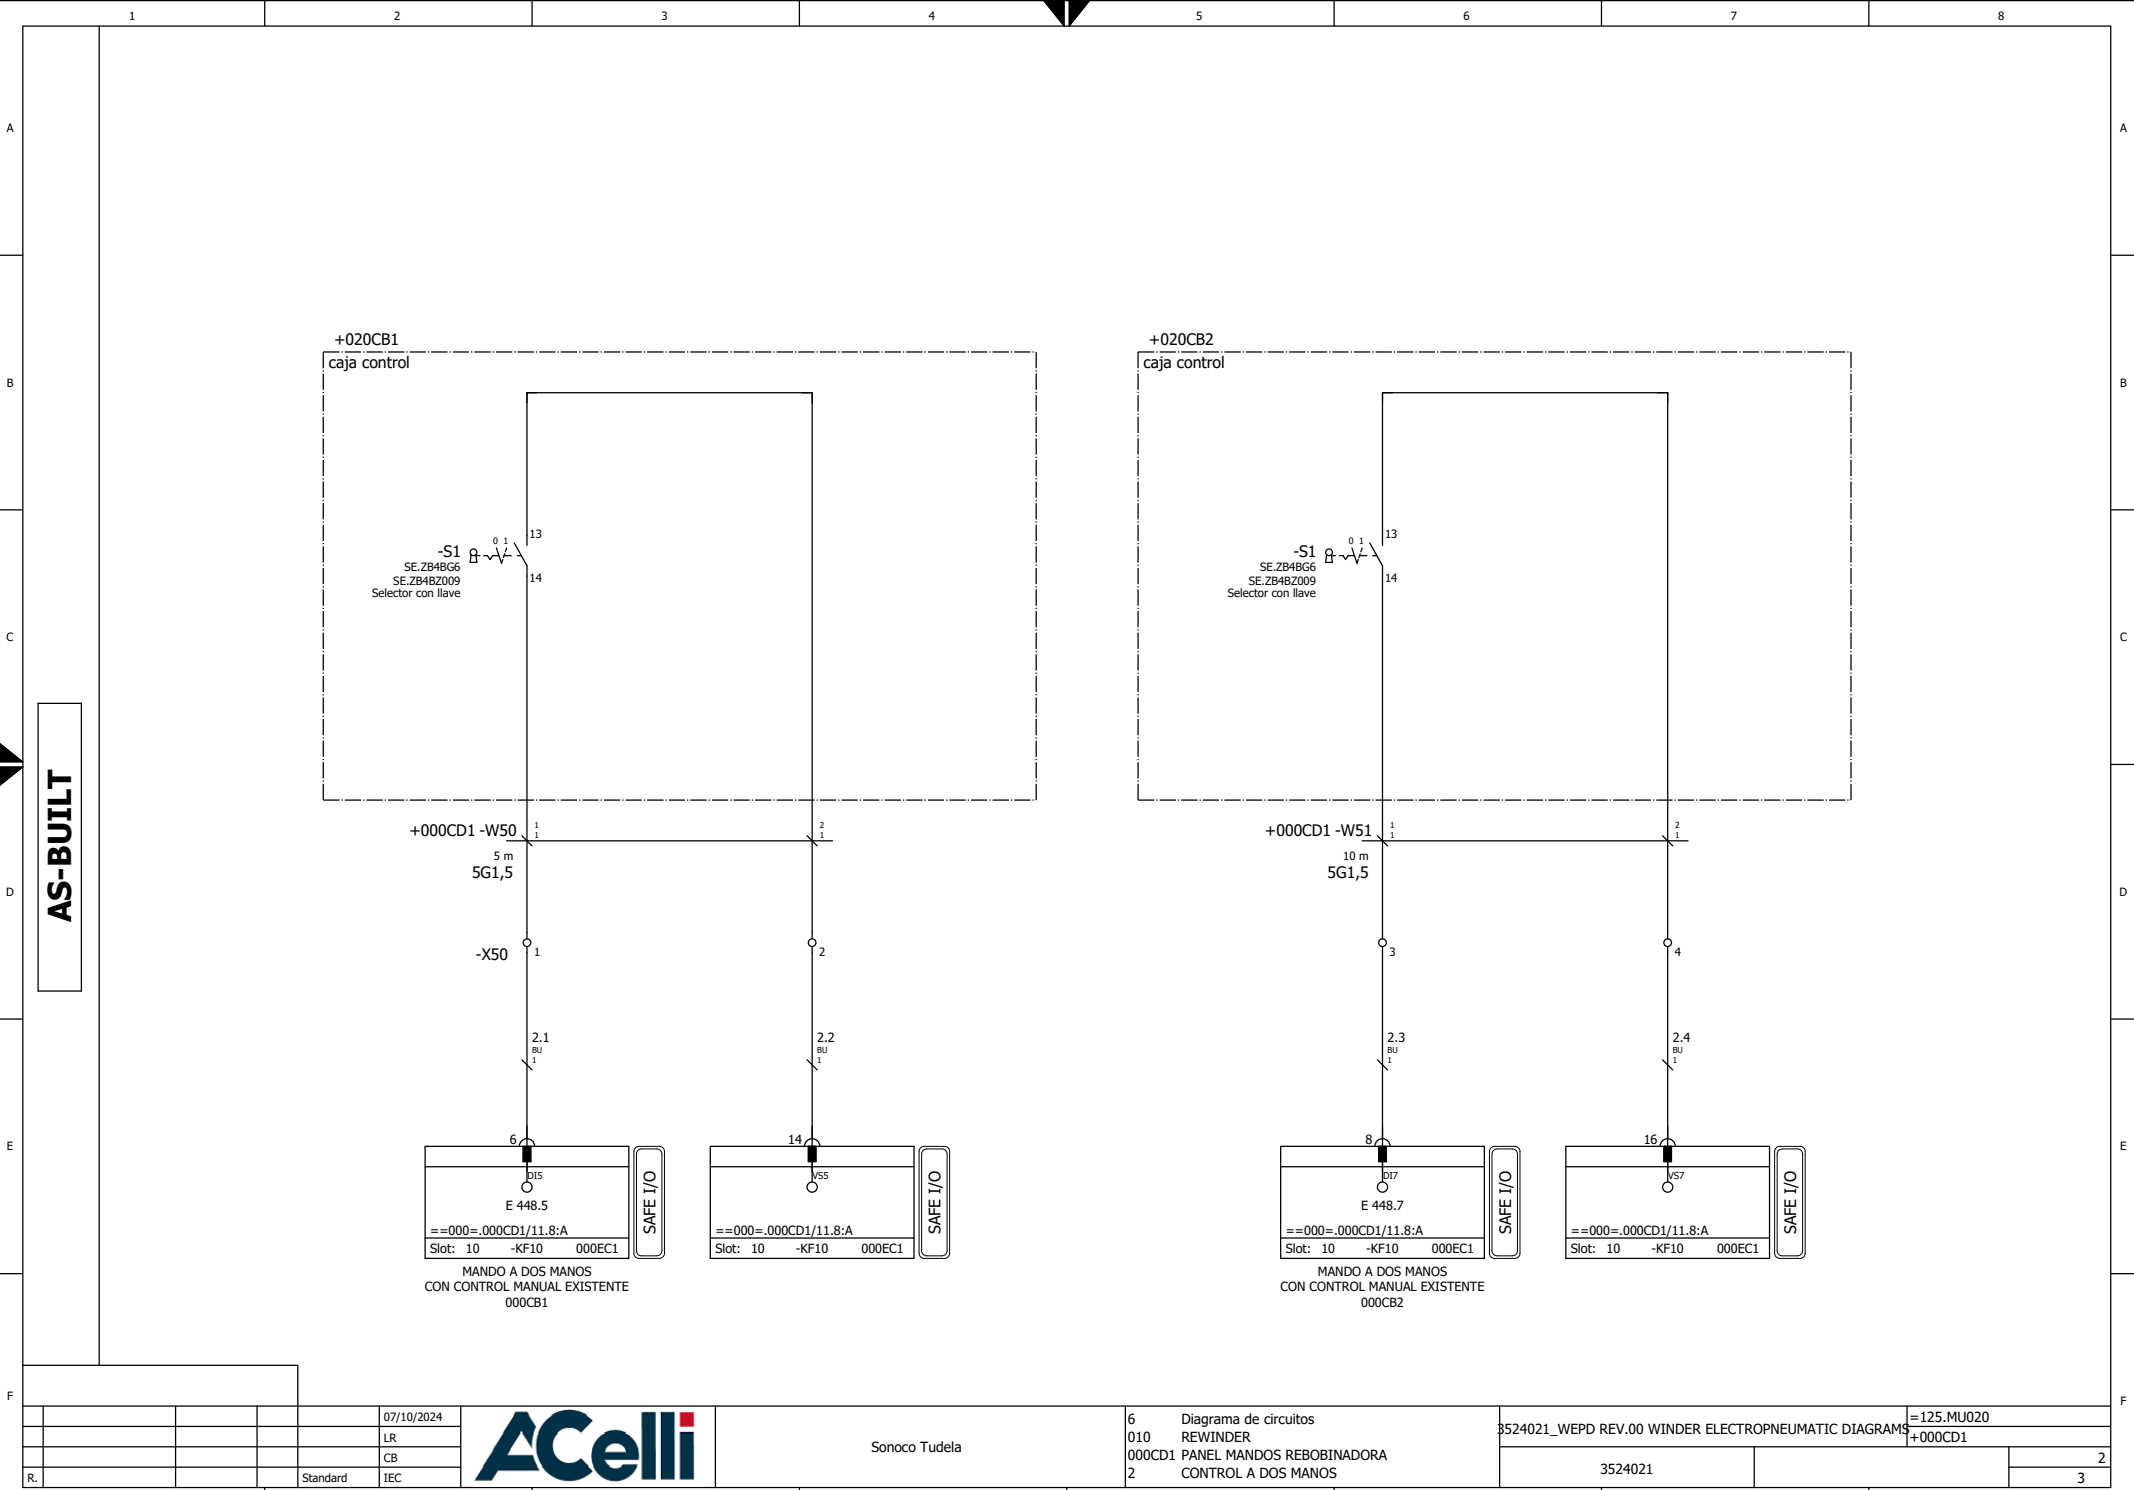

AS-BUILT



Sonoco Tudela

6 Diagrama de circuitos
010 REWINDER
000CD1 PANEL MANDOS REBOBINADORA
2 CONTROL A DOS MANOS

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

=125.MU020
+000CD1

3524021

2

3

Descripción


RODILLO PRENSA ENROLLADO


Function

MU021

AS-BUILT

				07/10/2024		Sonoco Tudela	6	Diagrama de circuitos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS		=125.MU021	
				LR			010	REWINDER			+	
				CB								
R.				Standard			1	PORTADA	3524021			1
				IEC						1		

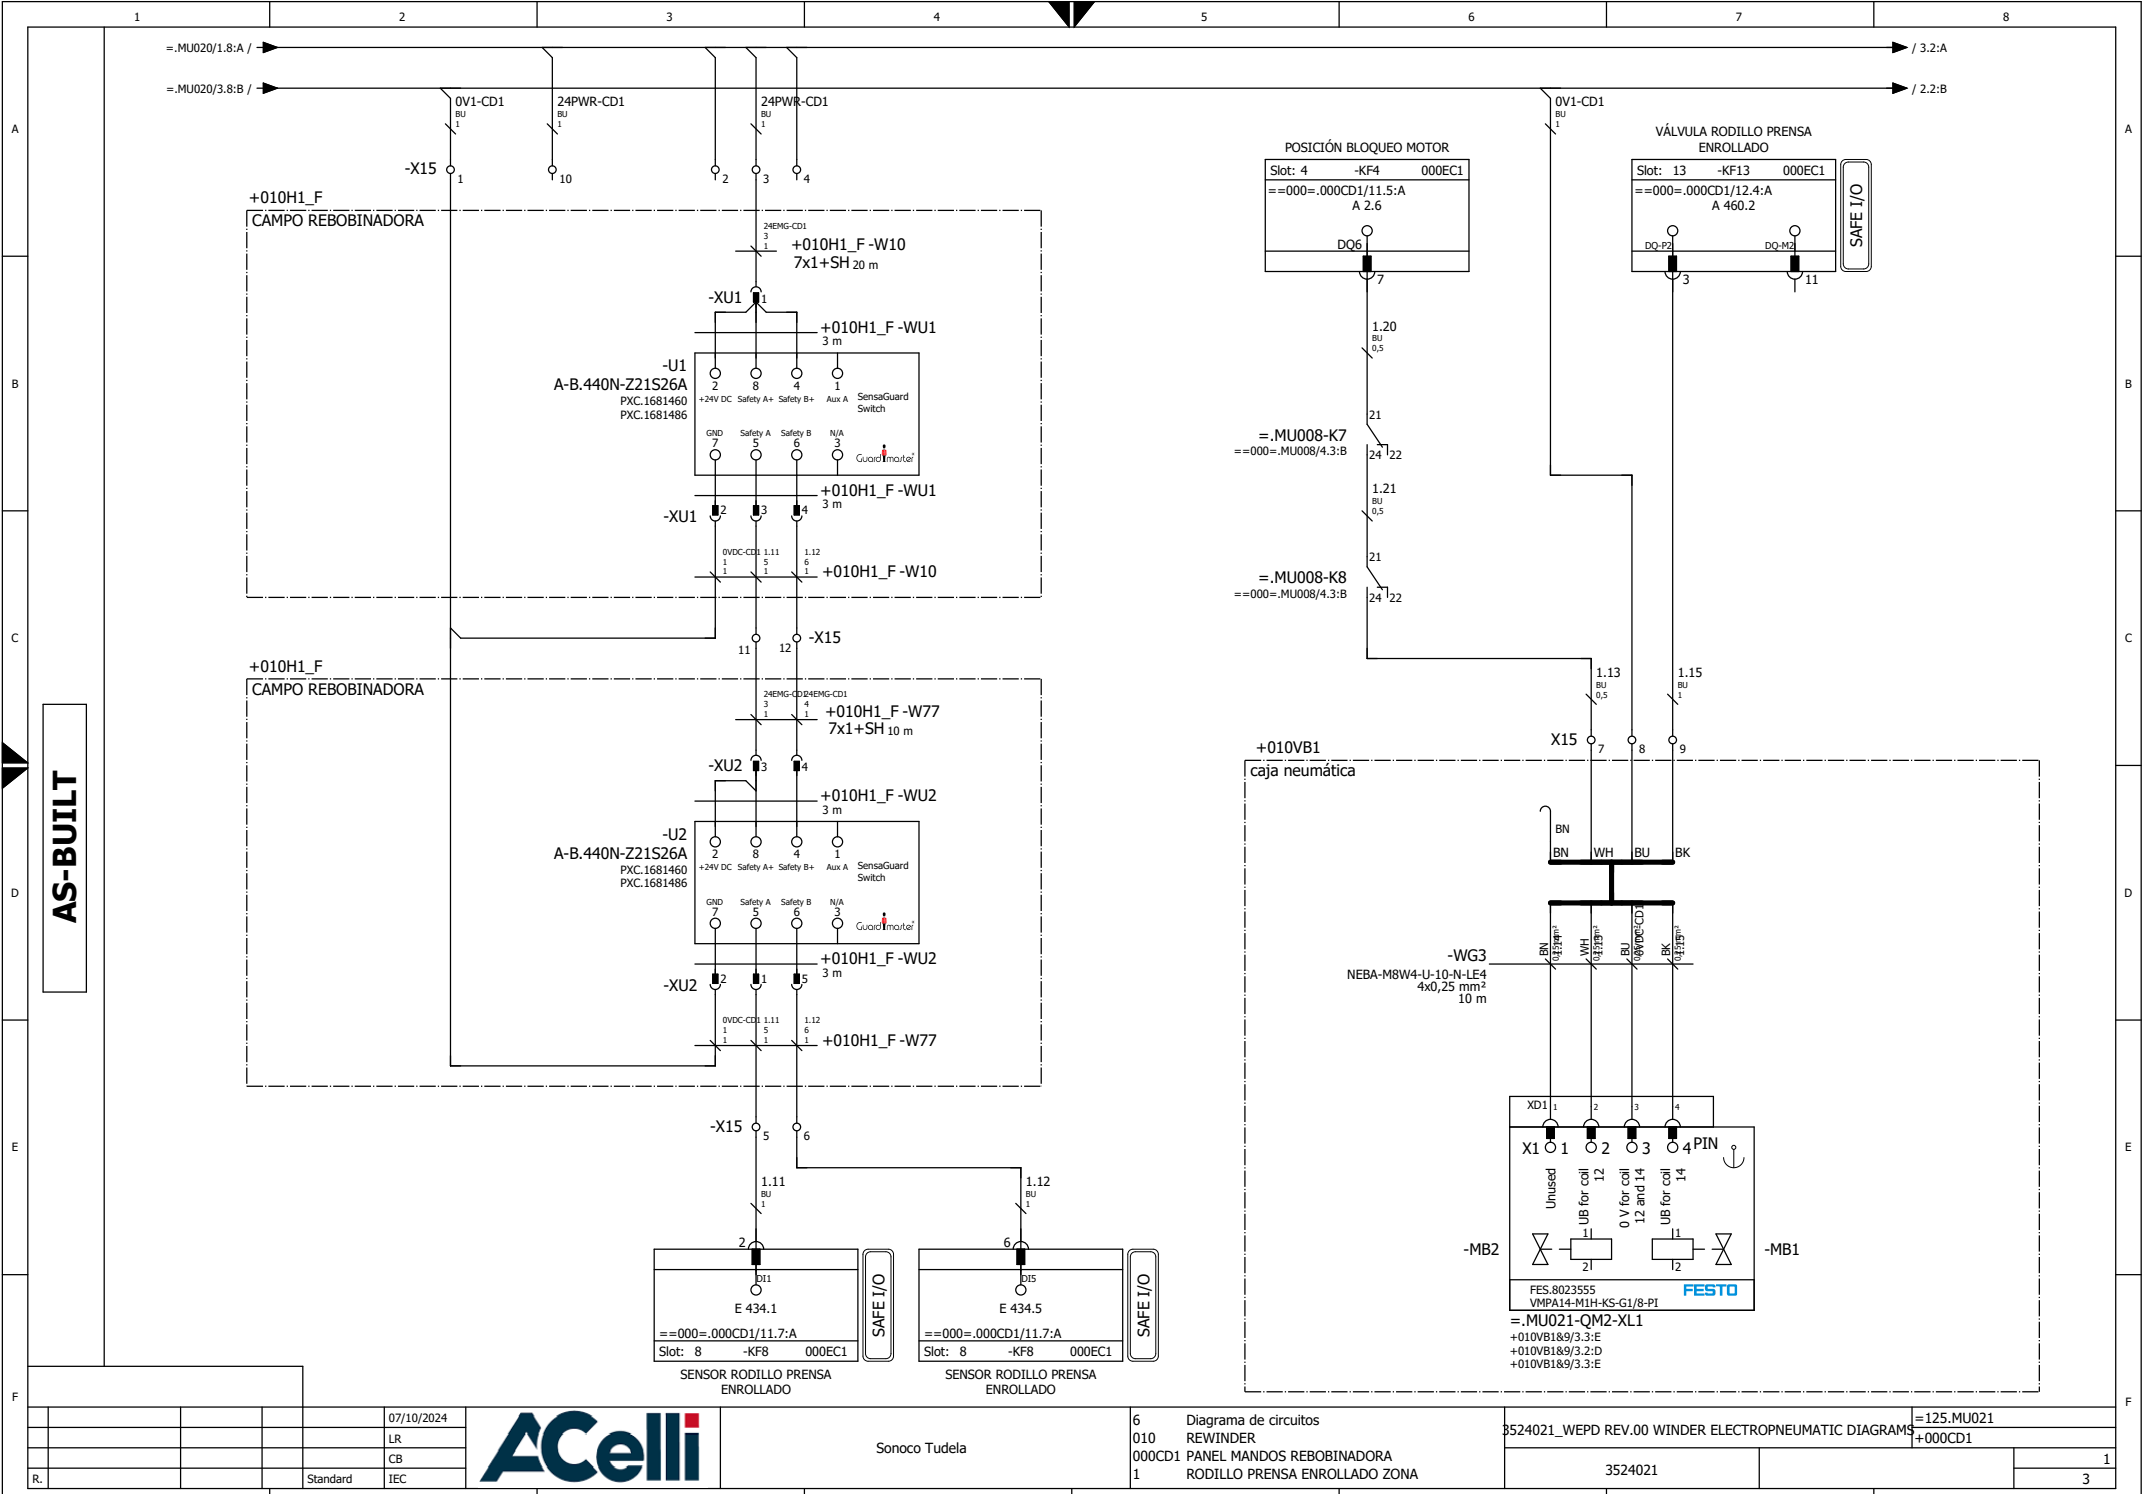

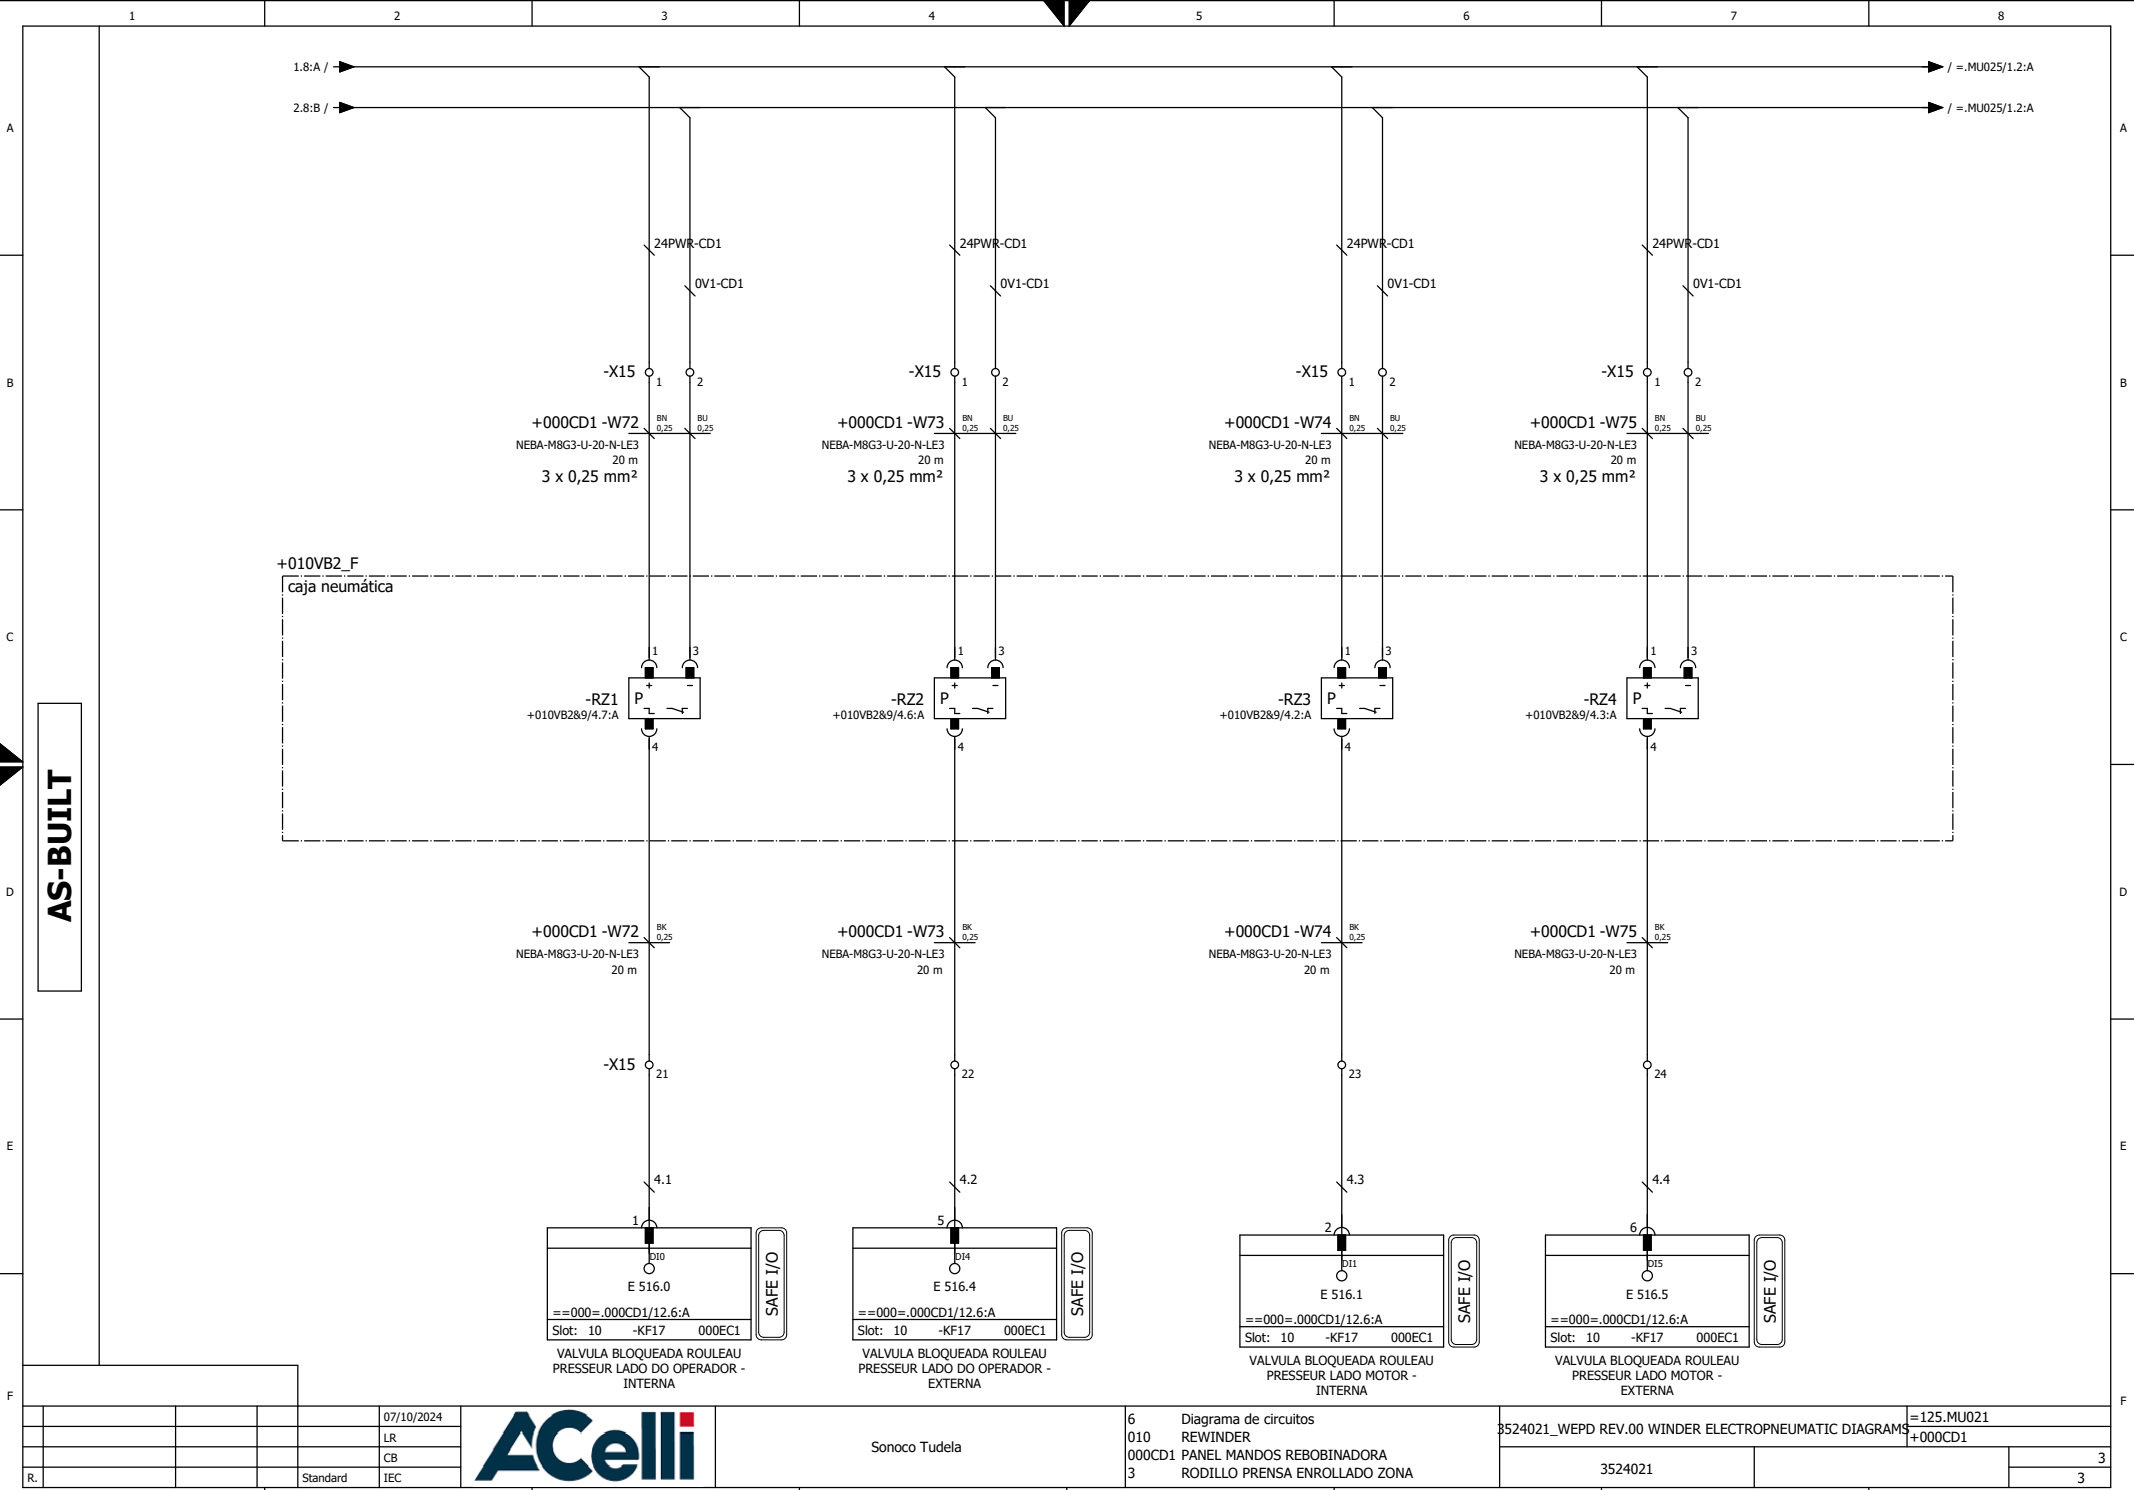

Descripción


SOPORTE DESCARGA

Function

MU025

AS-BUILT

				07/10/2024		Sonoco Tudela	6 010	Diagrama de circuitos REWINDER	B524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS =125.MU025			
				LR								+
				CB								
R.				Standard IEC								
							1	PORTADA	3524021		1	

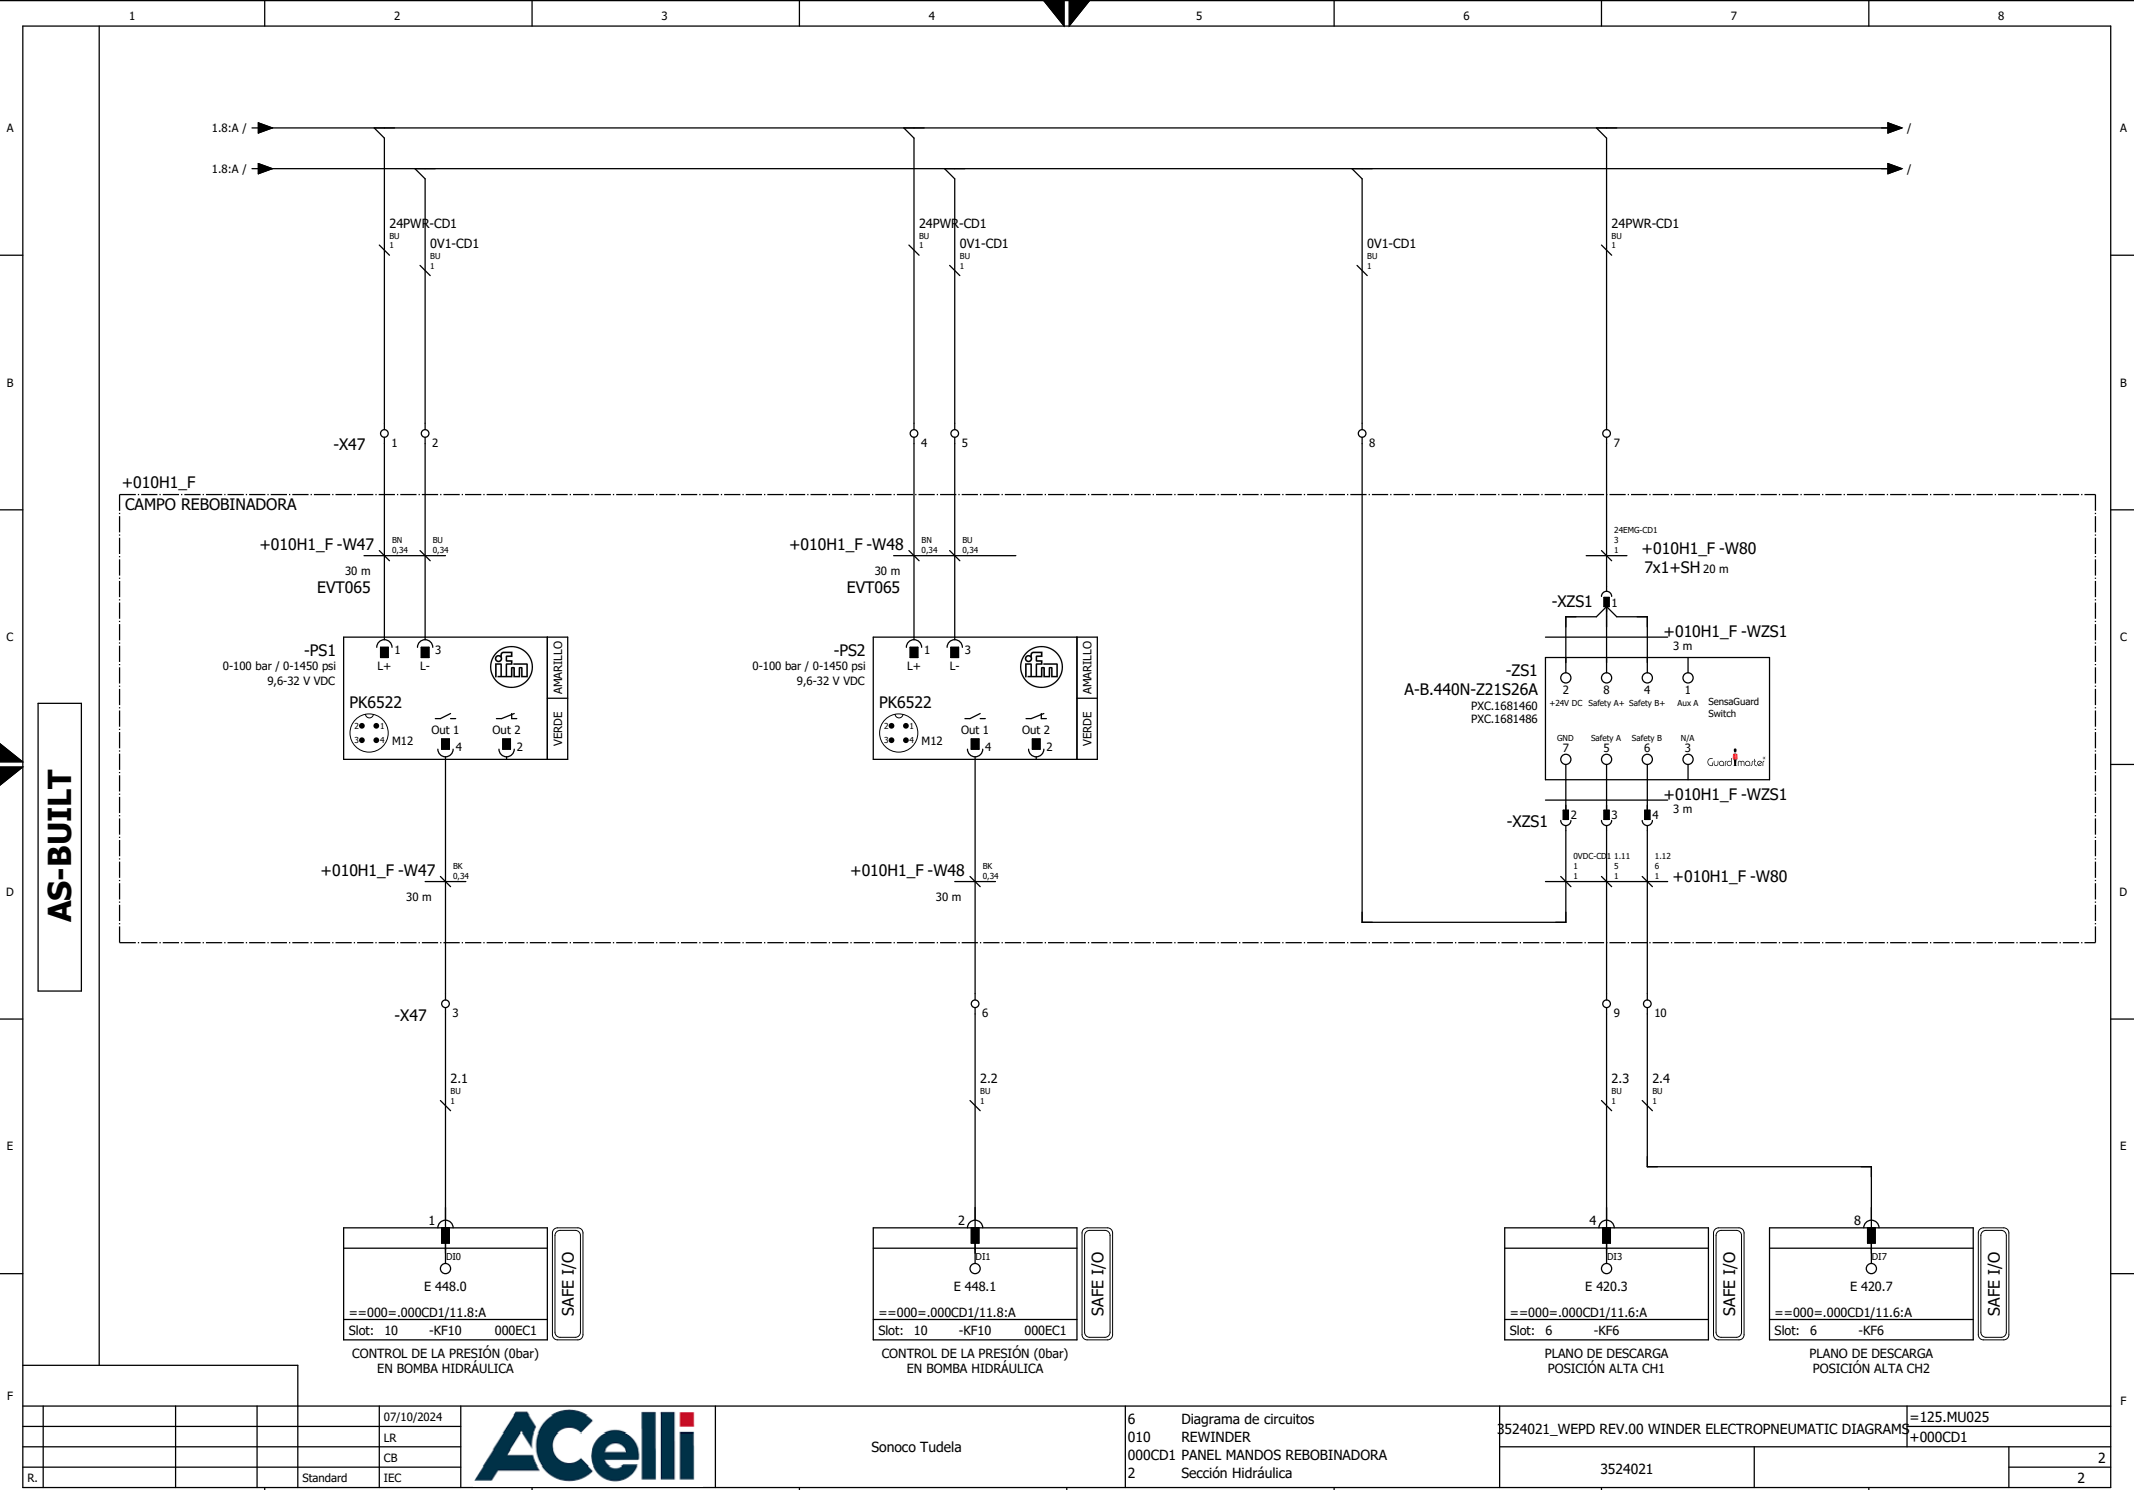

Descripción


PUERTAS DE SEGURIDAD

Function

MU101

AS-BUILT

			07/10/2024		Sonoco Tudela	6	Diagrama de circuitos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU101
			LR			100	DESEÑOLLADOR		+
			CB						
R.			Standard IEC					1	PORTADA

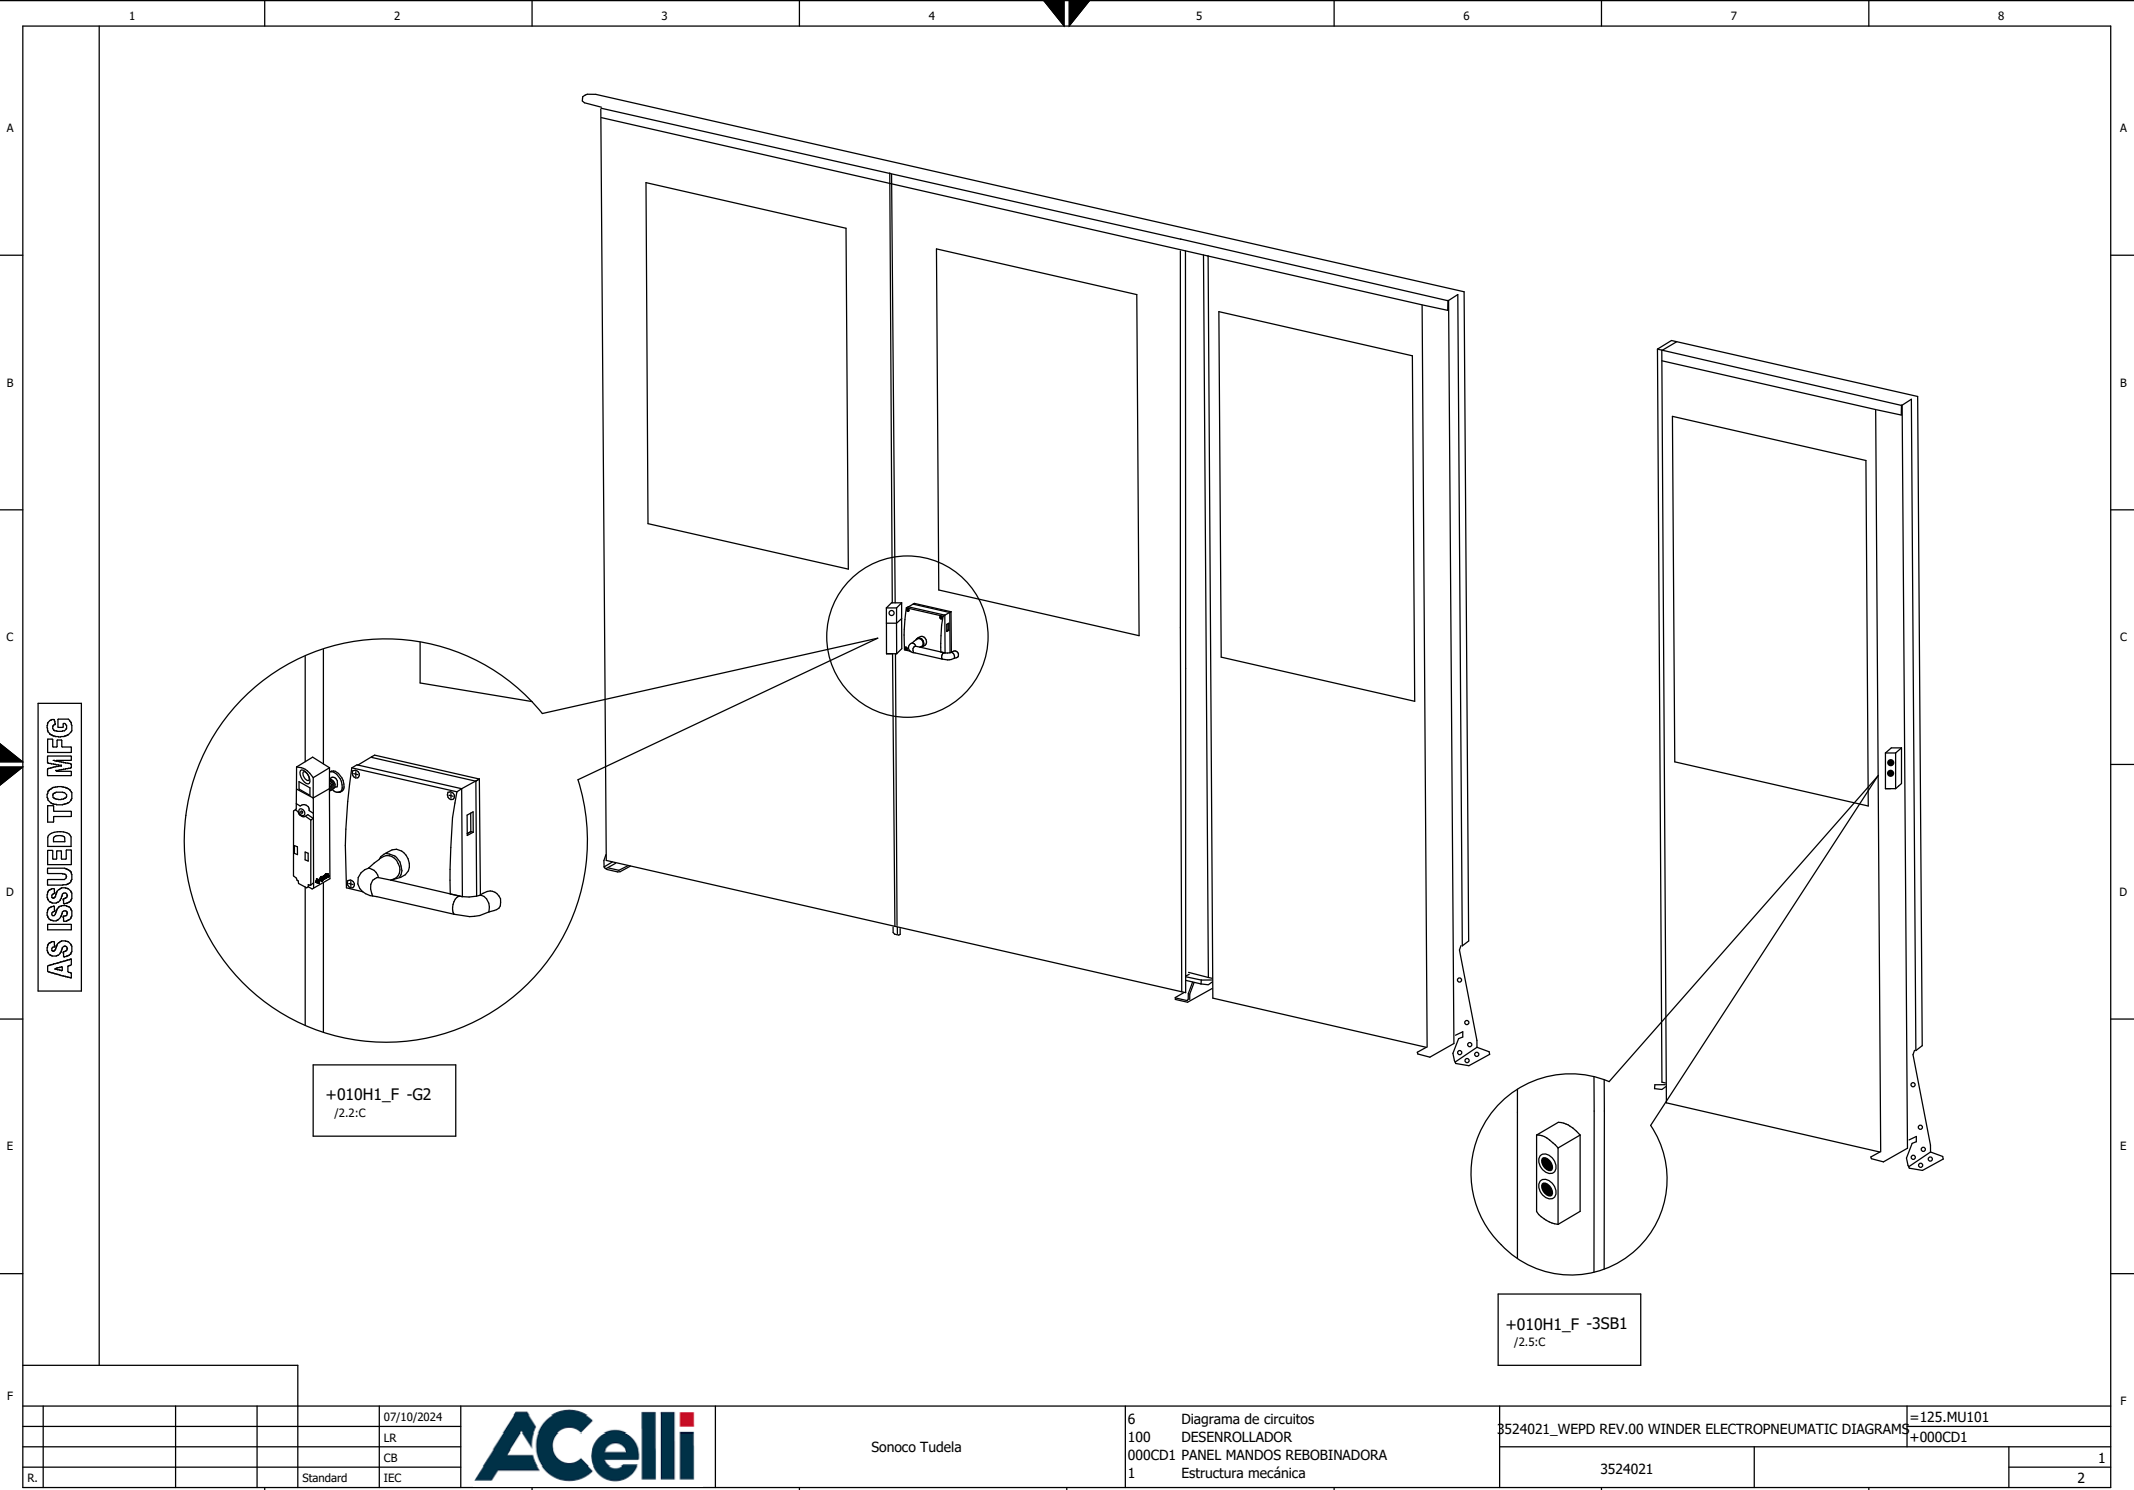

AS ISSUED TO MFG

					07/10/2024
					LR
					CB
R.				Standard	IEC



Sonoco Tudela

6 Diagrama de circuitos
100 DESENROLLADOR
000CD1 PANEL MANDOS REBOBINADORA
1 Estructura mecánica

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAM

=125.MU101
+000CD1

1
2

A	1		Internal Cable	6 mm²	Comment	2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
---	---	--	----------------	-------	---------	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

	1	2	3	4	5	6	7	8	
A	AS-BUILT	Internal Cable 6 mm²	Comment	BK					
B		Wires		L3					
		Internal Destination	Conn.						
			Identifier						
C	Terminal strip		Reference	X3 1	=000=125.000CD1+000CD1&6/3;4:A				
			Section						
D		Type	DBL80						
	External Destination	Bridges							
		Terminal number	L3						
E		Conn.	5/L3						
	External Cable 6 mm²	Identifier	F1						
				BK					
F									
			07/10/2024		Sonoco Tudela	7 Terminales 000 MAIN PARTS 000CD1 PANEL MANDOS REBOBINADORA 3 Schema morsetti =125.000CD1+000CD1-X3	9524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS 3524021	= +000CD1 3	
			LR						
R.			CB						
	Standard	IEC						11	

		1	2	3	4	5	6	7	8						
A	Internal Cable		Comment	2006-1291											
B	Wires	Internal Destination	-W1	PE											
			Conn.												
C	Terminal strip	Reference	Identifier												
			Section	XE 1											
D	External Destination	Conn.	Type	2006-1207											
			Bridges	•											
E	External Cable	Wires	Terminal number	PE											
			Identifier	XPE											
F															
				07/10/2024			Sonoco Tudela		7 Terminales 000 MAIN PARTS 000CD1 PANEL MANDOS REBOBINADORA 10 Schema morsetti = +000CD1-XE		3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS = +000CD1		10 11		
				LR											
				CB											
R.				IEC											
		1	2	3	4	5	6	7	8						

[illegible]

AS-BUILT																																		
1		2		3		4		5		6		7		8																				
R.		Standard	IEC	Comment	Internal Destination	Wires	Internal Cable	1 mm²	0,5 mm²	3x0,25	3x0,25	3x0,25	7x1	7x1	3x0,25																			
External Cable				Terminal strip				External Destination				Wires																						
1 mm²				Type				Identifier																										
7x1				Bridges				Conn.																										
3x0,25				Terminal number				Identifier																										
3x0,25																																		
3x0,25																																		
3x0,25																																		
7x1																																		
4x0,25																																		

[illegible]

[illegible]

1		2		3	4	5	6	7	8			
A	AS-BUILT	Internal Cable	Comment	281-311								
B												
C		Wires	Internal Destination	24WR-ED1								
				Conn.								
				Identifier								
				Reference								
				Section								
D		Terminal strip	7XFU1 1	=010=125.MU011+000CD18&5.2.A								
				Type	281-611							
				Bridges	•							
				Terminal number	1							
				Conn.	2.a							
E		External Destination	Identifier	X21								
F		Wires	External Cable									
F		1 mm²	BU									
				07/10/2024			Sonoco Tudela		7 Terminales REWINDER 000CD1 PANEL MANDOS REBOBINADORA 23 Schema morsetti =125.MU011+000CD1-7XFU1			
				LR								
				CB								
R.				IEC								
				Standard					3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS =+000CD1			
									23			
									24			
1		2		3	4	5	6	7	8			

	1	2	3	4	5	6	7	8			
A	AS-BUILT	Internal Cable	Comment								
B		16x1	-W6	5 EQP							
		Wires									
		Internal Destination	Conn.								
			Identifier								
			Reference								
C	Terminal strip		Section	XPE 1							
		Type									
		Bridges									
D		Terminal number	PE								
	External Destination	Conn.									
		Identifier									
	Wires										
	External Cable										
F											
R.											
	1	2	3	4	5	6	7	8			

07/10/2024

LR

CB

IEC

ACelli

Sonoco Tudela

7

010

000RE1

1

Terminales
REWINDER
caja control
Schema morsetti =125.MU016+000RE1-XPE

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

3524021

1

=

+000RE1

1

[illegible]

		1	2	3	4	5	6	7	8		
A											
	A 2.0		BOOL	REBOBINADORA CONDICIÓN EMERGENCIA // PULSADOR EMERGENCIA PRESIONADO	=125.000CD1-KF4	=125.MU001&6/1.7:B					
	A 2.1		BOOL	AUTORIZACIÓN EXTERNO	=125.000CD1-KF4	=125.MU008&6/2.2:A					
	A 2.2		BOOL	AUTORIZACIÓN EXTERNO	=125.000CD1-KF4	=125.MU008&6/2.4:A					
	A 2.3		BOOL	AUTORIZACIÓN EXTERNO	=125.000CD1-KF4	=125.MU008&6/2.5:A					
	A 2.4		BOOL	AUTORIZACIÓN EXTERNO	=125.000CD1-KF4	=125.MU008&6/2.7:A					
	A 2.5		BOOL	VÁLVULA SOLENOIDE CARRERA ASCENDENTE CORREA PASO PAPEL	=125.000CD1-KF4	=010=125.MU016&6/4.3:A					
	A 2.6		BOOL	POSICIÓN BLOQUEO MOTOR	=125.000CD1-KF4	=010=125.MU021&6/1.6:A					
	A 2.7		BOOL	LIBRE	=125.000CD1-KF4	=125.000CD1/4.2:B					
	A 3.0		BOOL	VÁLVULA SOLENOIDE SOPLANTES AIRE PASO PAPEL	=125.000CD1-KF4	=010=125.MU016&6/4.6:A					
	A 3.1		BOOL	PUERTA BLOQUEADO POSTERIOR DESENROLLADOR	=125.000CD1-KF4	=100=125.MU101&6/2.6:A					
	A 3.2		BOOL	PUERTA DESBLOQUEADO POSTERIOR DESENROLLADOR	=125.000CD1-KF4	=100=125.MU101&6/2.7:A					
	A 3.3		BOOL	PUERTA BLOQUEADO GRUPO CORTE	=125.000CD1-KF4	=010=125.MU011&6/2.4:B					
	A 3.4		BOOL	PUERTA DESBLOQUEADO GRUPO CORTE	=125.000CD1-KF4	=010=125.MU011&6/2.5:B					
	A 3.5		BOOL	PUERTA BLOQUEADO PASARELA	=125.000CD1-KF4	=010=125.MU011&6/3.4:B					
	A 3.6		BOOL	PUERTA DESBLOQUEADO PASARELA	=125.000CD1-KF4	=010=125.MU011&6/3.5:B					
	A 3.7		BOOL	PUERTA BLOQUEADO DESCARGADOR LADO TRANSMISIÓN (L.T.) OPERADOR	=125.000CD1-KF4	=010=125.MU011&6/4.4:B					
B											
	C										
D											
	E										
F											
			07/10/2024				8 Lista I/O		3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS		=
		LR				000 MAIN PARTS				+000CD1	
		CB				000CD1 PANEL MANDOS REBOBINADORA					
R.		Standard		IEC		4 Diagramma PLC:KF4		3524021		18	

[illegible]

[illegible]

[illegible]

		1			2			3			4			5			6			7			8		
A																									A
	E 441.0			BOOL	EXPULSOR BLOQUEADO VÁLVULA LADO DEL OPERADOR										=125.000CD1-KF9				==010=125.MU017&6/1.2:E						
	E 441.1			BOOL	CONTROL VELOCIDAD										=125.000CD1-KF9				==010=125.MU016&6/5.7:E						
	E 441.2			BOOL	LIBRE										=125.000CD1-KF9				=125.000CD1/9.2:B						
	E 441.3			BOOL	VÁLVULA PLANO DESCARGA LADO DEL OPERADOR										=125.000CD1-KF9				==010=125.MU025&6/1.2:E						
	E 441.4			BOOL	EXPULSOR BLOQUEADO VÁLVULA LADO MOTOR										=125.000CD1-KF9				==010=125.MU017&6/1.3:E						
	E 441.5			BOOL	LIBRE										=125.000CD1-KF9				=125.000CD1/9.2:B						
	E 441.6			BOOL	LIBRE										=125.000CD1-KF9				=125.000CD1/9.2:B						
B	E 441.7			BOOL	VÁLVULA PLANO DESCARGA LADO MOTOR										=125.000CD1-KF9				==010=125.MU025&6/1.3:E				B		

[illegible]

		1	2		3		4		5		6		7		8			
A																	A	
	A 250.0	15ZK1_2	BOOL	MCS CABINET PARADA EMERGENCIA CORTE ALIMENTACION					=125.000CD1-KF11			=125.000CD1&6/8.2:A						
	A 250.1		BOOL	PUERTA BLOQUEAR/DESBLOQUEAR POSTERIOR DESENROLLADOR					=125.000CD1-KF11			==100=125.MU101&6/2.8:A						
	A 250.2		BOOL	PUERTA BLOQUEAR/DESBLOQUEAR GRUPO CORTE					=125.000CD1-KF11			==010=125.MU011&6/2.8:A						
	A 250.3		BOOL	PUERTA BLOQUEAR/DESBLOQUEAR PASARELA					=125.000CD1-KF11			==010=125.MU011&6/3.8:A						
B																	B	
	C																	C
D																		D
	E																	E
F																		F

[illegible]

		1			2			3			4			5			6			7			8
A		A 460.0			BOOL	ZONA SOA1 INTERVENIDA							=125.000CD1-KF13				=125.MU008&6/4.2:A						
		A 460.1			BOOL	ZONA SOA2 INTERVENIDA							=125.000CD1-KF13				=125.MU008&6/4.3:A						
		A 460.2			BOOL	VÁLVULA RODILLO PRENSA ENROLLADO							=125.000CD1-KF13				==010=125.MU021&6/1.7:A						
		A 460.3			BOOL	CONTROL VELOCIDAD							=125.000CD1-KF13				==010=125.MU016&6/5.6:A						
B																							
C																							
D																							
E																							
F																							

AS-BUILT


					07/10/2024		Sonoco Tudela	8 Lista I/O 000 MAIN PARTS 000CD1 PANEL MANDOS REBOBINADORA 13 Diagramma PLC:KF13	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=+000CD1	13 18
				LR							
				CB							
R.		Standard	IEC								


[illegible]


[illegible]


[illegible]


[illegible]

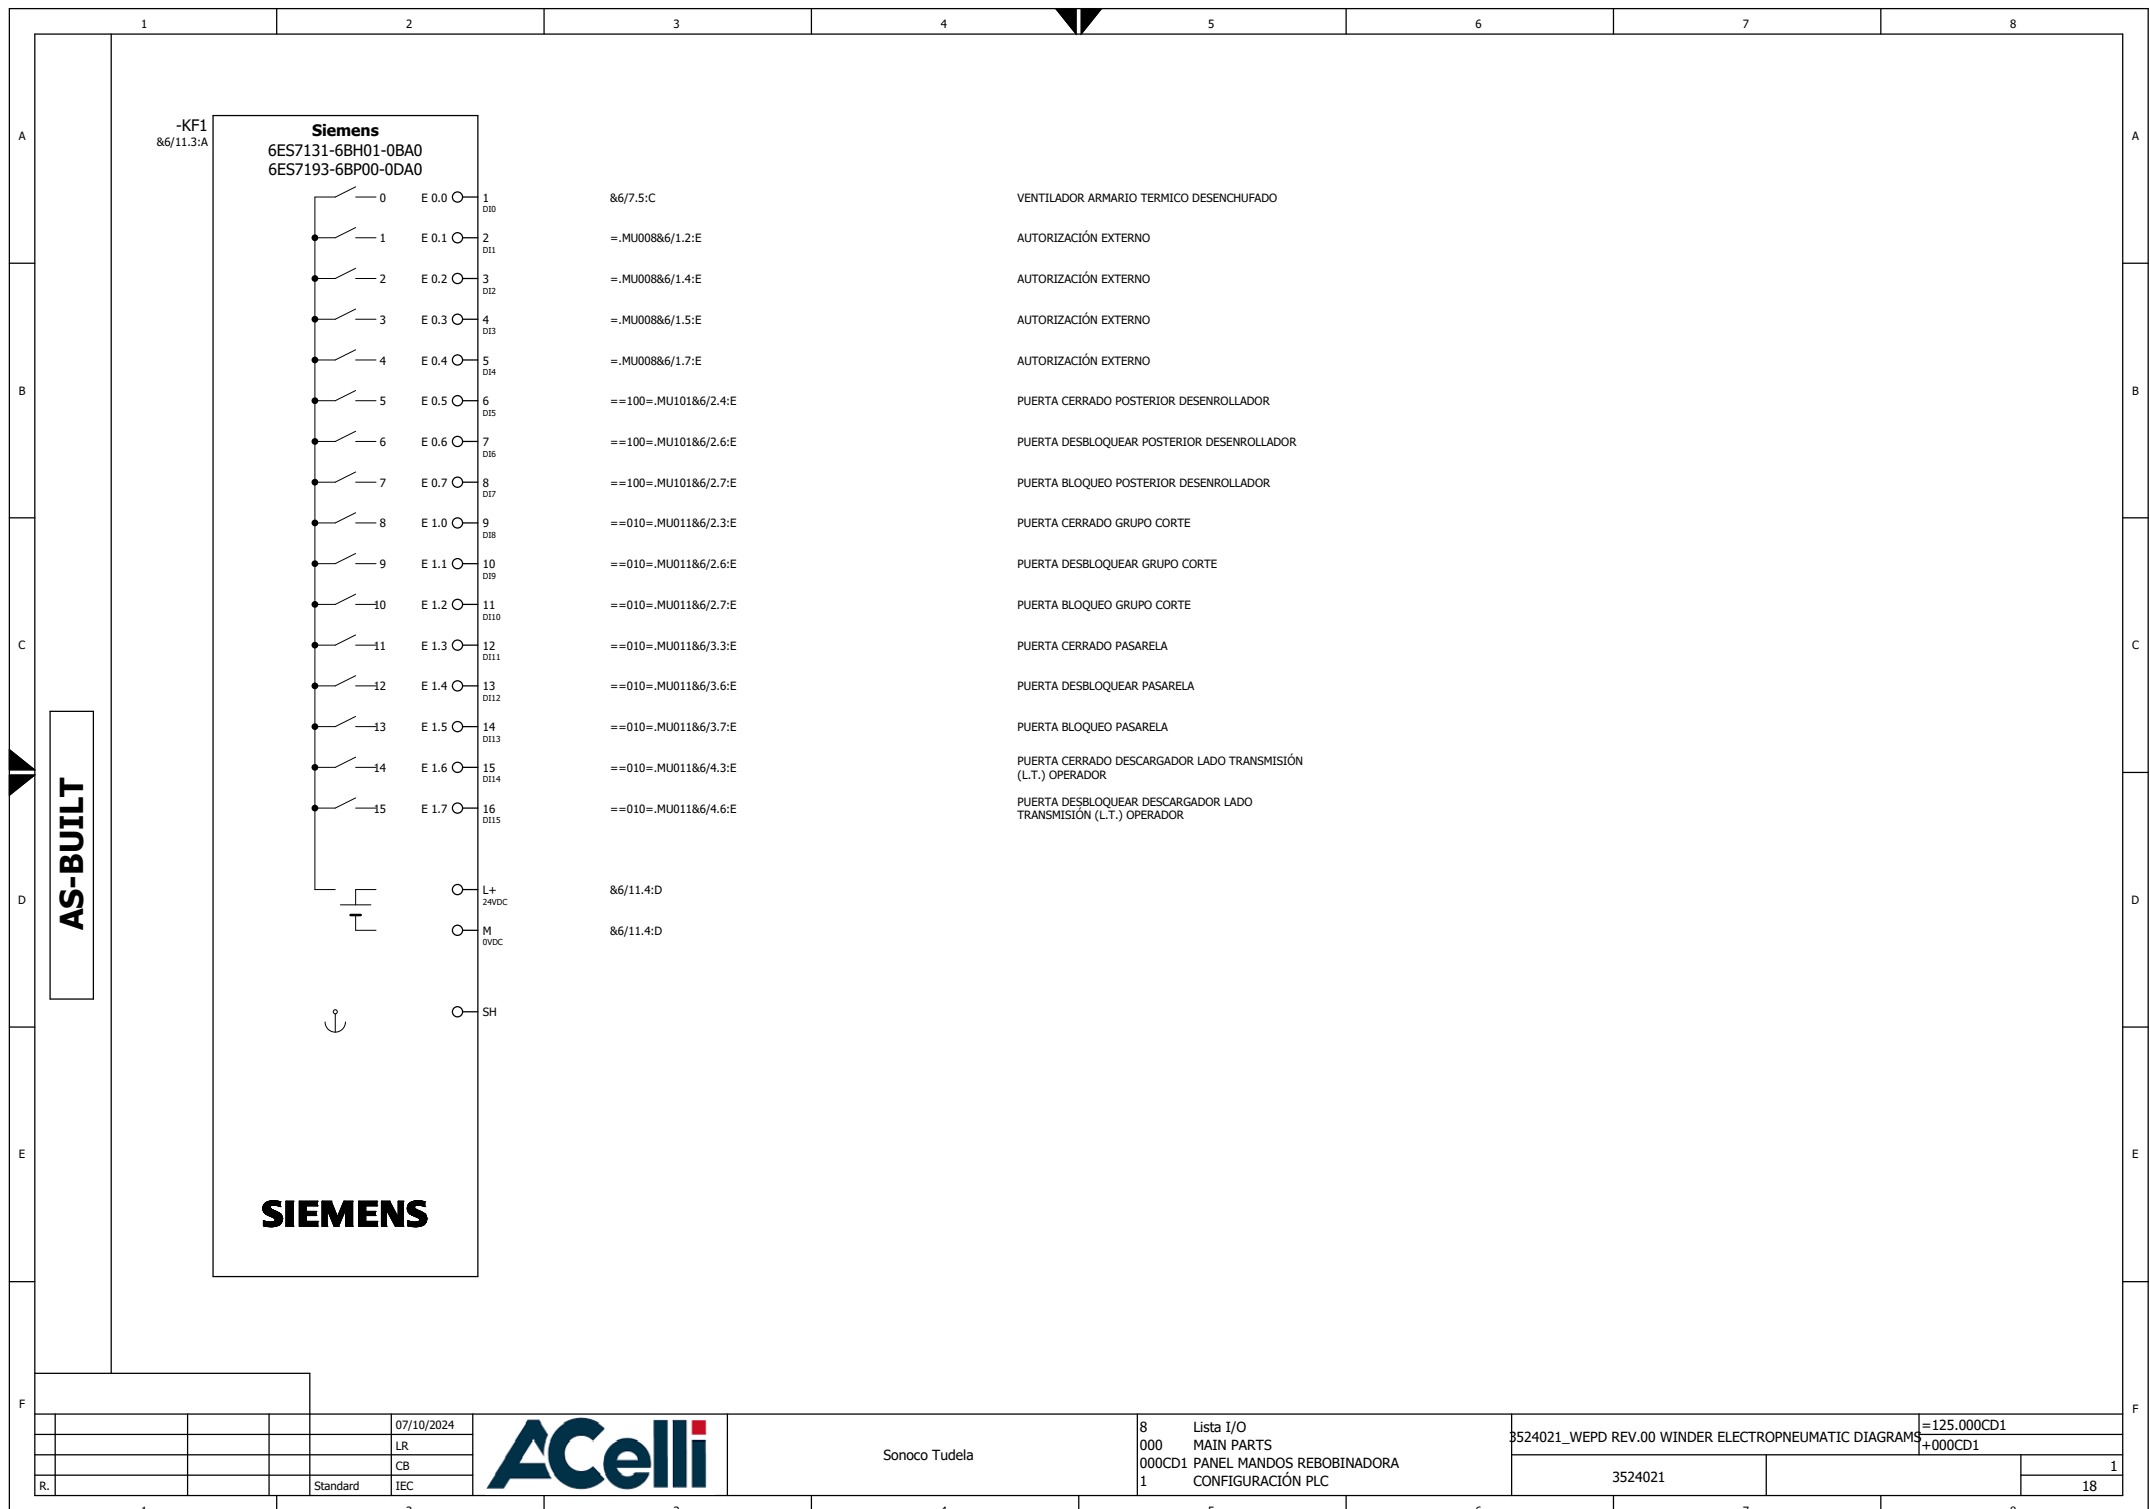

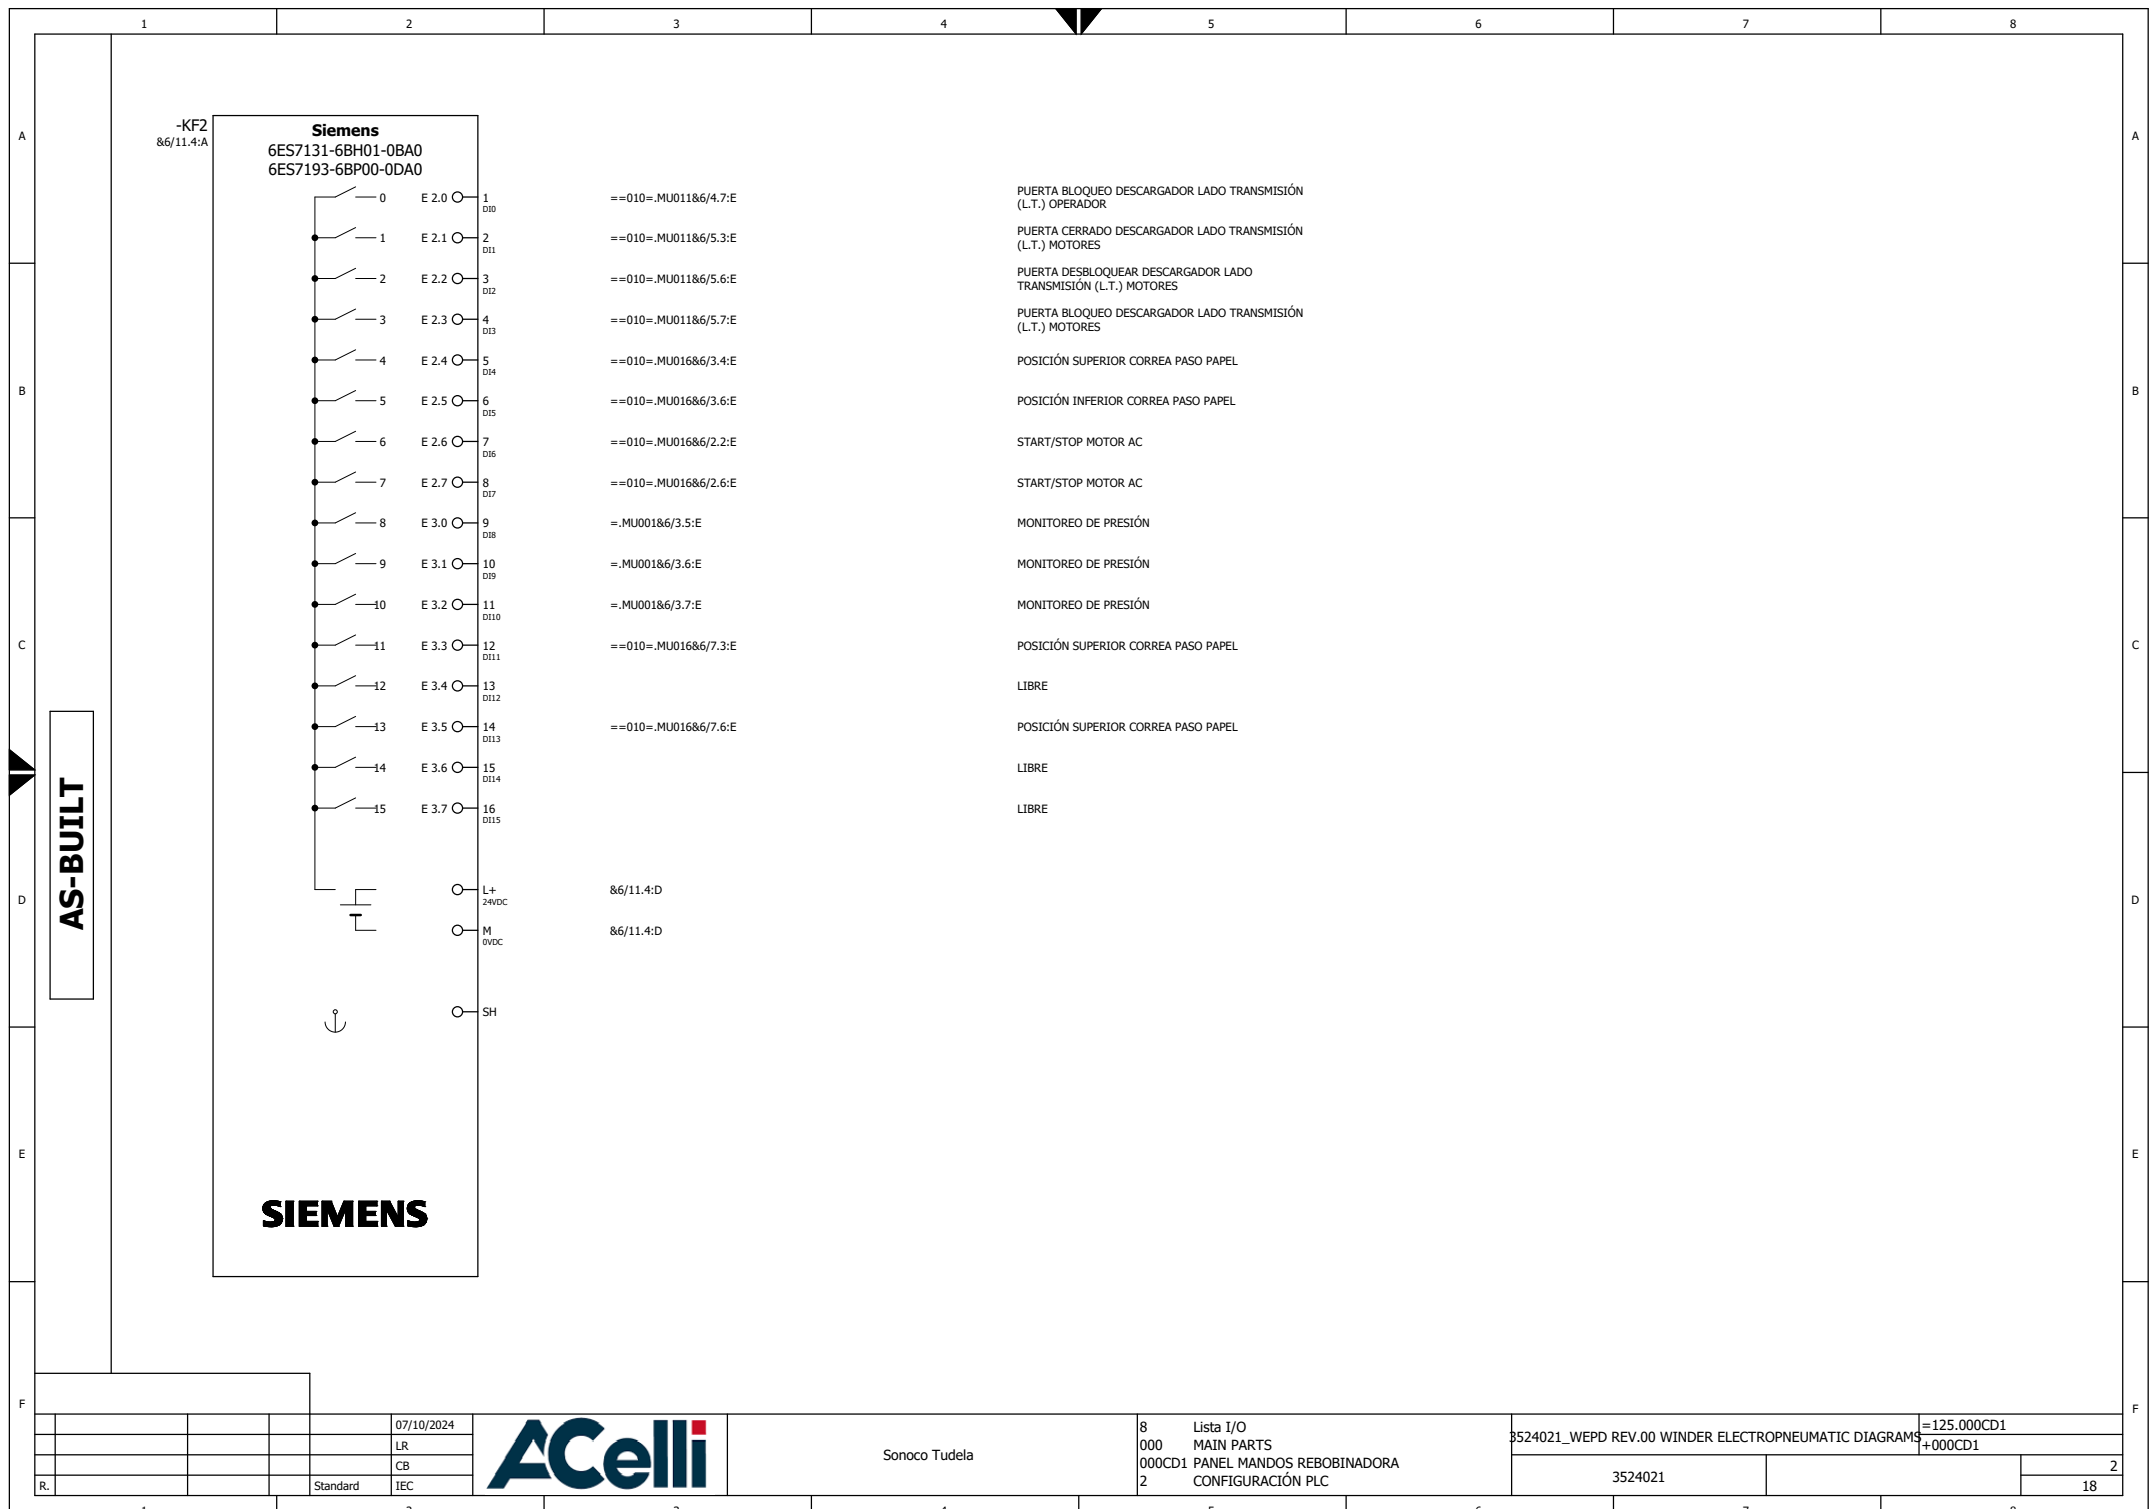


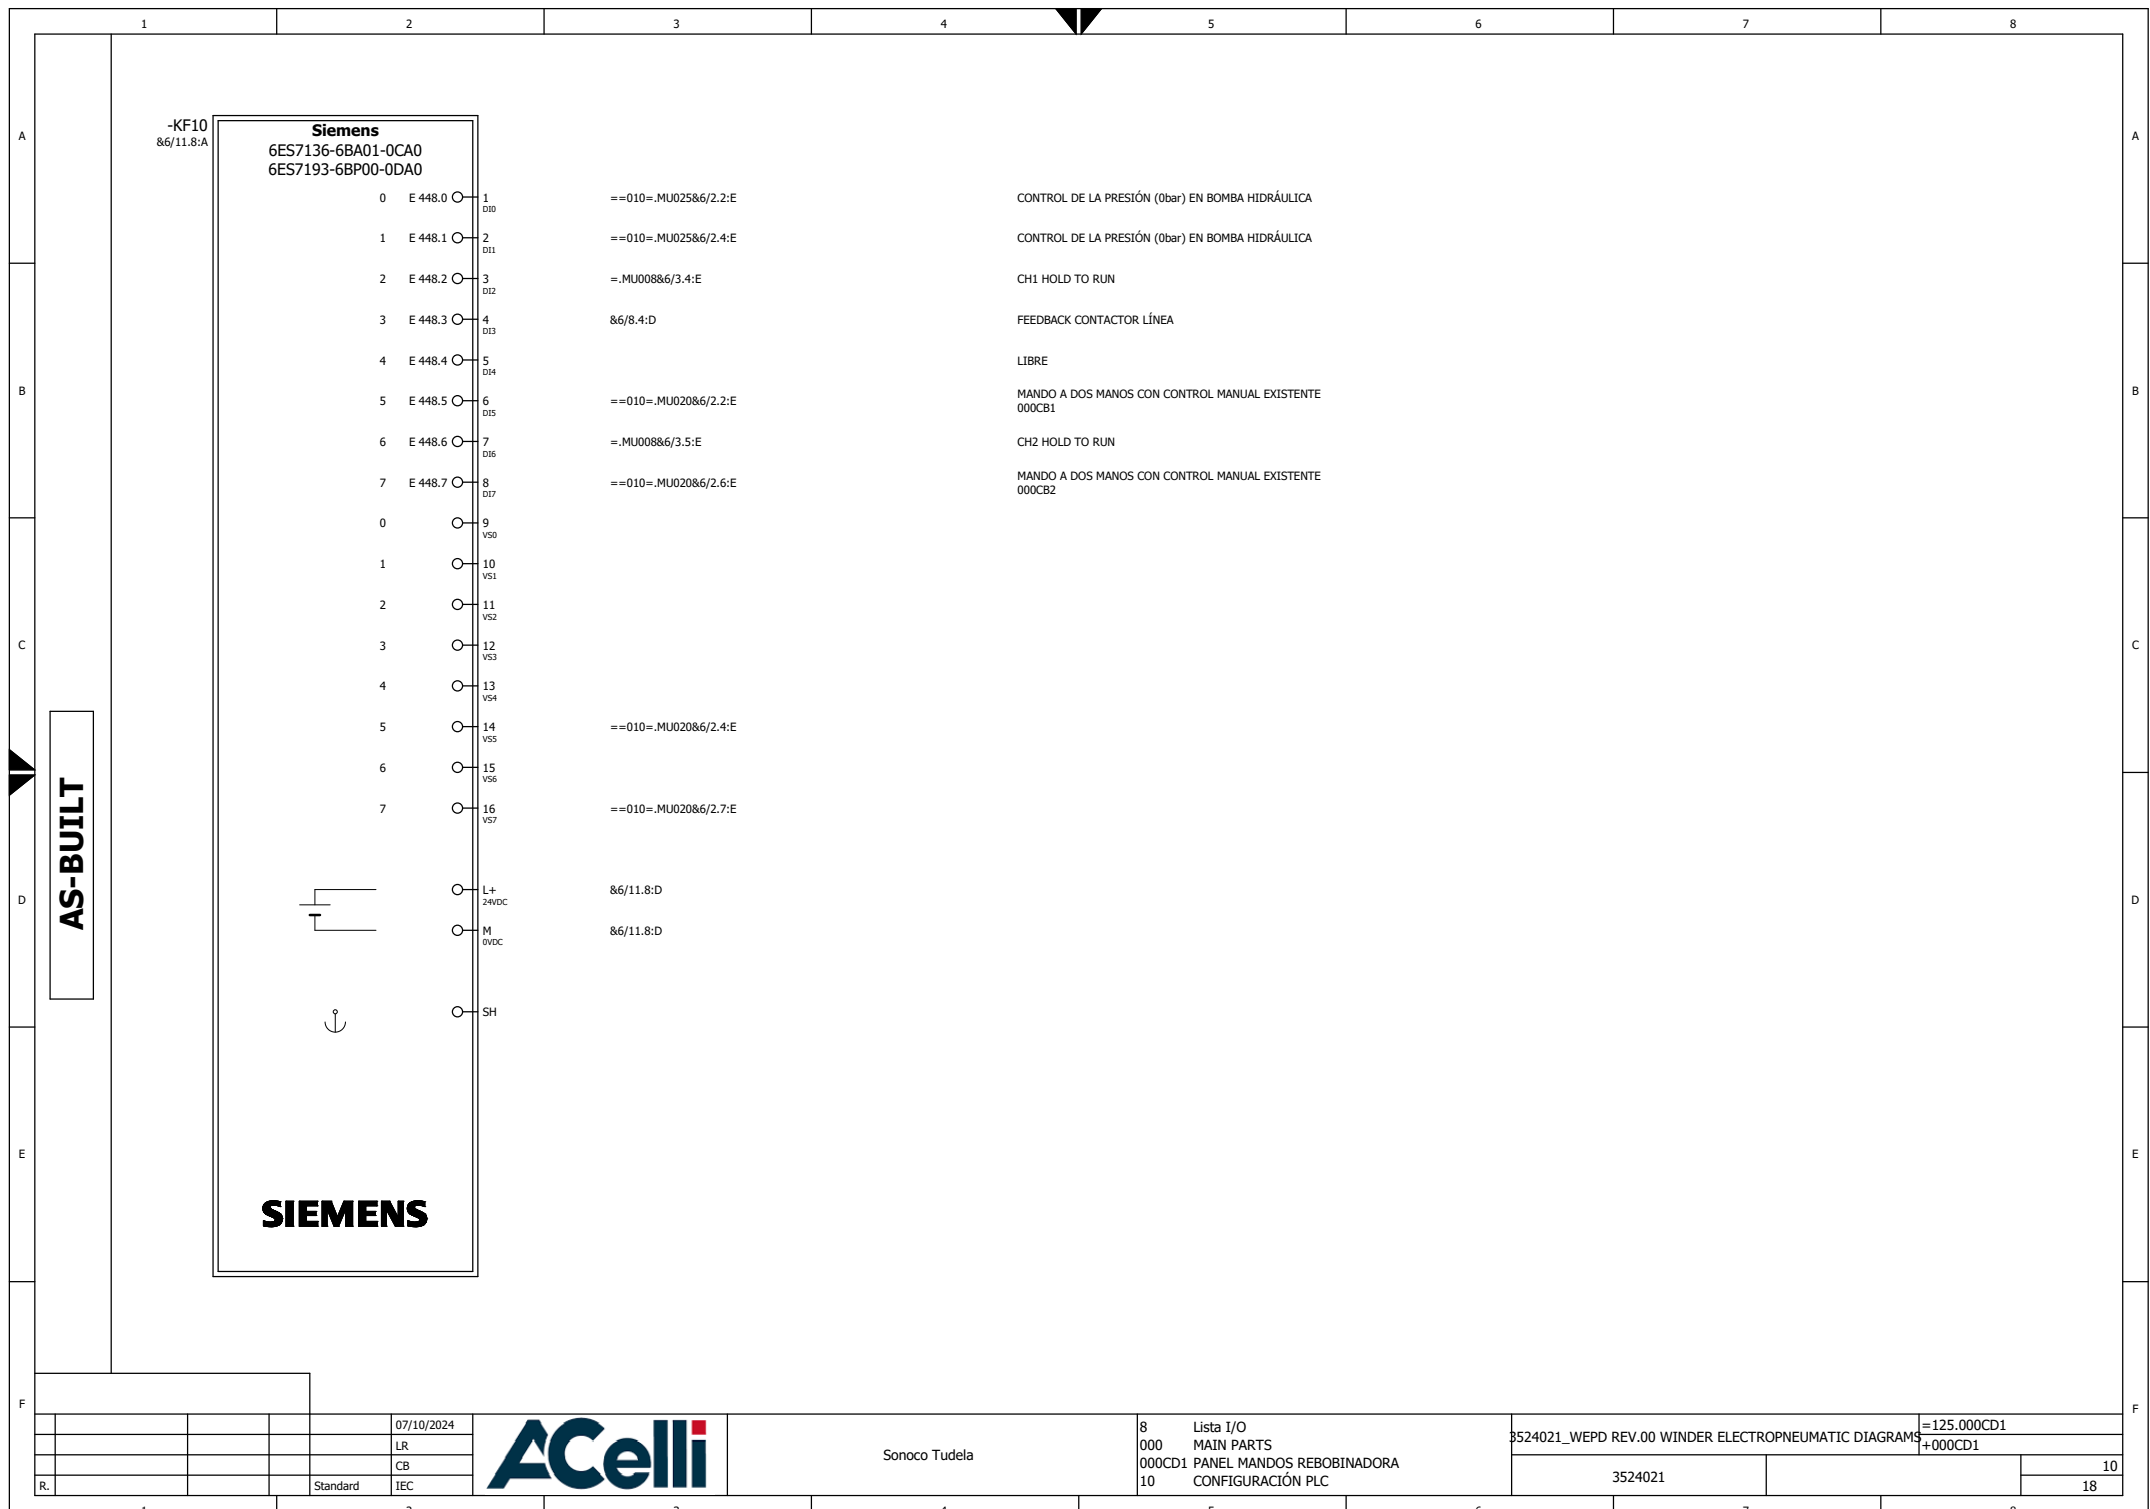


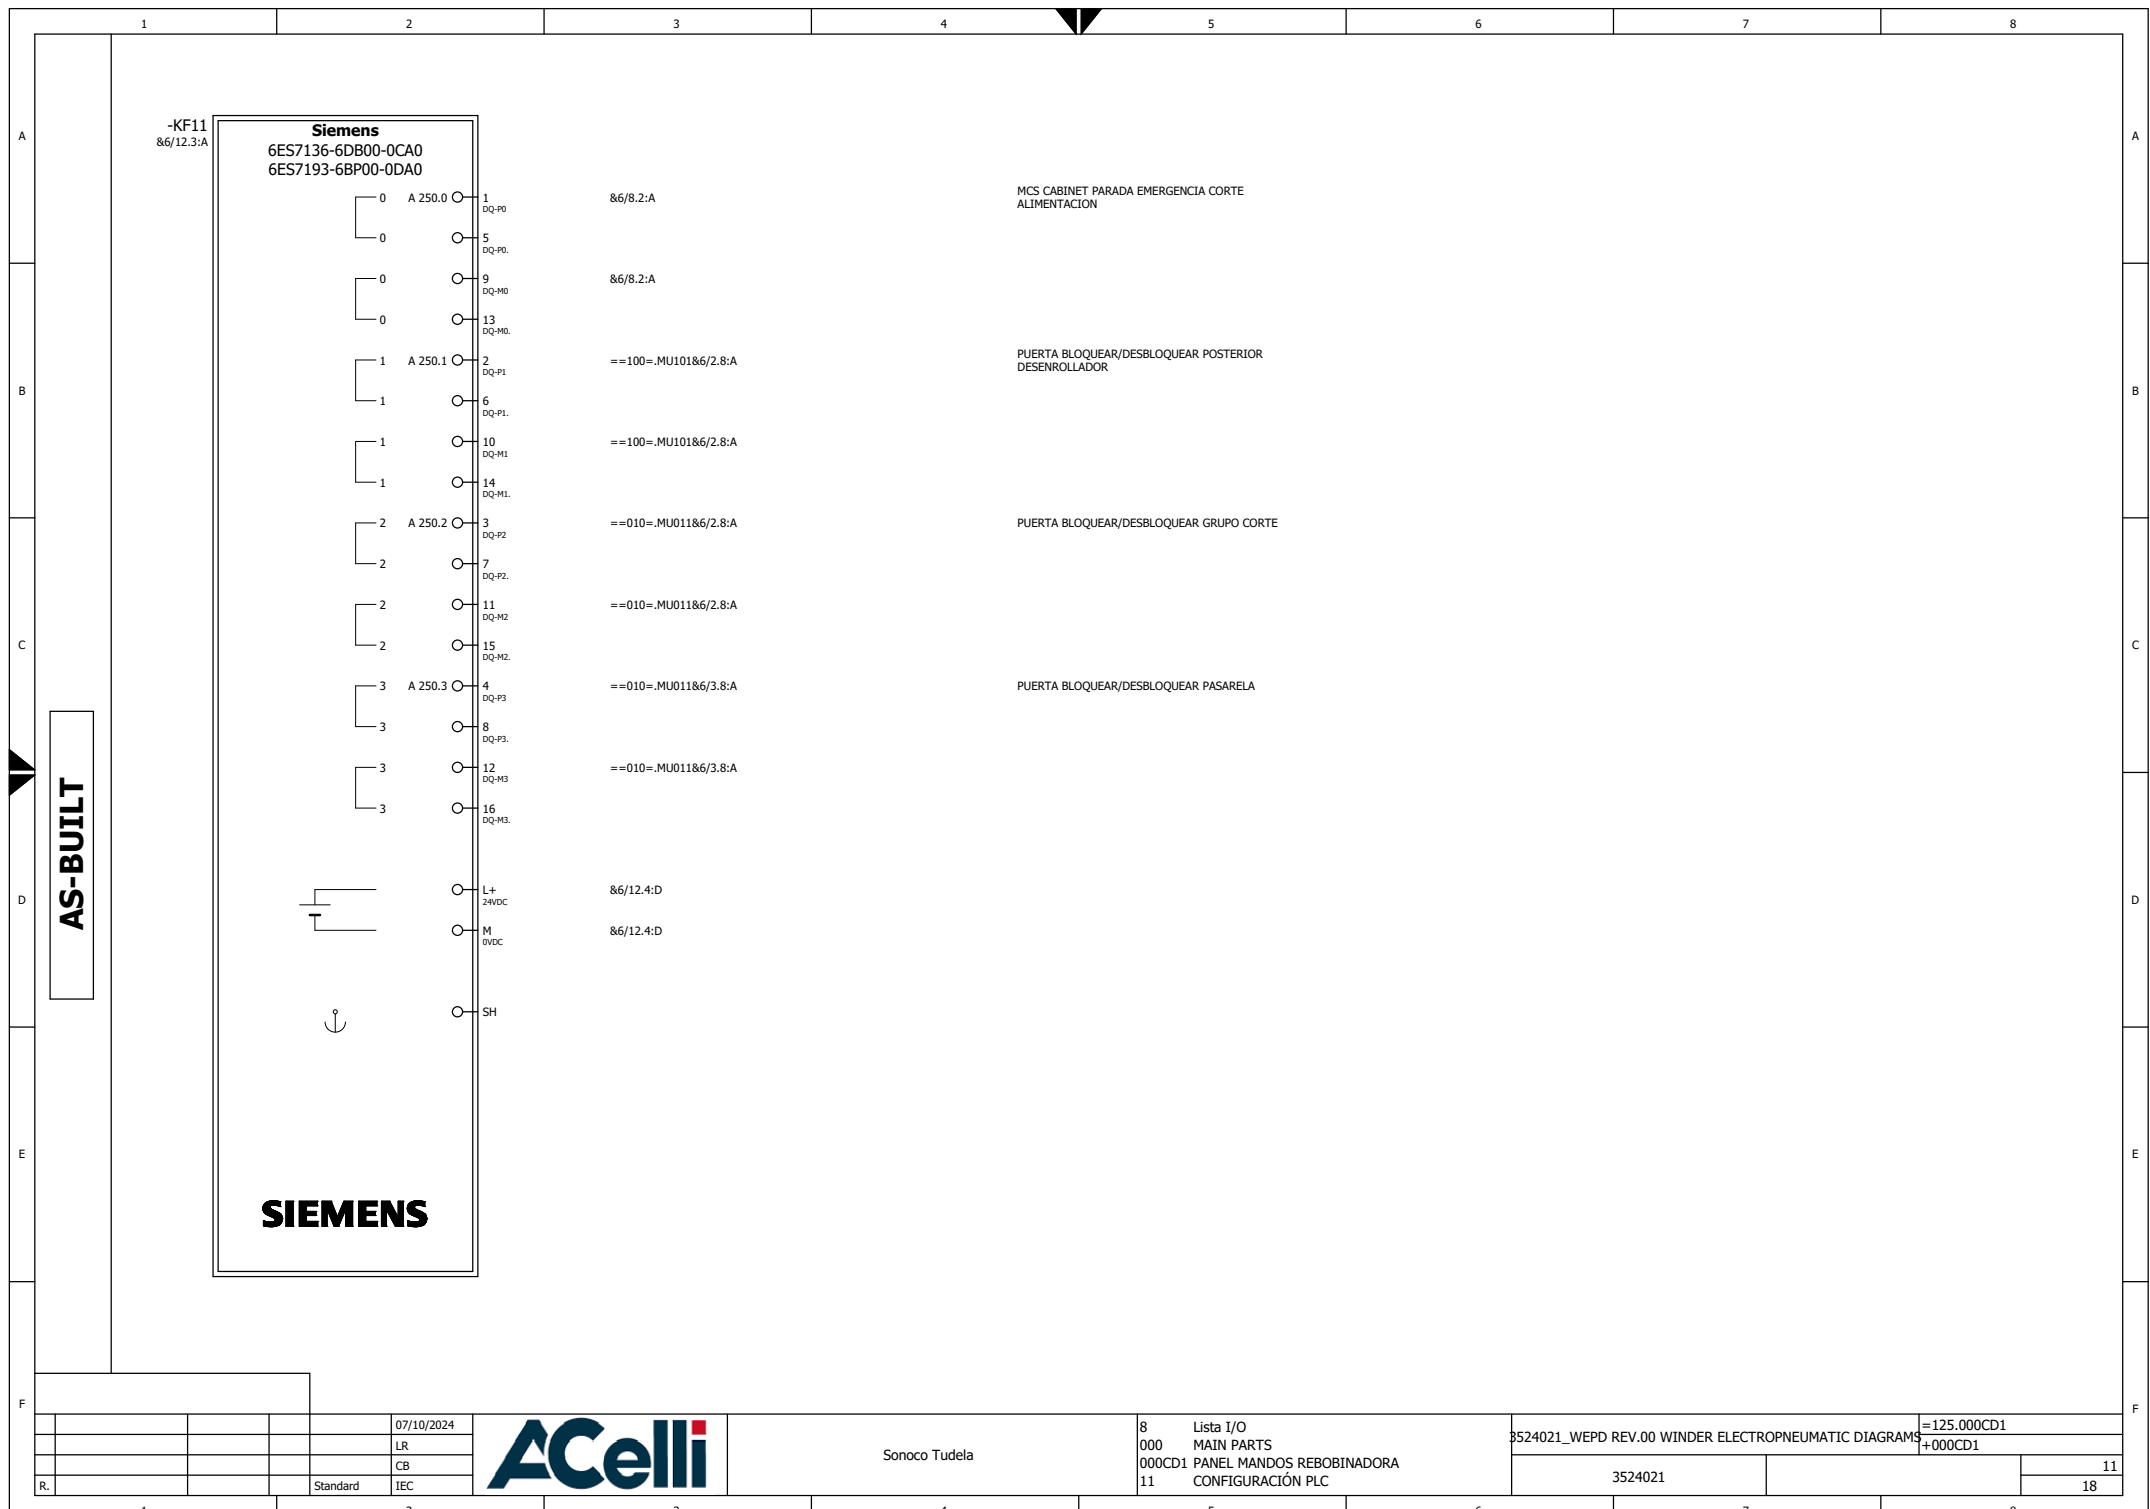

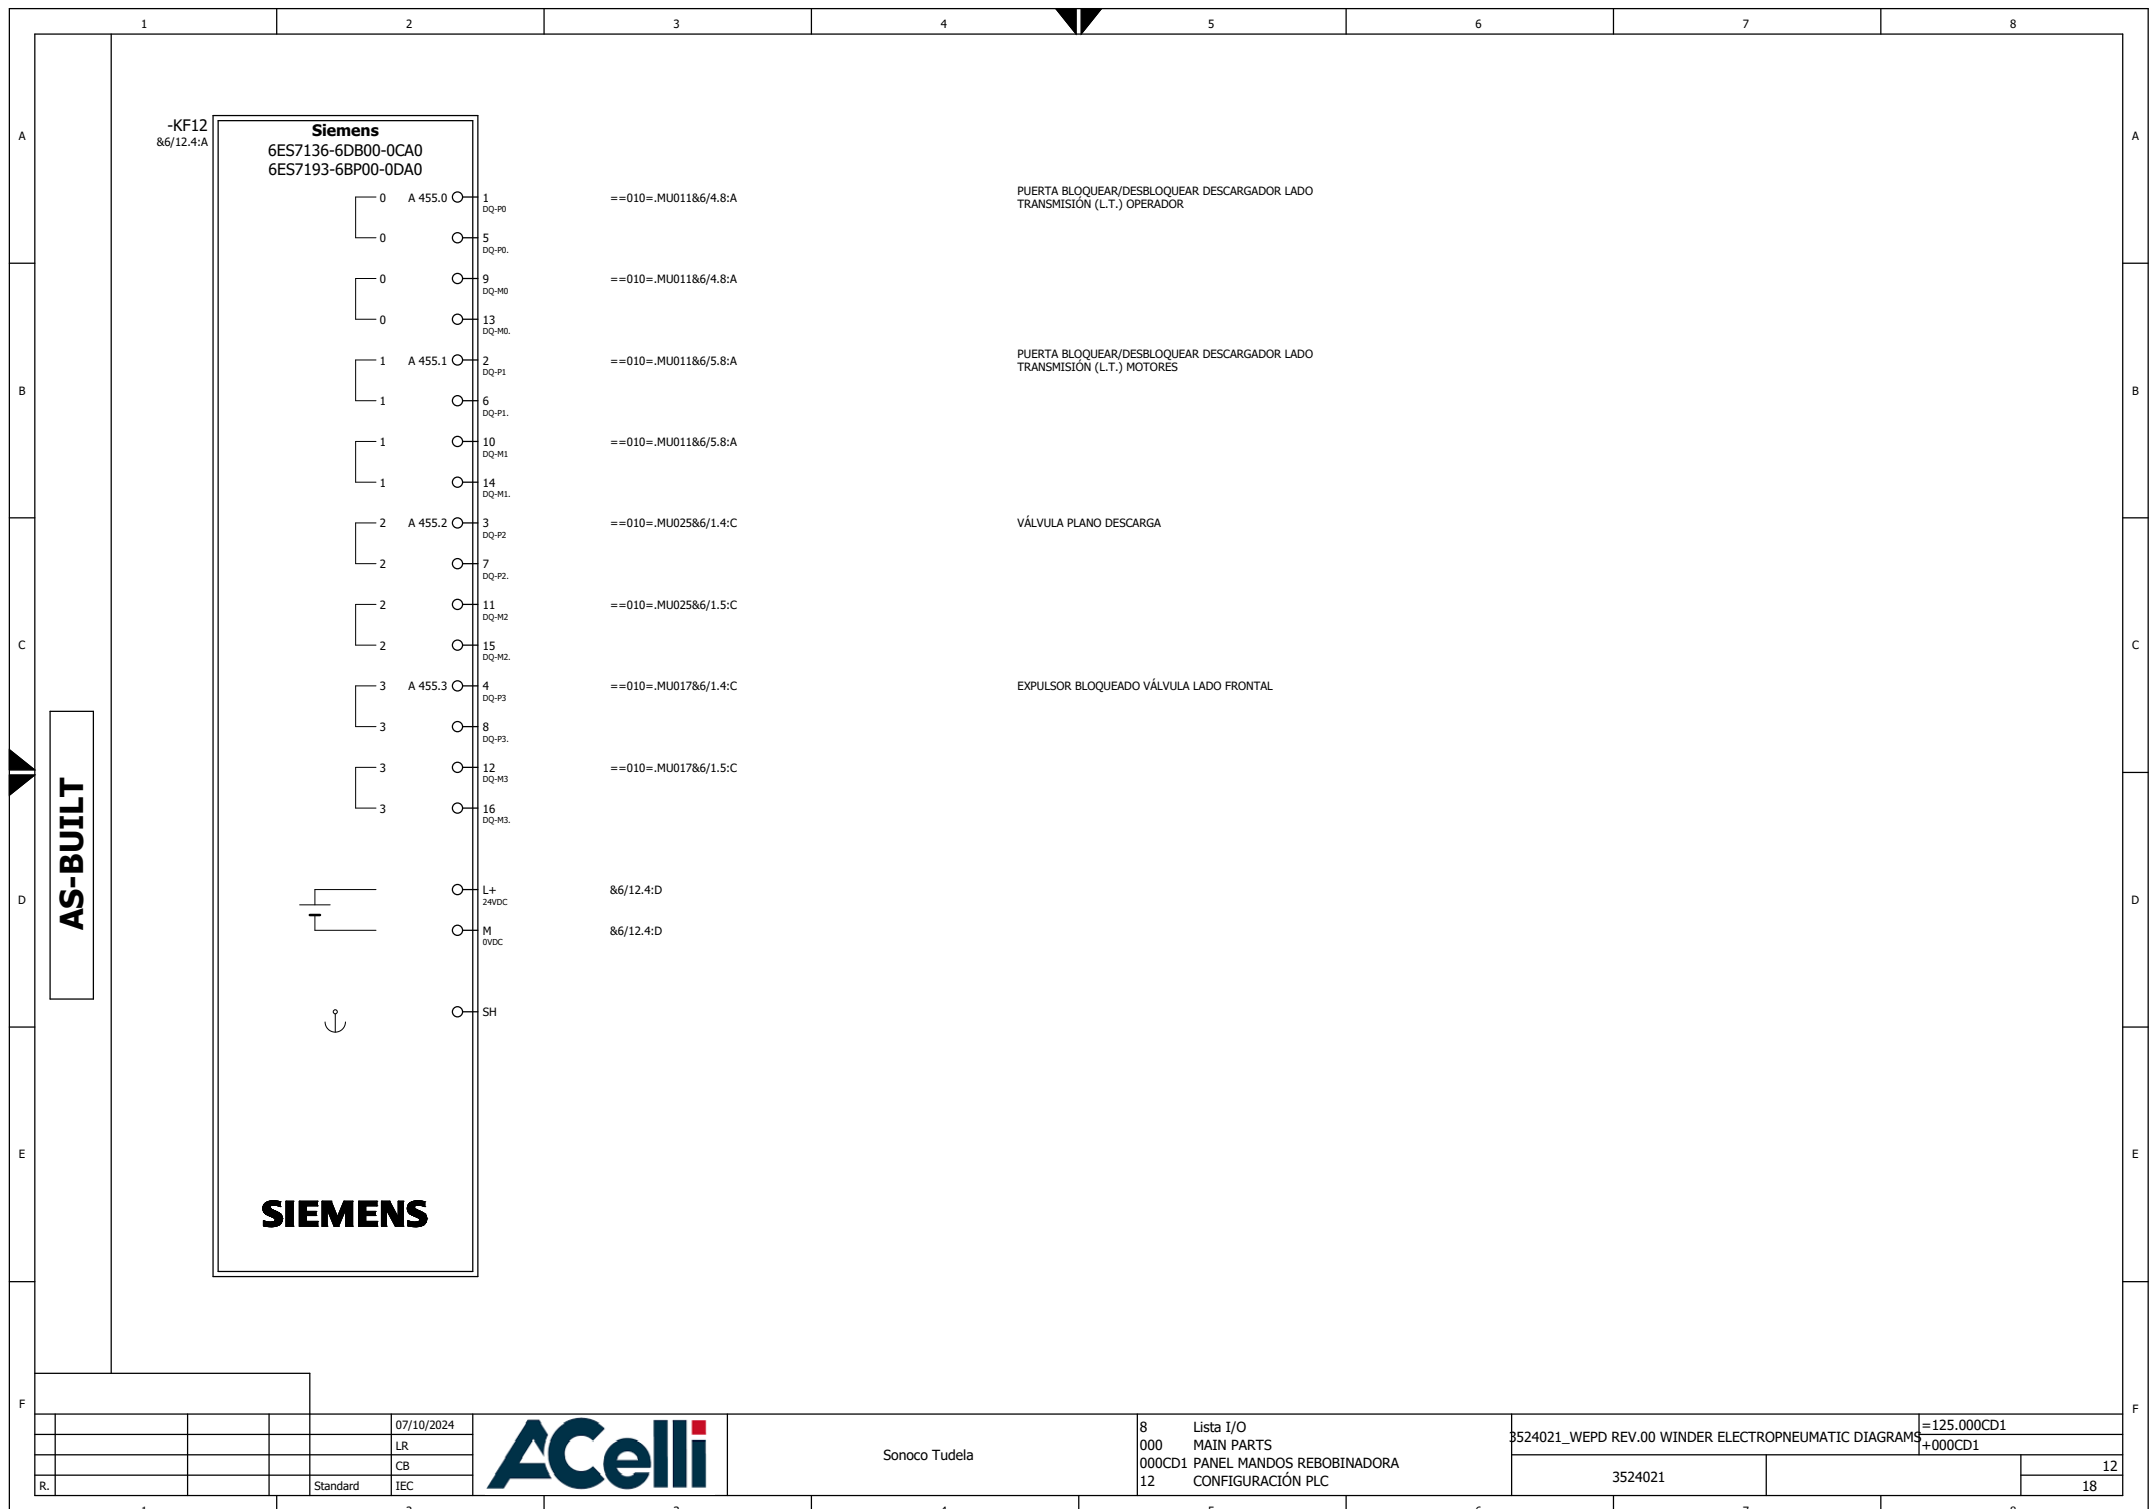



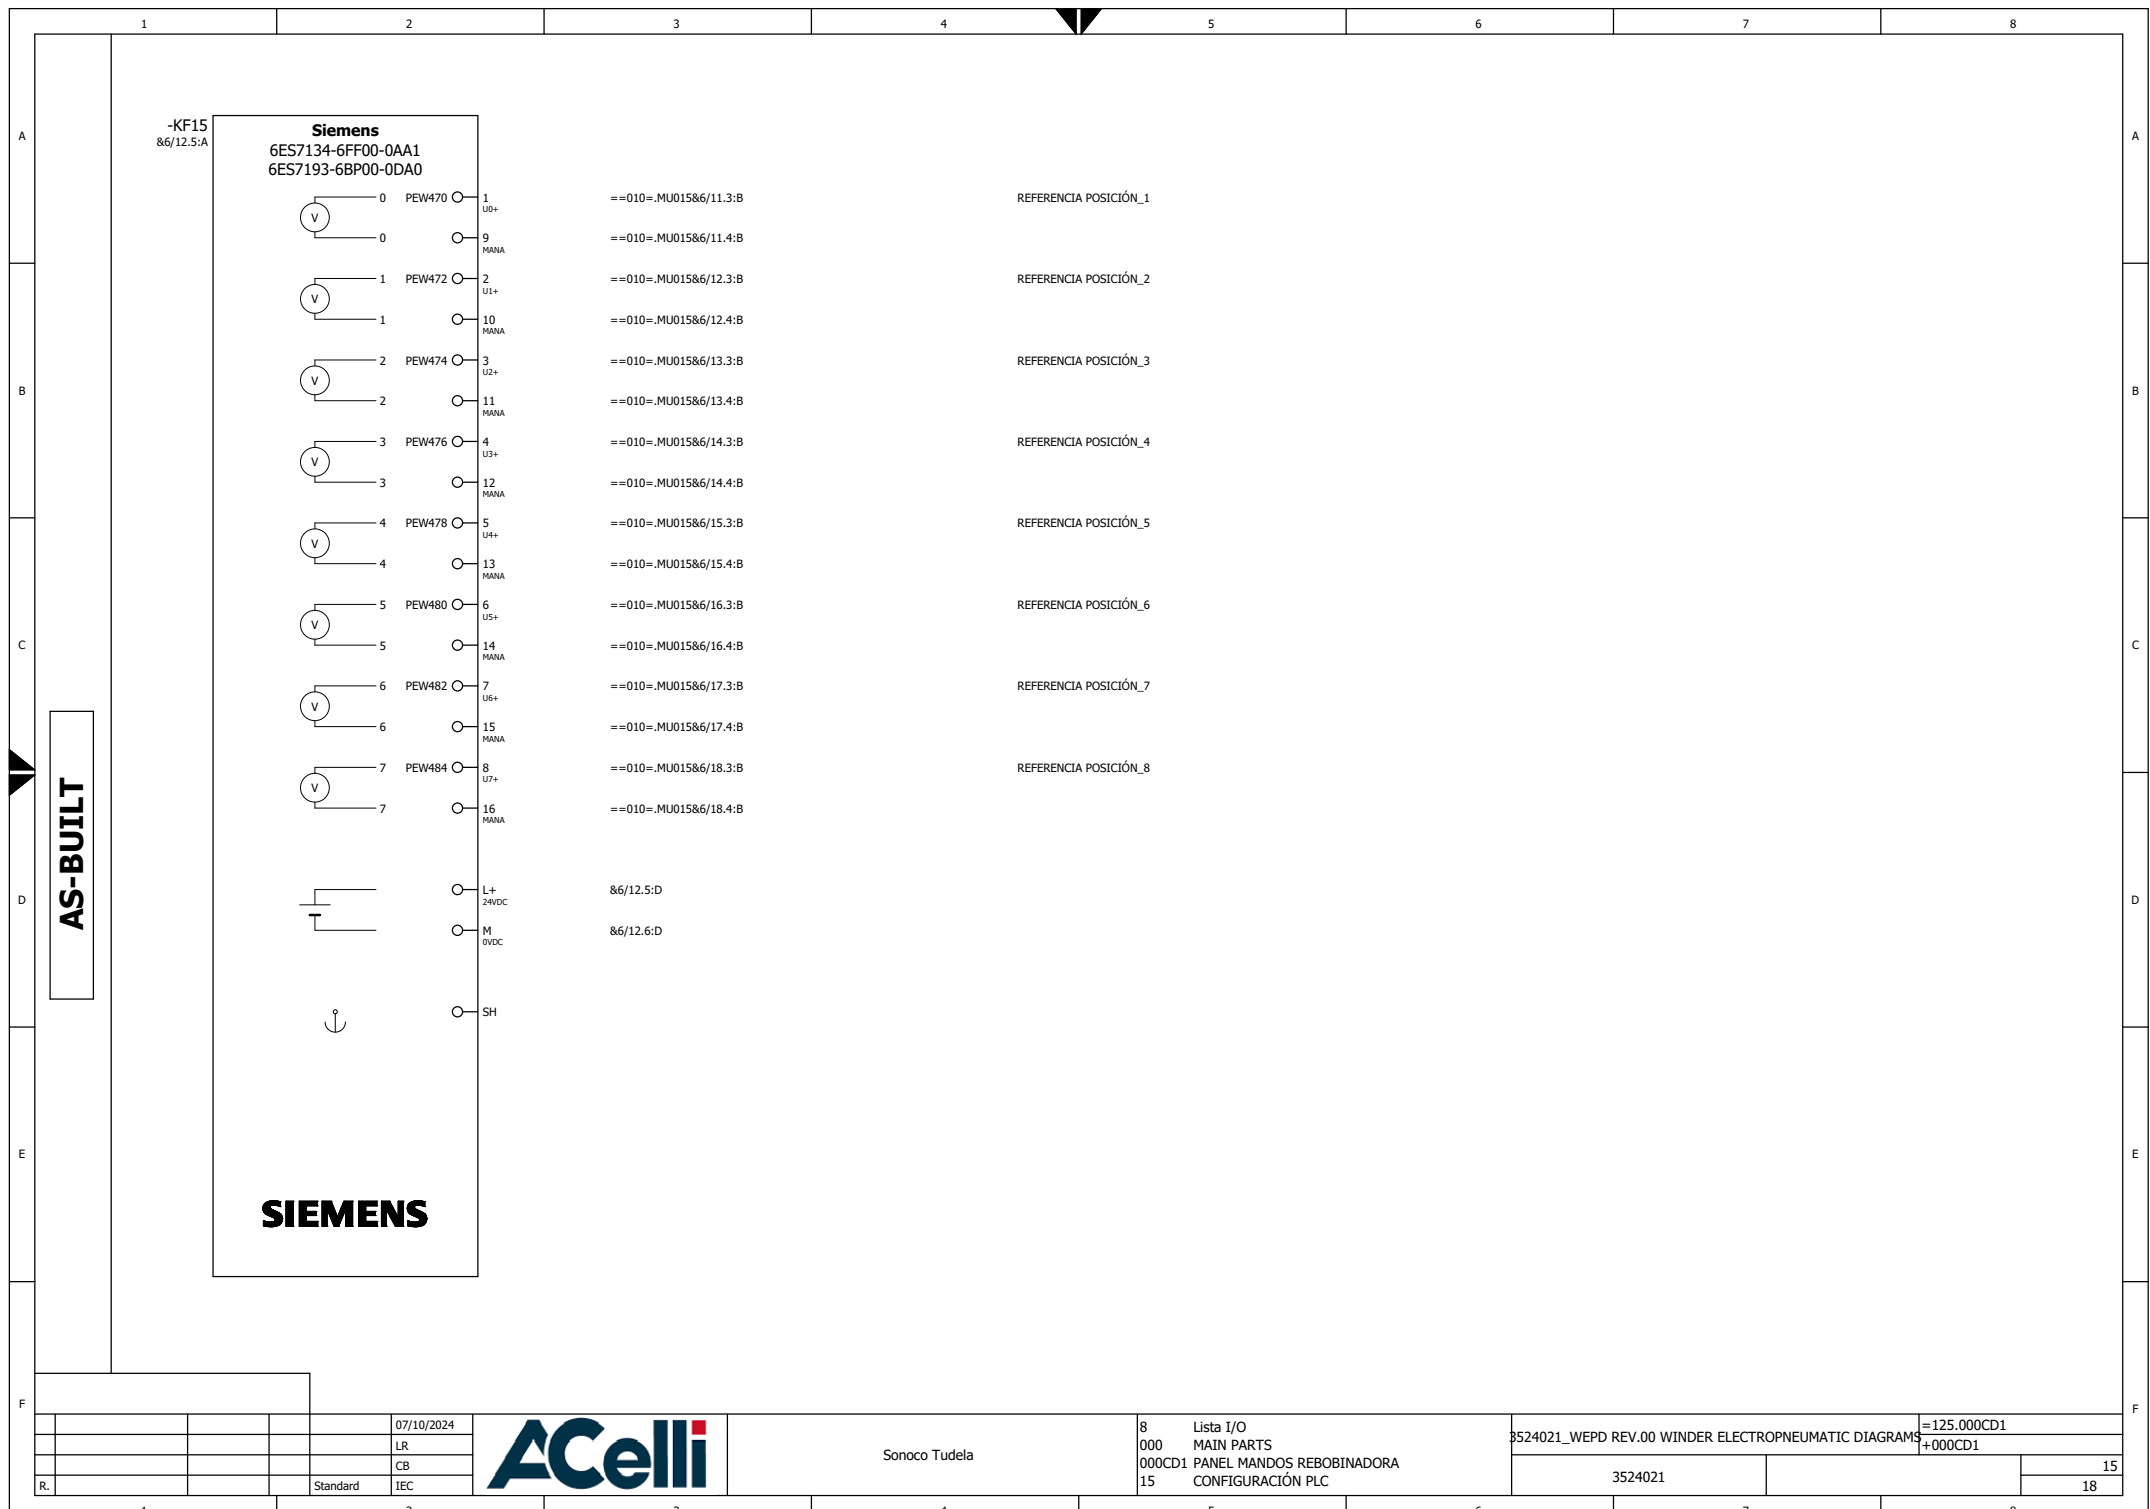



&6/12.6:D

SIEMENS

AS-BUILT

ACelli

Sonoco Tudela


8	Lista I/O
000	MAIN PARTS
000CD1	PANEL MANDOS REBOBINADORA
16	CONFIGURACIÓN PLC


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

AMS	=125.000CD1
	+000CD1

3524021

16
18

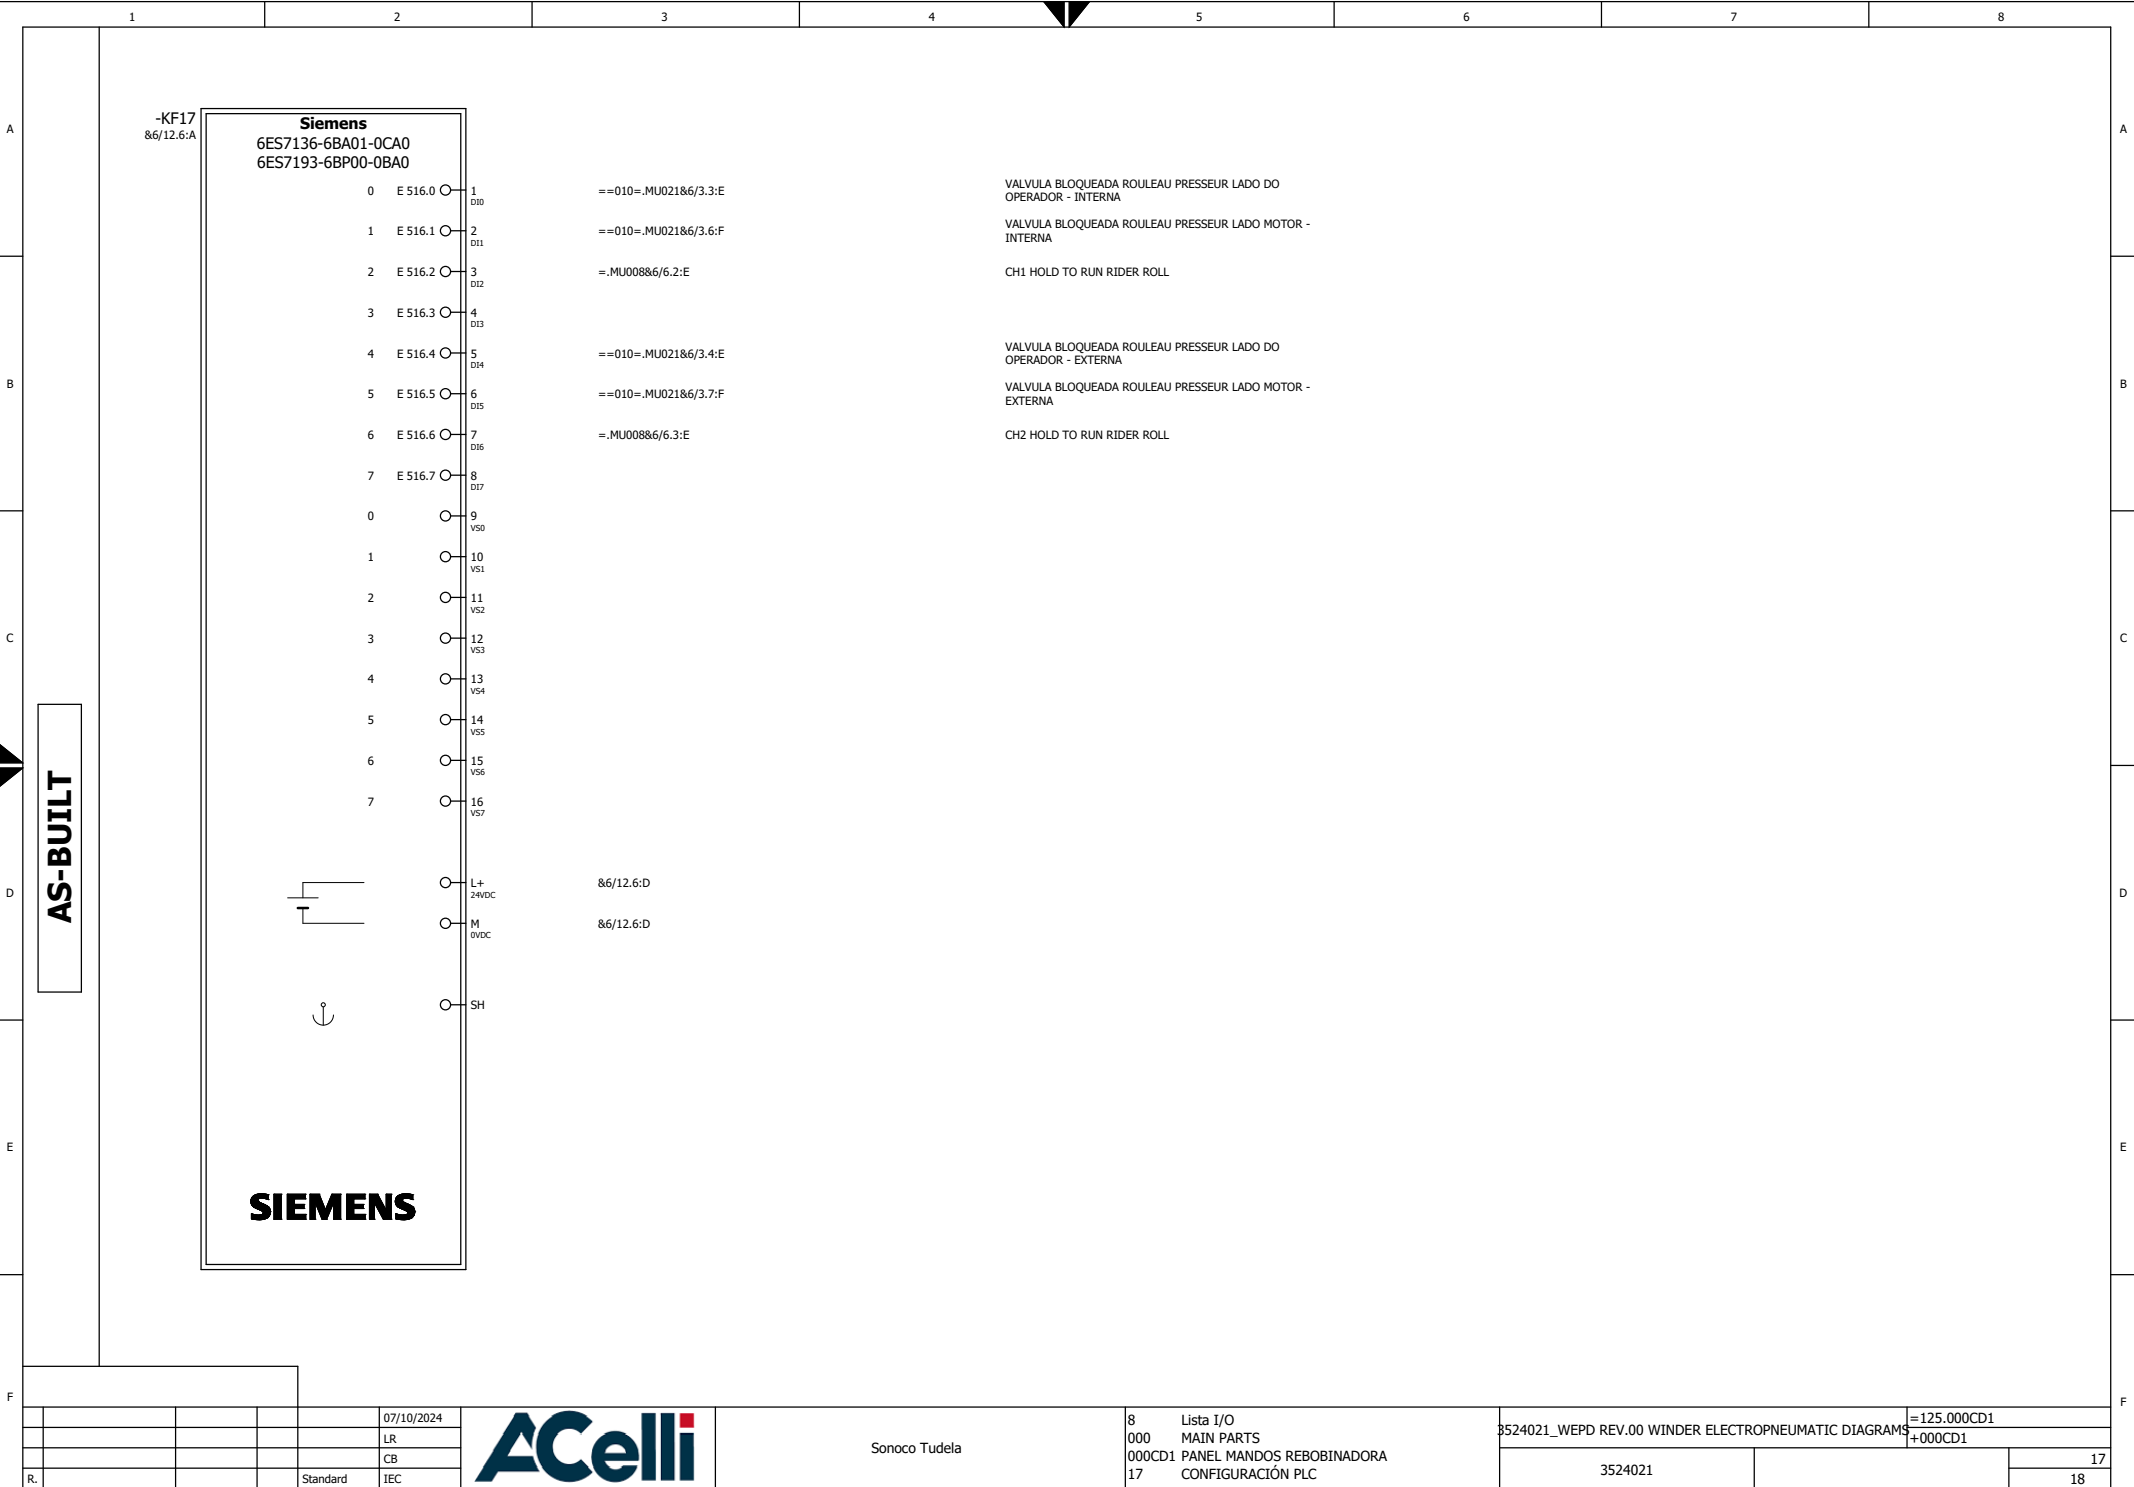

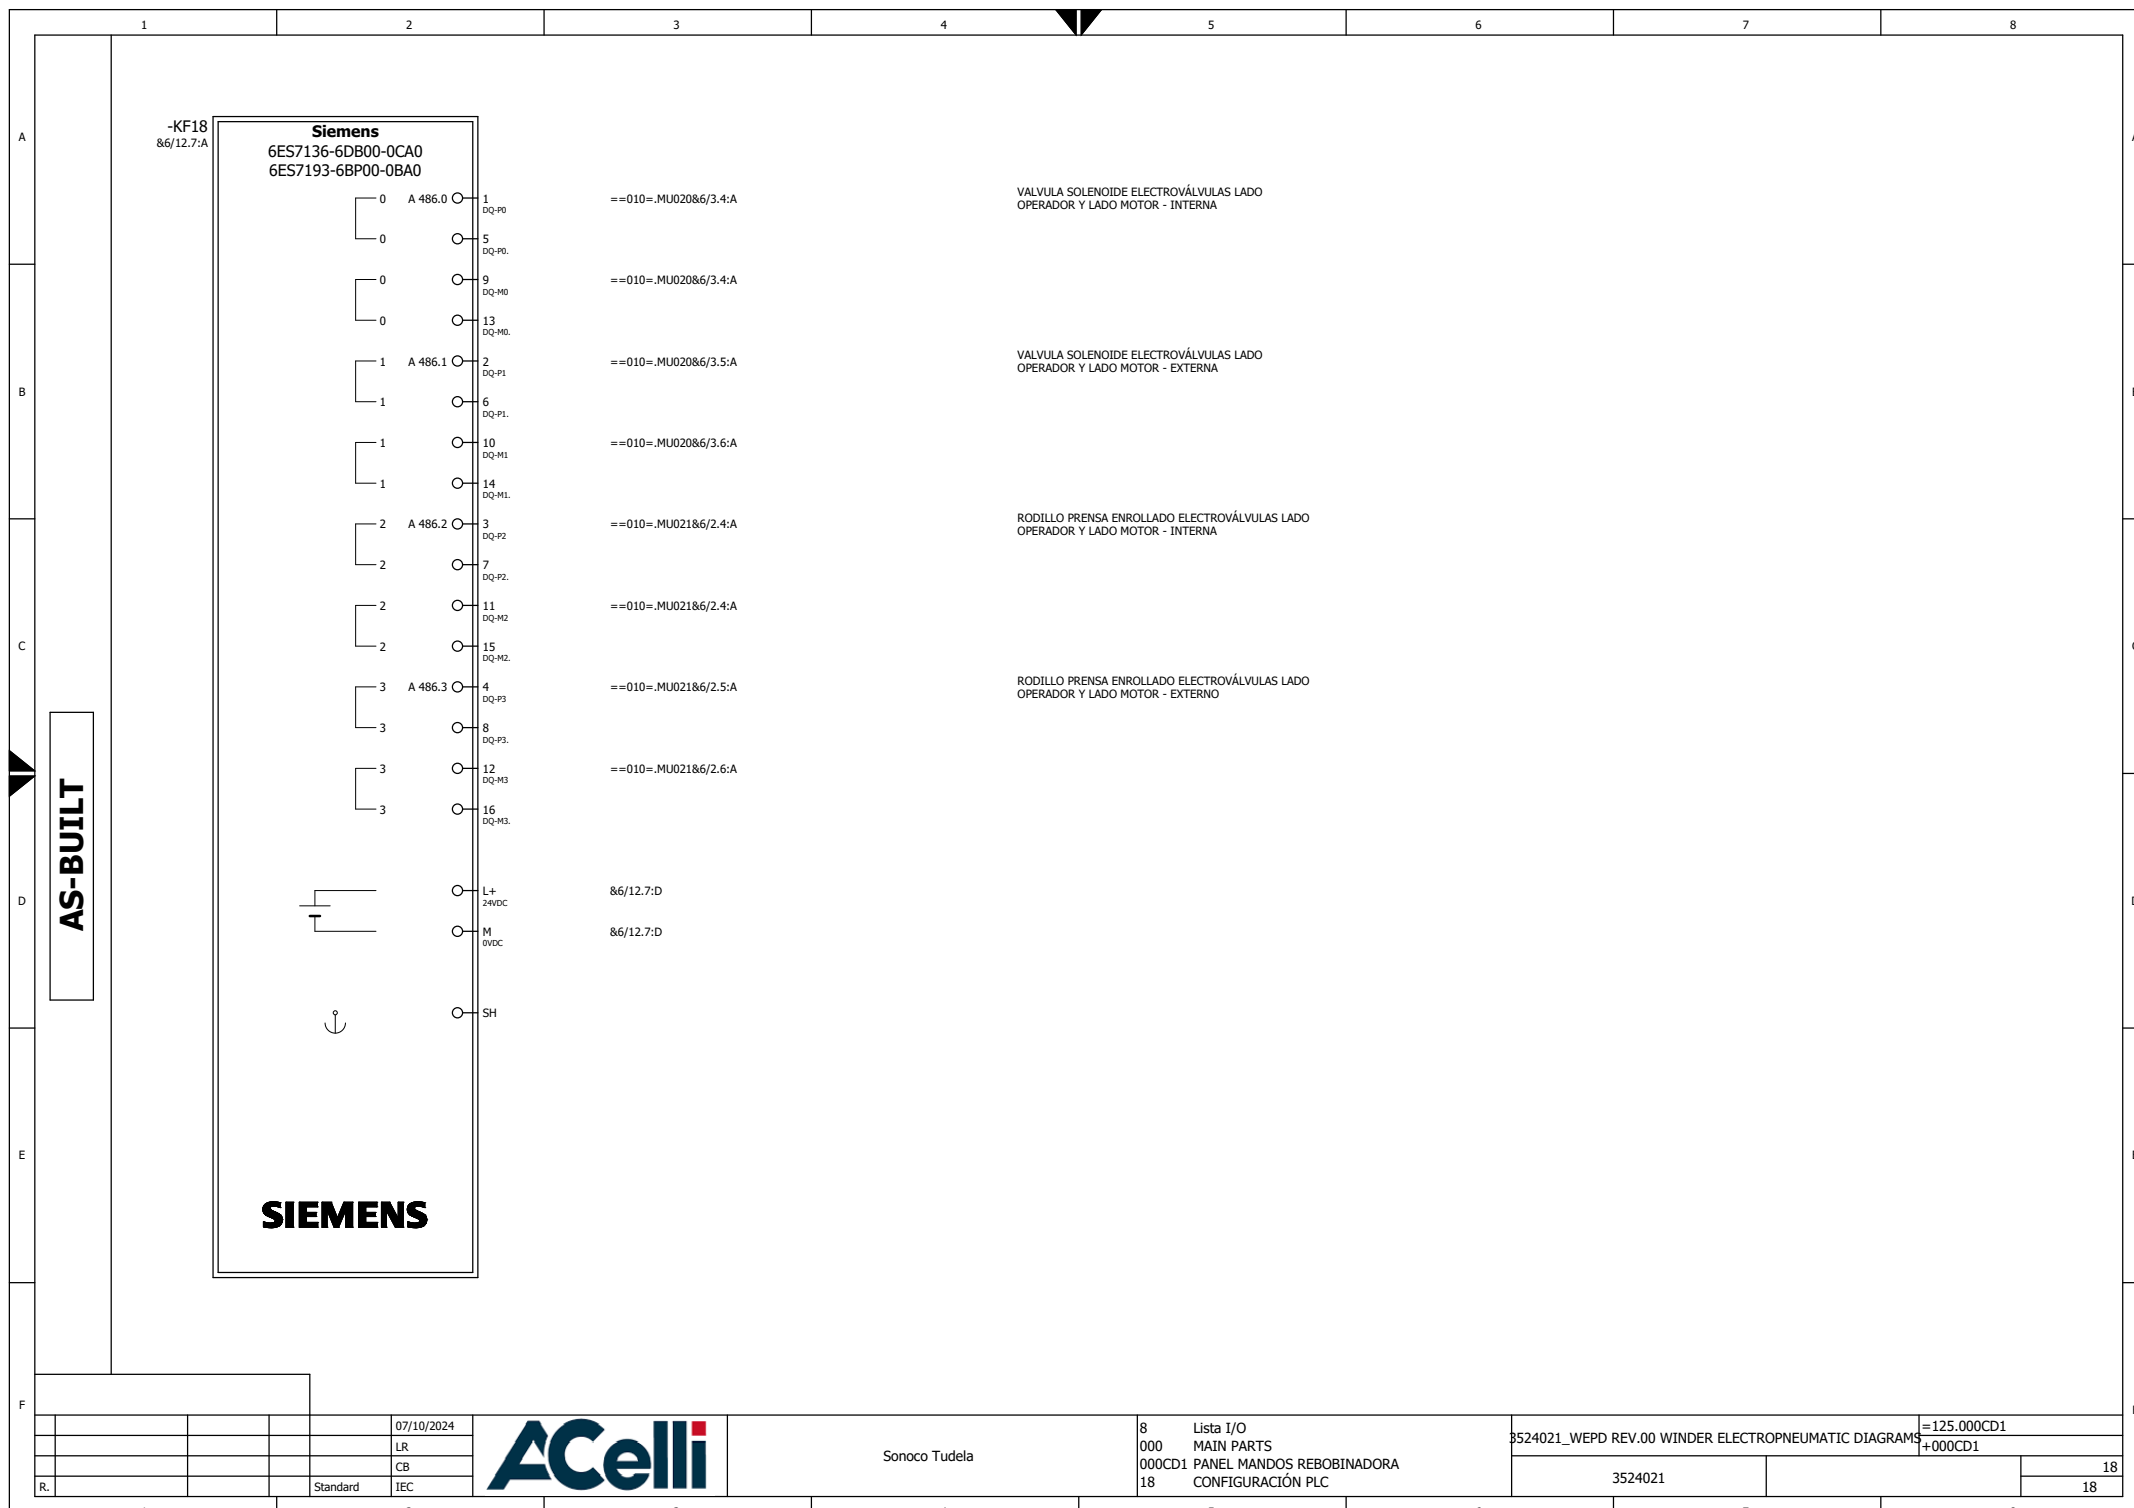


Descripción

Diagrama neumático

Disposición

000CD1

AS-BUILT

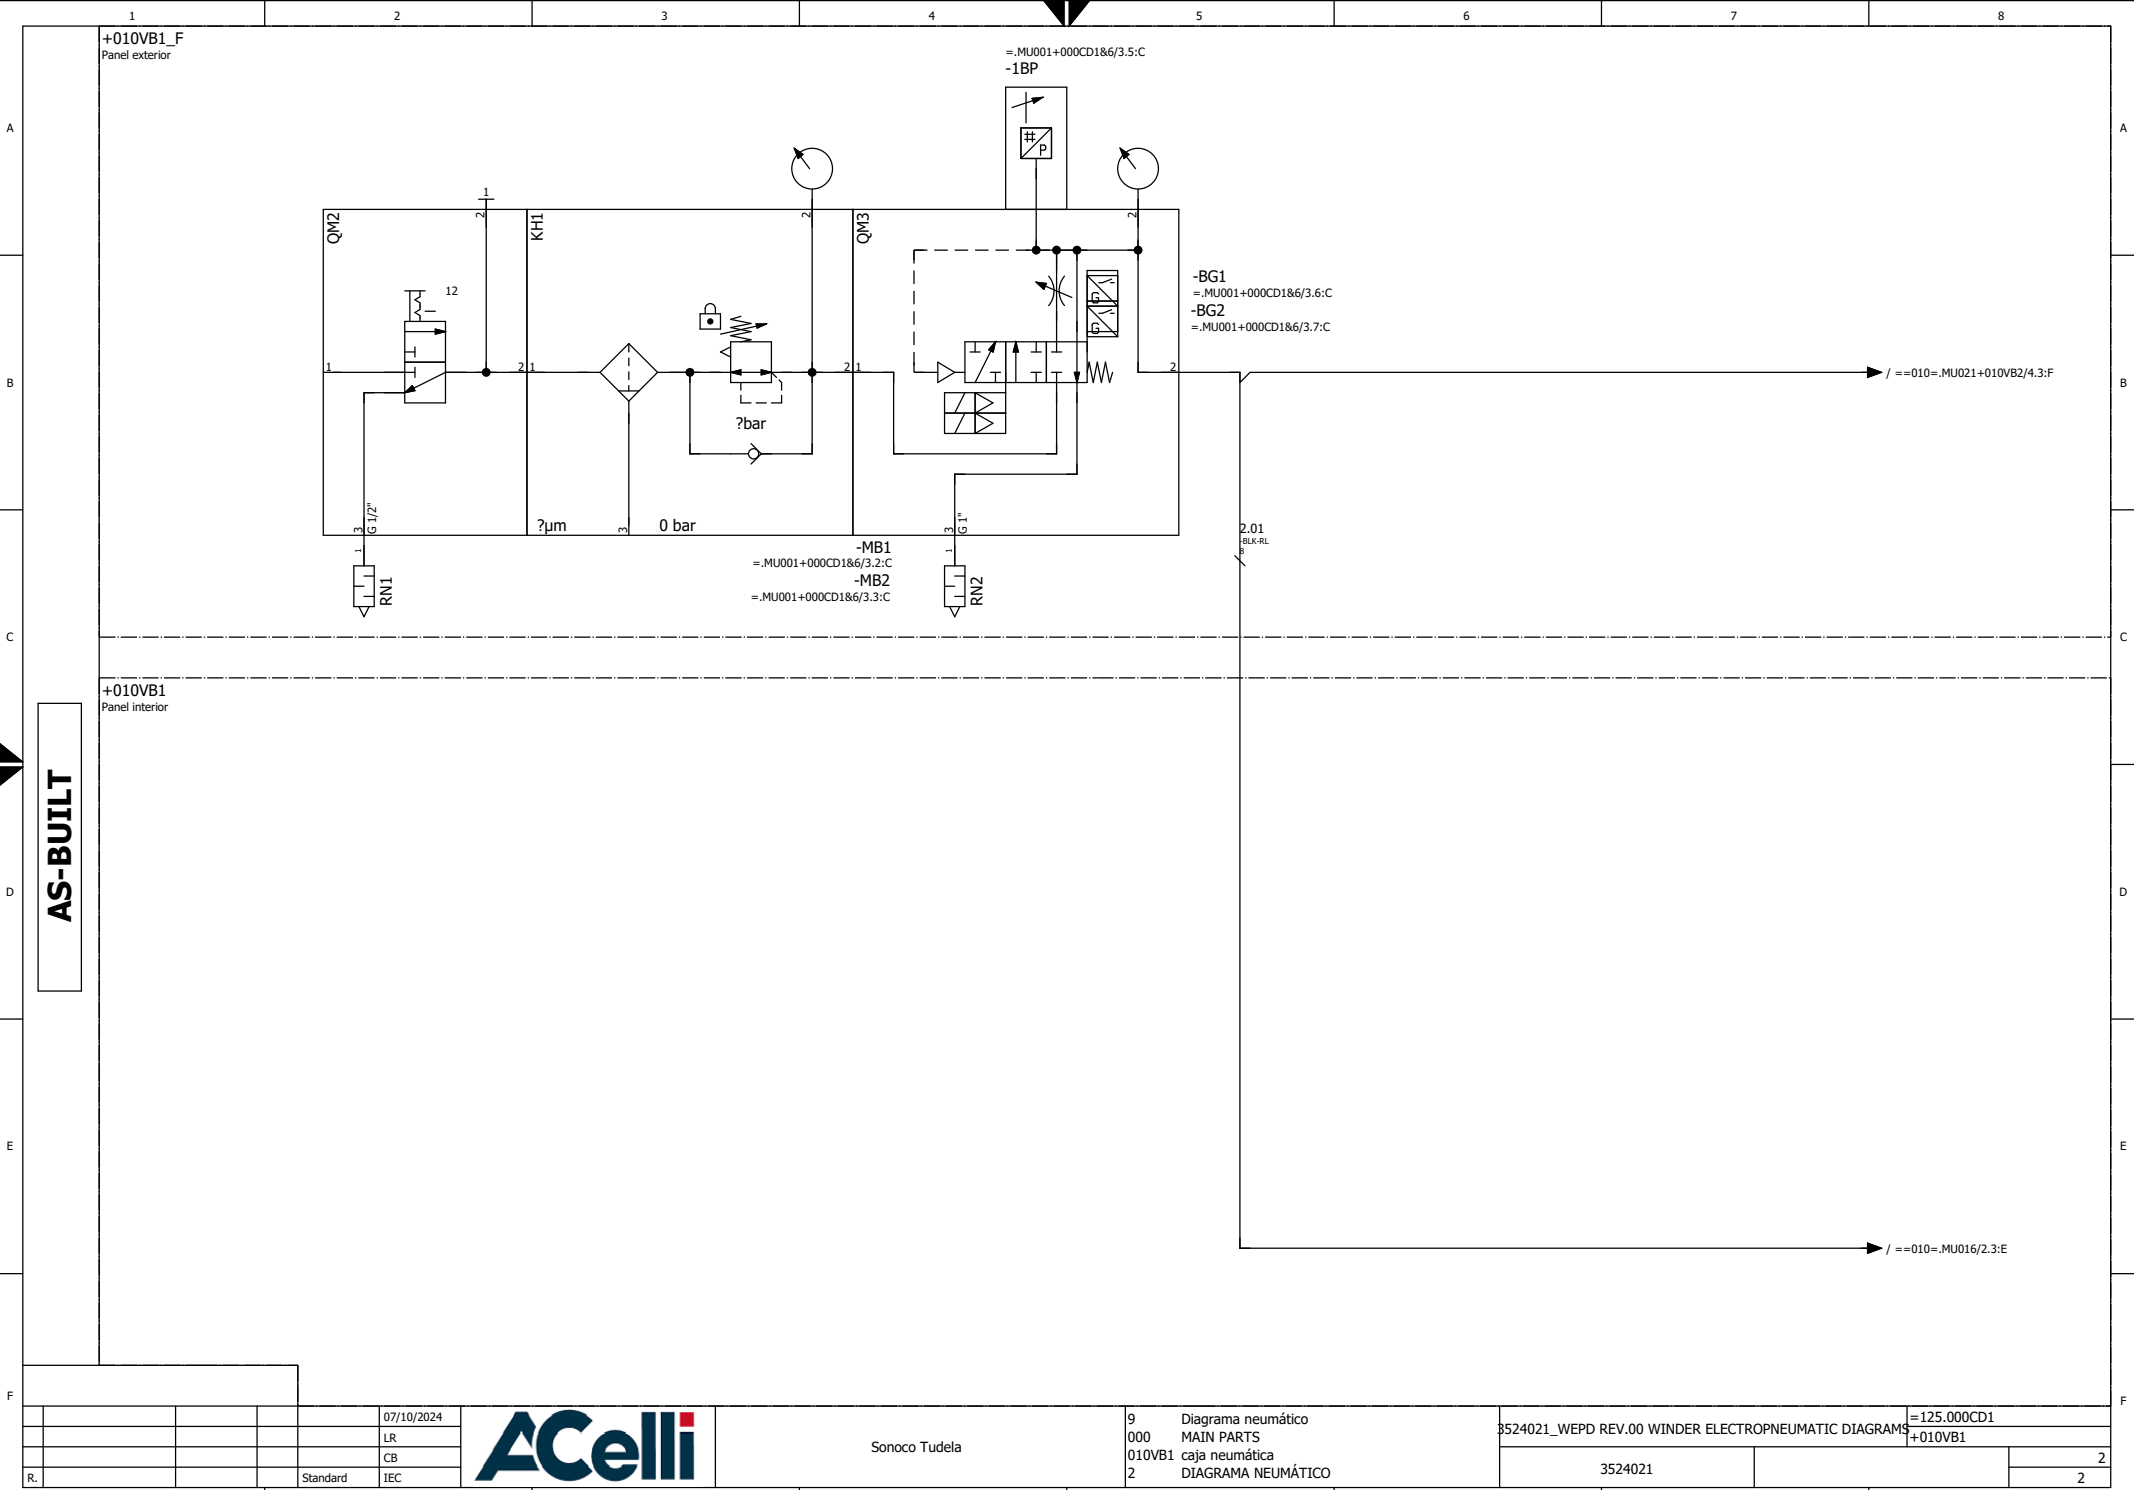

					07/10/2024
					LR
					CB
R.				Standard	IEC



Sonoco Tudela

9
000
010VB1
2
Diagrama neumático
MAIN PARTS
caja neumática
DIAGRAMA NEUMÁTICO

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS

=125.000CD1	
+010VB1	
	2
	2

Descripción

Automatic spreading device

Disposición


MU015

AS-BUILT

AS-BUILT



POSICIÓN DE LOS FRENOS
POR DEBAJO DEL OBSTÁCULO MECÁNICO
[FRENOS NO VISIBLES DESDE ESTA PERSPECTIVA].

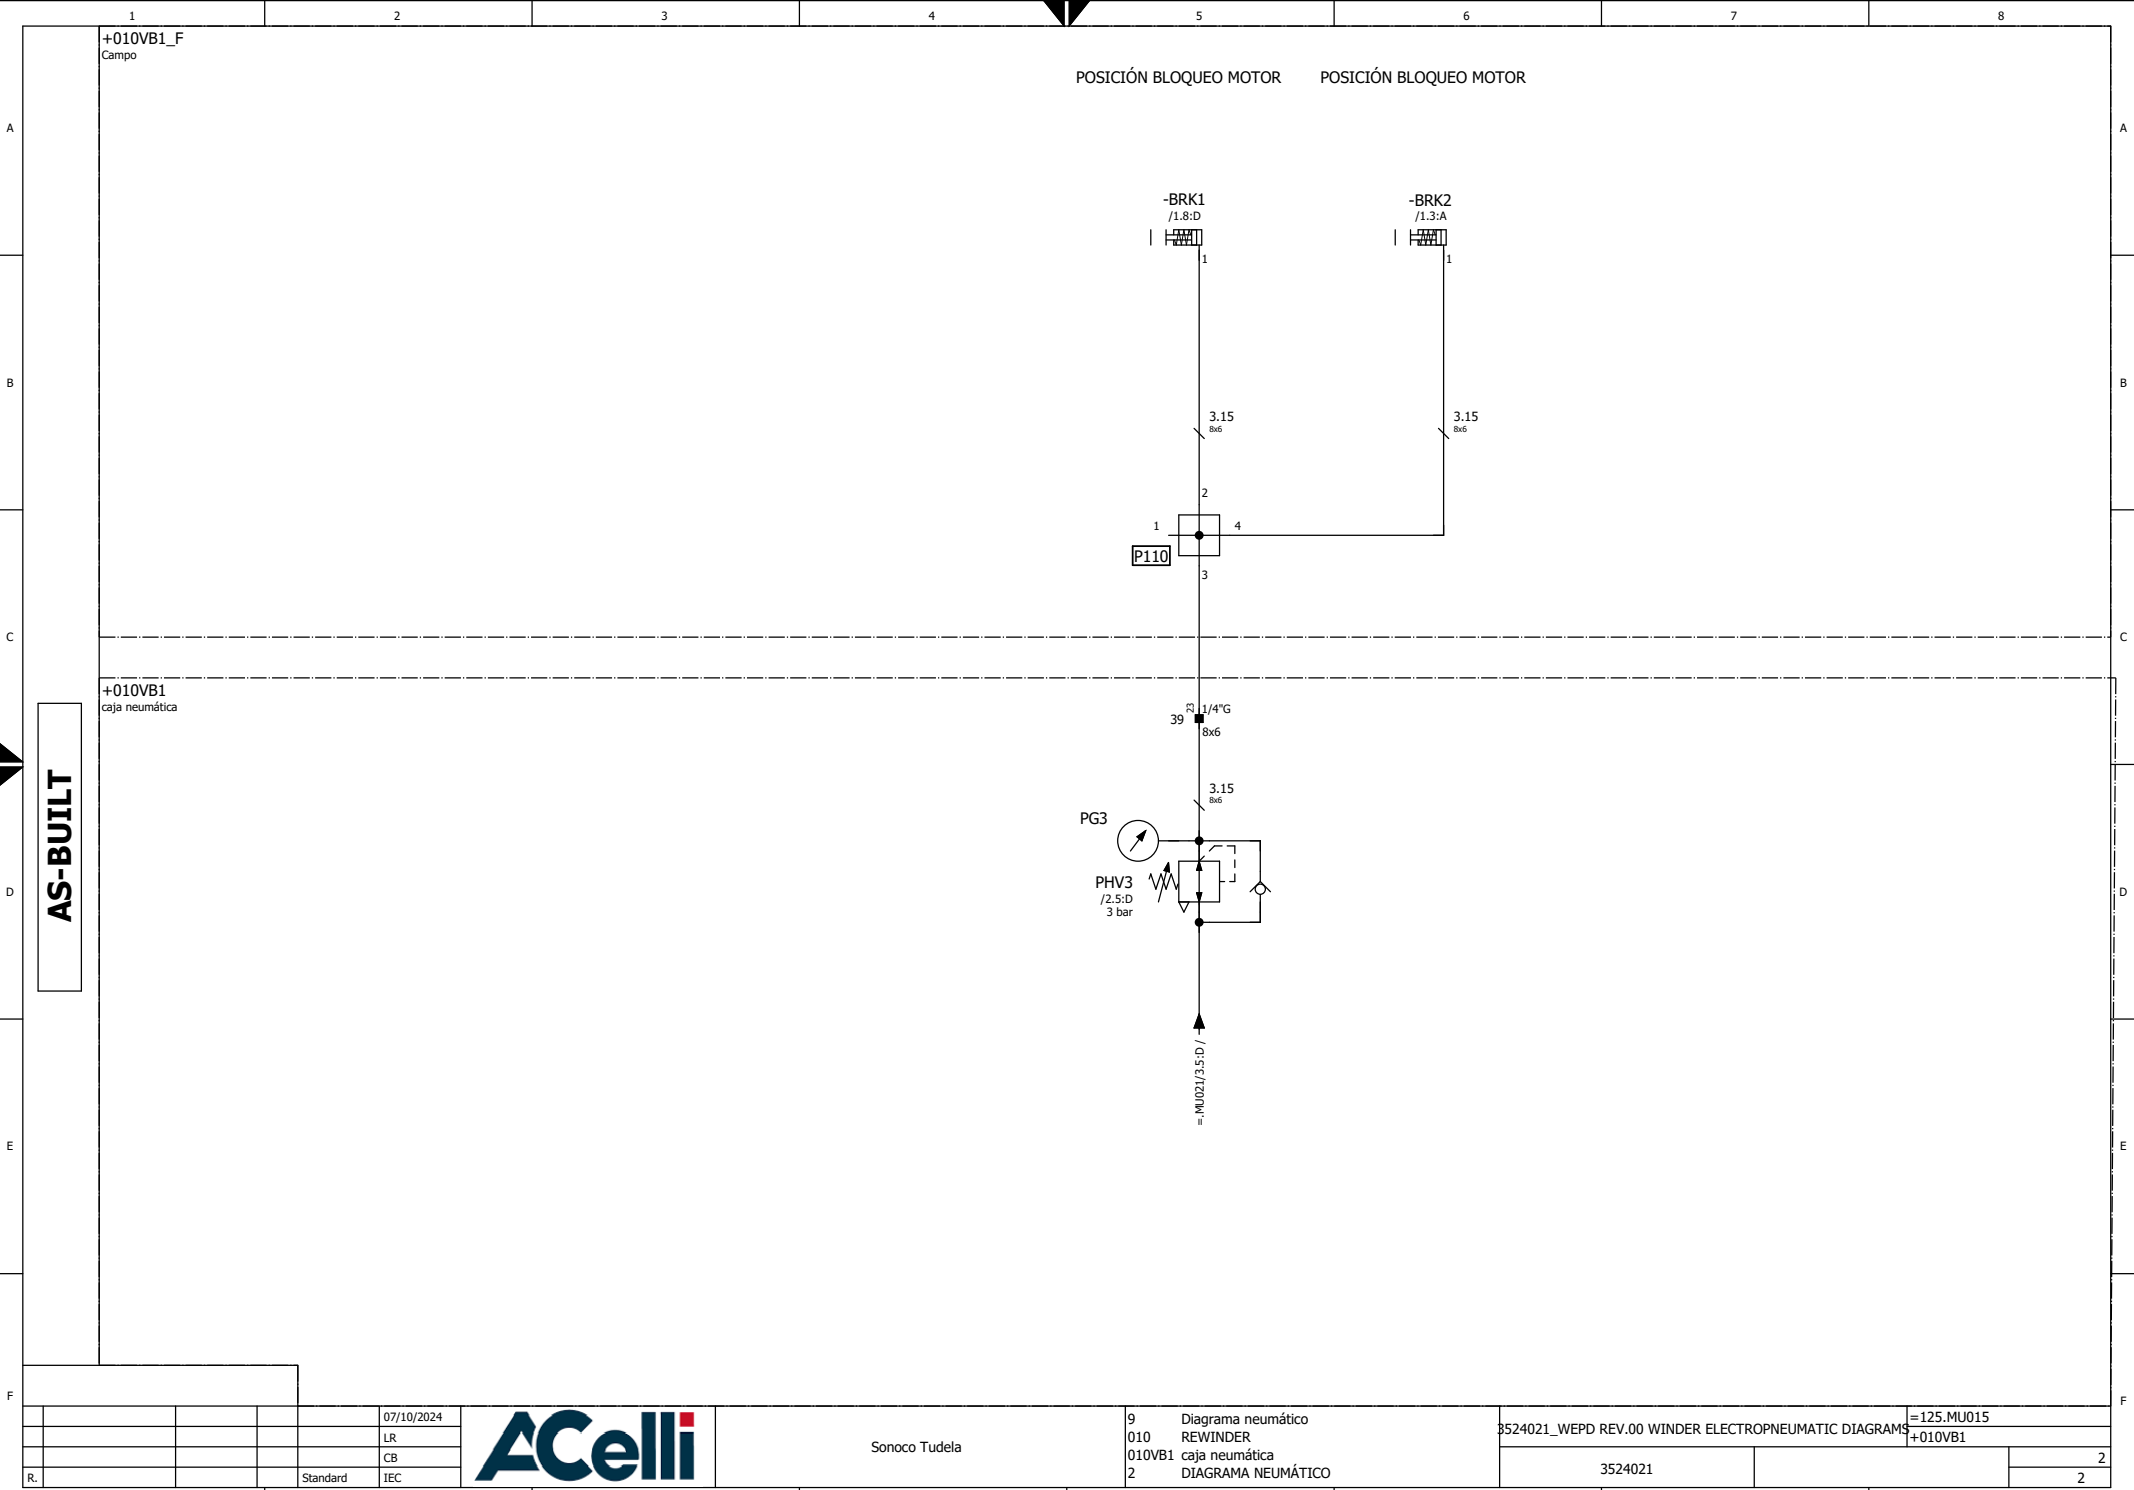


Descripción


PAPER THREADING

Disposición

MU016

AS-BUILT

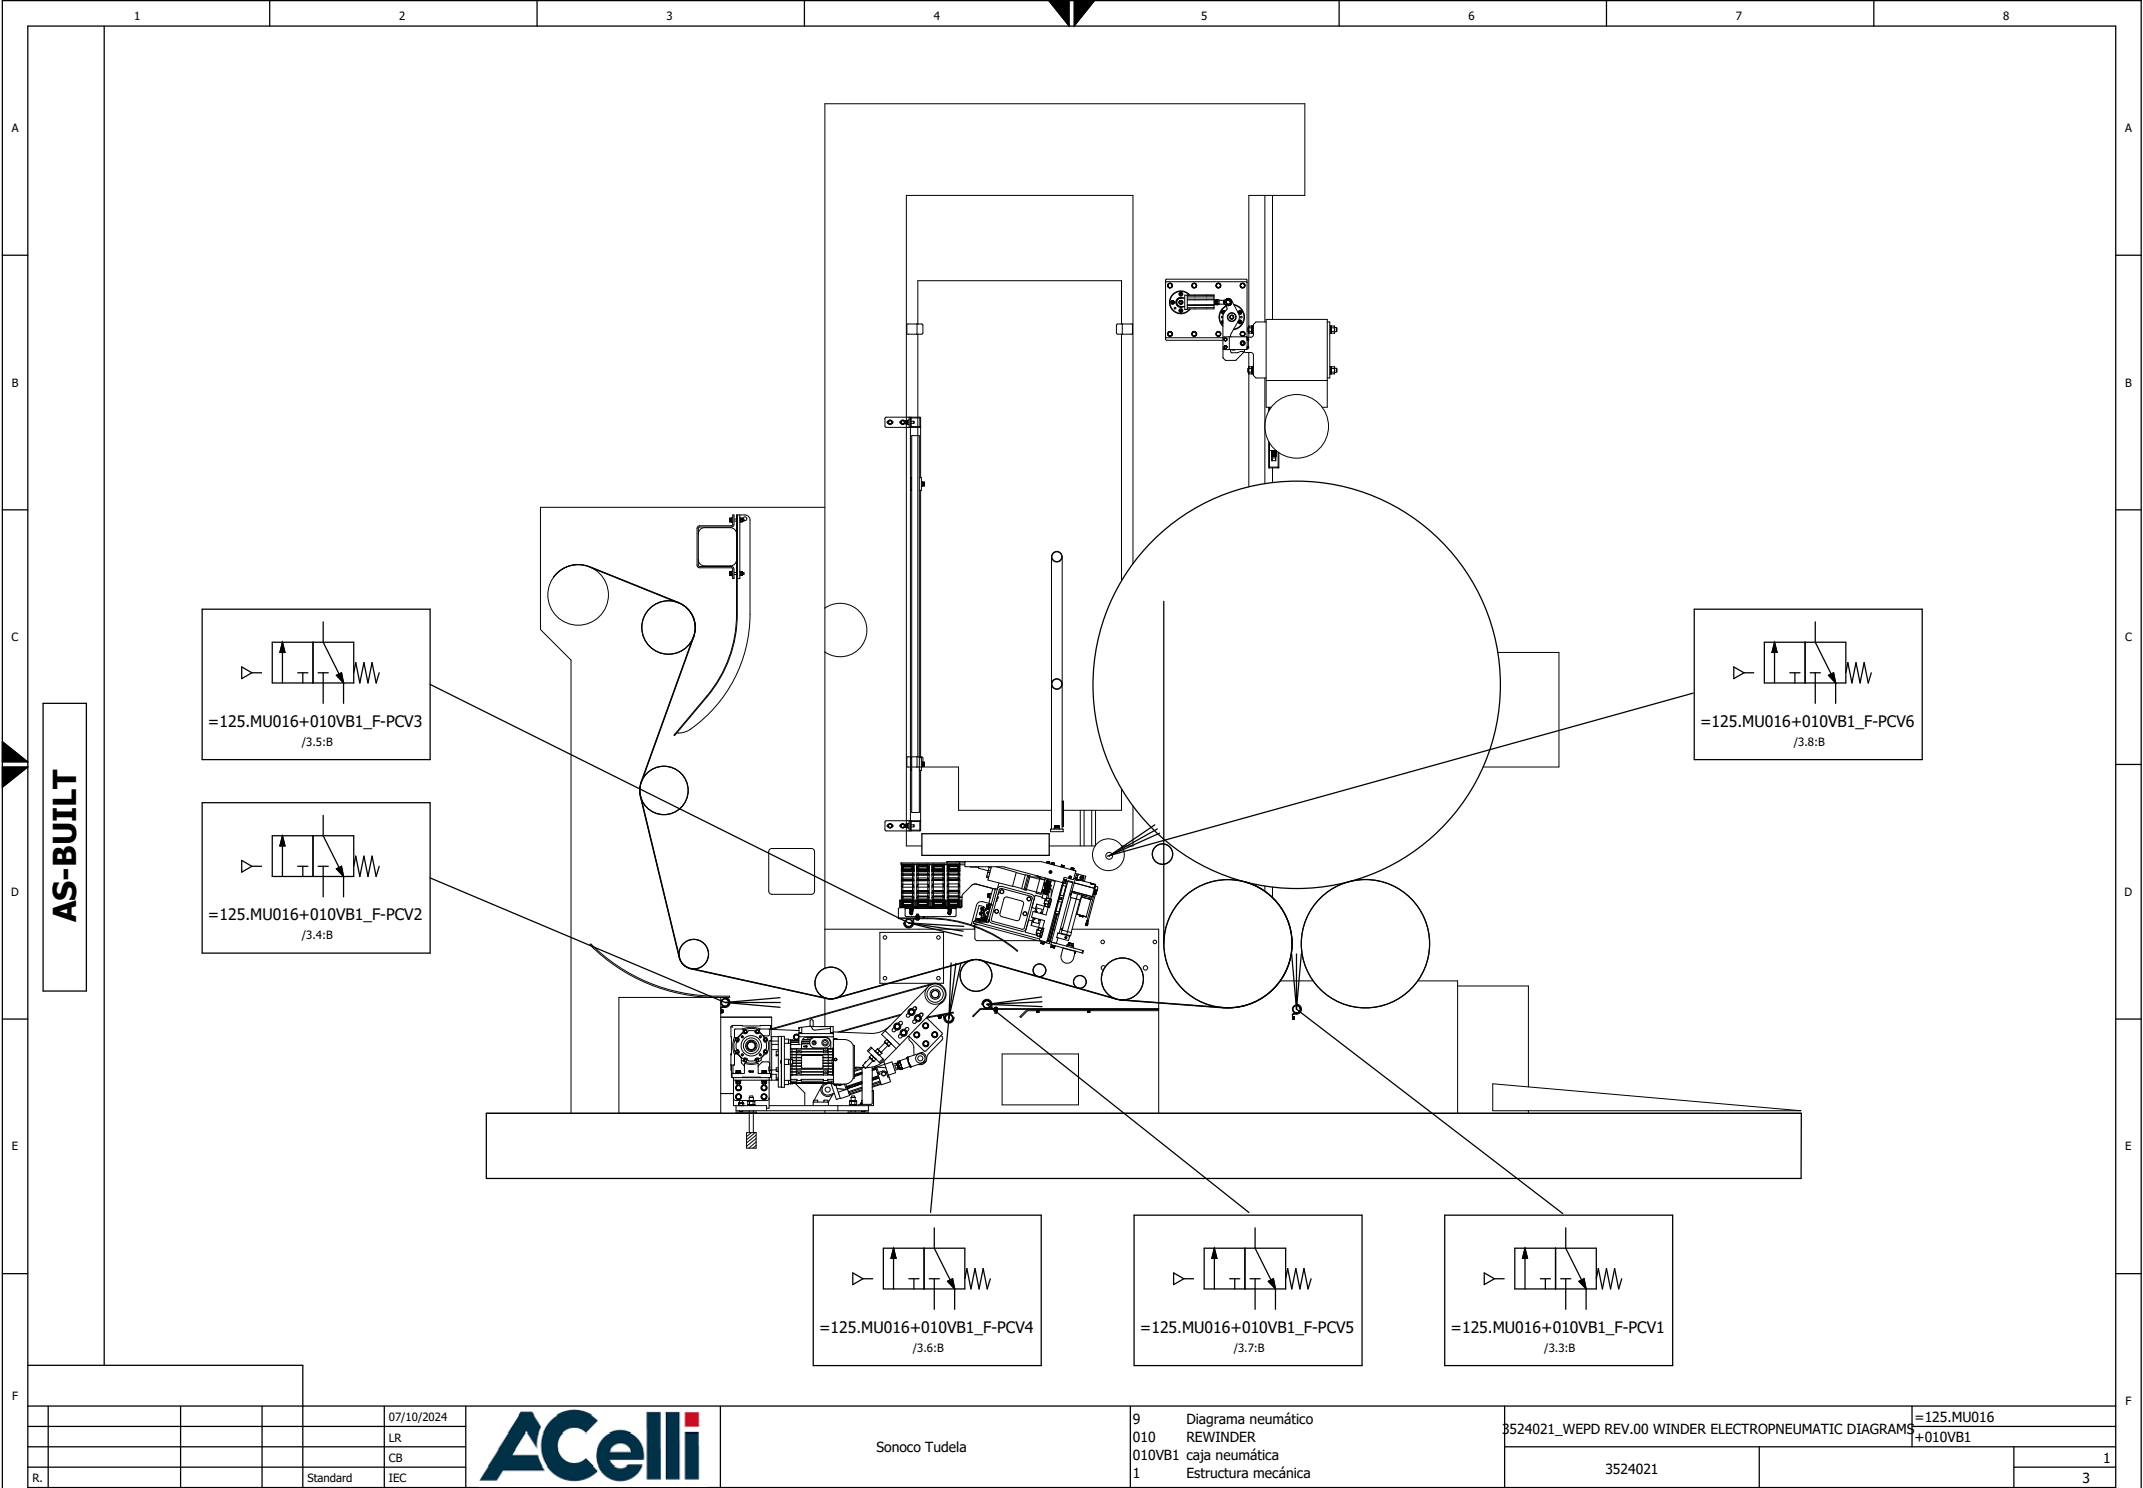


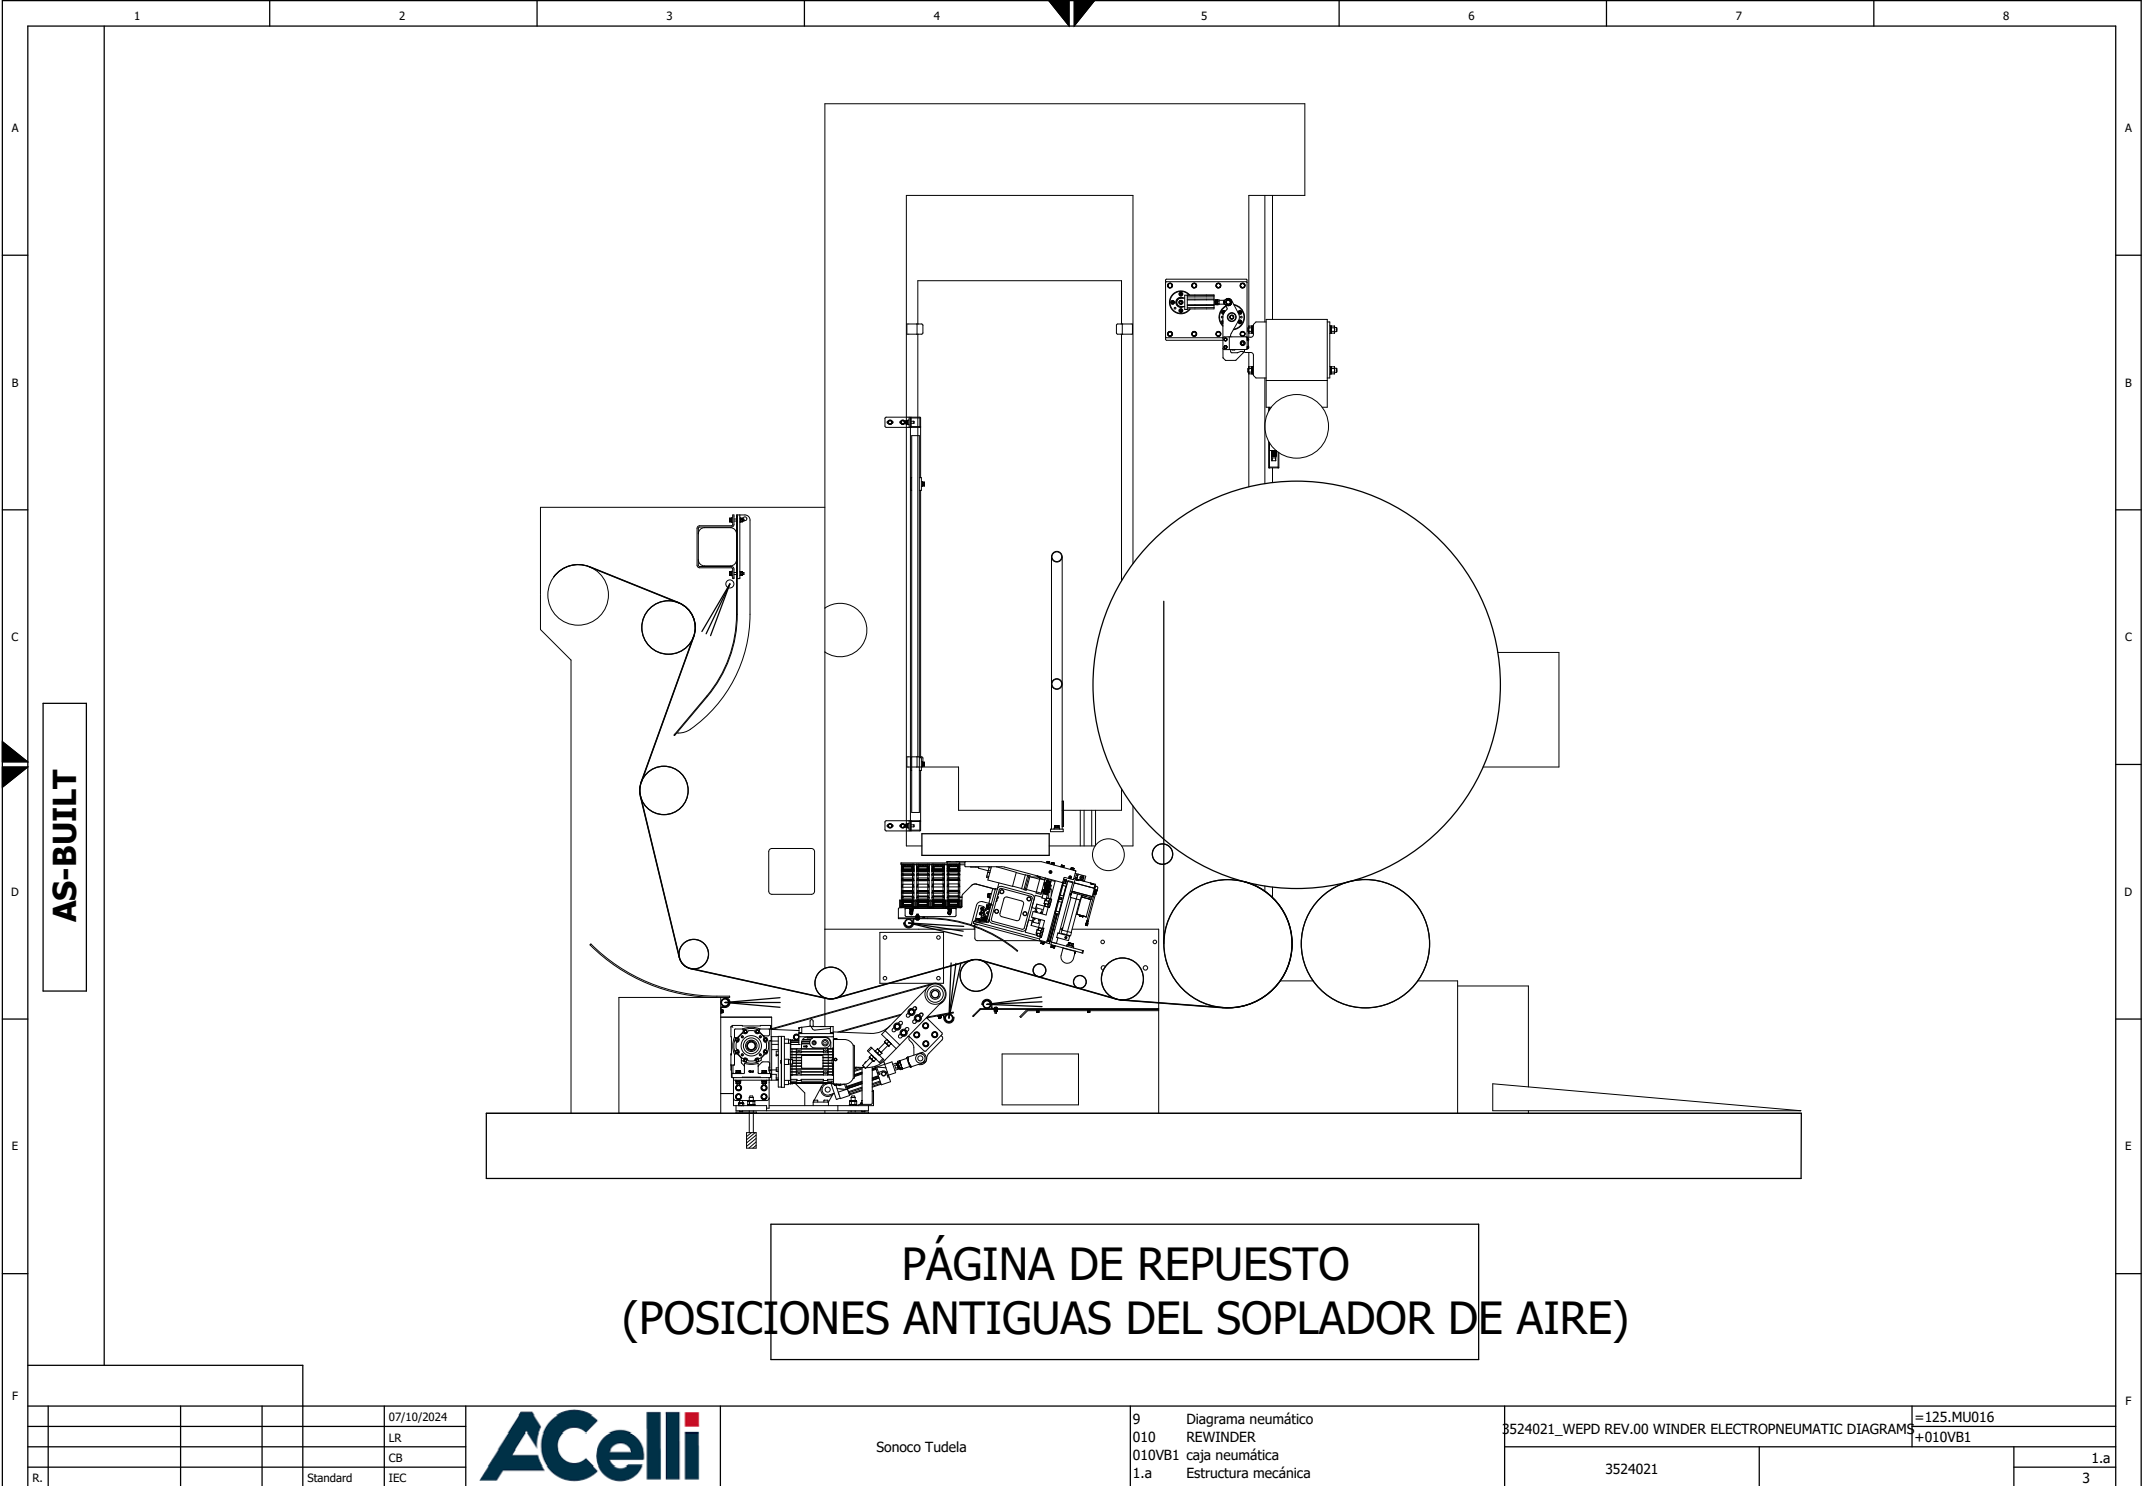

AS-BUILT

PÁGINA DE REPUESTO
(POSICIONES ANTIGUAS DEL SOPLADOR DE AIRE)

				07/10/2024		Sonoco Tudela	9	Diagrama neumático	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU016	
				LR			010	REWINDER			
				CB			010VB1	caja neumática			
R.				Standard	IEC		1.a	Estructura mecánica		3524021	1.a
											3

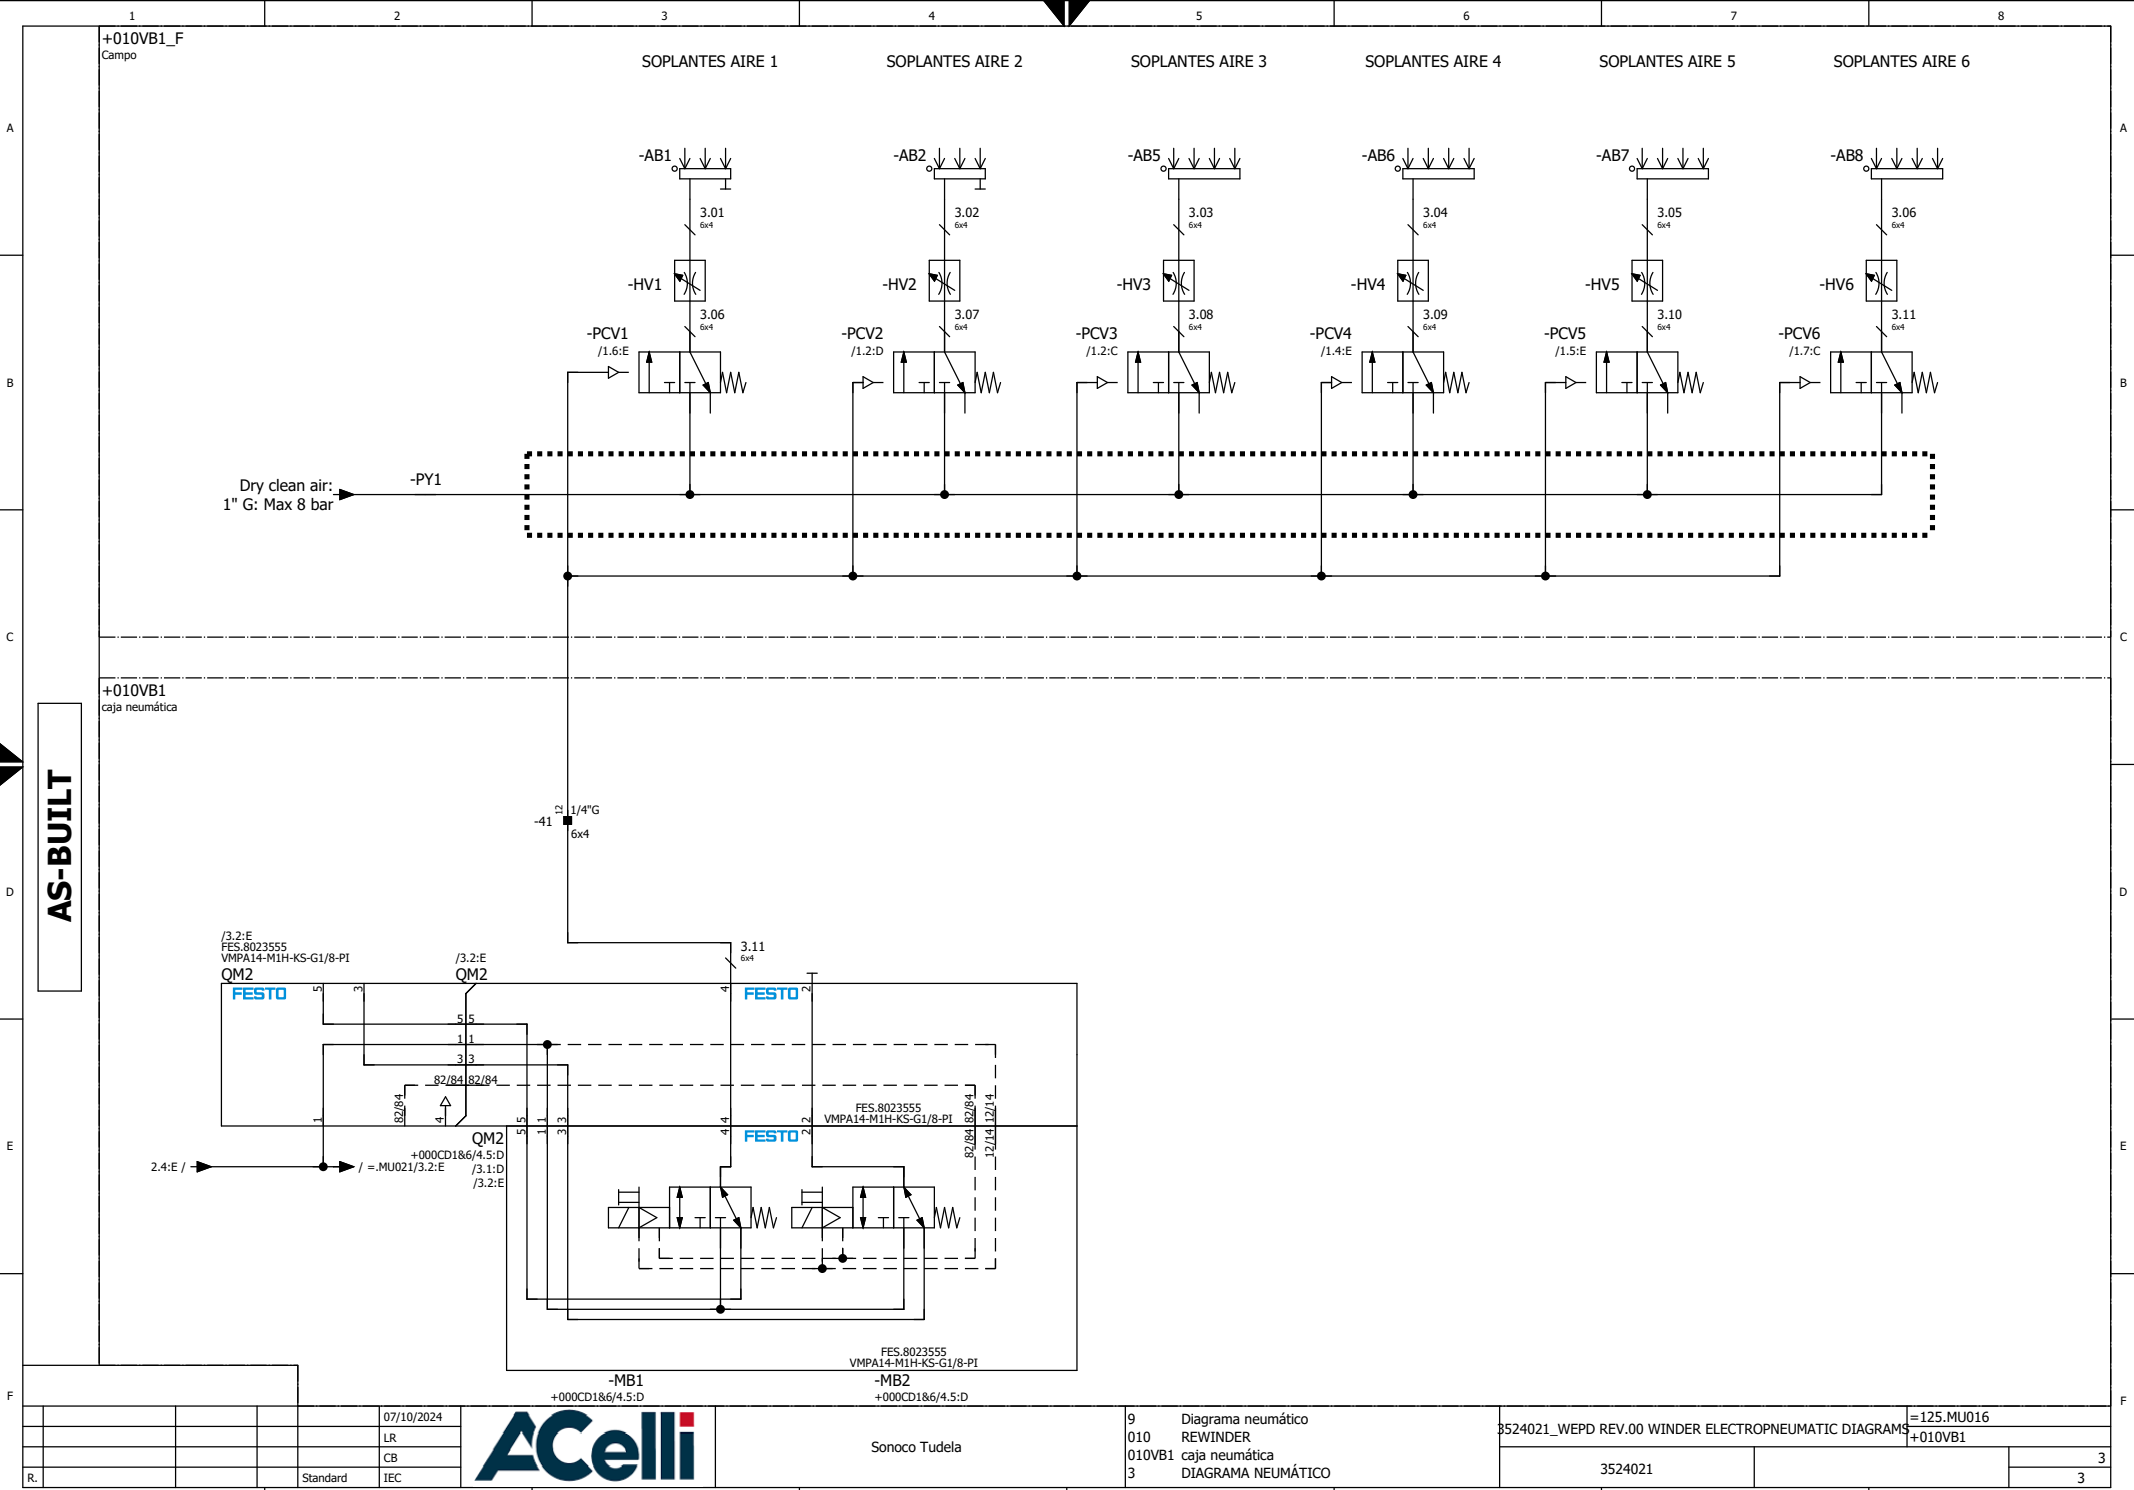

AS-BUILT



Sonoco Tudela

9	Diagrama neumático	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=125.MU016
010	REWINDER		+010VB1
010VB1	caja neumática		
3	DIAGRAMA NEUMÁTICO	3524021	3

Descripción

CABEZALES RETENCIÓN

Disposición

MU020

AS-BUILT

Descripción

RODILLO PRENSA ENROLLADO

Disposición

MU021


AS-BUILT

F



LADO POSTERIOR

3

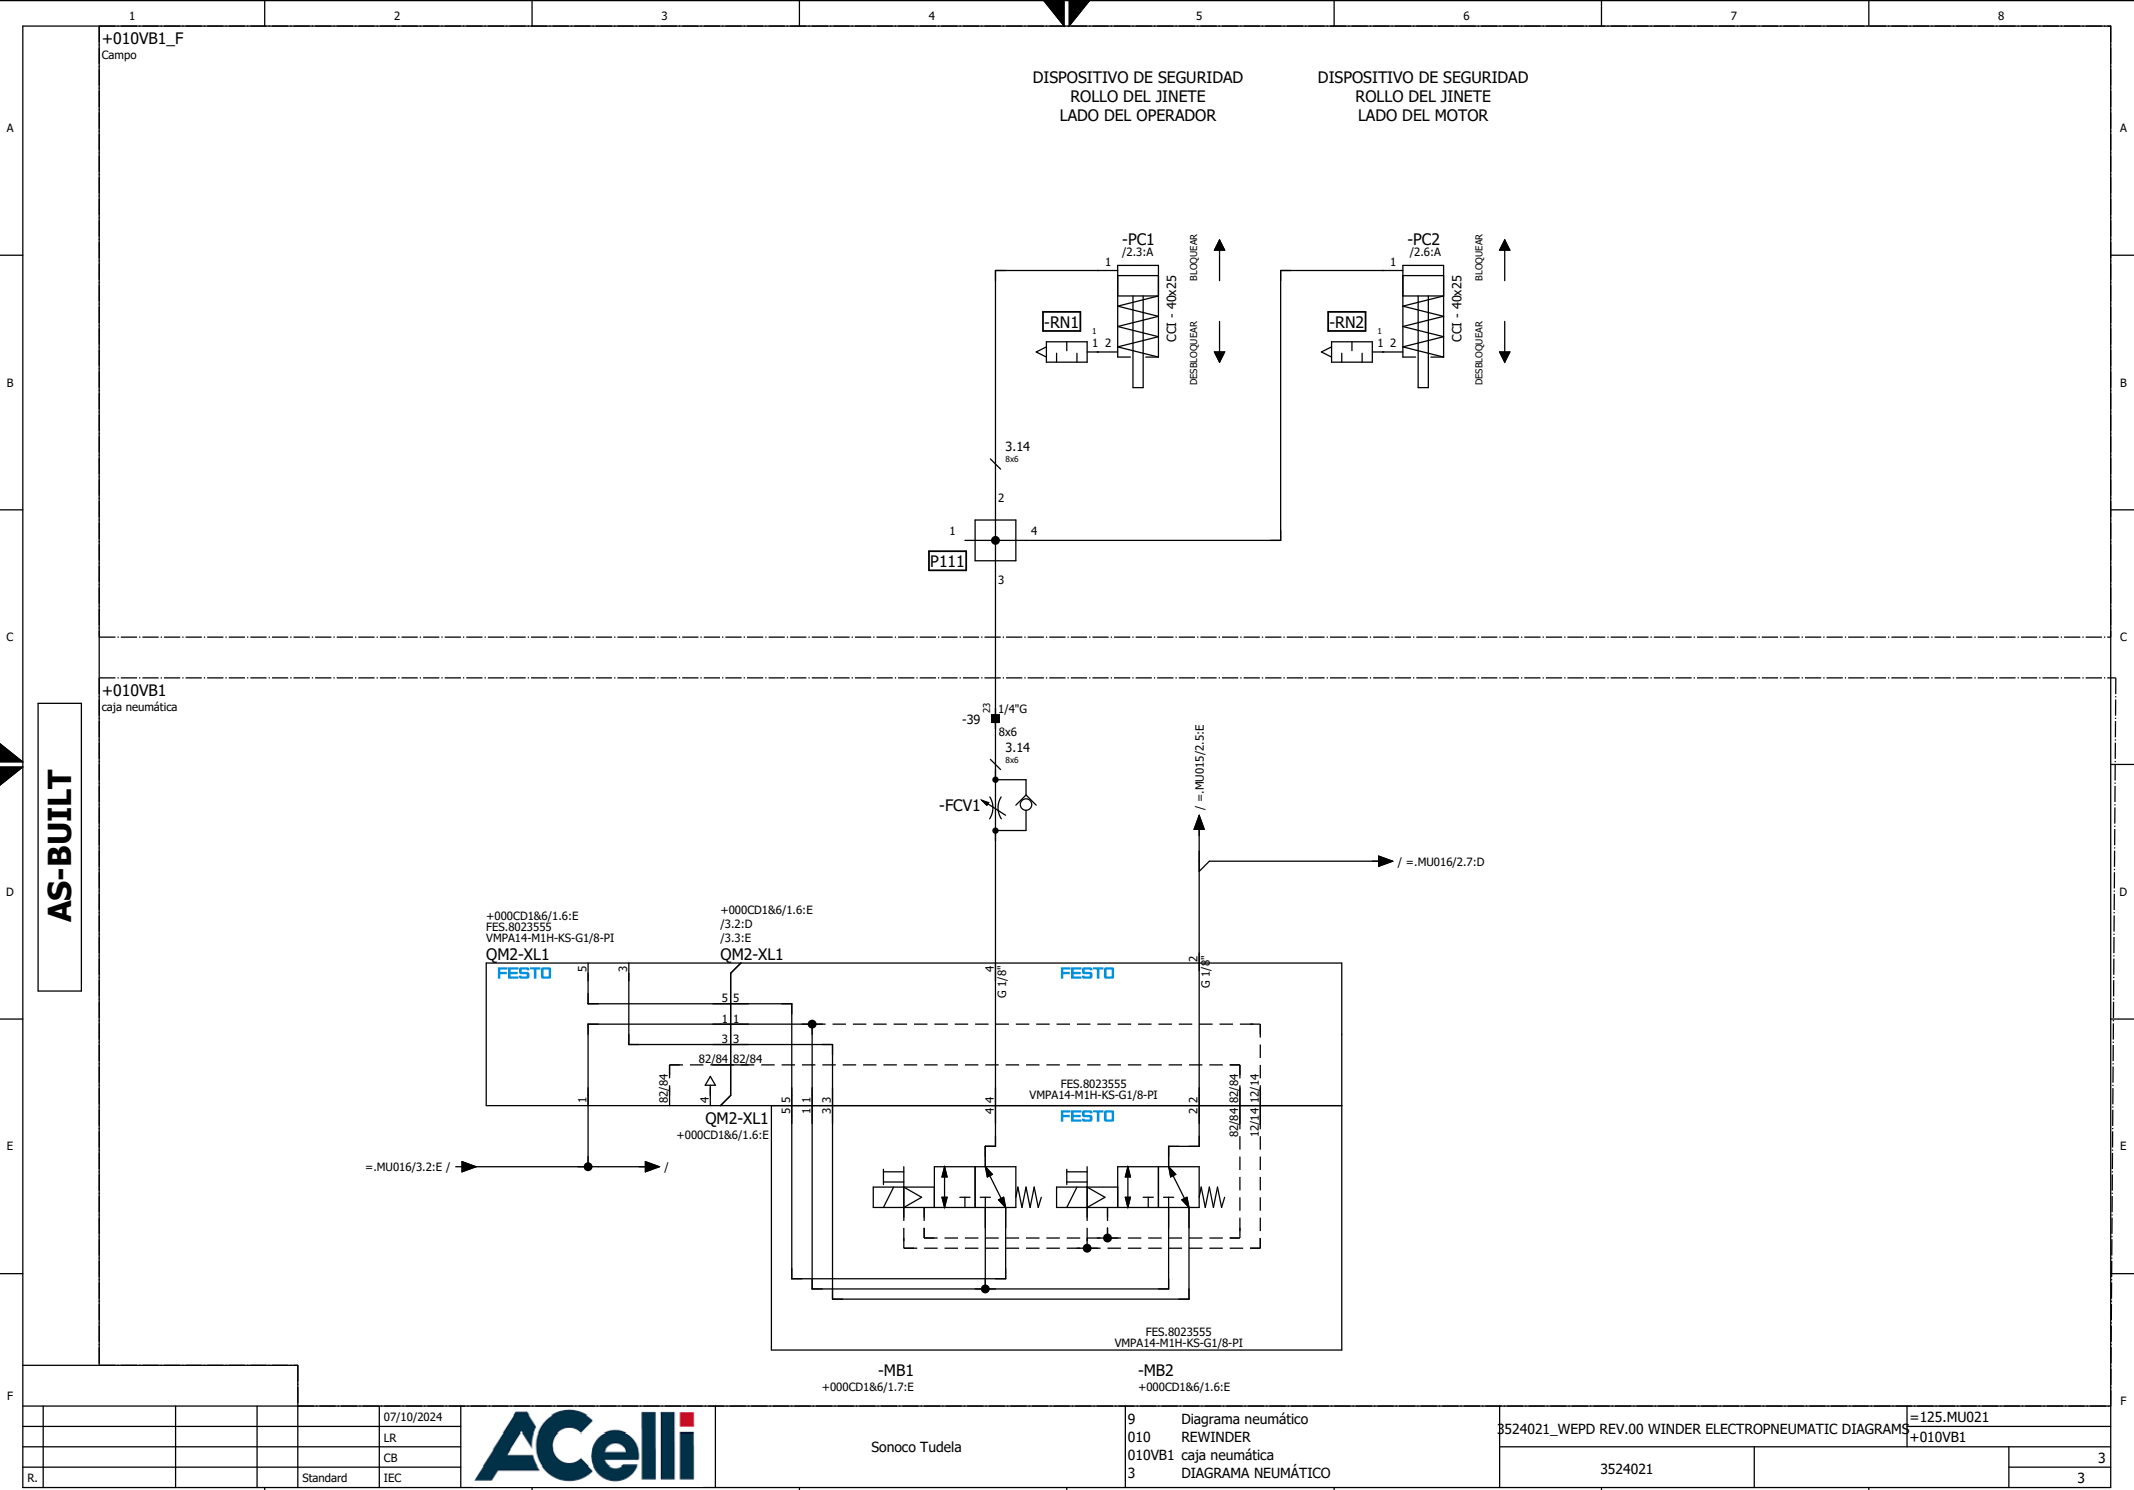

AS-BUILT



Sonoco Tudela

9 Diagrama neumático
010 REWINDER
010VB1 caja neumática
3 DIAGRAMA NEUMÁTICO


3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS


=125.MU021
+010VB1

3524021

3

3

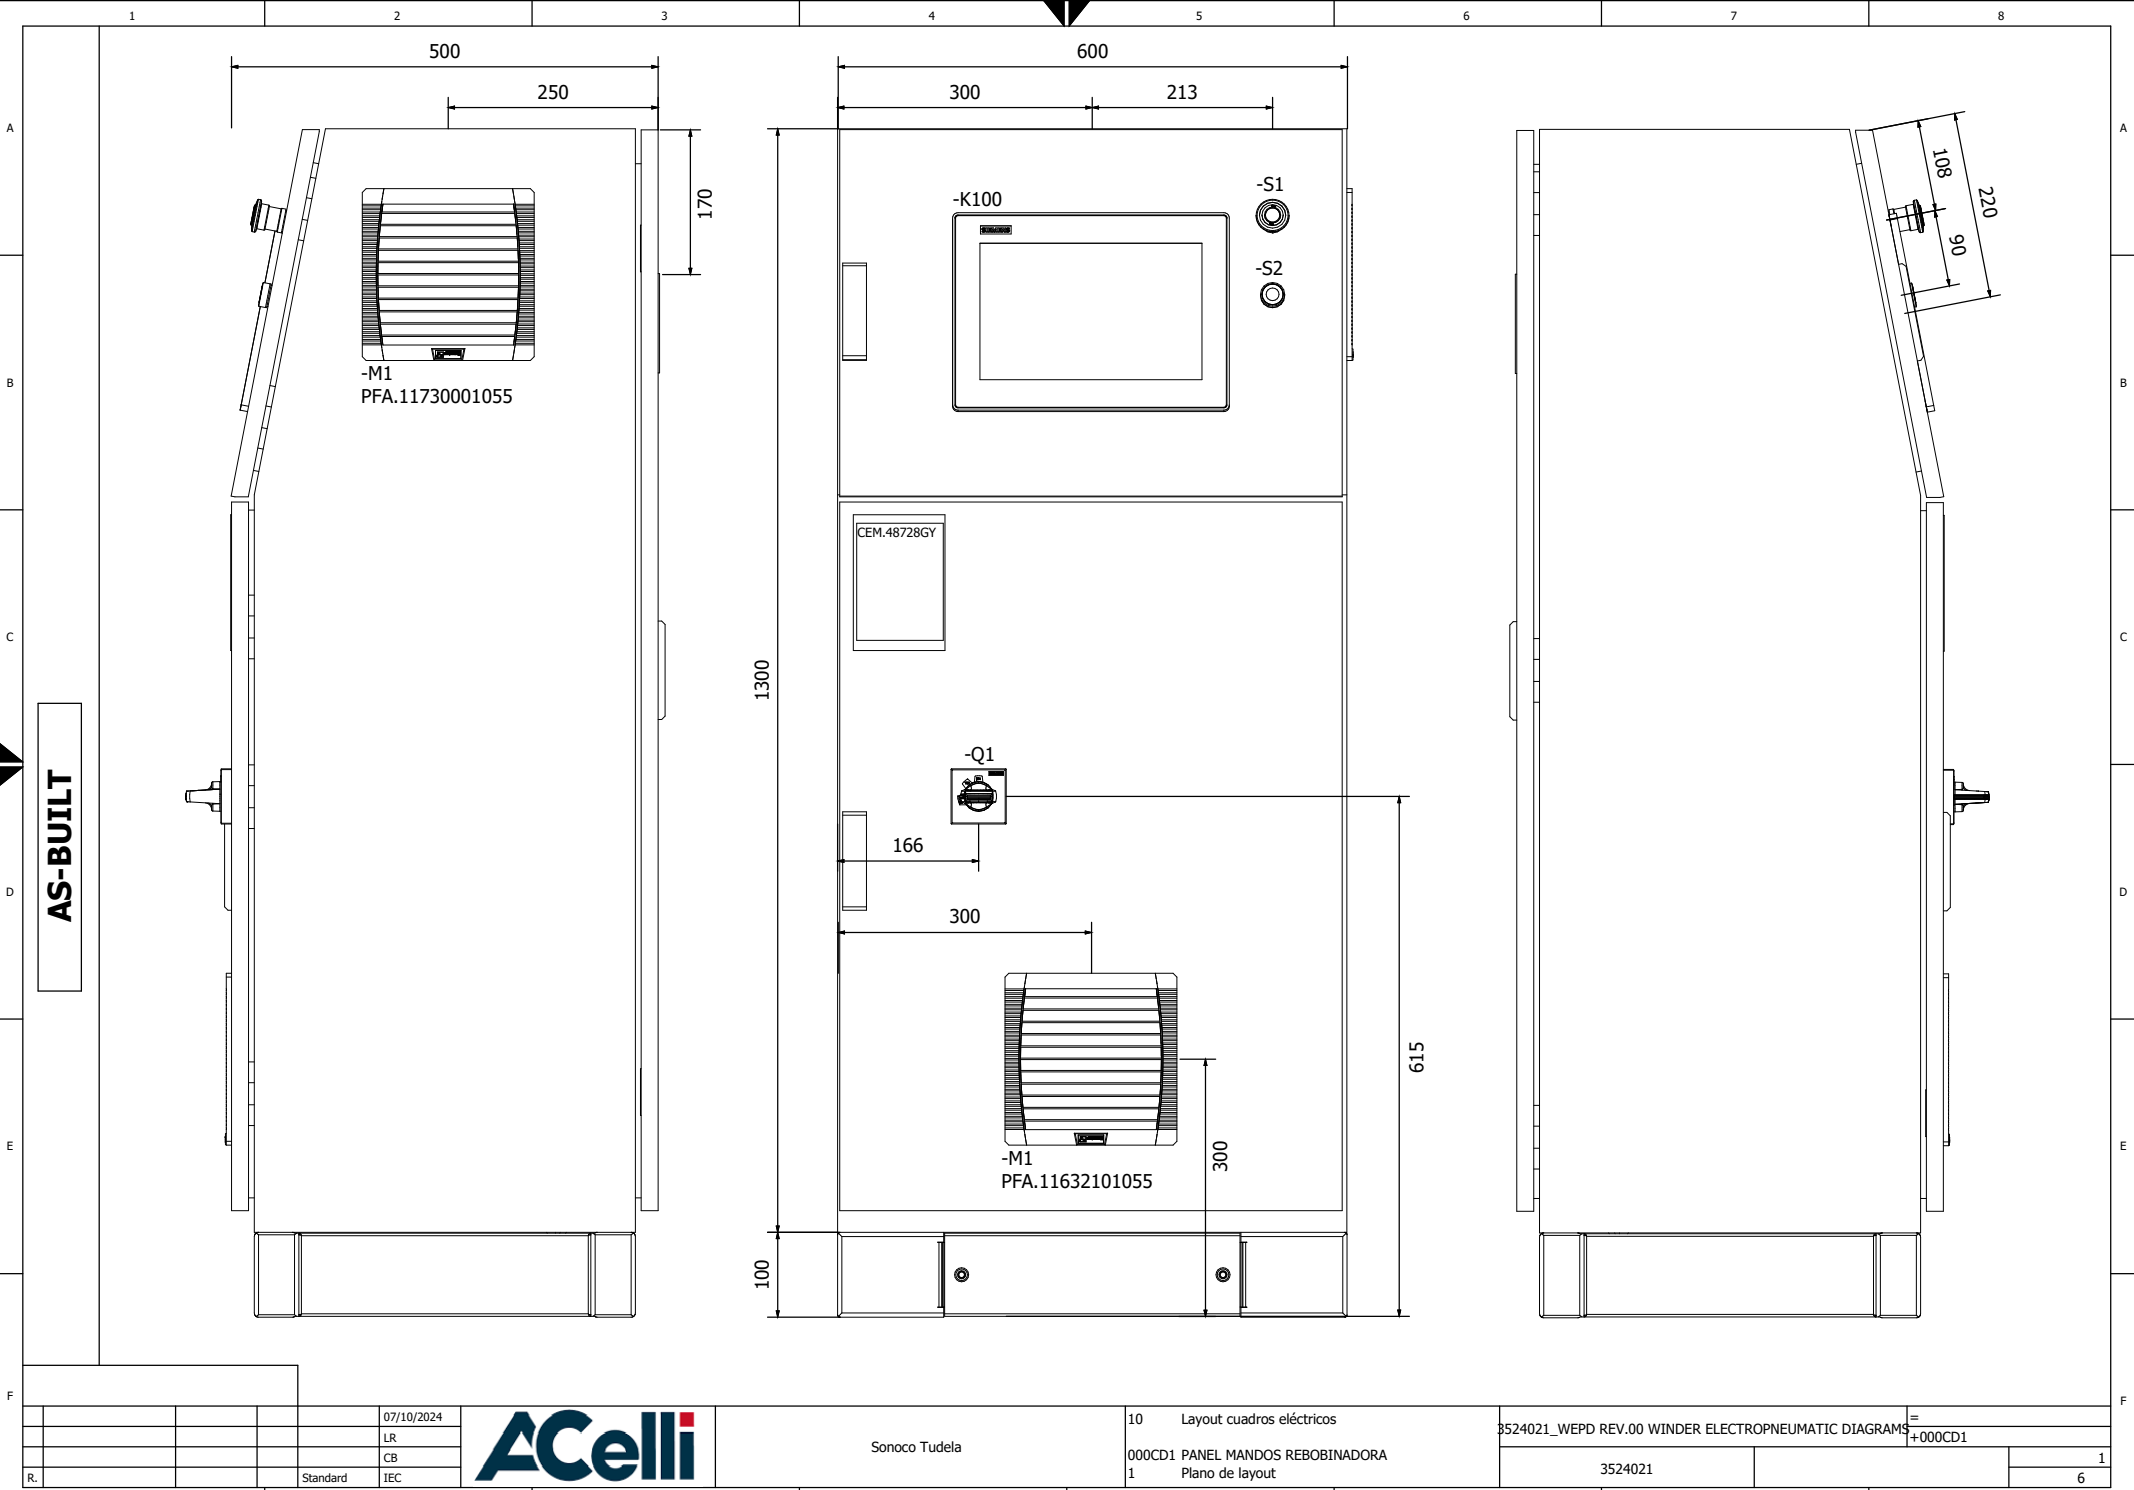

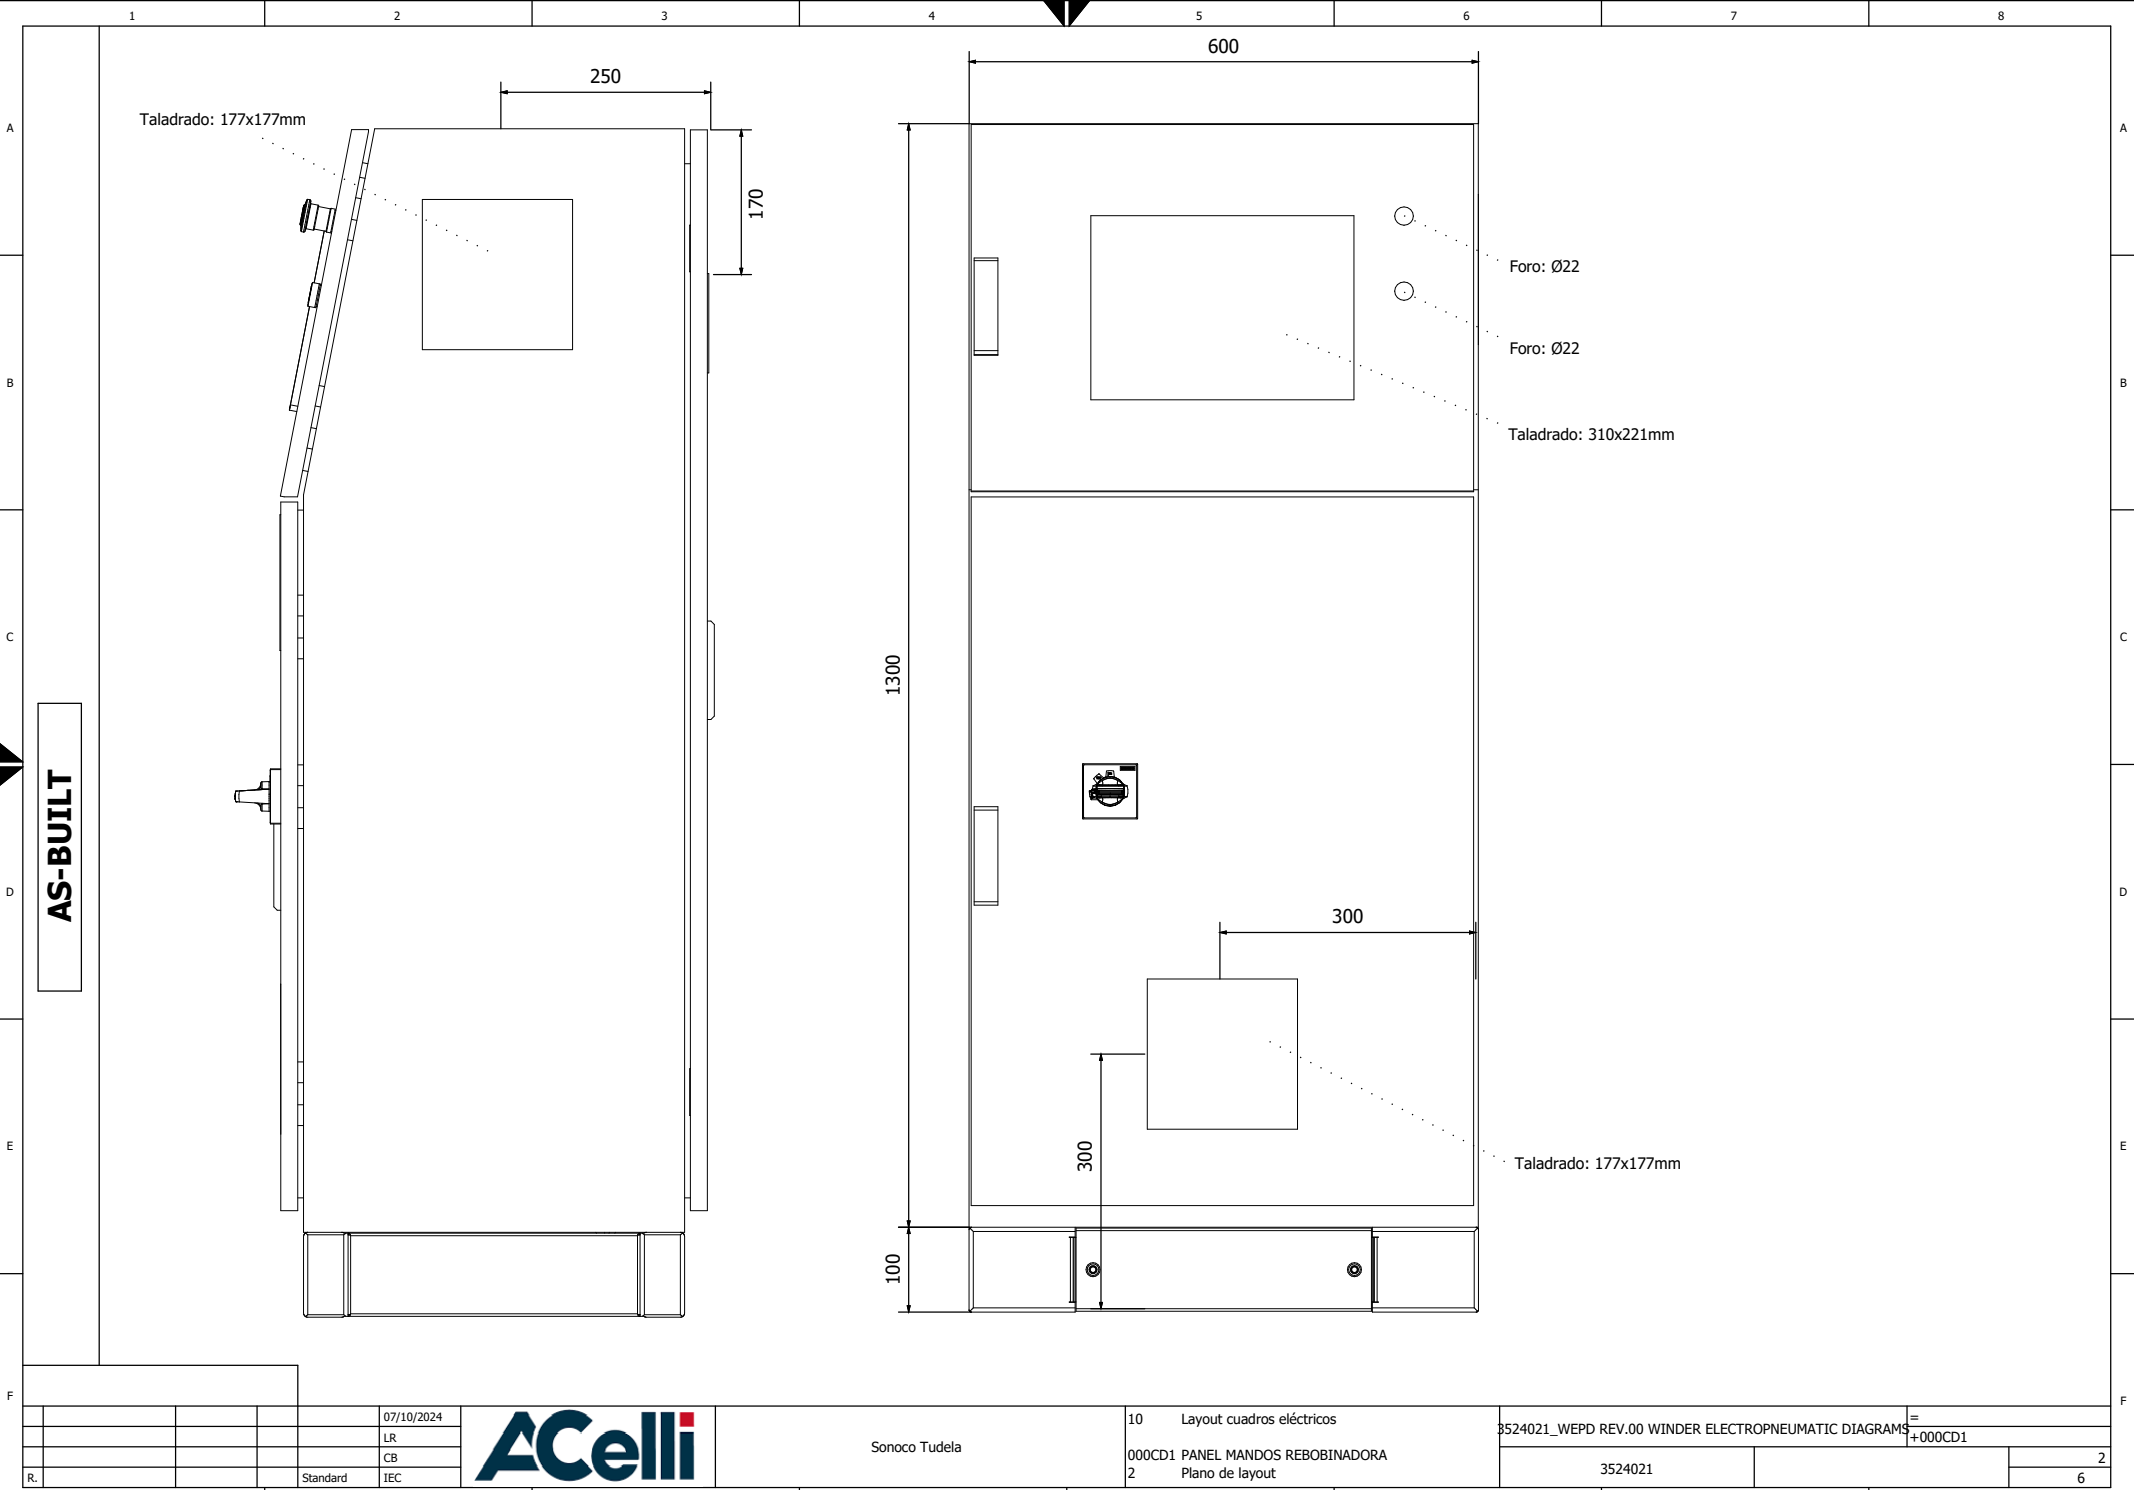


				07/10/2024
				LR
				CB
R.			Standard	IEC




Sonoco Tudela

10 Layout cuadros eléctricos
000CD1 PANEL MANDOS REBOBINADORA
2 Plano de layout

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=	
	+000CD1	
3524021		2
		6

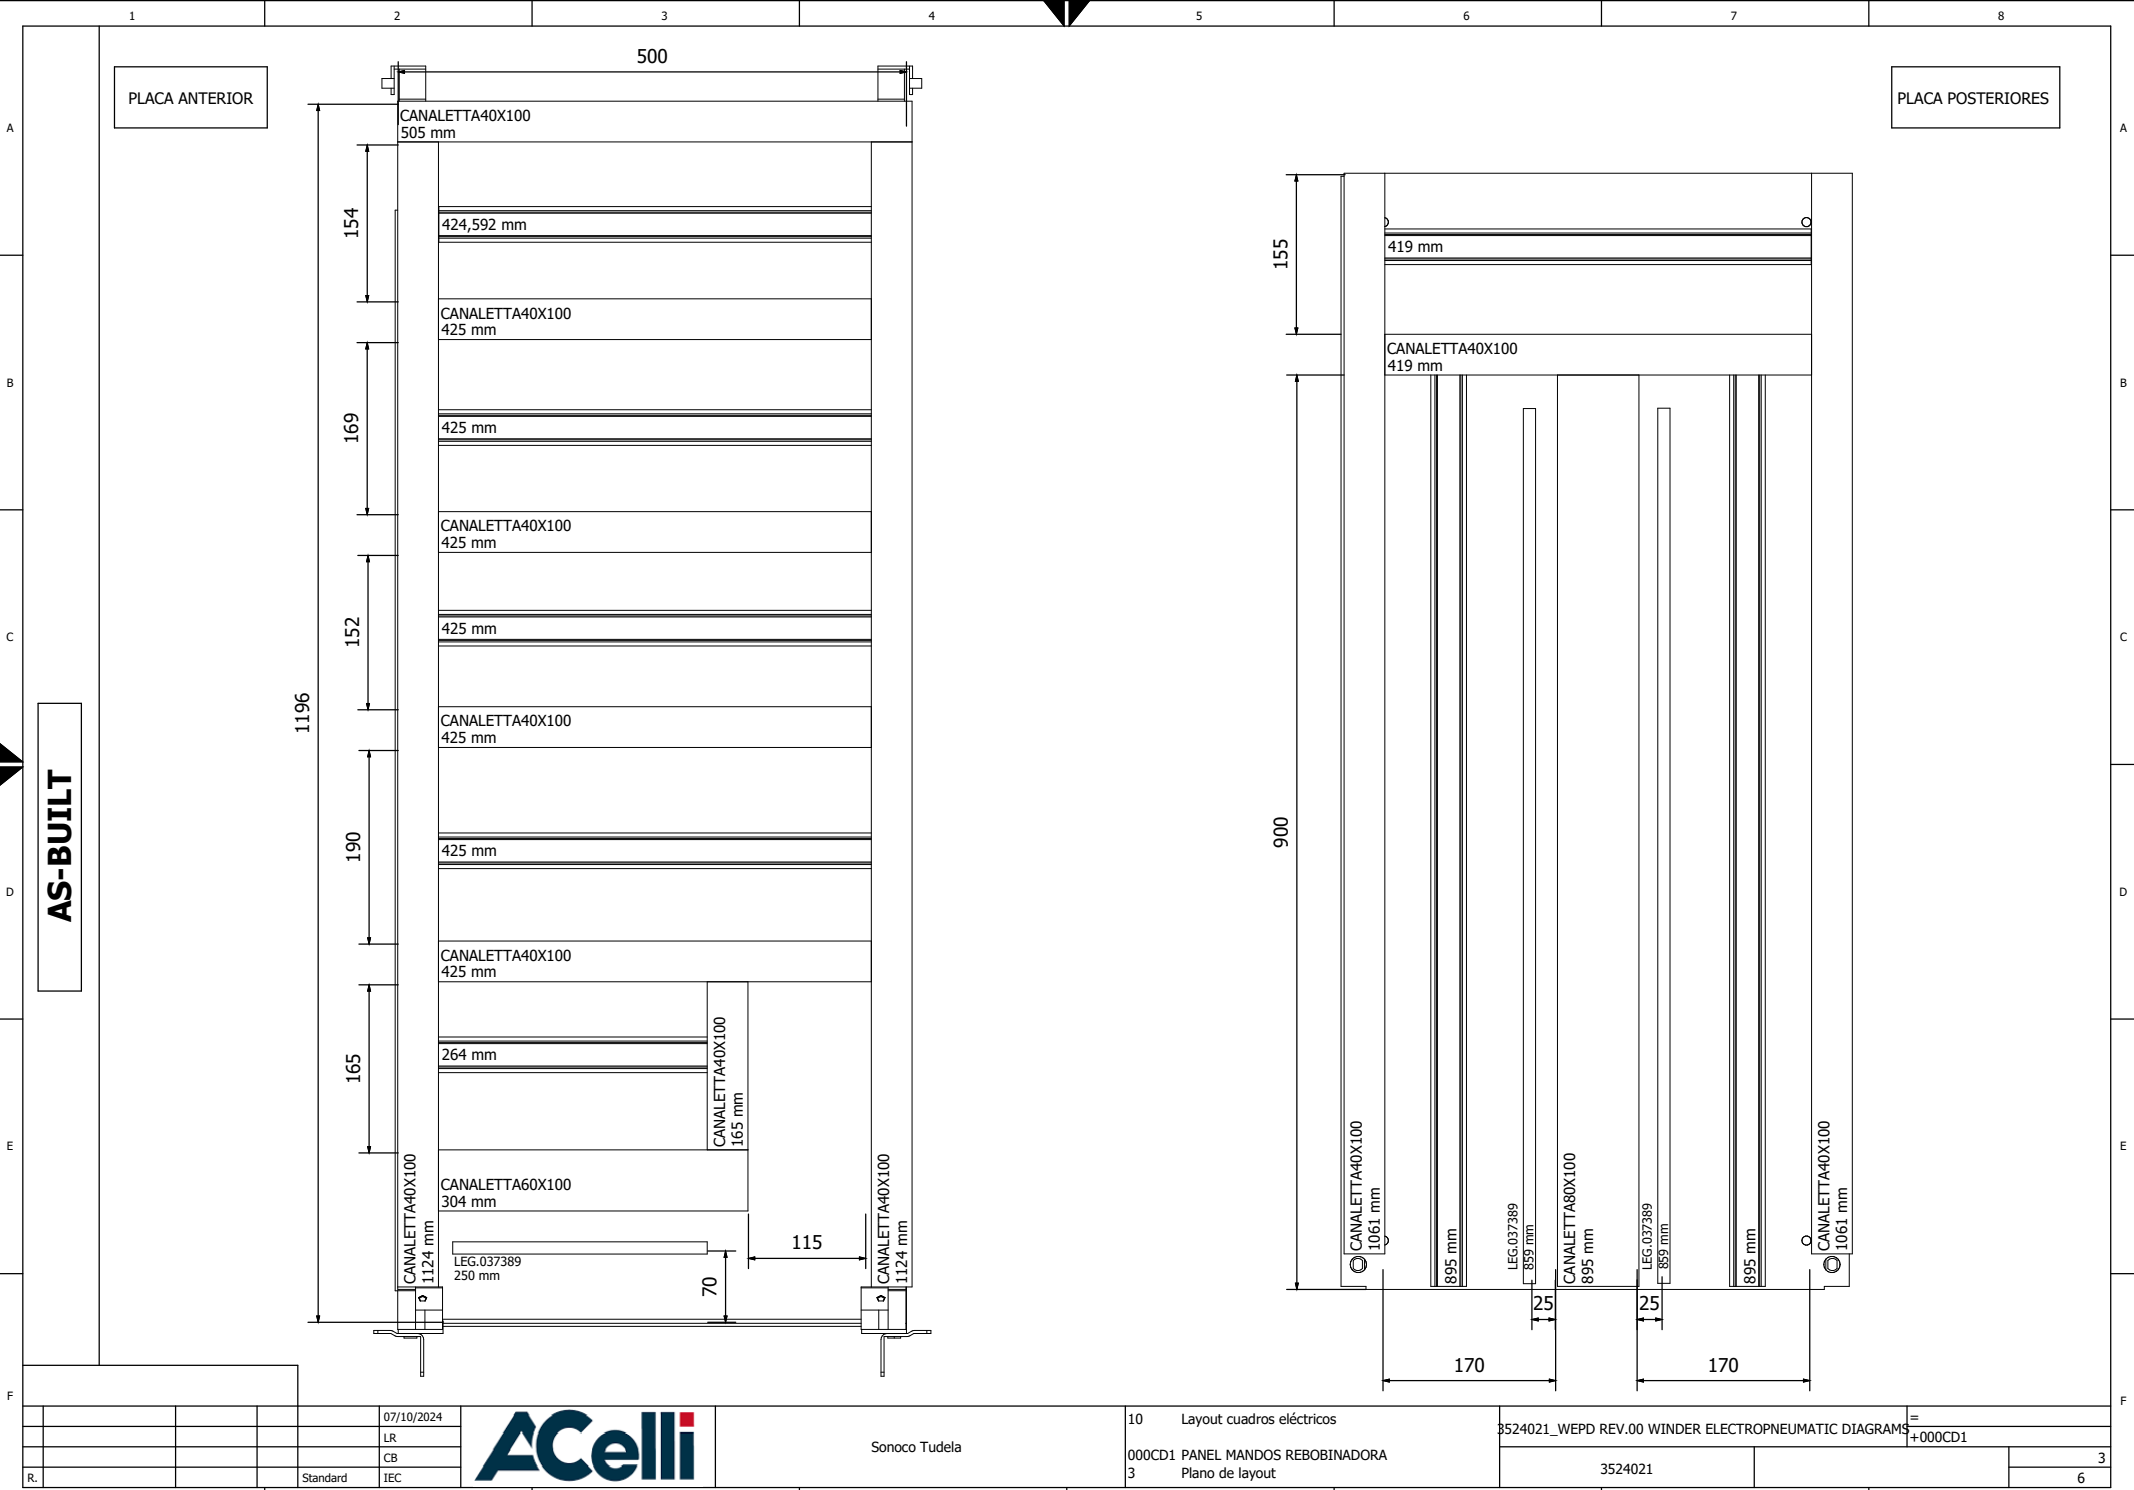

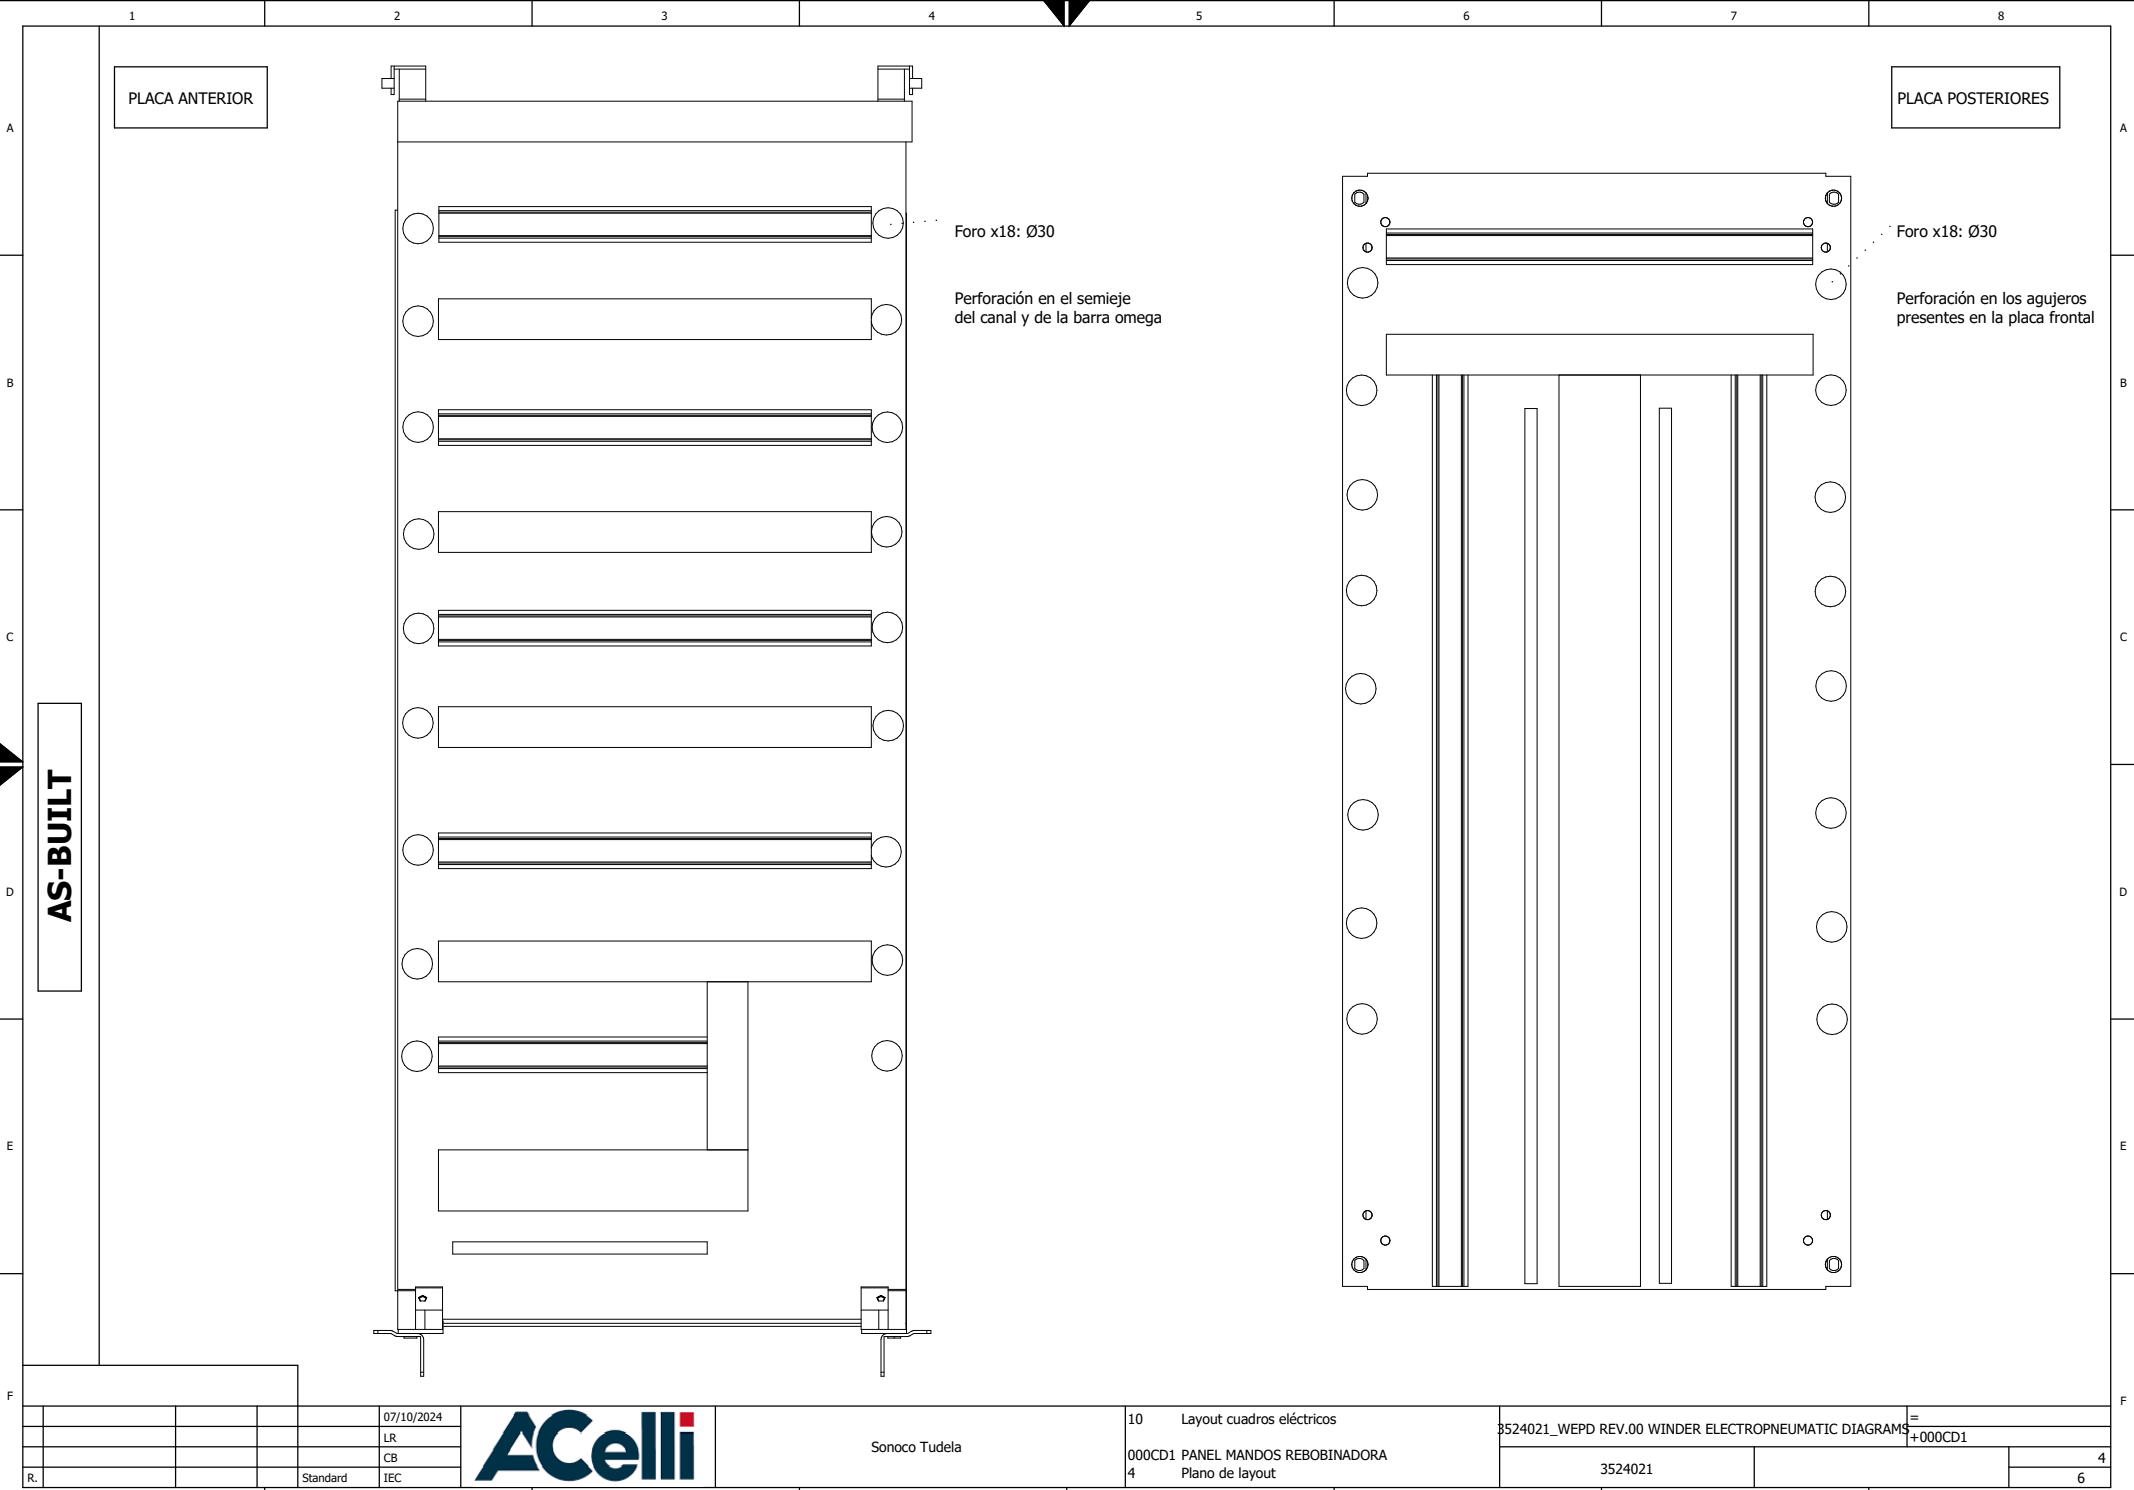


					07/10/2024
					LR
					CB
R.				Standard	IEC



Sonoco Tudela

10 Layout cuadros eléctricos
000CD1 PANEL MANDOS REBOBINADORA
4 Plano de layout

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=	
	+000CD1	
3524021		4
		6

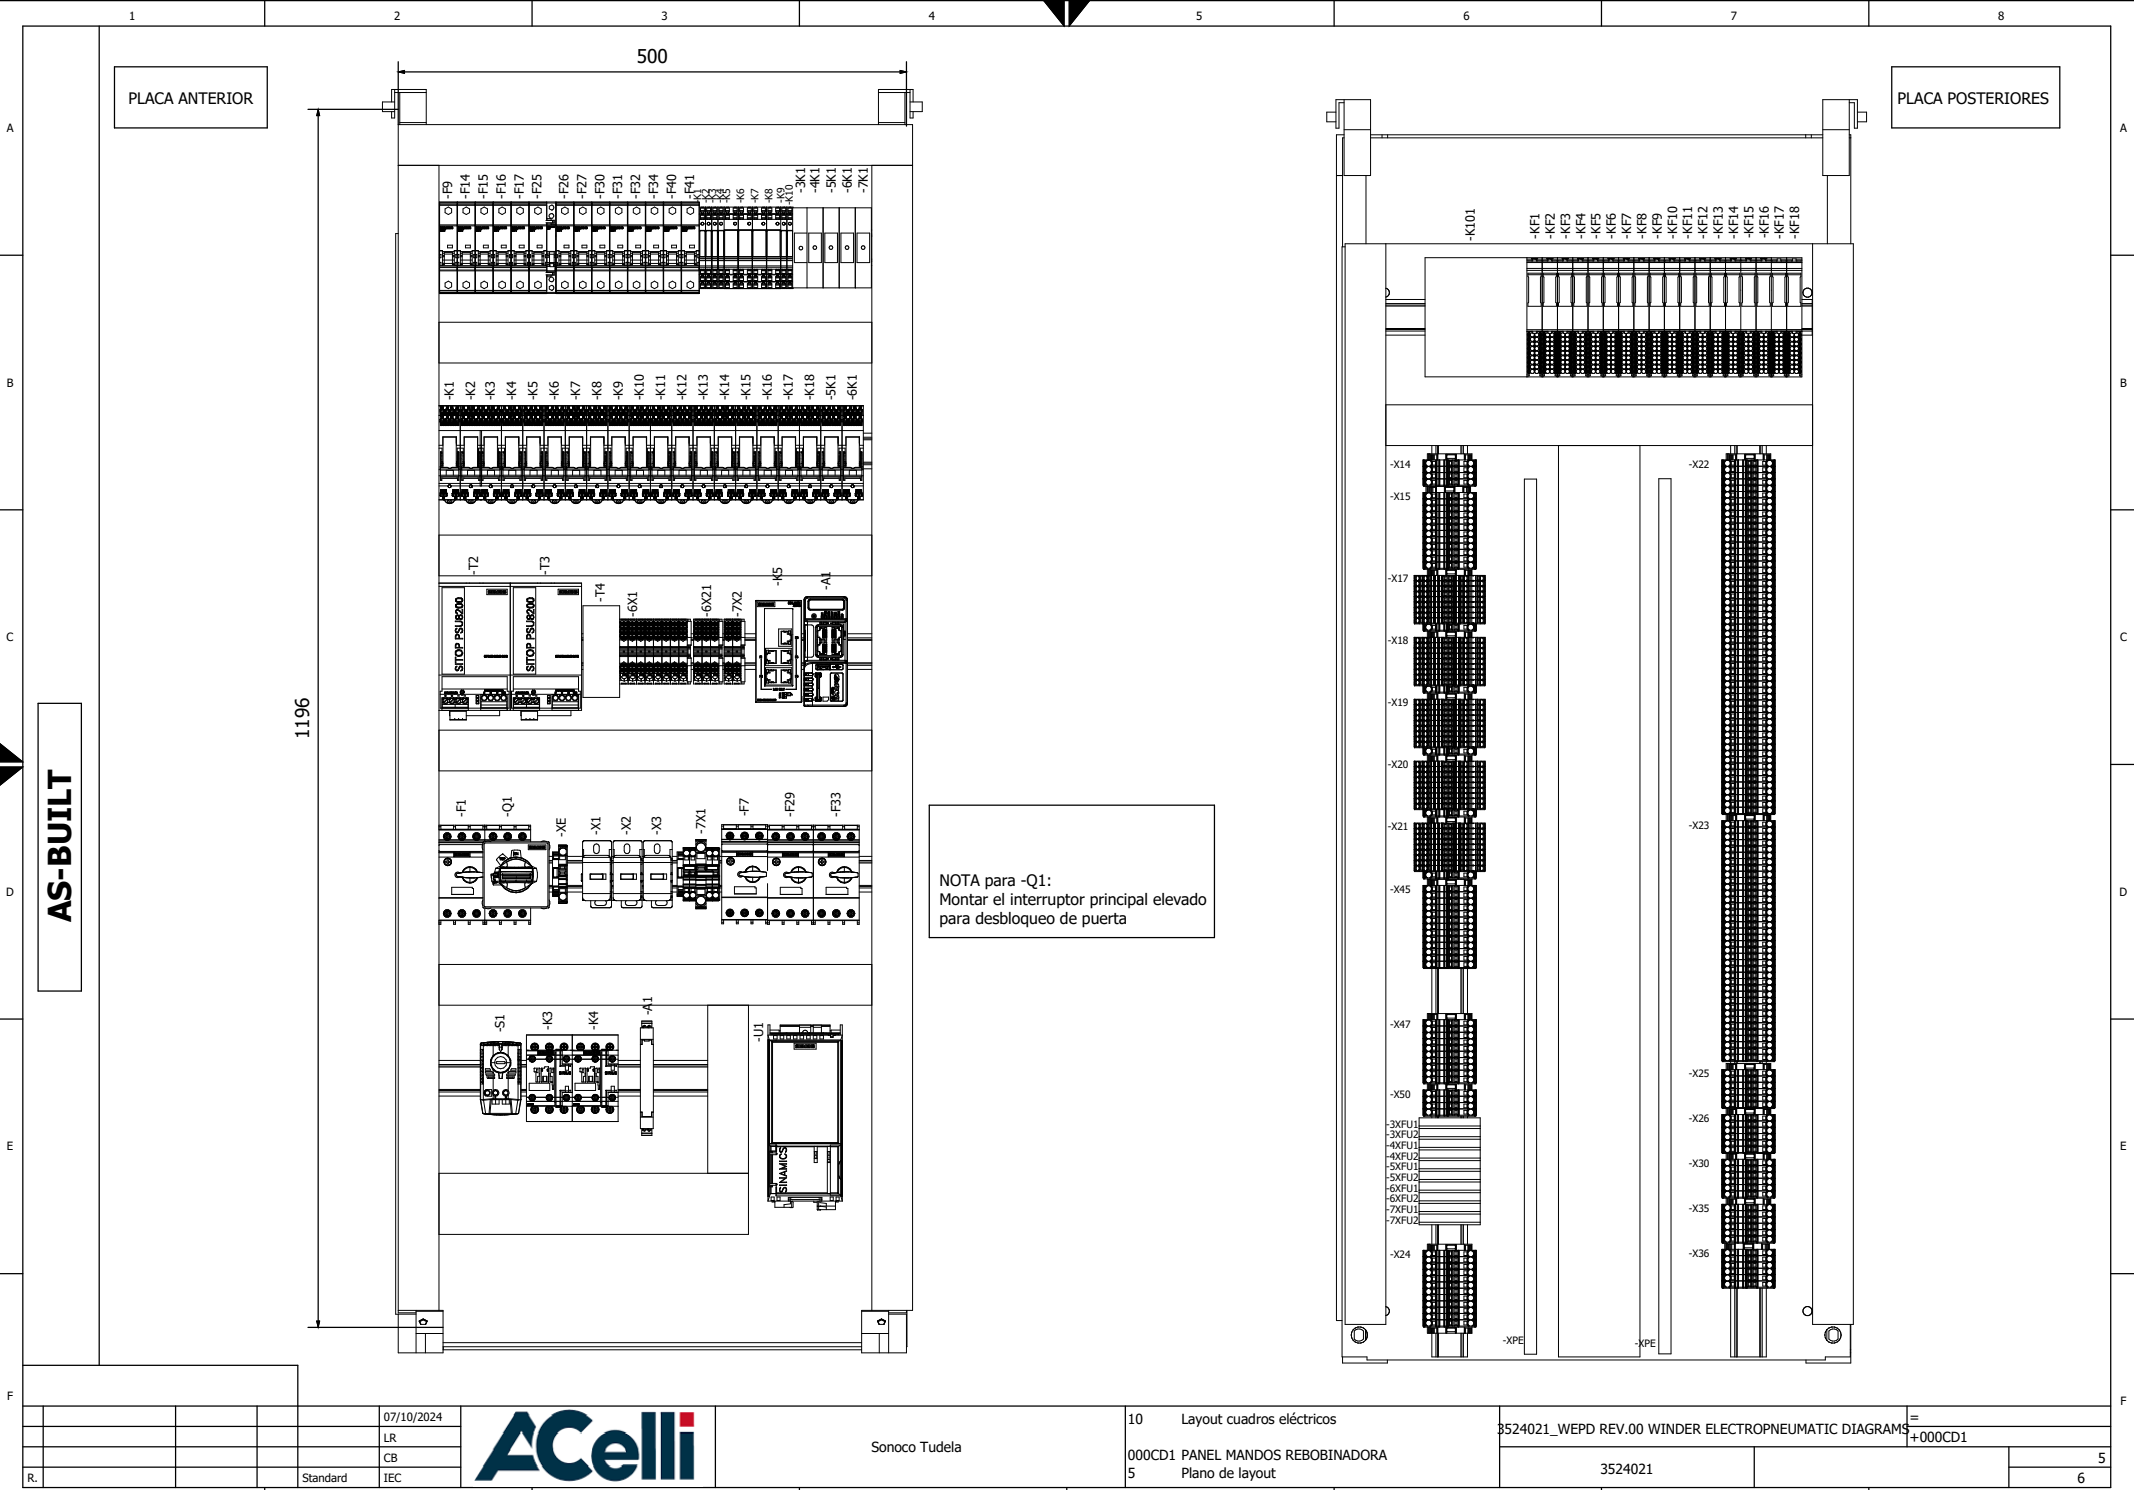


AS-BUILT

PLACA ANTERIOR

PLACA POSTERIORES

NOTA para -Q1:
Montar el interruptor principal elevado
para desbloqueo de puerta

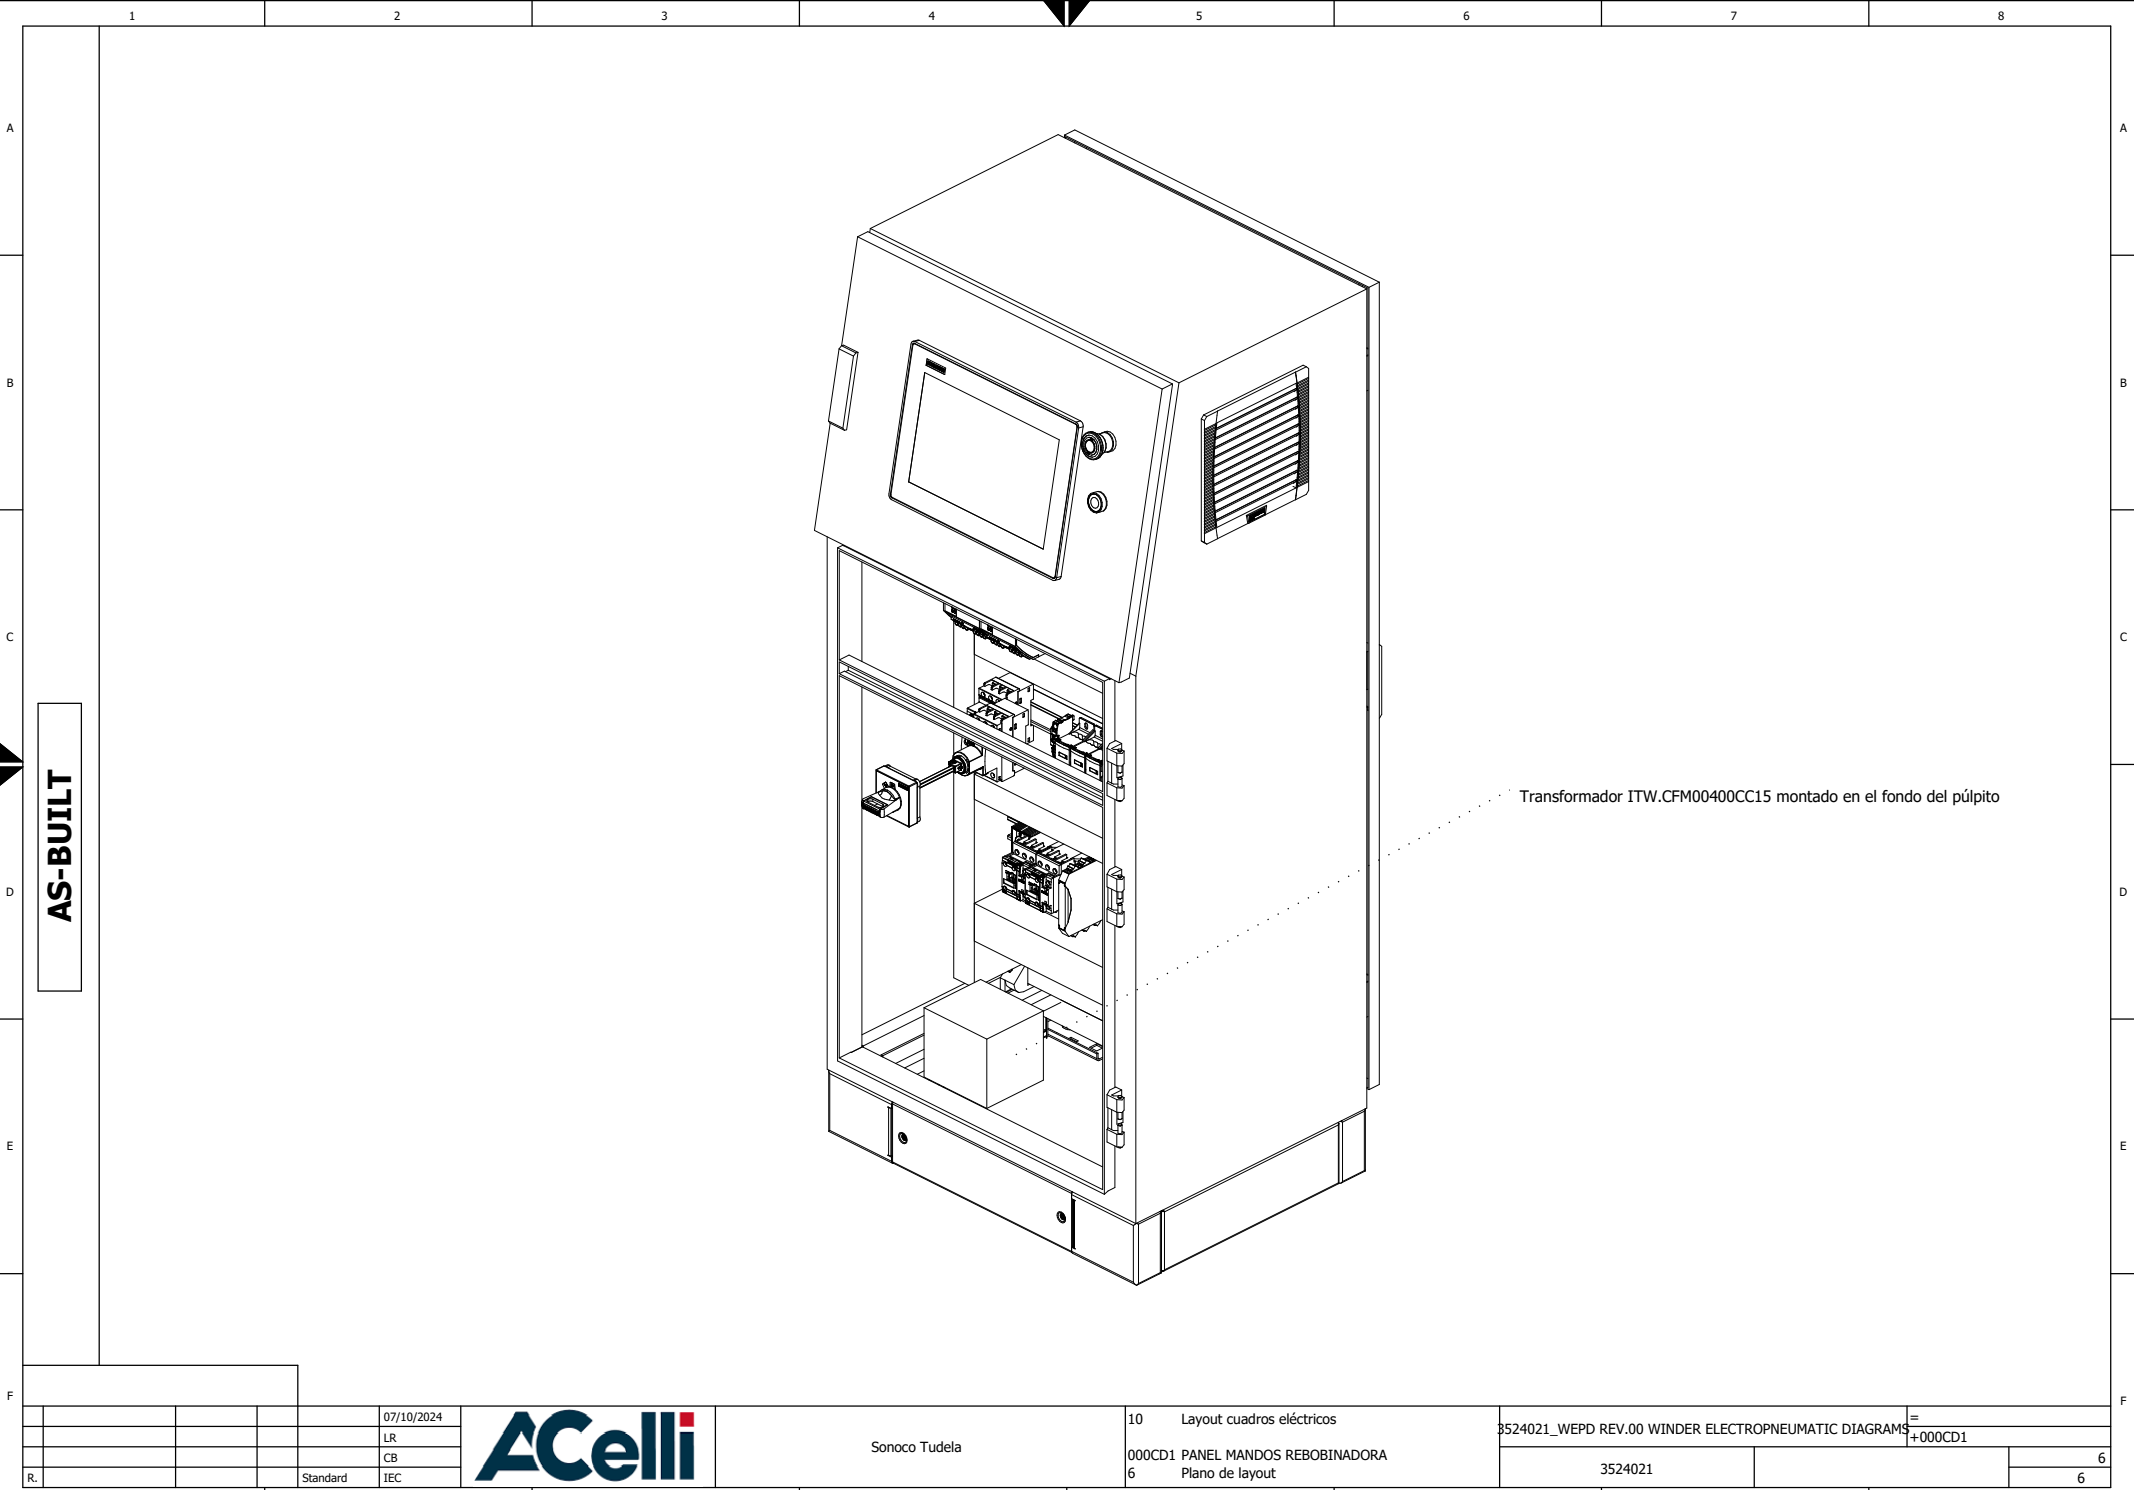

AS-BUILT

Transformador ITW.CFM00400CC15 montado en el fondo del púlpito

				07/10/2024
				LR
				CB
R.			Standard	IEC




Sonoco Tudela


10 Layout cuadros eléctricos
000CD1 PANEL MANDOS REBOBINADORA
6 Plano de layout

3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS
3524021

=
+000CD1
6
6


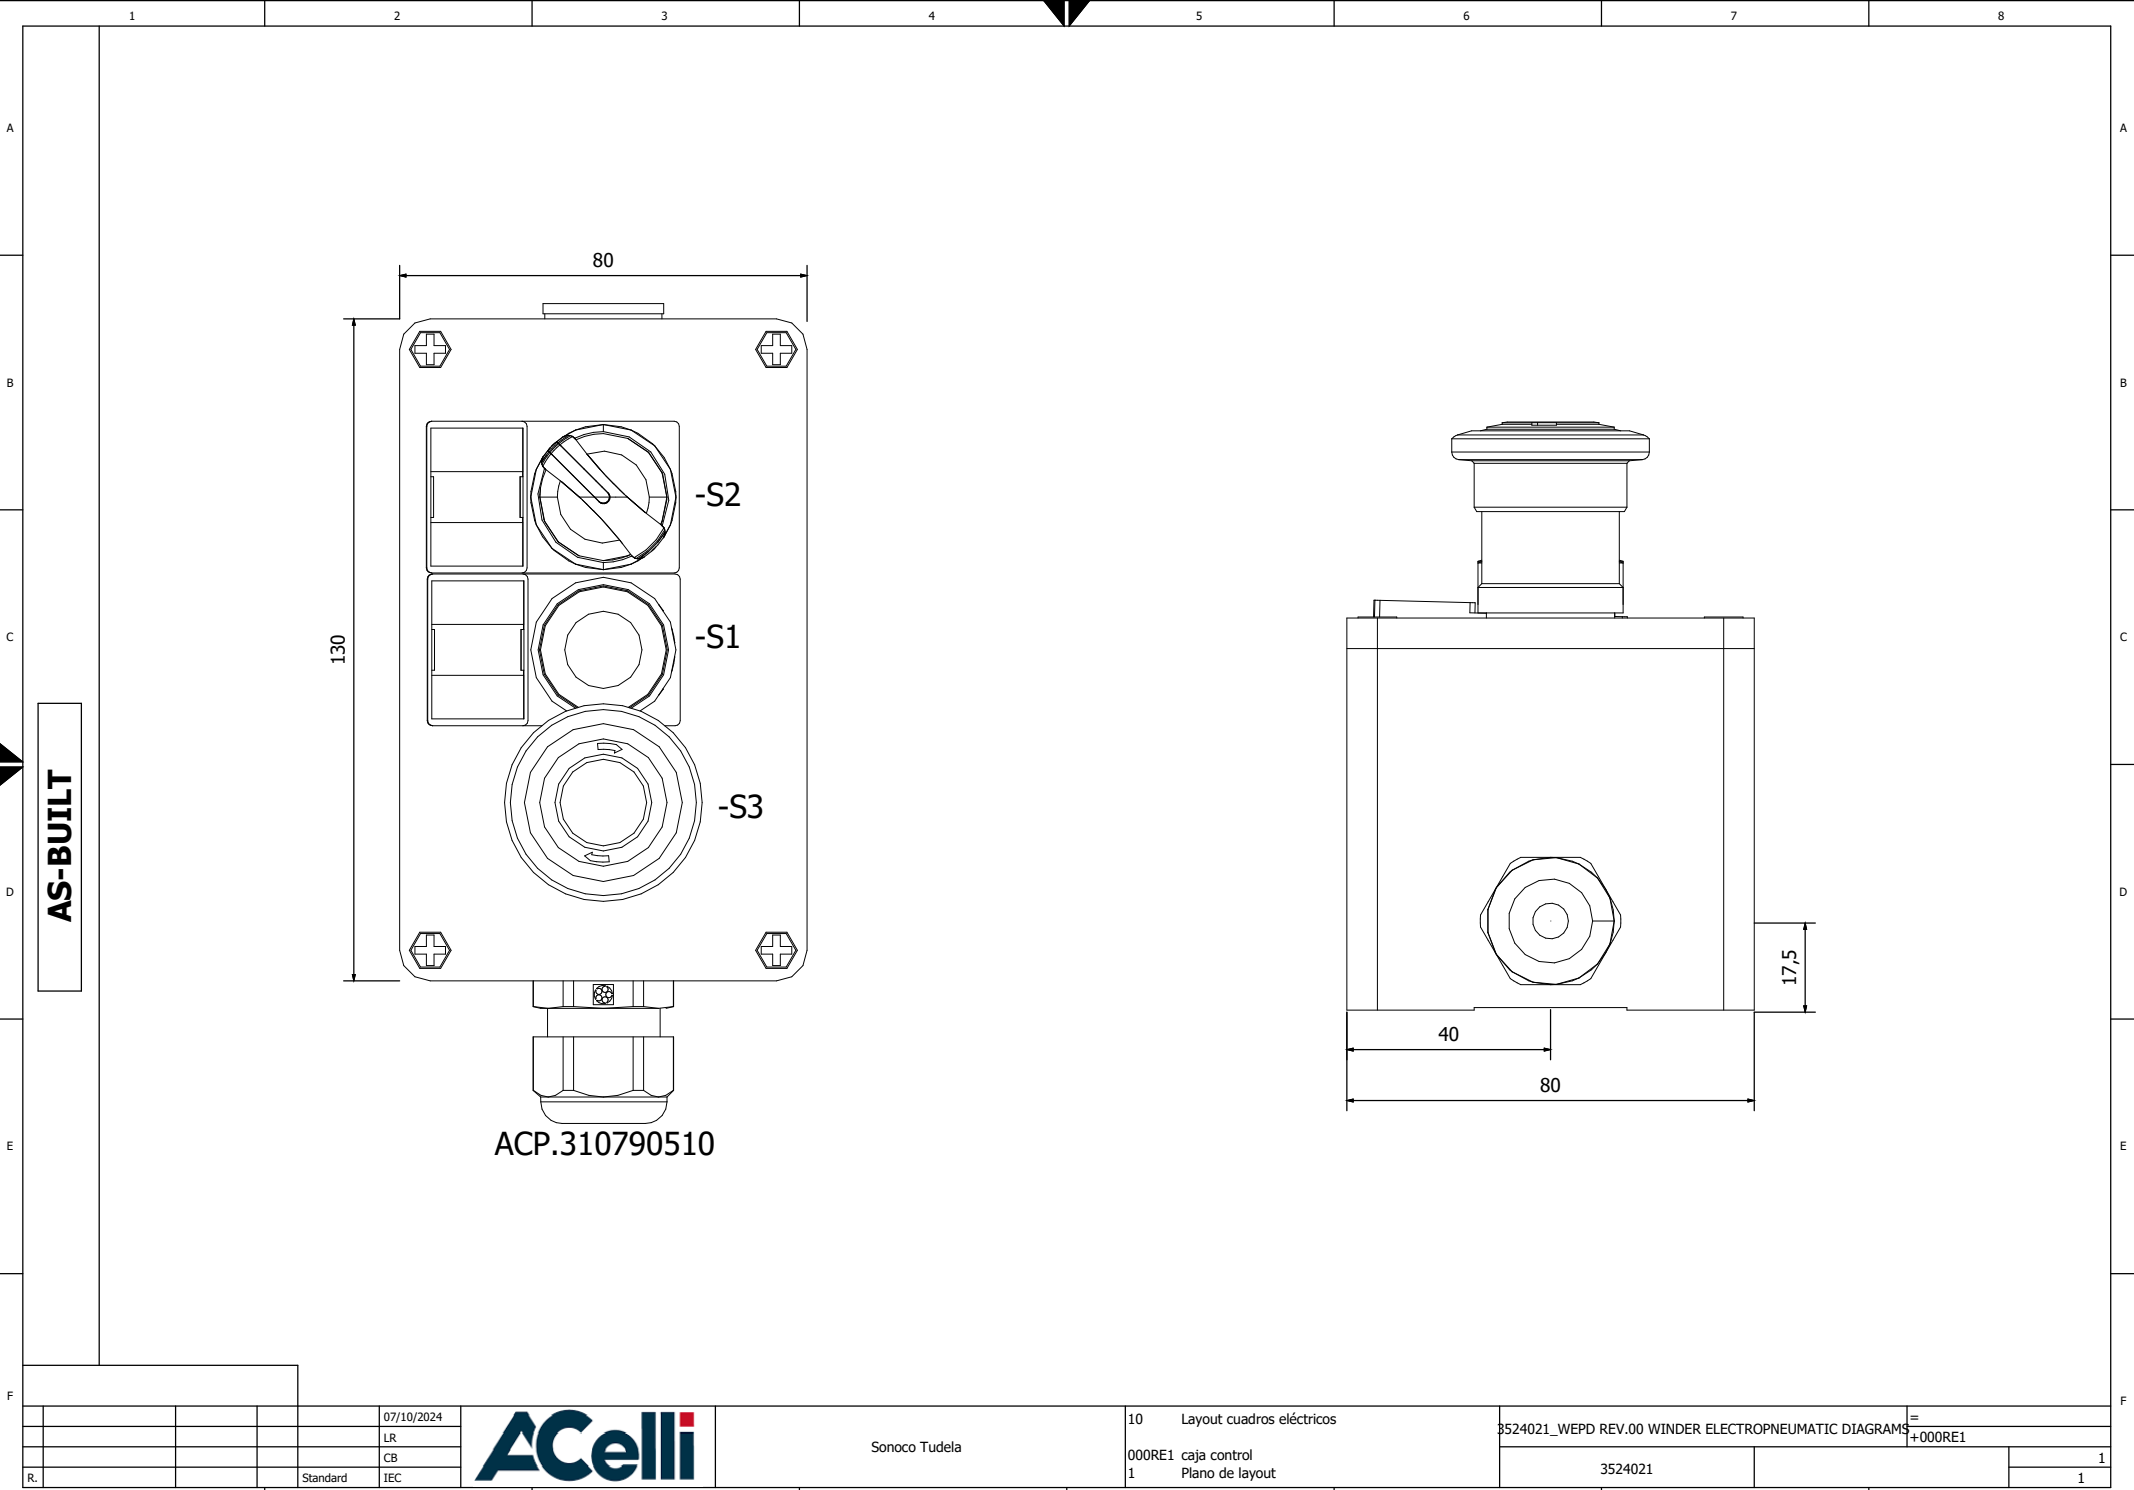


				07/10/2024		Sonoco Tudela	10 Layout cuadros eléctricos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=+000RE1	1
				LR						
				CB						
R.			Standard	IEC						
							1	000RE1 caja control		
							1	Plano de layout	3524021	1

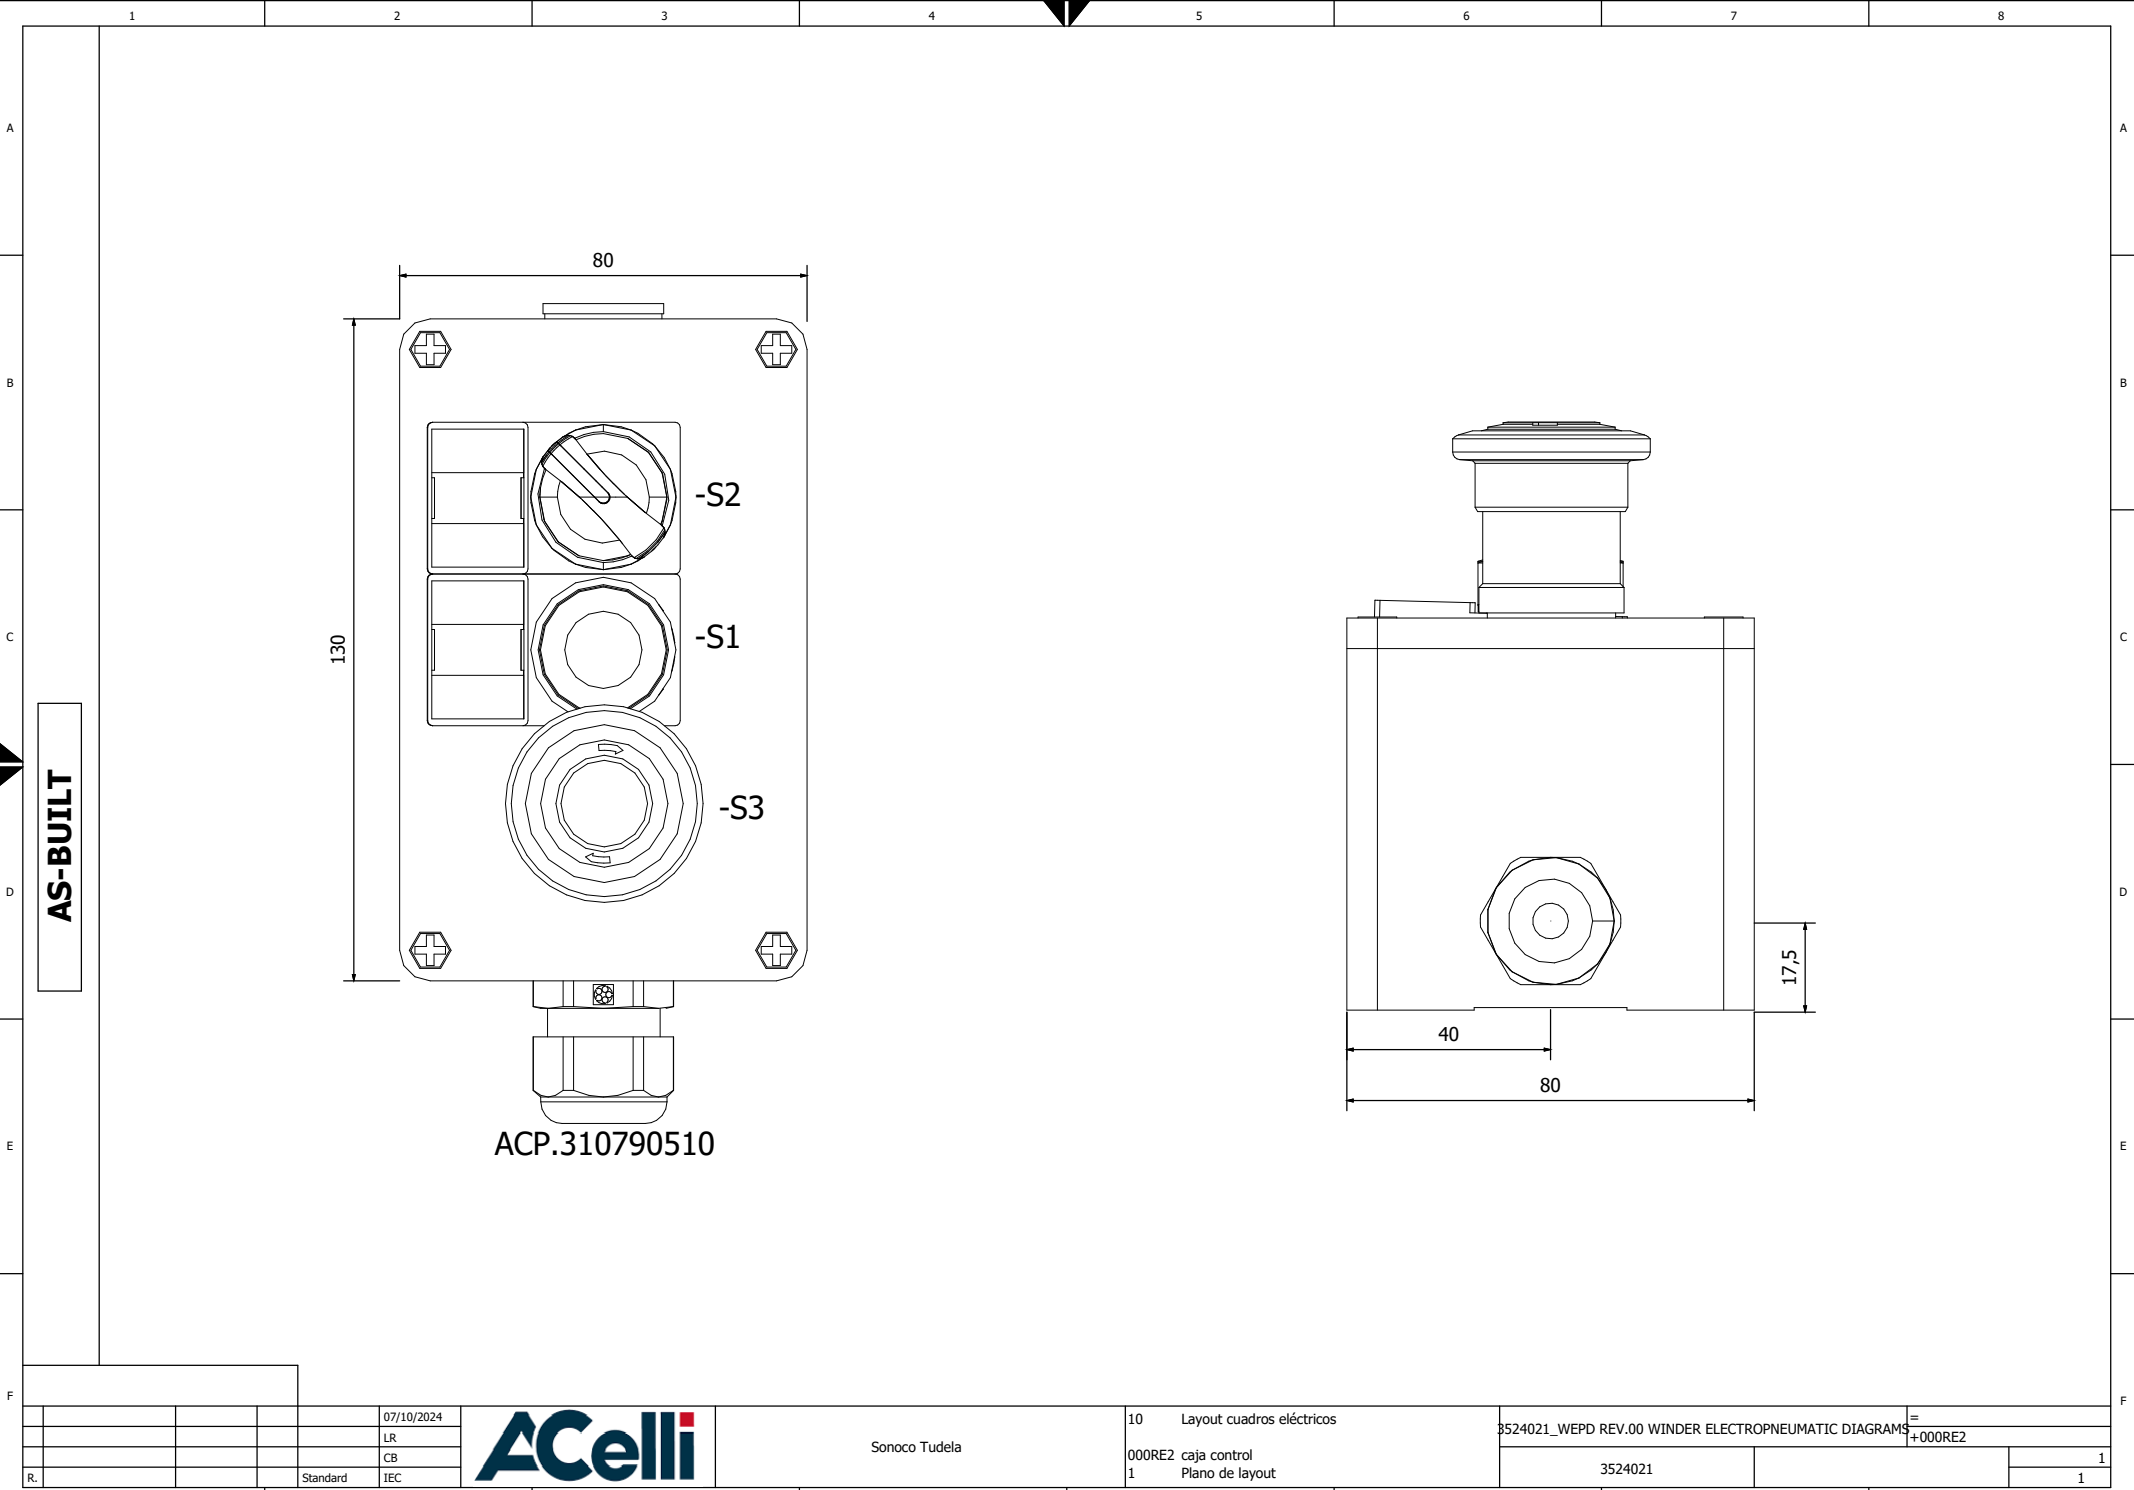


				07/10/2024		Sonoco Tudela	10	Layout cuadros eléctricos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=		
				LR			000RE2 caja control	1	Plano de layout	3524021		1
				CB								
R.			Standard	IEC								

AS-BUILT

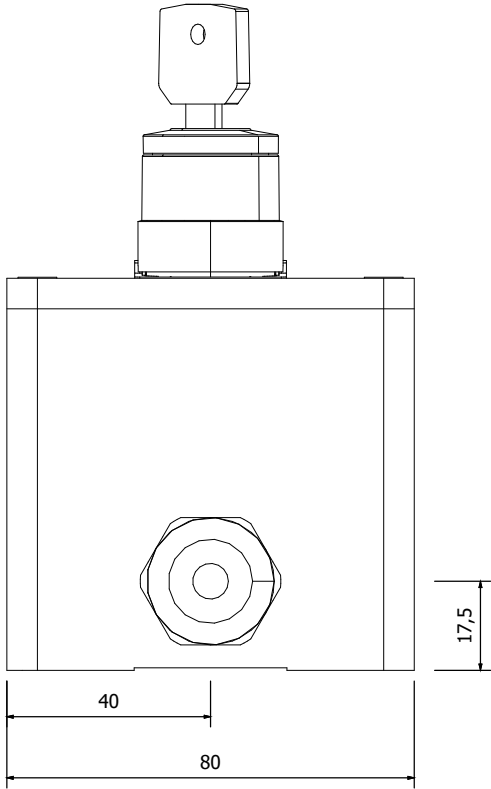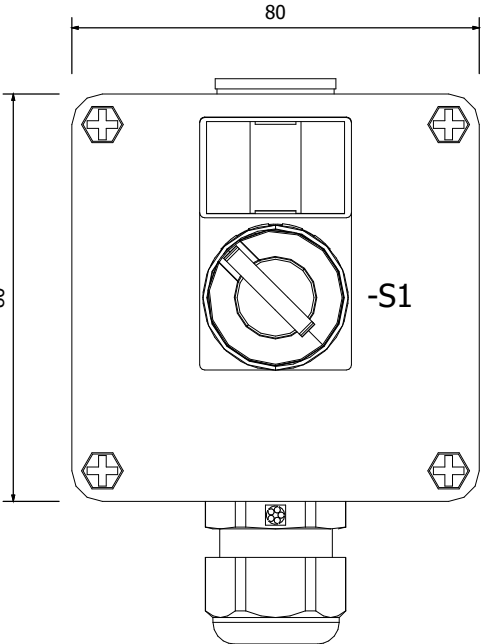

				07/10/2024		Sonoco Tudela	10	Layout cuadros eléctricos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS		=			
				LR					020CB1	caja control			+020CB1	
				CB					1	Plano de layout	3524021			1
R.				Standard			IEC							

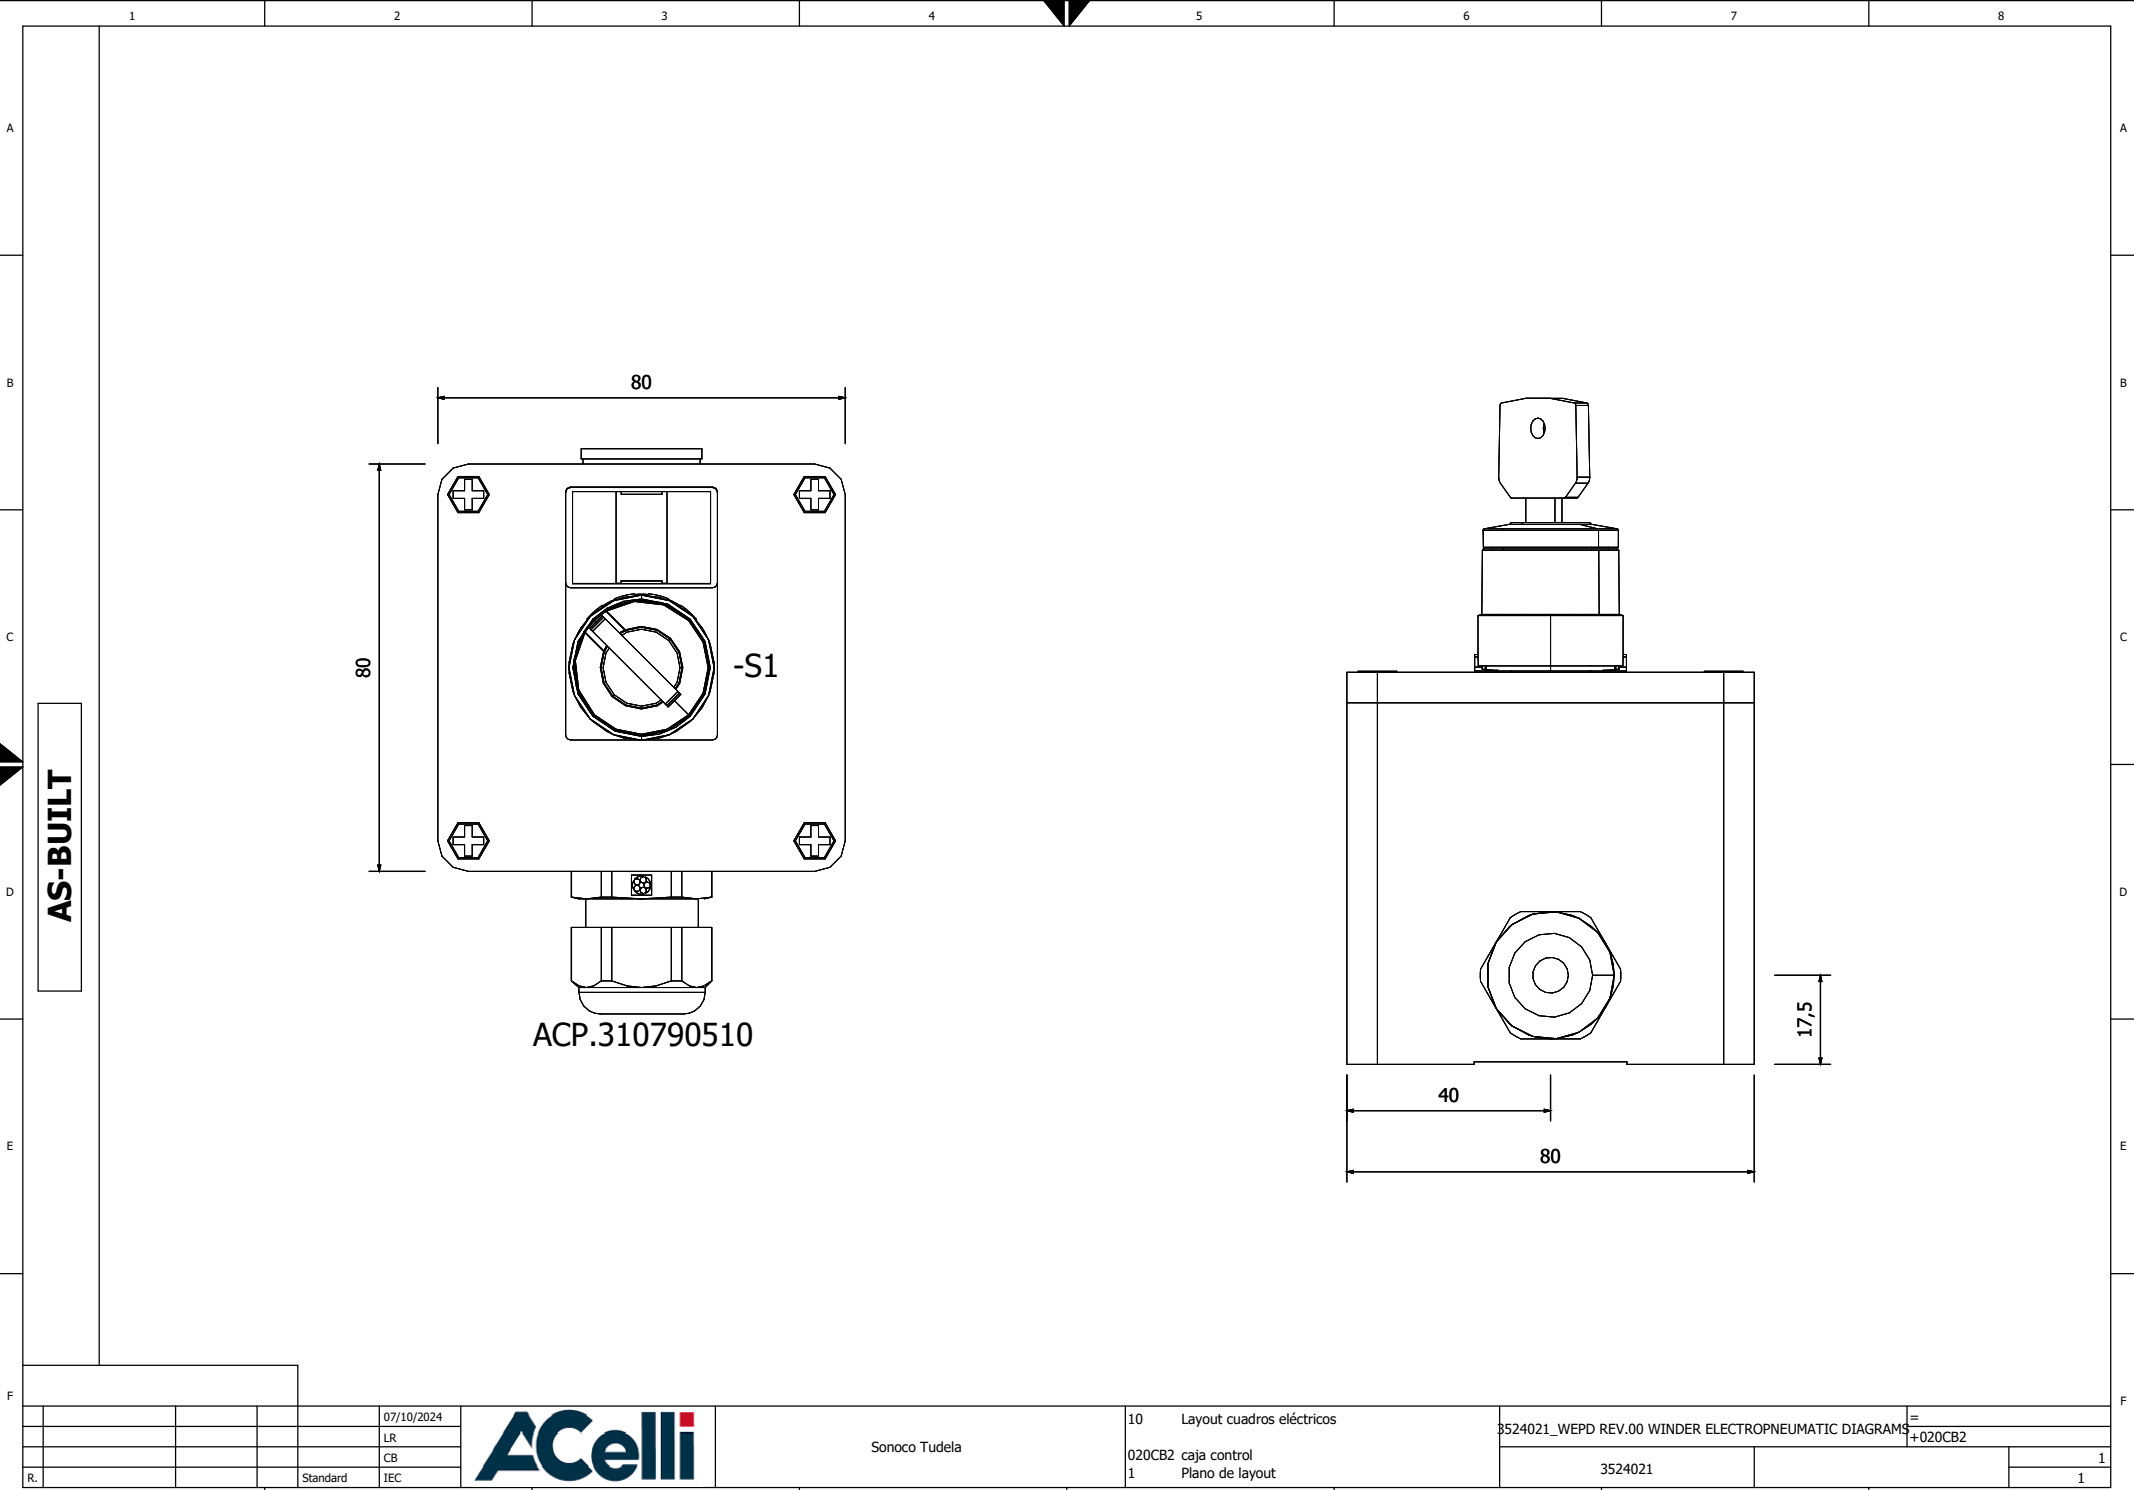


AS-BUILT


ACP.310790510

17,5


				07/10/2024		Sonoco Tudela	10 Layout cuadros eléctricos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=	
				LR					+020CB2	
				CB						
R.				Standard	IEC		020CB2 caja control	3524021		1
							1 Plano de layout			1

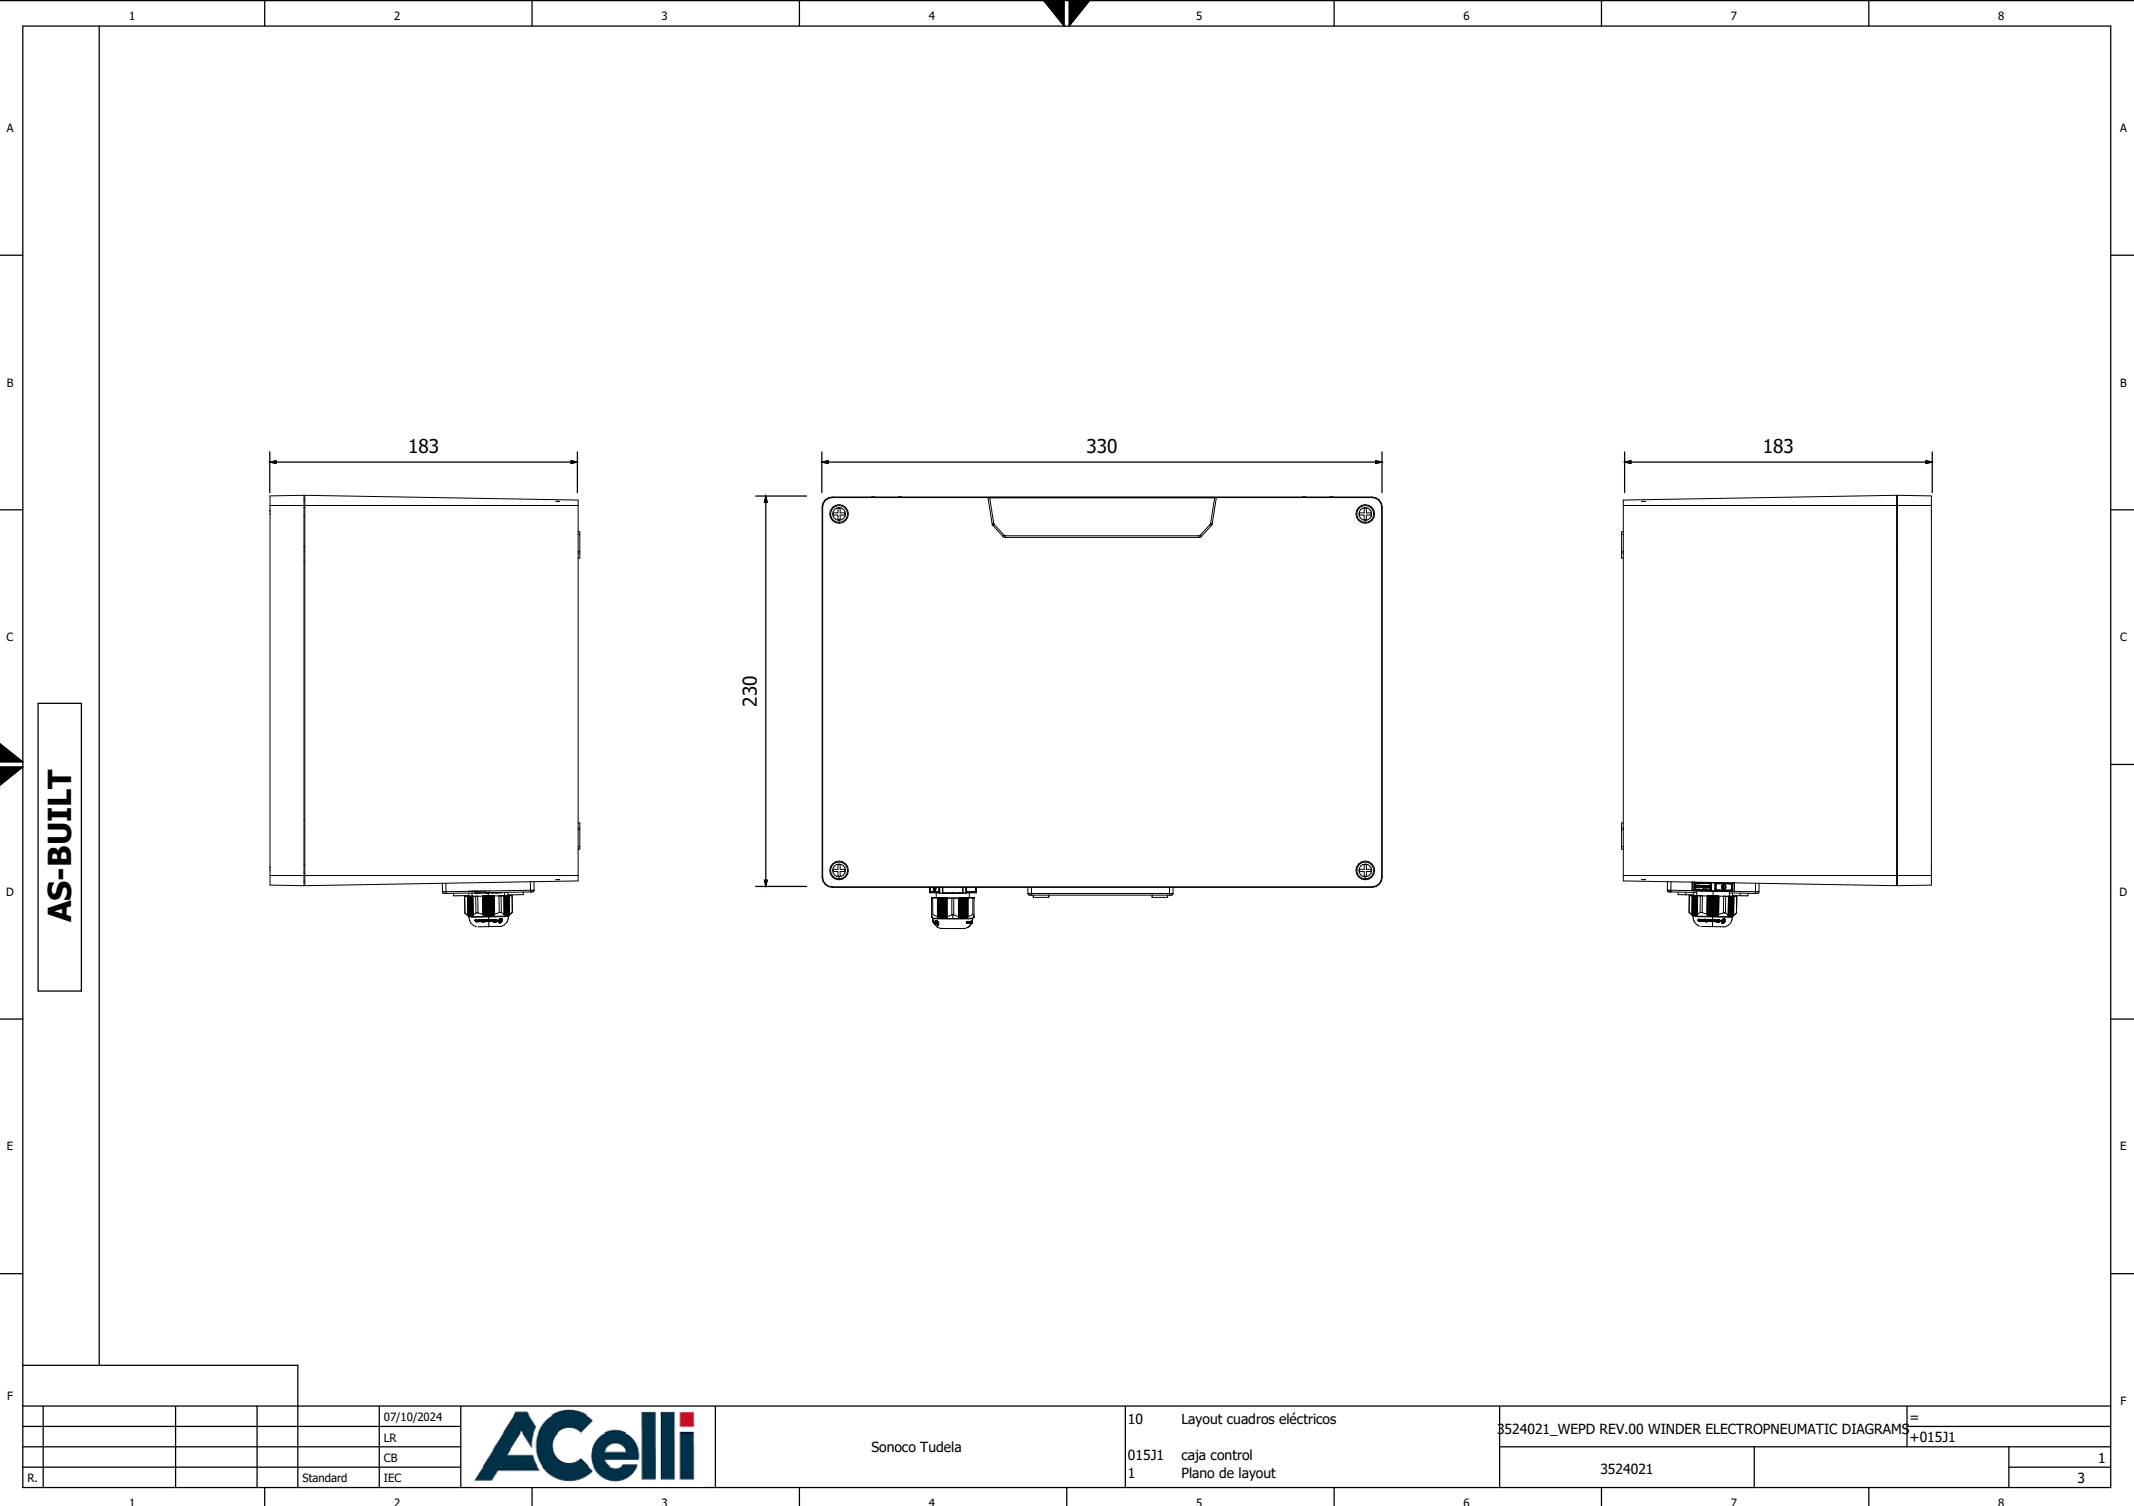

AS-BUILT




				07/10/2024		Sonoco Tudela	10	Layout cuadros eléctricos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS		=		
				LR					01531	caja control	+01531		
				CB					2	Plano de layout	3524021		
R.				Standard			IEC						3

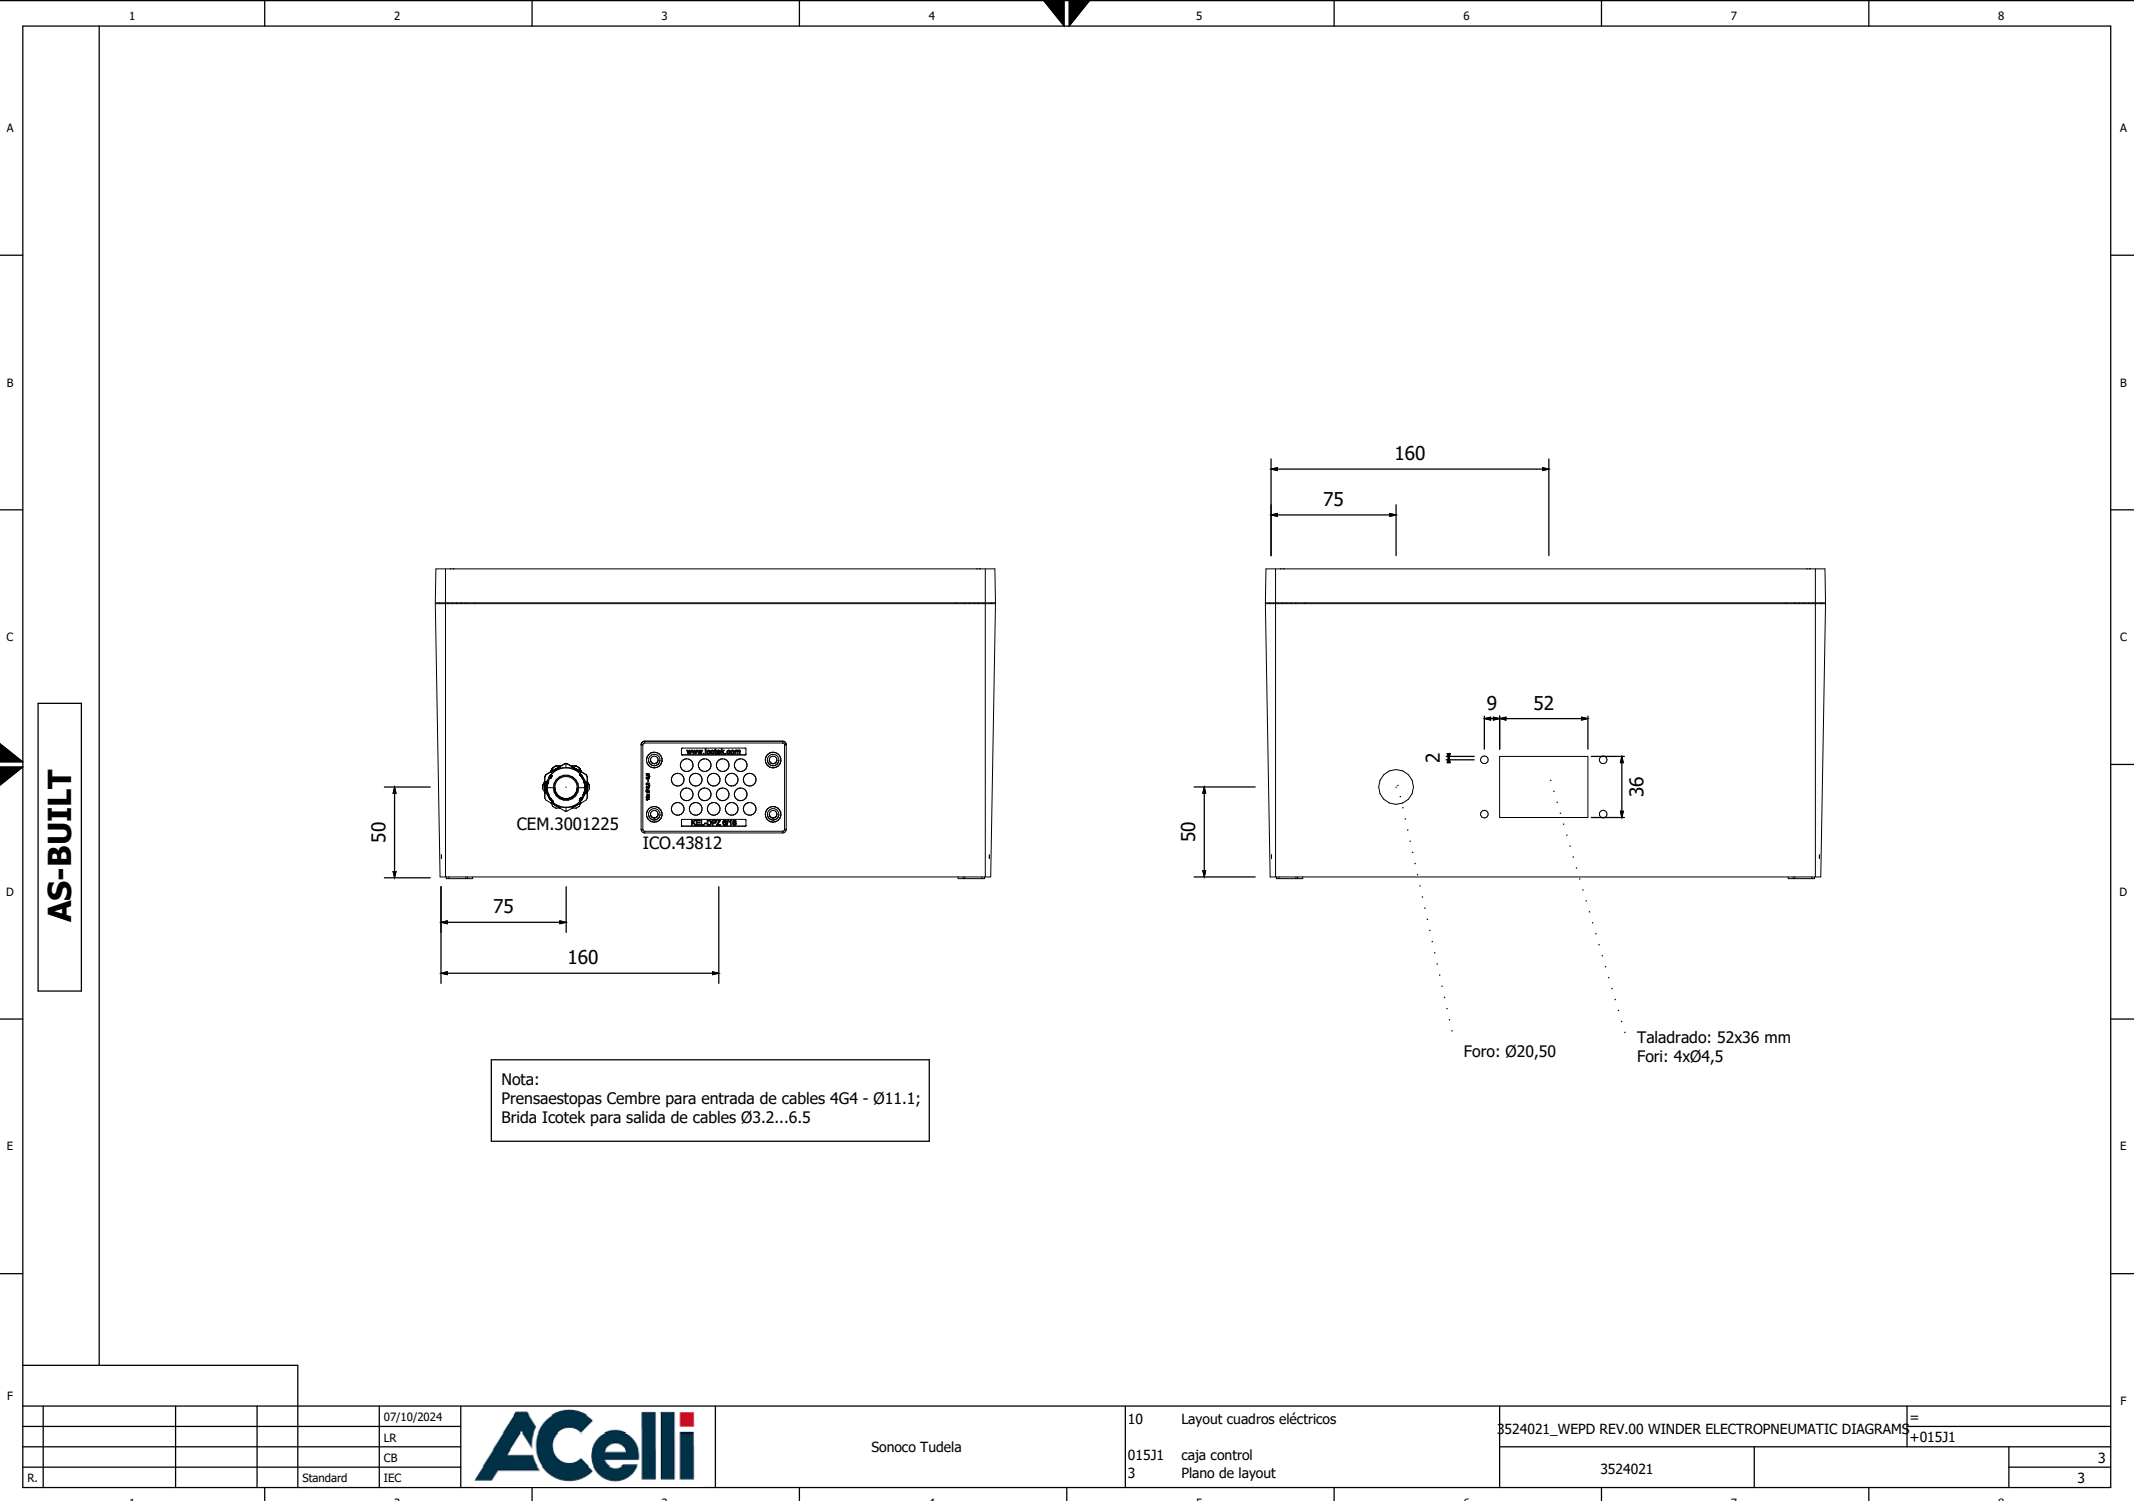

Nota:
Prensaestopas Cembre para entrada de cables 4G4 - Ø11.1;
Brida Icotek para salida de cables Ø3.2...6.5


Foro: Ø20,50
Taladrado: 52x36 mm
Fori: 4xØ4,5

				07/10/2024		Sonoco Tudela	10	Layout cuadros eléctricos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS			=
				LR			015J1	caja control				
				CB			3	Plano de layout	3524021			3
R.				Standard	IEC							3

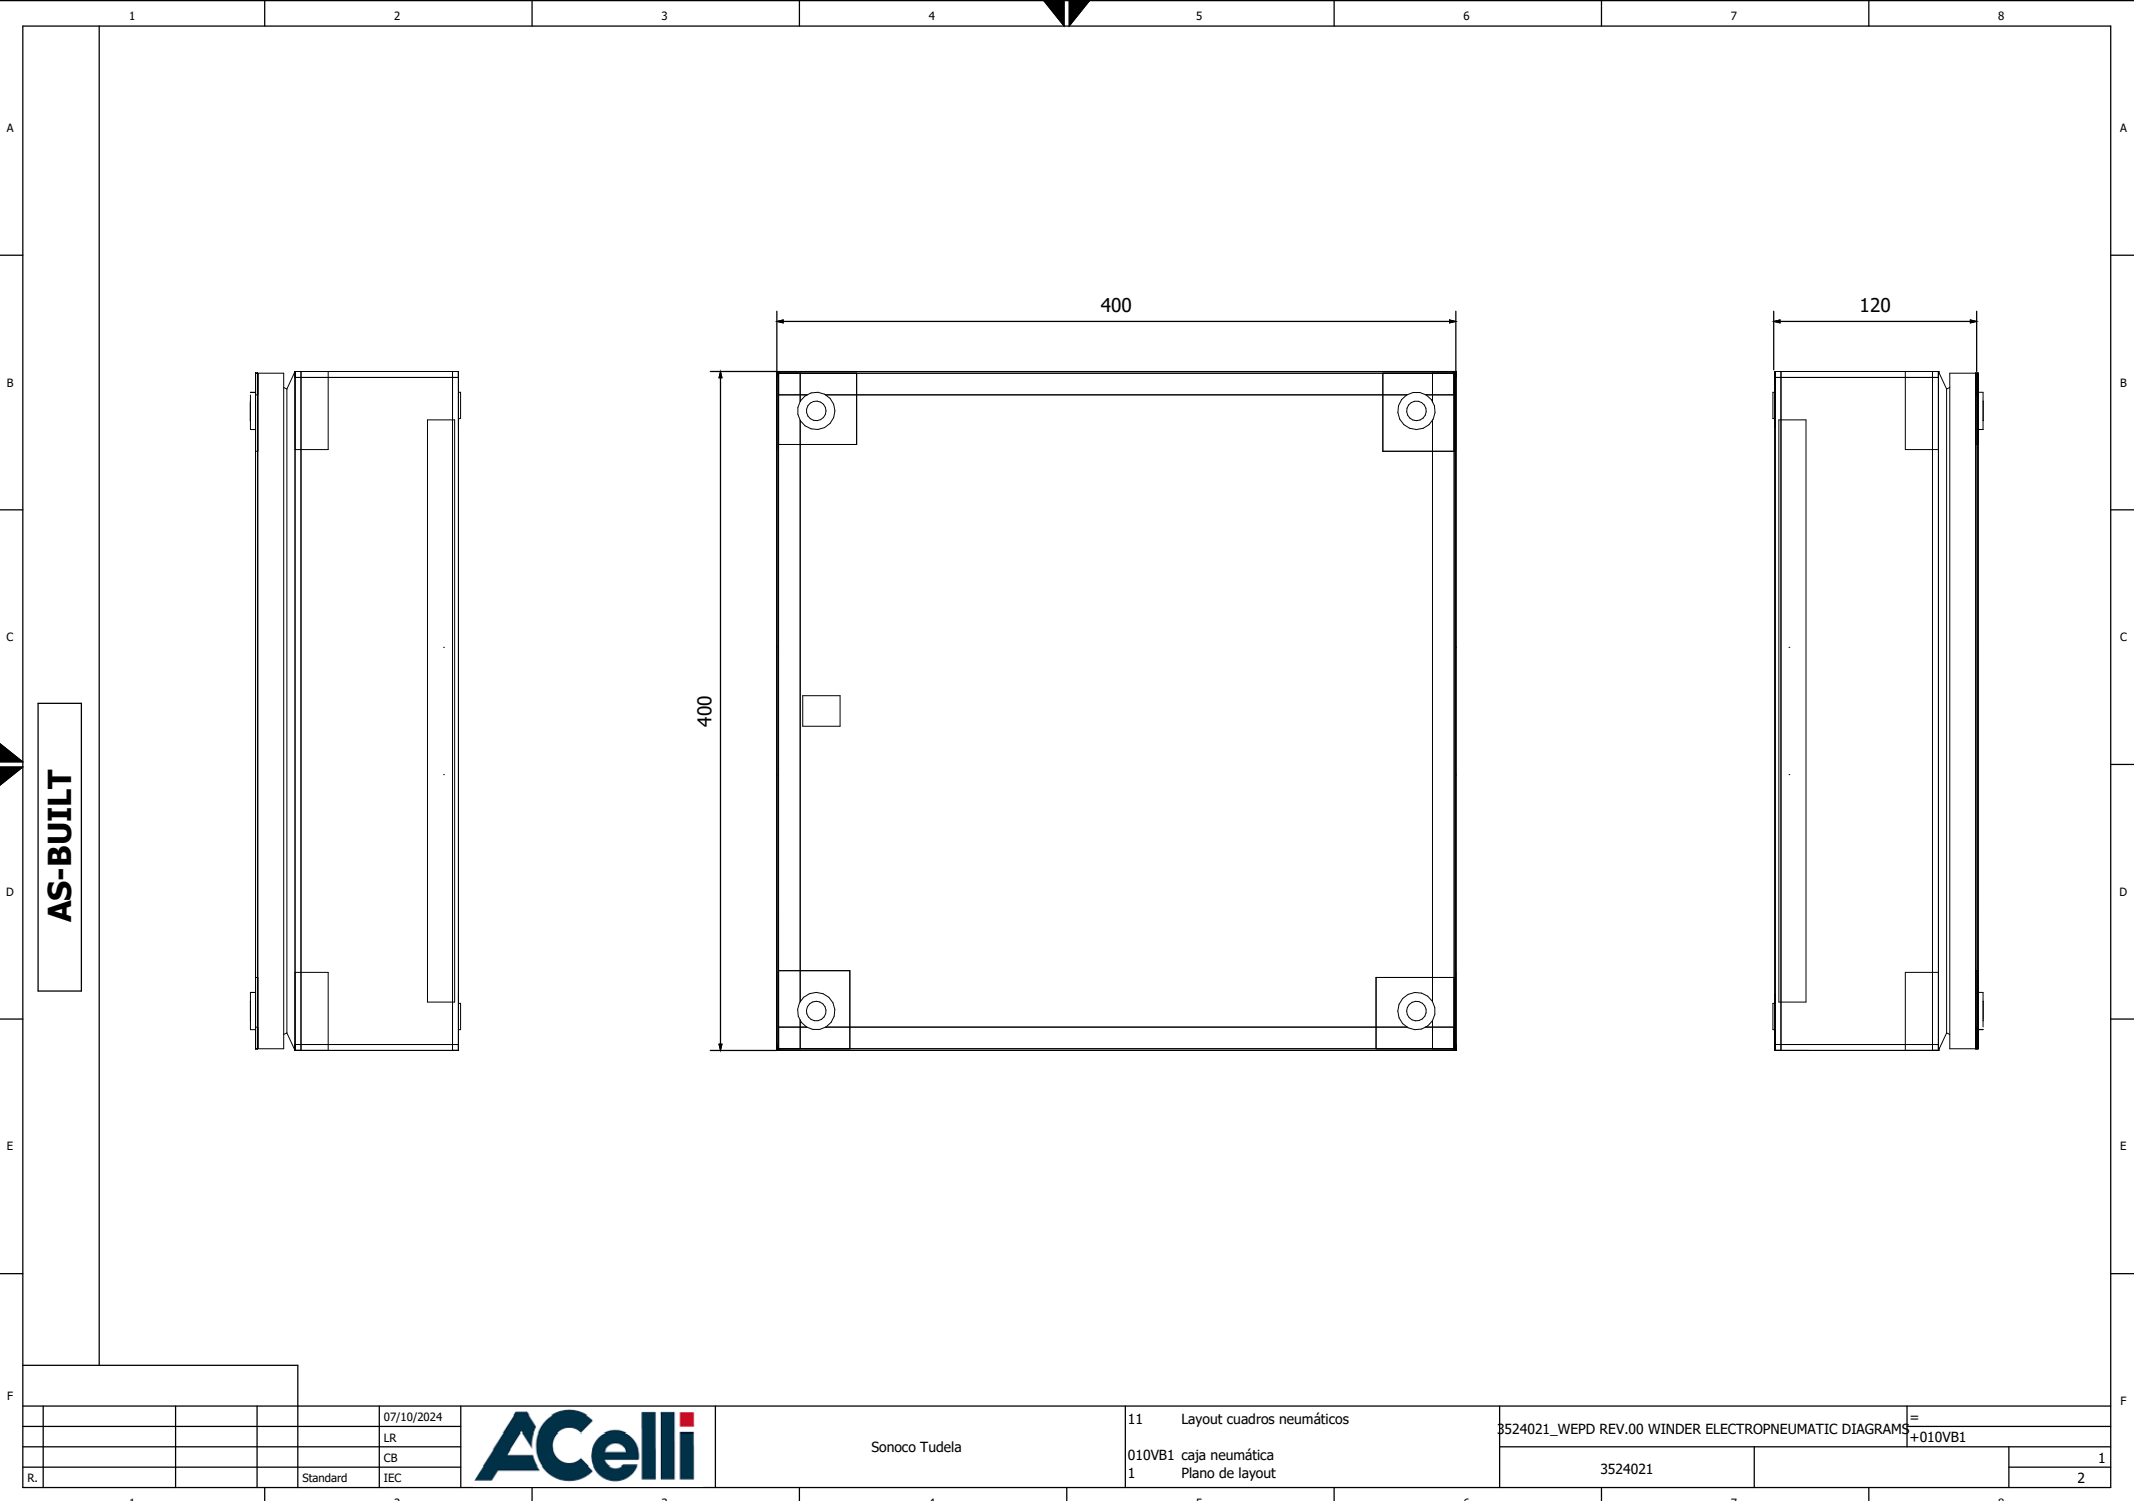

AS-BUILT

				07/10/2024		Sonoco Tudela	11 Layout cuadros neumáticos	3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS	=	
				LR					+010VB1	
				CB						
R.				Standard	IEC		010VB1 caja neumática	3524021		1
							1 Plano de layout			2

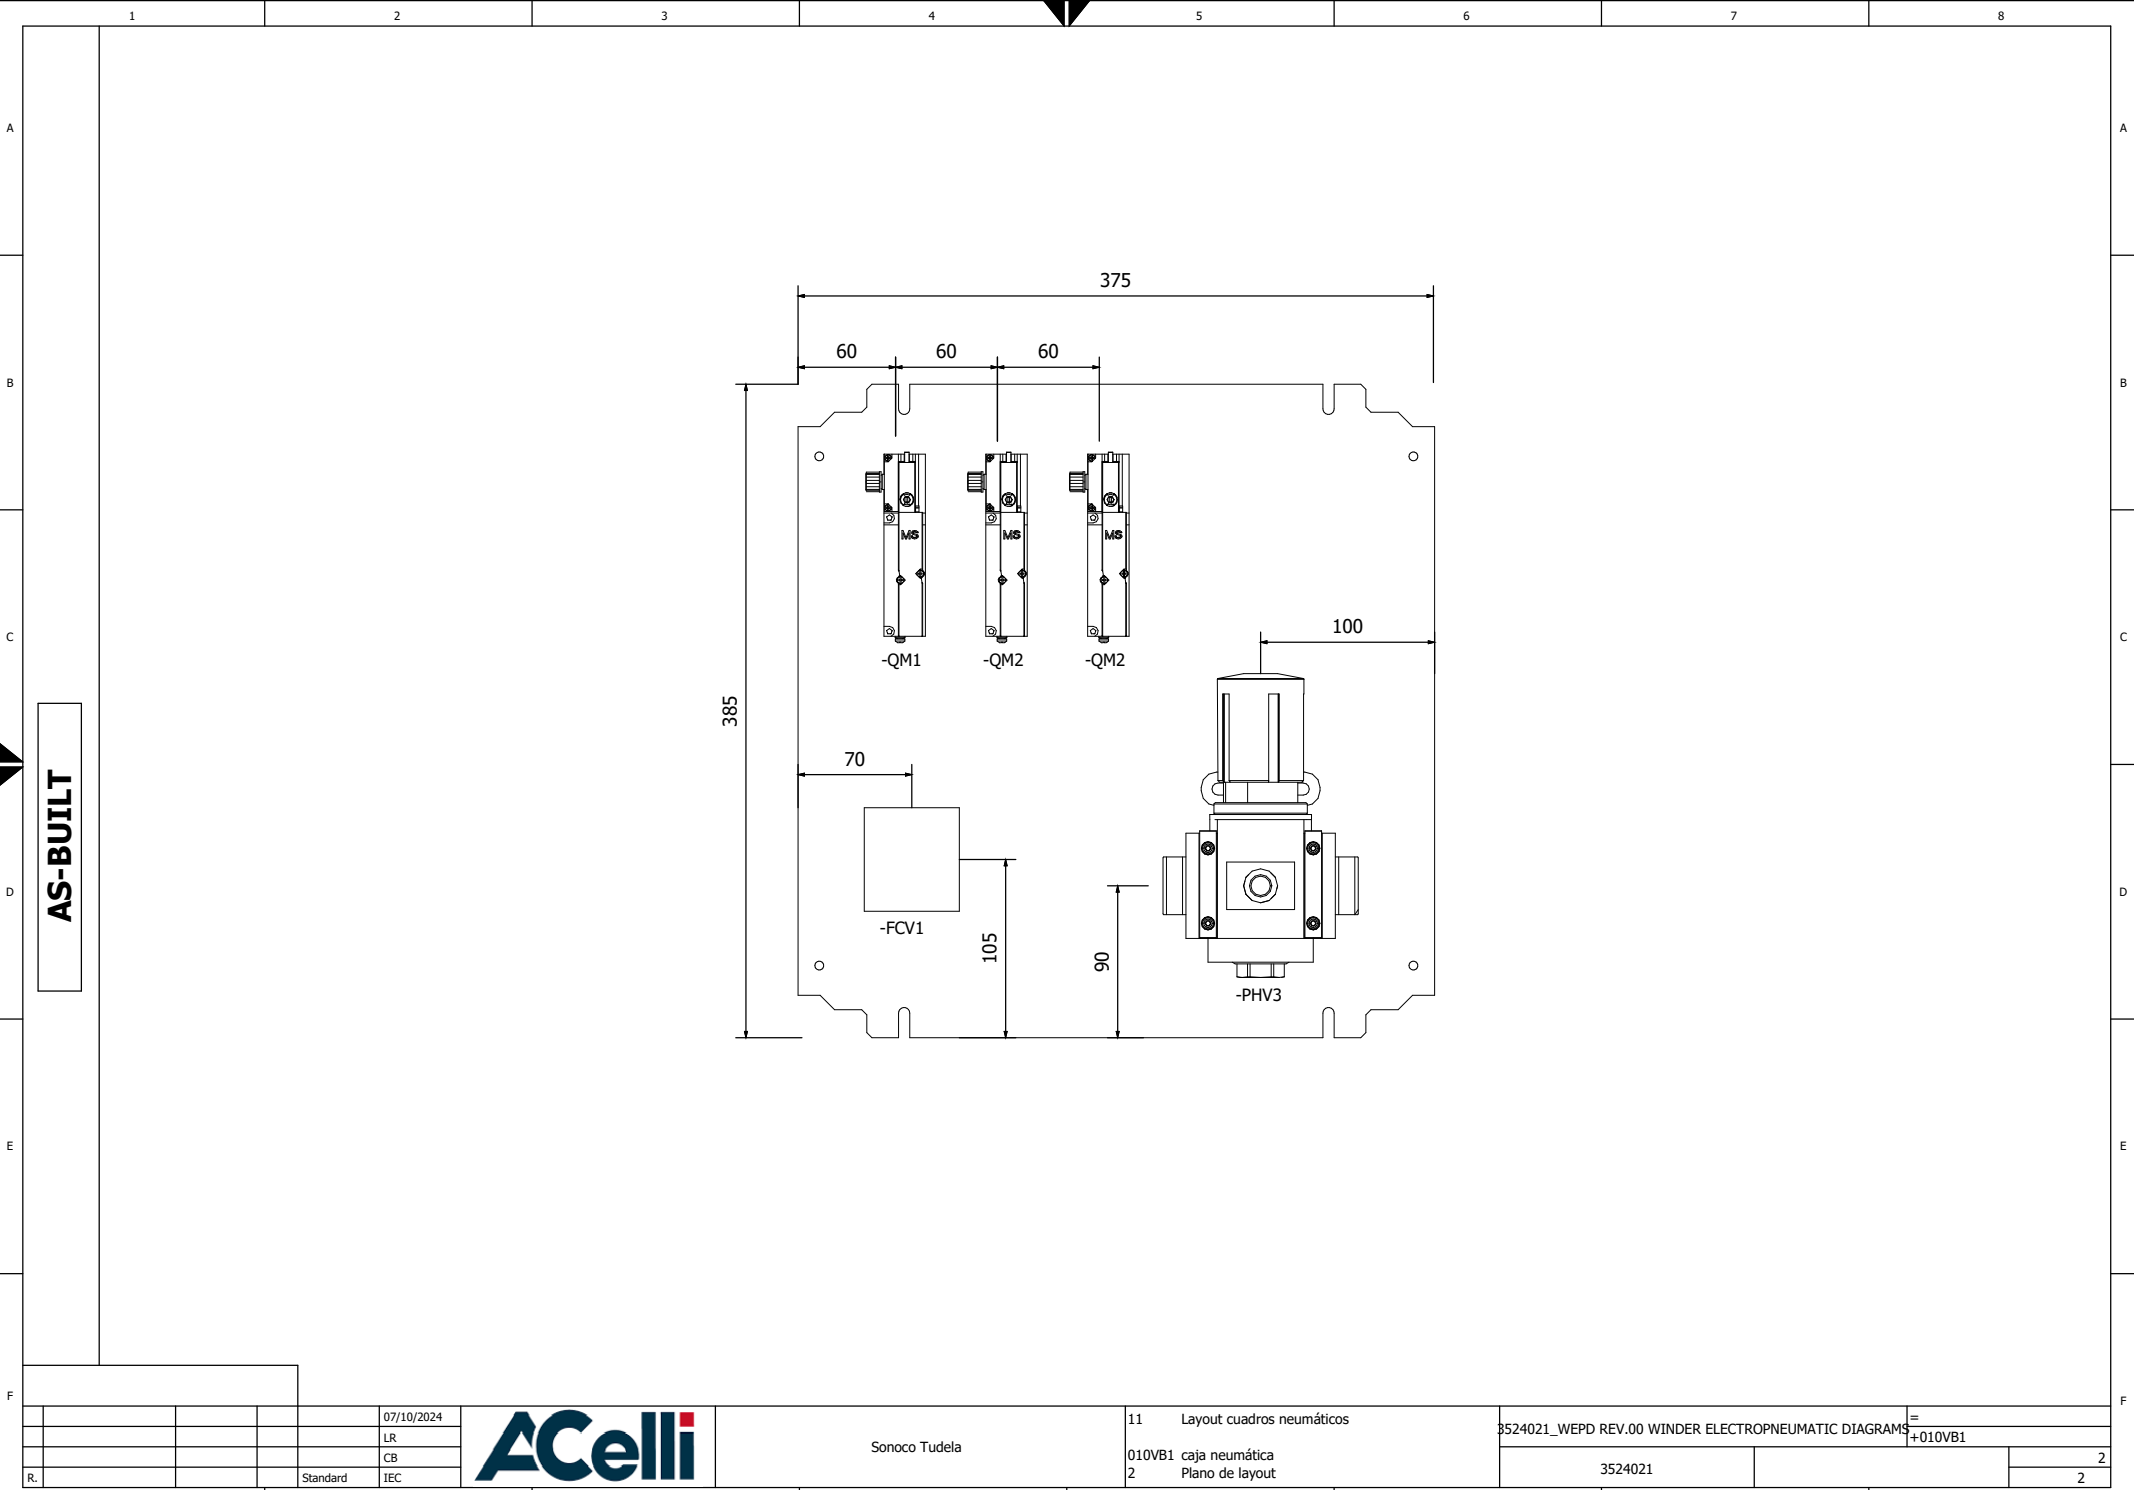

AS-BUILT

				07/10/2024		11		3524021_WEPD REV.00 WINDER ELECTROPNEUMATIC DIAGRAMS		=	
				LR		010VB1		3524021		+010VB1	
				CB		2				2	
R.				Standard		2				2	
				IEC							



Sonoco Tudela

Layout cuadros neumáticos
010VB1 caja neumática
2 Plano de layout

=125.MU020-QM2-MB2  =125.MU020-QM2-MB1
 =125.MU021-QM1-MB2  =125.MU021-QM1-MB1

