
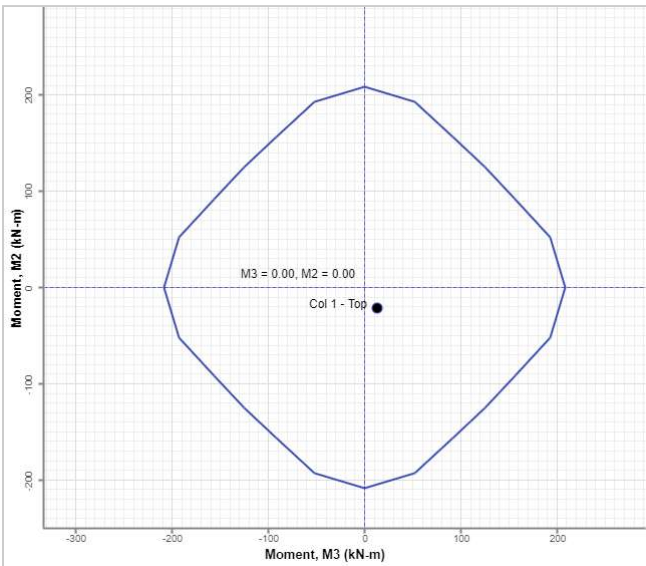
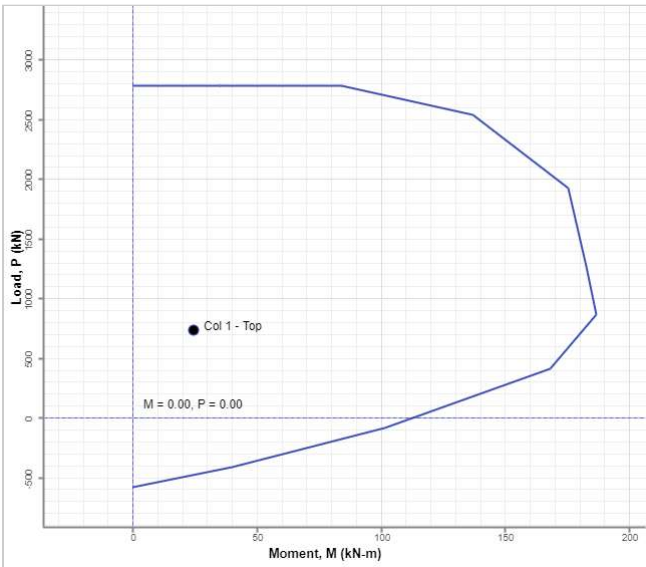


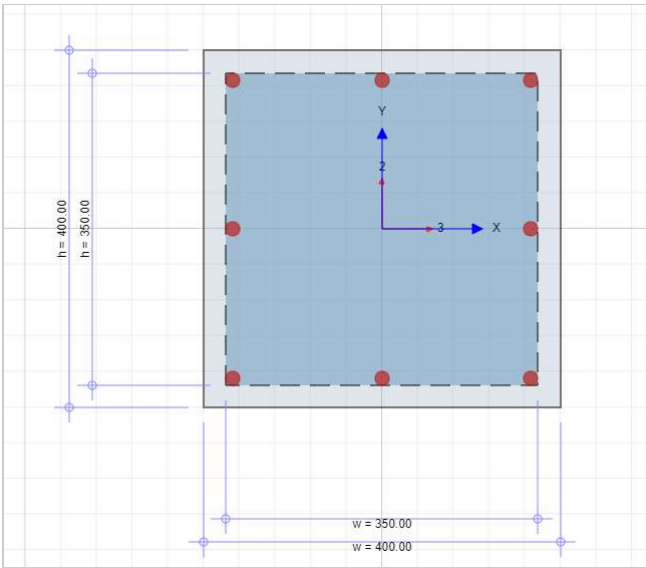

COLUMN INFORMATION

Name	Column 1
Code	ACI 318-19
Shape	Rectangle
Consider Slenderness	No

SHAPE

Name	Concrete Rectangle 1
Material	Concrete Fcu 35
Stress-Strain Curve	Mander, Unconfined
Confinement Zone	Mander, Rectangular Confined

SECTION PROPERTIES

Total Width, W_{total}	400.00 (mm)
Total Height, H_{total}	400.00 (mm)
Area, A	160,000.00 (mm ²)
Inertia, I_{22}	2,133,334,000.00 (mm ⁴)
Inertia, I_{33}	2,133,332,480.00 (mm ⁴)
Centroid, $\bar{x}$	200.00 (mm)
Centroid, $\bar{y}$	200.00 (mm)

REBARS

Rebars	8-d 16
Rebar Area	1,608.50 (mm ²)
Rebar Ratio	1.01%

COLUMN MATERIALS

Concrete

Name	Concrete Fcu 35
Elastic Modulus	26,030.75 (MPa)
Compressive Strength	35.00 (MPa)

Rebar

Name	Rebar Fy 400
Stress-Strain Curve	Park Strain Hardening
Elastic Modulus	199,947.96 (MPa)
Minimum Yield Stress	400.00 (MPa)
Minimum Tensile Stress	600.00 (MPa)

GOVERNING LOAD

Name	Col 1
Axial Load, P_u	738.30 (kN)
Moment Top, M_{ux}	12.40 (kN-m)
Moment Bottom, M_{ux}	-4.19 (kN-m)
Moment Top, M_{uy}	-20.90 (kN-m)
Moment Bottom, M_{uy}	10.99 (kN-m)
Design Moment, $M_{cDesign}$	20.90 (kN-m)
Max Capacity Ratio	0.27