

BETOPPER®

Mini Moving Head

User Manual



Model: LM70 LM70S

Please read the manual carefully before using

Mini Moving Head User Manual

Model: TLM70SK TLM70SP

Attention

- 1、Please read these operating instructions carefully to familiarize you with basic operations of this unit BEFORE USE.
- 2、Without permitted, it is prohibited to spread the contents of this manual to others.
- 3、This manual is only to provide related information, and the contents of this manual will be changed at any time without notice. Unless the instructions have already stated, please do not freely modified the unit.

12	0-255	Color Speed
	Auto	
	0-7	MOVEMENT(AUTO & SOUND EFFECT)
	8-22	Auto 1
	23-37	Auto 2
	38-53	Auto 3
	54-67	Auto 4
	68-82	Auto 5
	83-97	Auto 6
	98-112	Auto 7
	113-127	Auto 8
	128-142	Sound 1
	143-157	Sound 2
	158-172	Sound 3
	173-187	Sound 4
	188-202	Sound 5
	203-217	Sound 6
	218-232	Sound 7
	233-255	Sound 8
14	150-255	Reset

Technical parameters

Parameters	TLM70SK/TLM70SP
Light Source	7*8W 4-in-1 Led (RGBW)
Power Supply	100-240V/50-60HZ
Rated Power	100W
Control Mode	Auto/Sound/DMX/Master-slave
DMX Channel	9/14
Product Size	175*175*235mm
N.W./G.W.	2.7/3.5kg
In the box	Power cable x1; Handle x1; Screw x2; User Manual x1

Control Panel Instruction:



[MODE/ESC] Used to initially access the control panel system, and also navigate to the previous higher-level menu item.

[UP] Scrolls through menu items and numbers in ascending order.

[DOWN] Scrolls through menu items and numbers in descending order.


[ENTER] Used to select and confirm/store the current selection.

Operation Instruction


Controller Settings



Mode Setting

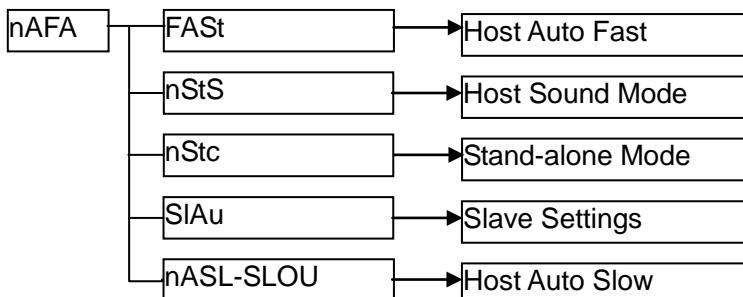


Motor Rotating Setting

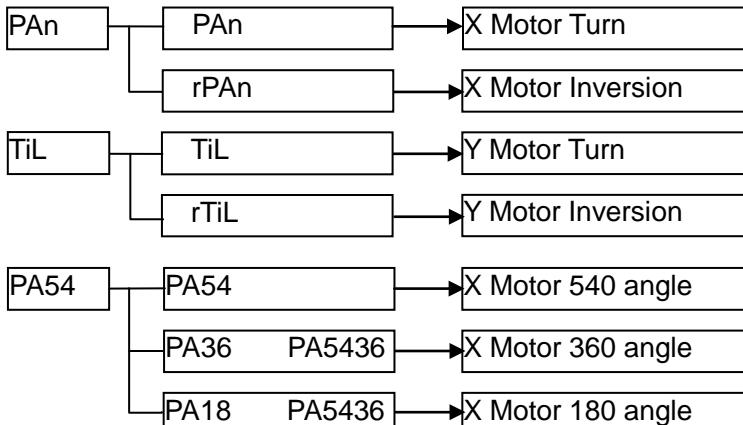




LED Display Direction Setting



Channel Mode Setting



Reset Setting



Initialization Setting



Remark: When the operation mode is chosen, press the Enter button to run.

9 Channels Mode

Channel		Function
1	X Axis	0-255
2	Y Axis	0-255
3	Master Control	0-8 Light off
		8-135 Dimming
		136-240 Strobe
		241-255 Power ON/OFF
4	R LED Dimming	0-255 Dimming from dark to bright
5	G LED Dimming	0-255 Dimming from dark to bright
6	B LED Dimming	0-255 Dimming from dark to bright
7	W LED Dimming	0-255 Dimming from dark to bright
8	Speed	0-255 XY Motor Speed
9	Reset	150-200

14 Channels Mode

Channel	Function
1	Pan
2	Pan fine
3	Tilt
4	Tilt fine
5	Speed
6	0-7 No Effect
	8-134 Dimming
	135-239 Strobe from slow to fast
	240-255 Light on
7	RED Dimming
8	Green Dimming
9	Blue Dimming
10	White Dimming
11	Color Choose
	0-7 Color Assortment1
	8-21 Color Assortment2
	22-34 Color Assortment3
	35-49 Color Assortment4
	50-63 Color Assortment5
	64-77 Color Assortment6
	78-91 Color Assortment7
	92-105 Color Assortment8
	106-119 Color Assortment9
	120-134 Color Assortment10
	135-147 Color Assortment11
	148-161 Color Assortment12
	162-175 Color Assortment13
	176-189 Color Assortment14
	190-203 Color Assortment15
	204-217 Color Assortment16
	218-231 Color Assortment17
	232-255 Color Saltus