


Model Description of Amass Products

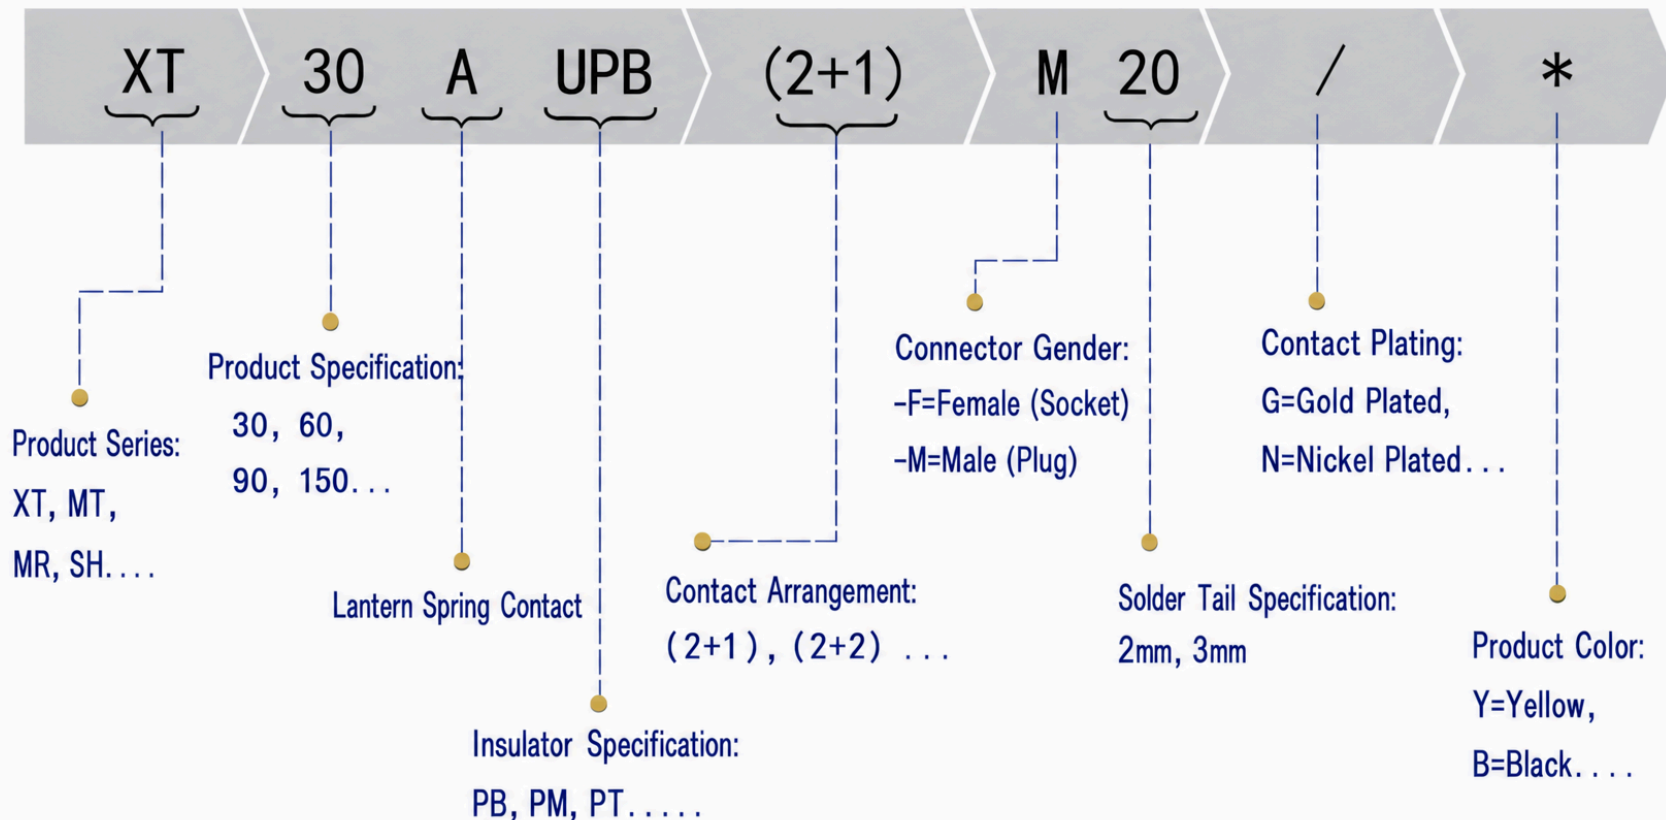

Amass Product Specification


1. Product Description

Right-angled molded 2PIN connector, designed to provide integrated solutions for space-constrained PCB applications. Available in gold-plated and nickel-plated options, with two insulation housing colors, and wire soldering design.

2. Application Modules

☐ Lithium Battery ☐ Motor ☒ Controller ☐ Charger ☐ Others

3. Product Illustration

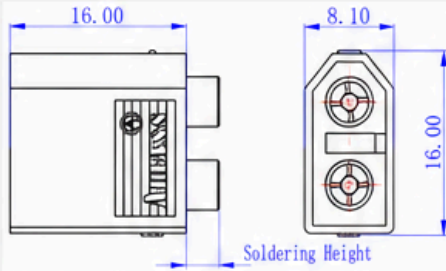Product Image	Outline Drawing
	
Part Number	Soldering Height
XT60PB30-M. G. *	3.0mm

4. Specifications

Material	Specification	Plating	Plating Thickœss
Metal Parts	H59-1	G: Gold Plated (Au)	0.03µm
Material	Specification	Color	Flammability Rating
Housing	PA66	*: Y=Yellow, B=Black	UL94-V0

5. Performance Characteristics

Electrical Performance	Test Method	Characteristics
Rated Voltage	UL1977	DC 500V
Rated Current	UL1977	20A
Contact Resistance	GB/T5095.2	0.60mΩ
Insulation Resistance	GB/T5095.2	2000MΩ
Withstanding Current	&A 1min <80°C	40A
Temperature Rise	UL1977	20A 4h <60°C
Pull-out Force	GB/T2900.18	5.90mm
Mechanical Performance	Standard	Characteristics
Insertion Force	GB/T5095.8	1.8kg-4.5kg
Extraction Force	GB/T5095.8	1.8kg-4.5kg
Durability	GB/T5095.1	100 times
Ingress Protection	GB/T4208	IP40
Environmental Performance	Standard	Characteristics
Operating Temperature	GB/T 2423.3	-20°C to 120°C
Salt Spray	GB/T 2423.17	48h

6. Current Carrying Capacity Reference

mm²	Temperature Rise 60°C	Temperature Rise 85°C
12#	40A	45A
14#	30A	35A
16#	25A	30A



7. Configuration Description

☒ With cover ☐ Without latch ☐ Waterproof ☐ Anti-sparking

8. Certification

☐ UL ☒ CE ☒ RoHS 2.0 ☐ Reach

9. Installation Recommendation

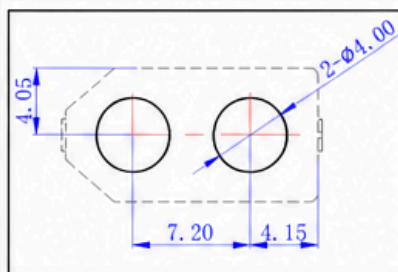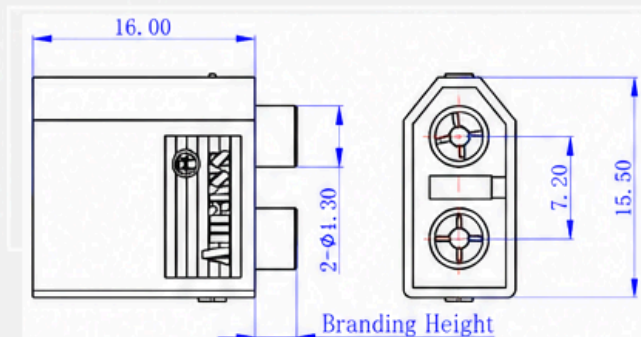

Mounting Hole Diagram

Important:

When in use, please do not exceed the specified current and voltage.



- Overcurrent and overvoltage may cause failure or accidents.
- When connectors are in a live state, plugging or unplugging may cause failure or accidents, so please plug and unplug only when unpowered.

Do not use connectors under external force



- Do not use the connector when it is subjected to external force on the wiring or the connector. Doing so may cause failure or accidents.
- The connector is a component designed for use in electrical circuits, so do not use it as a part of the outer shell or other structural components.

Confirm the operating environment



- Do not use in high-temperature, high-humidity environments.
- Do not use in environments outside the range specified in the specifications. Doing so may cause failure or accidents.

Use with care



- Connectors are precision components, so please handle them with care during use.
- Please use caution when opening the package, as doing so carelessly may cause products with lids and packaging to be subjected to strong impact, resulting in deformation, bending, detachment, or other phenomena.

Prepared by:

Checked by:

Approved by: