A+

Trackball · Vial

Layer 0 · default at startup

Base Layer: Left-Handed Navigation

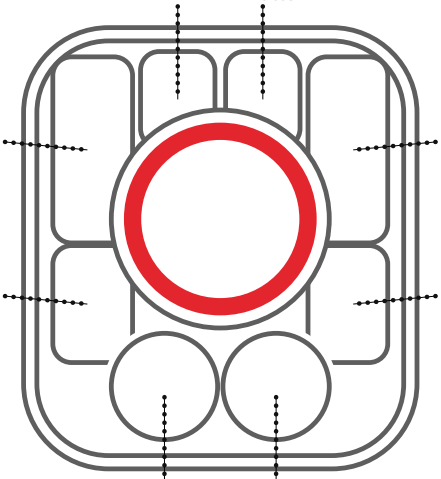

F7

Back
Button 4

Middle Click
Button 3

Forward
Button 5

Left Click
Bootloader: Hold While Plugging In USB

Right Click

Turn:
Volume
Press:
Switch To Control Layer

Turn:
Vertical Scroll
Press and hold:
Activate Mouse Gesture Layer

Custom Vial firmware · 2026-10-25

A+

Trackball · Vial

Layer 1 · switch with Mirror

Base Layer: Right-Handed Navigation

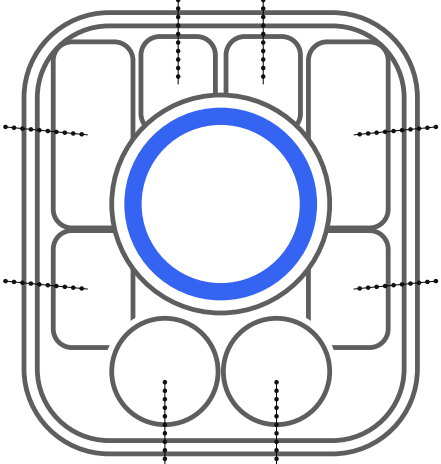

Forward
Button 5

Drag Scroll

Back
Button 4

Right Click

Left Click
Bootloader: Hold While Plugging In USB

Middle Click
Button 3

Turn:
Vertical Scroll
Press and hold:
Activate Mouse Gesture Layer

Turn:
Volume
Press:
Switch To Control Layer

Custom Vial firmware · 2026-10-25

A+

Trackball · Vial

Layer 3 · editable in Vial

Mouse Gestures Layer

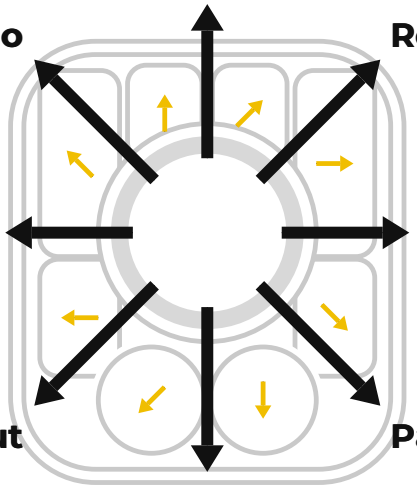

Play/Pause

Undo

Redo

Previous Virtual Desktop

Next Virtual Desktop

Cut

Paste

Copy

Gesture instructions:
Hold the gesture key, move the ball in a direction, then let go.
The LEDs blink when a gesture is recognised. Redo and desktop switching send the right shortcut for Windows, Linux or macOS.
In Vial, each direction is a key on layer 3 (the small arrows).

Custom Vial firmware · 2026-10-25

A+

Trackball · Vial

Layer 2 · press a wheel

Control Layer

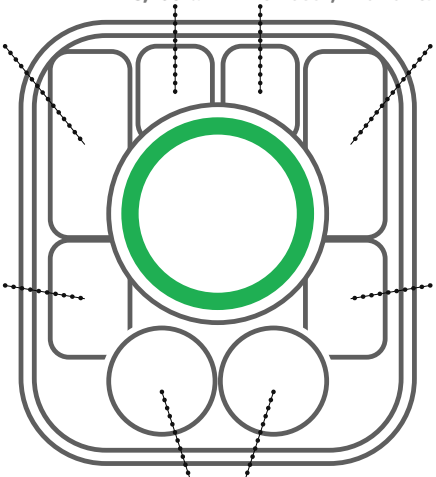

Toggle Vertical Scroll Type
Notched (default, works in games), smooth, or up/down arrows. Blinks: 3 = notched, 2 = smooth, 1 = arrows.

Adjust LED Brightness
Cycles 25, 50, 75, 100%.

Cycle DPI
600, 900, 1200, 1600, 2400. LEDs blink once for 600, more for higher. 900 is default.

Toggle Horizontal Scroll Type
Wheel H-Scrl only. Notched (default), smooth, or left/right arrows. Blinks: 3 = notched, 2 = smooth, 1 = arrows.

Mirror Base Layer
Left-handed (L0): 1 blink.
Right-handed (L1): 2 blinks.

Toggle Drag Scroll Type
Hold to activate (like Shift) or toggle (like Caps Lock). 1 blink = toggle, 2 = hold.

Same for both wheels

Press: Switch To Base Layer

Turn: Volume

LEDs blink briefly when a setting changes.
Settings are saved and survive unplugging.
LED colours & brightness: Vial → Lighting tab.

Custom Vial firmware · 2026-10-25