

Gimbal Mount Assembly

Definition File

Artjom Lukanowski on behalf of The Exploration Company SAS

Version 001 created on June 24, 2026

Contents

1. Introduction	1
1.1. Scope	1
1.2. Reference	1
2. GMA Overview	2
2.1. Engine system context	2
2.2. Role of the GMA in the Engine System	2
3. GMA Design Definition	3
3.1. Assembly architecture & Design Philosophy	3
3.2. Part breakdown, materials and mass	4
3.3. Tolerances and fits	5
4. Functional and mechanical characteristics	5
4.1. Generic functional characteristics	5
4.2. Chosen functional characteristics	6
4.3. Mechanical characteristics	6
5. Design recommendation for adjacent parts	7
6. Preliminary cost assessment	8
7. Acronym List	8

1. Introduction

1.1. Scope

The definition file serves as the identity card of the Gimbal Mount Assembly (GMA), detailing its intended capabilities and interactions with other systems. The document aims to provide a thorough understanding of the following key aspects:

- Overview of the components that constitute the GMA and their main purposes
- Description of the functional mechanical characteristics
- Design recommendations for adjacent parts
- Preliminary cost estimation

1.2. Reference

[RD1] Nyx Moon - Huracan Development Logic / TEC-FRA-DOC-01004 / Issue 02

[RD2] Gimbal Mount Assembly - Requirement Consolidation / Version 0

[RD3] Gimbal Mount Assembly - Trade-Off Report / Version 0

[RD4] Gimbal Mount Assembly - Interface Control Document / Version 0

[RD5] Gimbal Mount Assembly - Justification File / Version 0

2. GMA Overview

2.1. Engine system context

The development logic of the Huracan engine system, as presented during the Preliminary Design Review (PDR), features a rigid thrust structure that interfaces the main engine with the vehicle [RD1]. Based on this logic, GNC maneuvers were originally intended to be performed by a Reaction Control System (RCS).

For the on-Earth demonstrator *Oneiros*, which shall be driven by the Huracan engine, pitch and yaw control is planned to be realized by a Thrust Vector Control (TVC) system. The TVC system steers the vehicle by physically pivoting, or gimbaling, the main engine in order to vector the thrust. Therefore, the main mechanical components of the TVC system are the GMA and two actuators.

This Definition File and all associated documents focus exclusively on the development of the GMA.

In the figure below, the GMA and its position within the engine layout is shown. The GMA is attached to a Thrust Dome, which interfaces with the Injection Head (IH). The upper end of the GMA is connected to the Thrust Frame Beams, which are individually connected to the GMA in a 90°-clocked configuration.

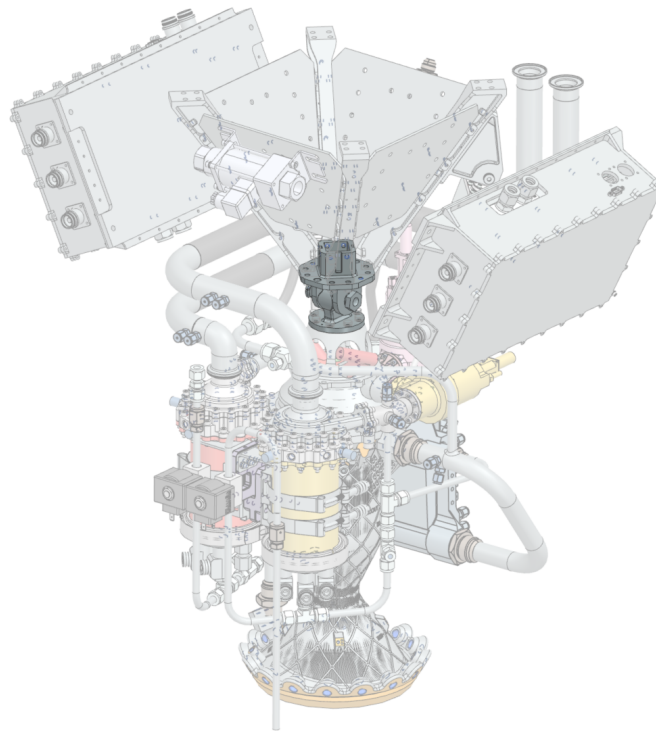


Figure 1: GMA in engine system

2.2. Role of the GMA in the Engine System

The main role of the GMA is to provide the structural and kinematic connection between the engine's Thrust Chamber Assembly (TCA) and the vehicle structure, while allowing controlled angular deflection of the engine.

The GMA does not directly generate thrust, specific impulse, or combustion performance. However, it is strongly influenced by engine-level performance and configuration, since these parameters define the loads, deflections, actuator forces, alignment requirements, and environmental conditions that the assembly must withstand.

The GMA shall therefore be considered as an interface and primary mechanical load-path component between the engine and the vehicle. It transmits nominal thrust loads of 15 kN in vacuum and 10 kN under atmospheric conditions. In addition to transmitting the nominal loads, the GMA shall provide an operational gimbal capability of $\pm 10^\circ$ per axis in pitch and yaw. Further requirements are shown in the Requirement Consolidation [RD2].

3. GMA Design Definition

3.1. Assembly architecture & Design Philosophy

Breaking down the engine assembly to focus on the GMA and its directly adjacent parts, the figure below shows the GMA connected to the Thrust Dome at the bottom and the Thrust Frame Beams above. The Thrust Dome and Thrust Frame Beams are shown transparently because they are outside the scope of this development. Nevertheless, design recommendations for these components are provided in a subsequent chapter.

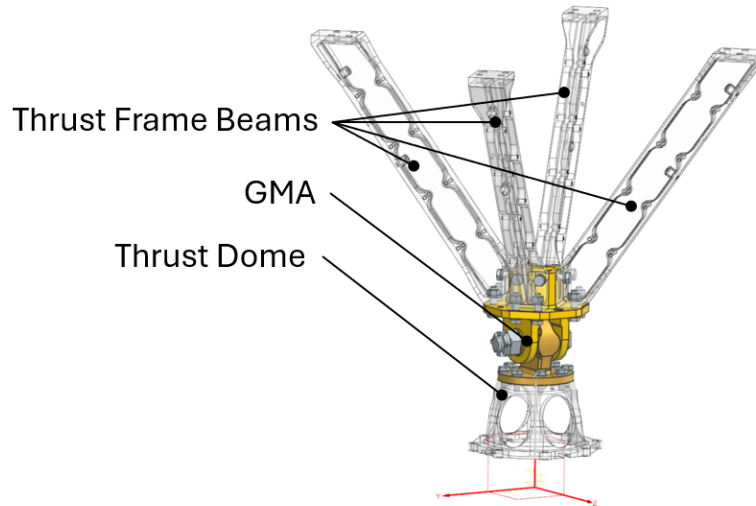


Figure 2: GMA architecture

The design philosophy is aligned with the trade-off criteria described in [RD3]. To achieve a GMA design that is *safe, simple, and achievable*, the primary objectives are to minimize the number of parts and maximize the use of commercial off-the-shelf (COTS) parts. As a result, the final GMA design consists of eight parts: four COTS parts and four custom-made parts. The following figure shows the COTS parts used in the GMA.

Machine parts in accordance with military and aerospace standards were selected as COTS because of their guaranteed material properties, tight tolerances, and controlled manufacturing and inspection processes. The use of imperial units is accepted for some parts in this project because they can be sourced more quickly and at a lower cost.

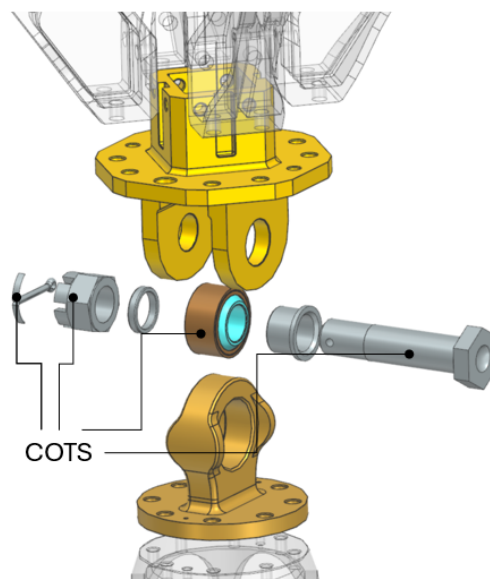


Figure 3: COTS parts in the GMA

3.2. Part breakdown, materials and mass

The image and the subsequent table illustrate the parts and their designated materials in an isometric and cross-sectional view. The GMA design equals a double-shear clevis joint, where the GMA Lug Head carries the stacked outer race of a self-lubricated Plain Bearing. The inner race of the Plain Bearing is centered within the GMA Clevis Head through a Spacer and clamped by a Bushing through the preload of a NAS-bolt. This bolt is preloaded by a castellated nut, that is in contact with the outer surface of the GMA Clevis Head. The Cotter Pin secures the Castellated Nut from loosening from the bolt's male thread and thus, keeps all axially stacked parts centered. The Clevis Head features two Clevis Ears, which is in contact with the Bolt on the one and the GMA Bushing on the other side. To allow unhindered clamping of all axially stacked parts and maintain the centered position between both Clevis Ears and the GMA Lug Head, both load transmitting bore holes of the Clevis feature different diameters and a radial clearance fit (see subsequent chapter). For the NAS-bolt specifically, it should be noted that the finish indicated by the letter U (passivated bolt) is determined by the market availability of this specific bolt size. Passivation is not required for the function of the assembly itself.

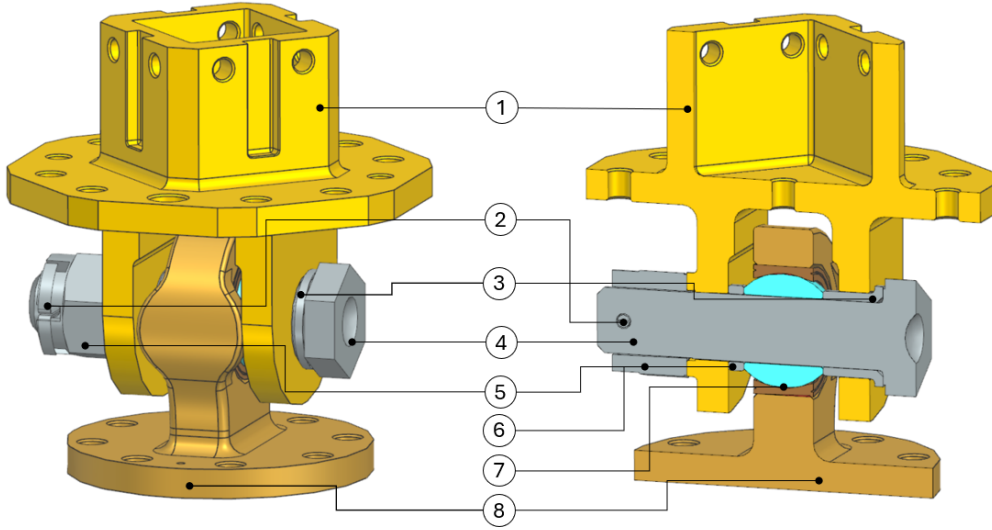


Figure 4: GMA isometric view and cross section

Table 1: Total mass of main parts

Number	CAD-ID	Designation	Material	Mass (kg)
1	126749/01	GMA CLEVIS HEAD	17-4PH - H900	0.864
2	3489/01	COTTER PIN MS24665-374	AISI 302 or 304	0.0022
3	126711/01	GMA BUSHING	17-4PH - H900	0.0147
4	3423/01	BOLT NAS6710DU29	A286	0.1316
5	3437/01	NUT MS9358-16	A286	0.0386
6	126707/01	GMA SPACER	17-4PH - H900	0.0003
7	3489/01	BEARING MS14103-10	330C / 17-4PH	0.1089
8	124890/01	GMA LUG HEAD	17-4PH - H900	0.381
Total mass				1.544

Taking into account the additional bolts, washers, nuts, and pins, an additional CAD mass of 0.212 kg must be considered. The total mass is therefore approximately **1.8 kg**, which is **64 %** lower than the maximum mass specified in requirement [RD2]. Further details of the interface connections are provided in the GMA Interface Control Document (ICD) [RD3].

3.3. Tolerances and fits

The selection of dimensional fits between mating cylindrical surfaces is governed by the fixed dimensions of the COTS parts used in the design, namely the plain bearing and the bolt. It also considers the fit recommendations specified by the applicable standards for the bearing and the GMA Lug Head, as well as the functional requirements of the assembly and the flexibility required during Manufacturing, Assembly, Integration, and Testing (MAIT).

Table 2: Tolerances and fits

Parts	Shaft (mm)	Hole (mm)	Resulting tolerance (mm)
BEARING & LUG	30.1498–30.1625	30.1570–30.1700	-0.0055 to +0.0202
BOLT & BEARING	15.8369–15.8496	15.8623–15.8750	+0.0127 to +0.0381
BOLT & CLEVIS	15.8369–15.8496	15.8623–15.8750	+0.0127 to +0.0381
BOLT & BUSHING	15.8369–15.8496	15.8623–15.8750	+0.0127 to +0.0381
BOLT & SPACER	15.8369–15.8496	15.8623–15.8750	+0.0127 to +0.0381
BUSHING & CLEVIS	19.9800–19.9930	20.0000–20.0210	+0.0070 to +0.0410

4. Functional and mechanical characteristics

4.1. Generic functional characteristics

An overview of the functions of the main GMA parts is provided in the table below. The part numbers and designations correspond to those shown in Figure 4.

Table 3: GMA parts and function

Number	Designation	Function
1	GMA Clevis Head	Transfers loads into the thrust frame structure; provides centering and positioning of the lug interface; supports engine handling and positioning of instrumentation interfaces
2	COTTER PIN MS24665-374	Provides positive locking of the nut and prevents unintended loosening
3	GMA GMA Bushing	Provides axial positioning of the lug/bearing interface and supports axial load transfer between adjacent components
4	BOLT NAS6710DU29	Transfers shear and bending loads through the clevis/lug joint; provides axial and radial positioning of the connected parts
5	CASTELLATED NUT MS9358-16	Retains the bolt in the clevis/lug joint and maintains joint assembly integrity
6	GMA Spacer	Provides centered positioning of the lug/bearing assembly and maintains the required axial spacing
7	BEARING MS14103-10	Supports radial and axial loads while allowing angular displacement in pitch and yaw

Number	Designation	Function
8	GMA Lug Head	Transfers loads between the bearing and engine interface; provides bearing support and mechanical stop functionality

4.2. Chosen functional characteristics

The GMA Lug Head and Clevis Head incorporate several specific mechanical features that are worth highlighting.

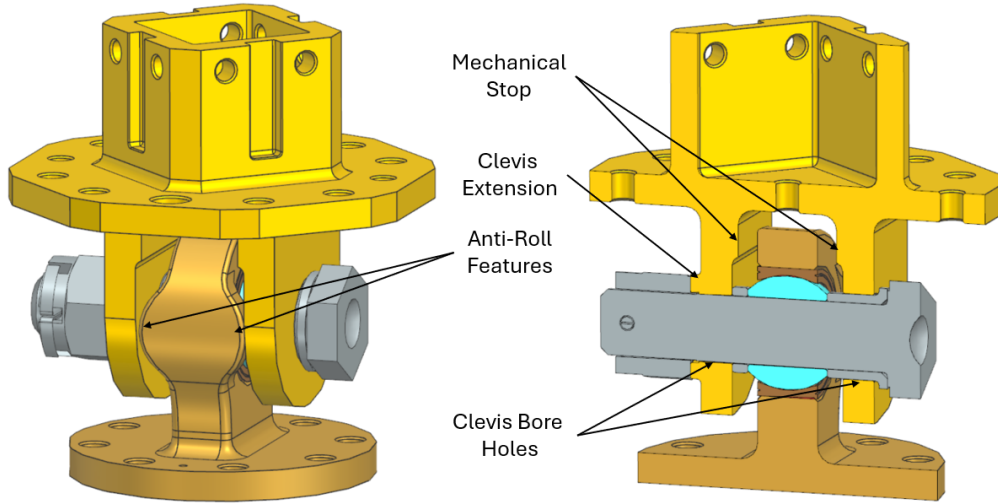


Figure 5: Chosen features of GMA parts

The GMA Clevis Head contains two **mechanical stops** that limit the oscillation angle of the GMA Lug Head about the axis perpendicular to the NAS bolt axis (z-axis; see Figure 2). These geometric features are intended to prevent the maximum permissible oscillation angle of the bearings from being exceeded.

A total of four **anti-roll features** are incorporated into the design of the GMA Lug Head. Their purpose is to limit rolling of the engine, and consequently of the vehicle, as much as possible under all gimbal-angle conditions. Therefore, the clearance between these features and the nearest surface of the clevis is kept as small as possible.

The GMA design uses two different **clevis bore holes**. The smaller bore is in direct contact with the NAS bolt, whereas the larger bore provides a clearance fit around the GMA bushing. This clearance allows the axially clamped components to seat against one another in a controlled manner during bolt tightening.

The surface of the GMA Clevis Head that locally contacts the castellated nut incorporates a raised **clevis extension**. Considering the bolt lengths currently available on the market, this feature ensures proper axial alignment between the slots in the castellated nut and the cross-drilled hole in the NAS bolt, allowing the joint to be secured against loosening with a cotter pin. In addition, the bore diameter in this extension is larger than that in the remainder of the same Clevis Ear. This design prevents the threaded portion of the bolt from contributing to the transfer of transverse shear and bending loads.

4.3. Mechanical characteristics

The mechanical limits can be categorized as stability related, geometrical and kinematical limits.

Stability limits of the GMA are driven by the weakest and most sensitive part. This will be elaborated in detail in the Justification File [RD4].

Geometrical and kinematical limits are given by the nature of the chosen bearing's capability to tilt. For the self lubricating plain bearing *MS14103-10*, the max. angle of tilt is 12° . Exceeding this value may result in a reduction of the bearing lifetime, additional bending of the bolt etc. To protect the bearing, a mechanical stop feature is considered in the design of the GMA Clevis Head as shown in the figure below, where the GMA Lug is tilted by nominally 12° w.r.t. the GMA Clevis Head.

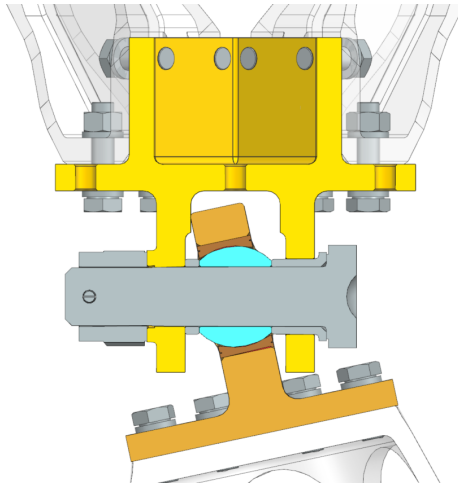


Figure 6: GMA - yaw=12°, pitch=0°

5. Design recommendation for adjacent parts

As mentioned in the previous chapters, the GMA development does not include the interfacing parts on the engine side and the vehicle side. Nevertheless, since these parts have not yet been finalized and directly interface with the GMA, it is useful to present design suggestions from the perspective of the GMA development.

Thrust Frame Beam

The GMA Clevis Head is designed to allow four separate structural members to be attached independently in a quadpod configuration. These Thrust Frame Beams are primarily intended to transmit the engine thrust into the vehicle structure. Their secondary function is to provide attachment points for additional components and instrumentation. The suggested dimensions of the I-beam are shown in the figure below. The chosen material is EN AW-7075 T6.

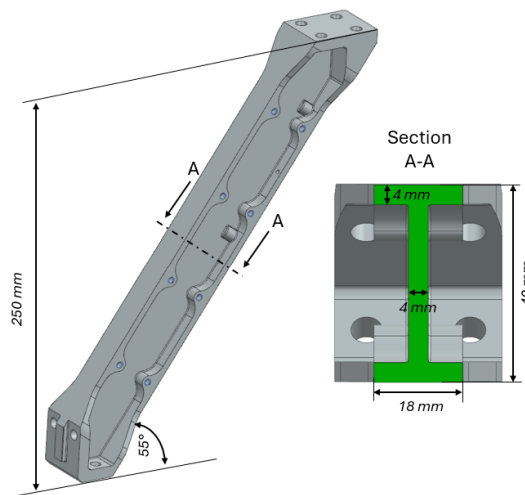


Figure 7: Thrust Frame Beam dimensions

Thrust Dome

The main function of the Thrust Dome is to provide space to accommodate the IGS and its peripheral attachments, while also transmitting the total thrust and thermal loads from the IH to the GMA. It is designed as an axially symmetric body with radial cut-outs to provide space and accessibility for the IGS. The proposed material is 17-4PH H900.

The main suggested dimensions are shown below. The centering feature is designed as a longitudinal groove in a 90° clocked configuration. The function of this groove is to precisely position the Thrust Dome on the IH with respect to the lateral axis and to define its clocking, while accounting for the thermal contraction of the male

feature (e.g. pins on the IH).

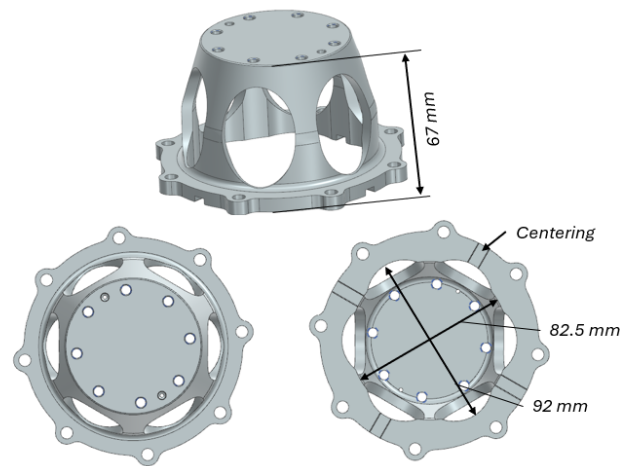


Figure 8: Thrust Dome design

6. Preliminary cost assessment

For the preliminary cost assessment, the custom-made parts were quoted through [makerverse.com](https://www.makerverse.com), while the costs of the COTS parts were estimated using prices from suppliers such as [adeptfasteners.com](https://www.adeptfasteners.com), [lmfixations.com](https://www.lmfixations.com), and [militaryfasteners.com](https://www.militaryfasteners.com). The unit prices shown below are based on order quantities of up to 10 units. The quoted prices are associated with estimated delivery times of approximately 14 to 20 business days.

Table 4: Cost estimation In addition to the estimated costs listed above, a dedicated staking tool is required to secure the outer race of the bearing in the GMA Lug Head. The estimated cost of this tool is approximately €260. Therefore, the total estimated cost, including the staking tool, is **1.295 €**.

Part	CAD-ID	Material	Cost (€/unit)
GMA CLEVIS HEAD	126749/01	17-4PH - H900	532
GMA LUG HEAD	124890/01	17-4PH - H900	241
GMA BUSHING	126711/01	17-4PH - H900	35
GMA SPACER	126707/01	17-4PH - H900	30
BEARING MS14103-10	126707/01	17-4PH - H900	50
BOLT NAS6710DU29	3423/01	A286	50
CASTELLATED NUT MS9358-16	3437/01	A286	88
PIN MS24665-374	3489/01	A286	9
Total cost			1035

7. Acronym List

The acronyms used in this document are listed below.

Table 5: Acronyms

Acronym	Definition
GMA	Gimbal Mount Assembly
IGS	Ignition System
IH	Injection Head
PDR	Preliminary Design Review

Acronym	Definition
RCS	Reaction Control System
TCA	Thrust Chamber Assembly
TVC	Thrust Vector Control