STM32-base

Home   Guides   Concepts   Boards   Cheatsheets   Github
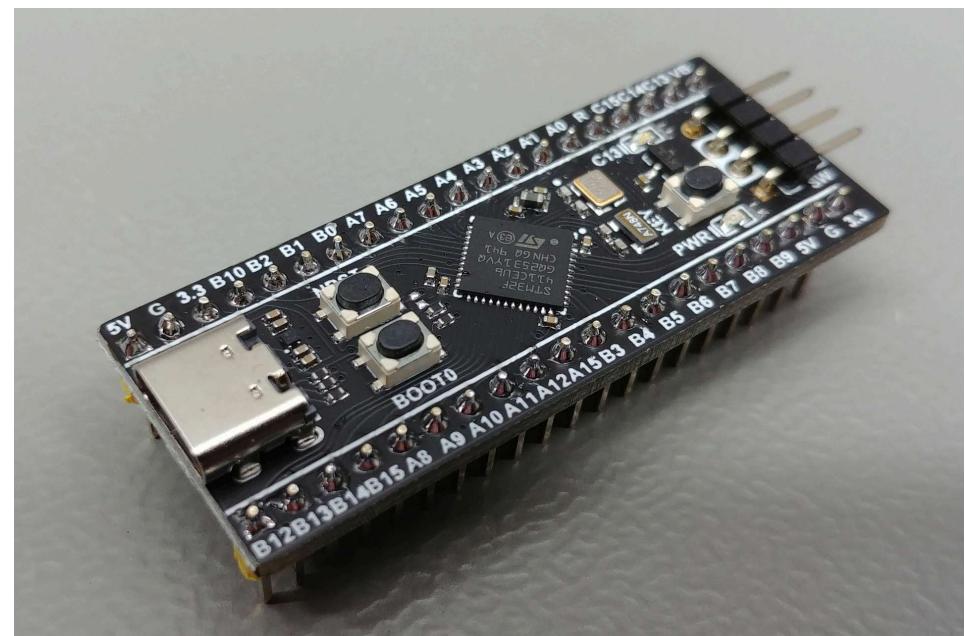
WeAct Black Pill V2.0

STM32F411CEU6

📝 Board

Name	WeAct Black Pill V2.0
Part	Unknown
Brand	WeAct Studio
Origin	China

🖾 Pictures

WeAct Black Pill V2.0: Perspective view

🖳 Microcontroller

Part	STM32F411CEU6
Manufacturer	ST-Microelectronics
Core	Arm Cortex-M4
Max. Clock Speed	100MHz
Package	UFQFPN 48 pins

🎛 Internal memories

FLASH	512KiB
SRAM	128KiB

⎍⎍ Oscillators

HSI	16MHz
LSI	32kHz
HSE	25MHz
LSE	32.768kHz

⚡ Power
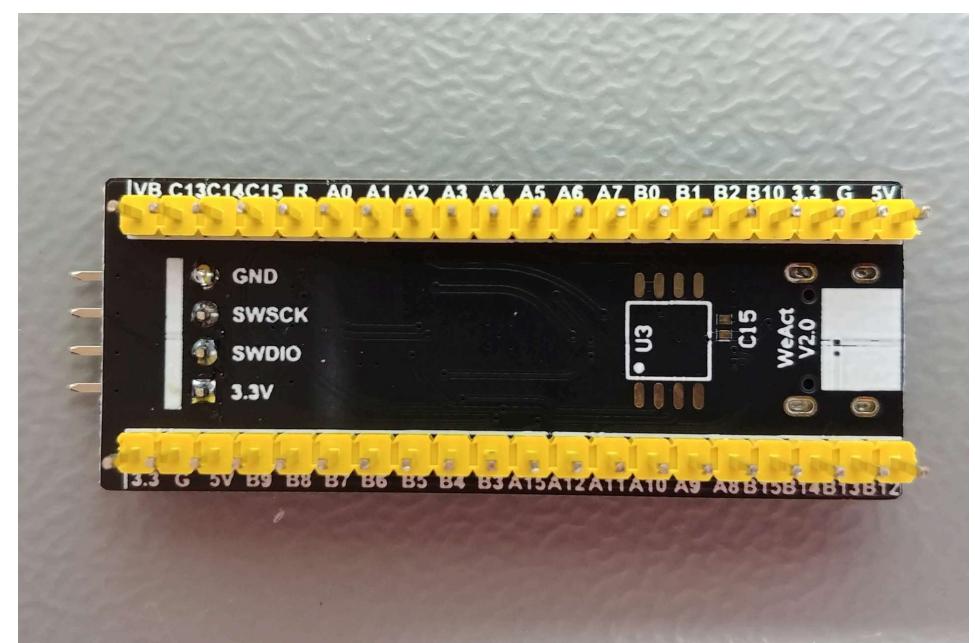
Sources	Any +3.3V pin (+3.3V)
	Any +5V pin (+5V)
	USB connector (+5V)
V_{DDA} pin	No
V_{SSA} pin	No
V_{REF-} pin	No
V_{REF+} pin	No
Backup battery	Pin

⤫ Regulator

Manufacturer	Diodes Incorporated
Part	AP7343 (6т)

WeAct Black Pill V2.0: Top view

WeAct Black Pill V2.0: Bottom view

Package	X2-DFN1010-4 4 pins
Input	+3.52V to +5.25V
Output	+3.3V @ 300mA
Datasheet	AP7343.pdf

■ PCB

Color	Black
Size (w x l)	20.78mm x 52.81mm
Mounting	Breadboard

❗ Remarks

- **Warning:** The +5V pins on this board are directly connected to the +5V pin of the USB connector. There is no protection in place. Do not power this board through USB and an external power supply at the same time.

📄 Resources

- 🖼 Perspective view
- 🖼 Top view
- 🖼 Bottom view
- 📄 Original schematic
- 📄 Original dimensions drawing
- 🔗 Source files on Github

↓ Inputs

- ↻ Reset button
- ✳ BOOT0 button
- 👤 User button

↑ Outputs

- ⏻ Power LED
- 👤 User LED

▦ Connectors

- ⇄ Header 1
- ⇄ Header 2
- ⟜ USB connector
- 🐞 SWD header

▥ Devices

- 🗄 Generic EEPROM

Inputs & outputs

↻ Reset button

Name	NRST
Reference	-
Type	Button
Connected to	$\overline{NRST}$
Mode	Active low

⏻ Power LED

Name	PWR
Reference	-
Type	LED
Connected to	+3.3V rail
Mode	N.A.

✳ BOOT0 button

Name	BOOT0
Reference	-
Type	Button
Connected to	BOOT0
Mode	Active high

👤 User LED

Name	PC13
Reference	-
Type	LED
Connected to	PC13
Mode	Sink

👤 User button

Name	KEY
Reference	-
Type	Button
Connected to	PA0
Mode	Active low

Connectors & headers

⇄ Header 1 properties

Name	Unknown
Reference	None
Type	pin header (2.54mm, 20x1, male)

⇄ Header 1 pins

#	Name	Function	Connected to
1	5V	-	+5V rail
2	G	-	Ground plane
3	3.3	-	+3.3V rail
4	B10	-	PB10
5	B2	-	PB2
6	B1	-	PB1
7	B0	-	PB0
8	A7	-	PA7
9	A6	-	PA6
10	A5	-	PA5
11	A4	-	PA4
12	A3	-	PA3
13	A2	-	PA2
14	A1	-	PA1
15	A0	-	PA0
16	R	-	$\overline{\text{NRST}}$
17	C15	-	PC15

18	C14	-	PC14
19	C13	-	PC13
20	VB	-	V_{BAT}

⇄ Header 2 properties

Name	Unknown
Reference	None
Type	pin header (2.54mm, 20x1, male)

⇄ Header 2 pins

#	Name	Function	Connected to
1	B12	-	PB12
2	B13	-	PB13
3	B14	-	PB14
4	B15	-	PB15
5	A8	-	PA8
6	A9	-	PA9
7	A10	-	PA10
8	A11	-	PA11
9	A12	-	PA12
10	A15	-	PA15
11	B3	-	PB3
12	B4	-	PB4
13	B5	-	PB5
14	B6	-	PB6
15	B7	-	PB7
16	B8	-	PB8

17	B9	-	PB9
18	5V	-	+5V rail
19	G	-	Ground plane
20	3.3	-	+3.3V rail

🔌 USB connector properties

Name	Unknown
Reference	None
Type	USB C

🔌 USB connector pins

#	Name	Function	Connected to
A1/B12	-	GND	Ground plane
A4/B9	-	VBUS	+5V rail
B8	-	SBU2	Ground plane via 5.1kΩ (R8)
A5	-	CC1	Ground plane via 5.1kΩ (R8)
B7	-	D-	PA11 via 10Ω (R9)
A6	-	D+	PA12 via 10Ω (R7)
A7	-	D-	PA11 via 10Ω (R9)
B6	-	D+	PA12 via 10Ω (R7)
A8	-	SBU1	Ground plane via 5.1kΩ (R8)
B5	-	CC2	Ground plane via 5.1kΩ (R8)
B4/A9	-	VBUS	+5V rail
B1/A12	-	GND	Ground plane

🐛 SWD header properties

🐛 SWD header pins

Name	SW
Reference	None
Type	pin header (2.54mm, 4x1, male)

#	Name	Function	Connected to
1	3.3V	VCC	+3.3V rail
2	SWDIO	SWDIO	PA13
3	SWCLK	SWCLK	PA14
4	GND	GND	Ground plane

Devices

🗄 Generic EEPROM properties *footprint*

Name	Unknown
Reference	U3
Manufacturer	Unknown
Part	Generic EEPROM
Marking	Unknown
Datasheet	Unavailable
Package	SOP 8 pins
Description	Generic I2C EEPROM

🗄 Generic EEPROM pins *footprint*

#	Name	Function	Connected to
1	-	/CS	PA4
2	-	DO	PB4
3	-	/WP	+3.3V rail
4	-	GND	Ground plane
5	-	DI	PA7
6	-	CLK	PA5
7	-	/HOLD	+3.3V rail
8	-	VCC	+3.3V rail

This is the STM32-base project website. Learn more about the STM32-base project or check out this project on Github. The STM32-base project is *in no way*

This website is hosted on Github Pages. This page is designed to last. Check out which licenses apply to this website and its contents. Check out the Privacy

affiliated with STMicroelectronics.

policy.