Lesson 10:

Configuring Events



IGSS

Interactive Graphical
SCADA System

YouTube
Broadcast Yourself™

Contents of this lesson



Topics:

- What is an event ?
- The Event List
- Creating events
- Showing events as alarms

What is an event ?




An event is a registration of a system, user defined or periodical event in IGSS. Each event is shown in the Event List and, optionally, in the Alarm List.

The event types are:


- OP Connect/Disconnect
- Periodical
- System start/stop
- User defined
- User login/logout
- Writing stopped/started
- Error packet

The Event List

Active Events
Shows all events from the last hour or the 500 latest events.

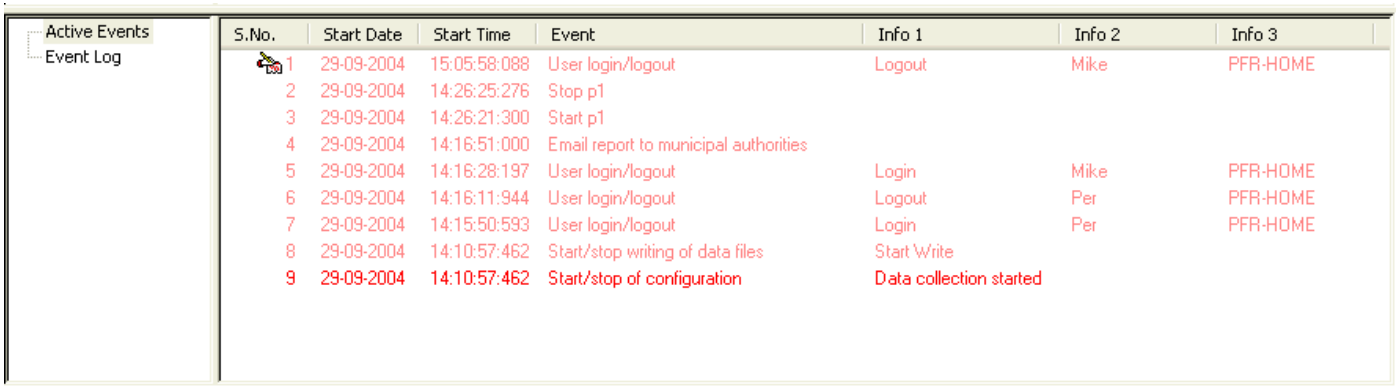


Event Log
Shows the events which have the ”To history” option enabled

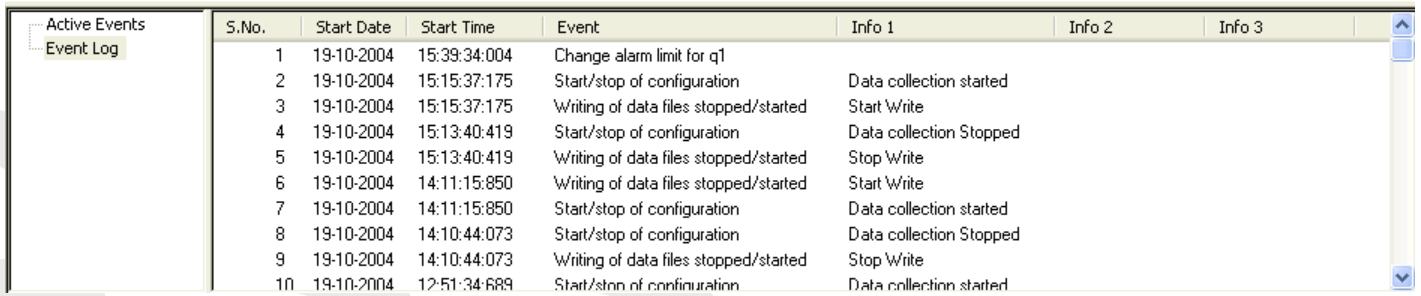


Creating events

In Definition

1. In the **Edit** menu, select **Event List**.

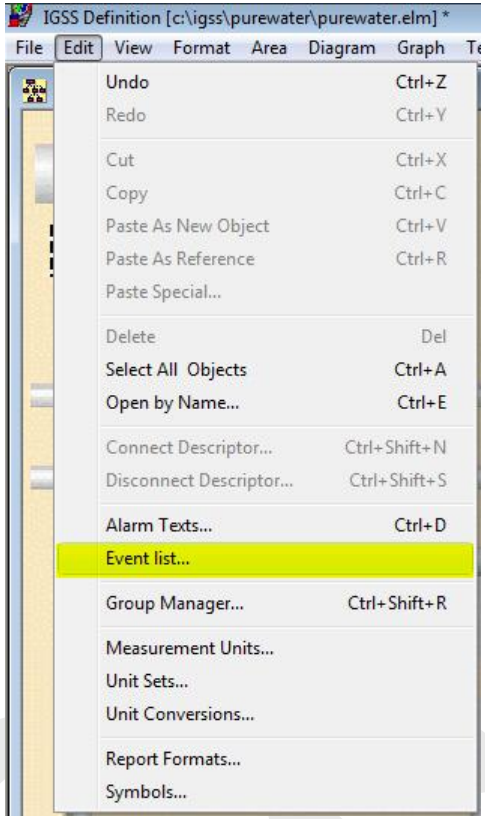


2. Click the **Add** button.

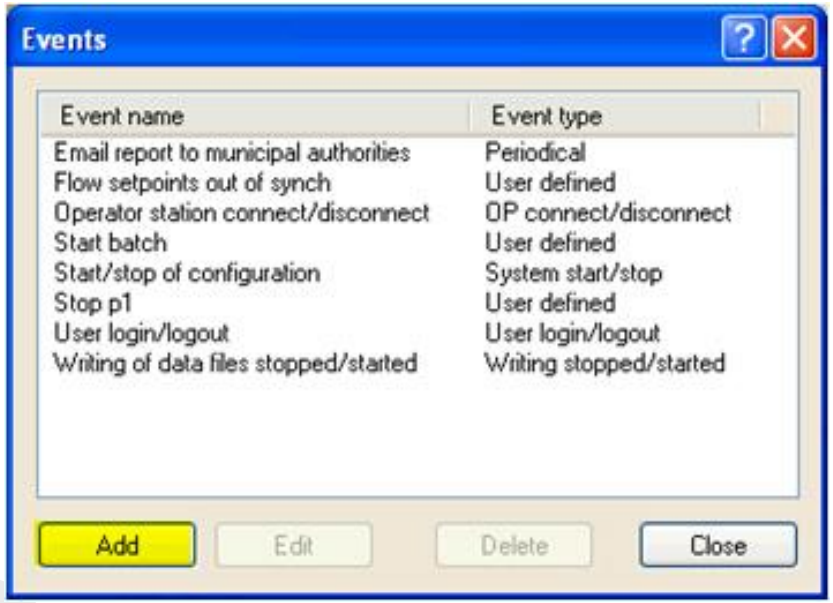

Create user defined event


1. Name the event.
2. Choose type.
3. Choose display color.
4. Define criteria for event.

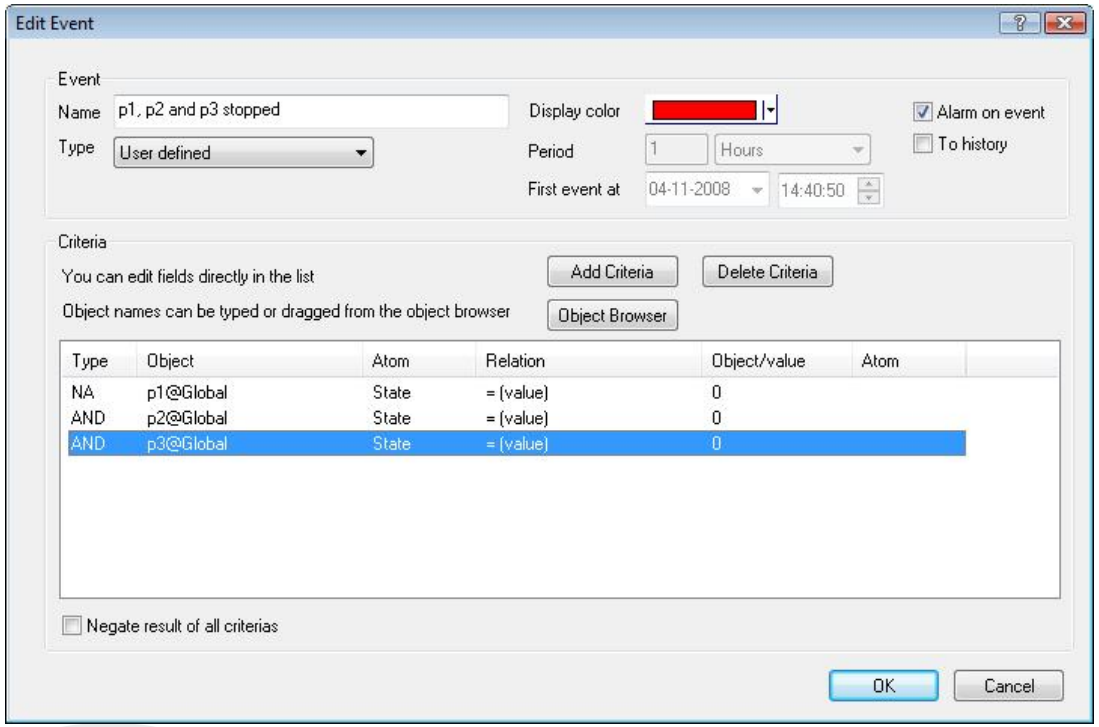

Showing events as alarms

- Events with”Alarm on event” select will appear in Alarm List
- ”Alarm text” is the event name
- Acknowledging an event alarm also ends the alarm
- Alarm no. 90 is assigned to event alarms



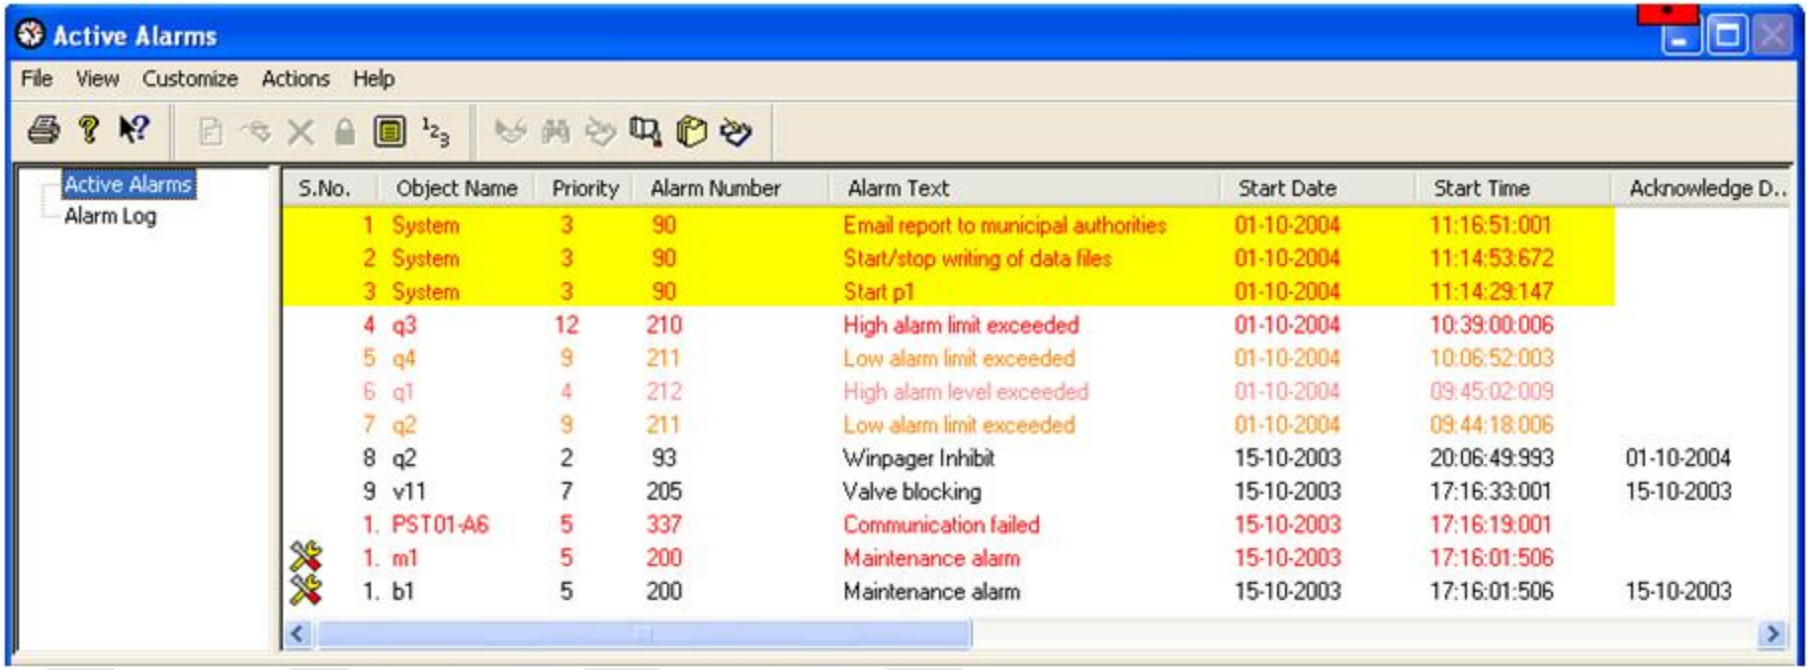

Try it yourself ...



Exercise: Create and show events

Find presentations and exercises on www.7t.dk/igss



Exercise: Create and Show Events

Purpose

In this exercise you will learn how to create different types of events. The event types can be divided into three main categories:

- System events
- Periodical events
- User defined events

The events will be shown in the **Event List** which is shown just below the **Alarm List**. The list is fully user defined, so you decide yourself which events to show.


The events can be defined both from the **Definition** and **Supervise** programs.

Task 1: Create a system event

In this task we will define an event to occur every time the configuration is started or stopped.

1. In the **Definition** program, open the **Edit** menu and select **Event List**.
2. Click the **Add** button.
3. In the **Edit Event** dialog box, do the following:
   - In the **Name** field, type `Start/stop of configuration`. This is the text that will appear in the **Event List**.
   - Under **Type**, select **System Start/stop**.
   - Select the **To history** check box to save the event in the event log.
   - Click **OK**.

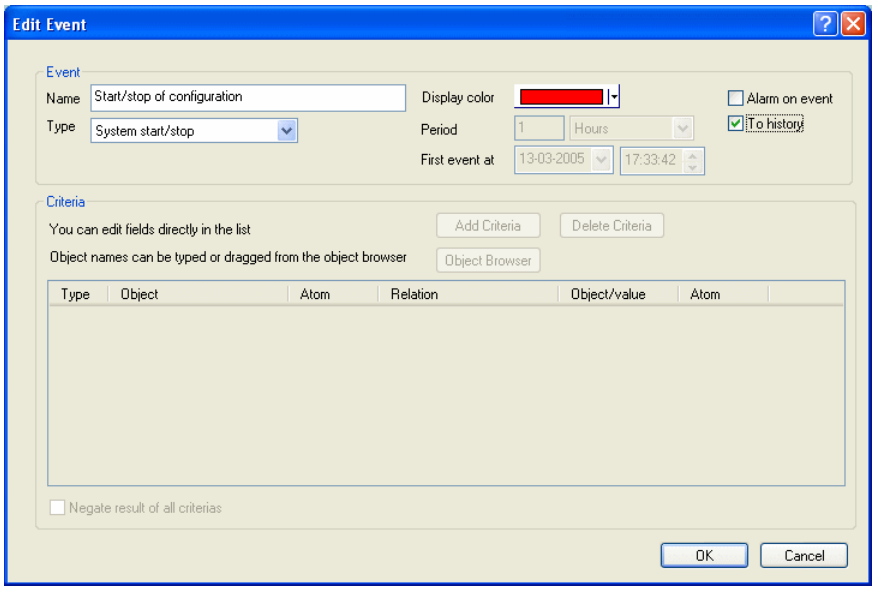



Edit Event
Event
Name
Start/stop of configuration
Type
System start/stop
Display color
Period
1
Hours
First event at
13-03-2005
17:33:42
Alarm on event
To history
Criteria
You can edit fields directly in the list
Object names can be typed or dragged from the object browser
Add Criteria
Delete Criteria
Object Browser
Type
Object
Atom
Relation
Object/value
Atom
Negate result of all criterias
OK
Cancel



Task 2: Create a periodical event

In this task we will create a monthly event which tells the operator to email a report to the municipal authorities.

1. In the **Events** dialog box, click the **Add** button.
2. In the **Edit Event** dialog box, do the following:
   - Under **Name** type `Email report to municipal authorities`.
   - Under **Type** select **Periodical**.
   - Select the **Alarm on event** and **To history** check boxes. The first option will make the event appear in the **Alarm list**.
   - Under **Period** select 1 month.
   - Under **First event at** select the date of yesterday.

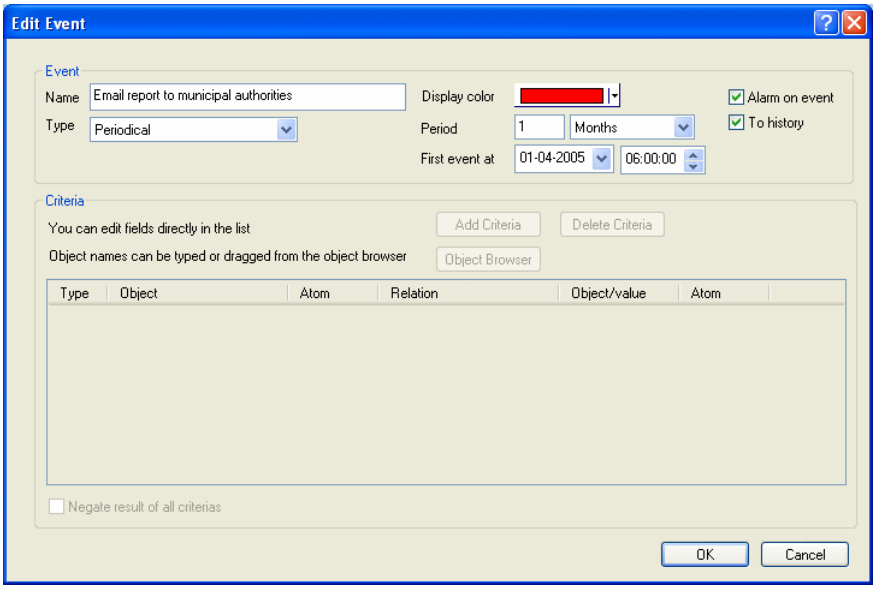


Task 3: Create a user defined event

One of the two pumps must be running all the time to supply the tank with water. Therefore, we want an event (and an alarm) if both pumps are stopped at the same time.


1. In the **Events** dialog box, click the **Add** button.
2. In the **Edit Event** dialog box, do the following:
   - Under **Name** type `p1 and p2 stopped`.
   - Under **Type** select **User defined**.



- Select the **Alarm on event** and **To history** check boxes.
- In the **Criteria** section, click the **Add Criteria** button.
- Click the **Object Browser** button and drag the object p1 to the **Object** column. Under **Atom** select **State**. Under **Relation** select **=(value)**. Under **Object/value** type 0 (corresponding to stopped).
- Repeat the previous bullet for the object p2 and under **Type** select **AND** (both criteria must be fulfilled before the event occurs).

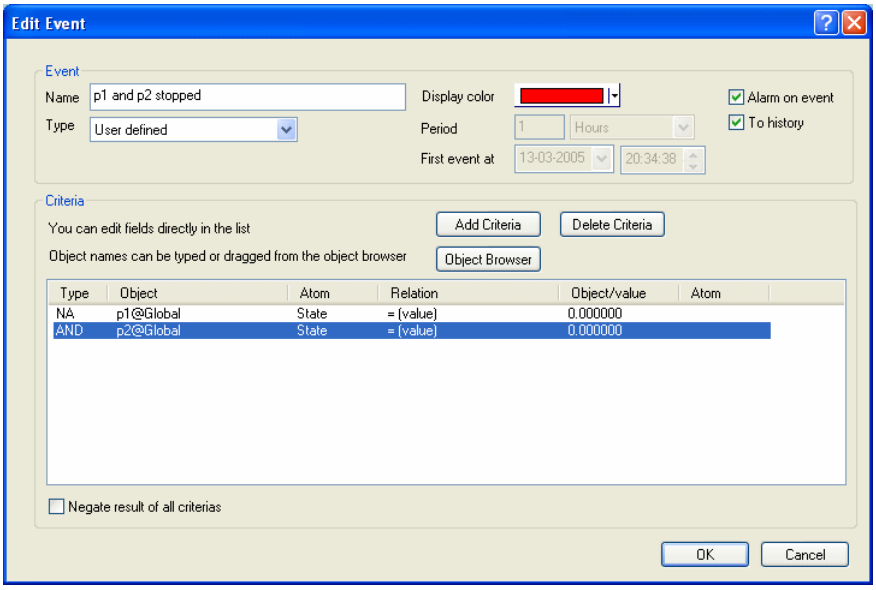

3. Click **OK** to return to the list of events defined.

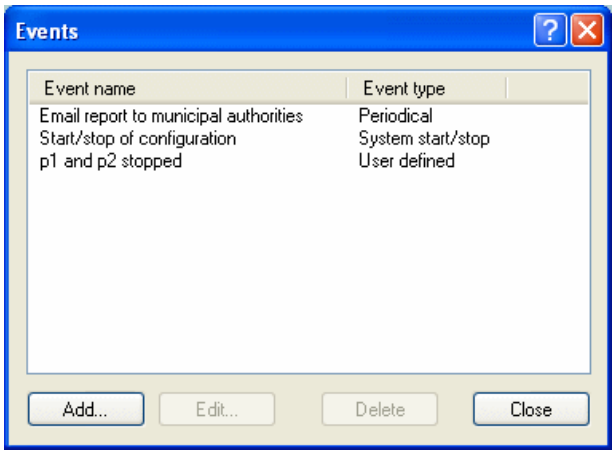

4. Click **Close** to close the dialog box.

Task 4: Test the events


We will now start the configuration and stop both pumps to trigger the user defined event.

1. In the **File** menu, select **Online Update**.



2. When the installation is completed, double-click the alarm count icon. Notice that the “Start/stop of configuration” event is now shown in the **Event List**.

3. Stop both pumps. The “p1 and p2 stopped” event now occurs in the **Event List** and alarm number 90 (alarm generated by event) appears in the **Alarm List**.

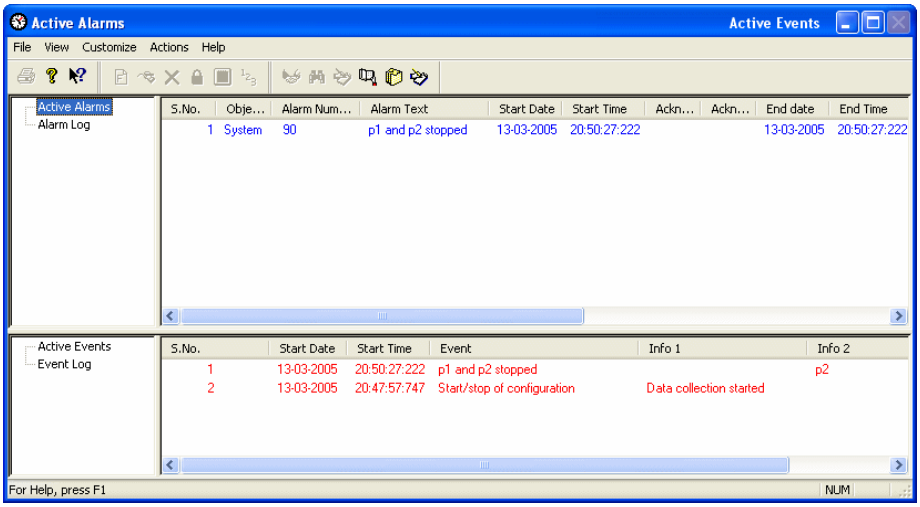

YOU HAVE SUCCESSFULLY COMPLETED THE EXERCISE !!