Lesson 14:

The Group Object



IGSS

Interactive Graphical
SCADA System

YouTube
Broadcast Yourself™

Contents of this lesson



Topics:

- What is a Group object ?
- Pump stations as Group objects
- Replace object names and PLC addresses
- Reusable diagram

Example: Pump stations as Group objects



Your task


- You need 3 identical pump stations
- Object names and PLC addresses must be unique for each pump station

Your solution

- Design the first pump station diagram
- Include all objects in a Group object
- Copy/Paste the Group object, substituting object names and PLC addresses on-the-fly


Use case – Pump stations

- 3 pump stations created from one Group object
- Object name replaced
- Node (PLC) number replaced

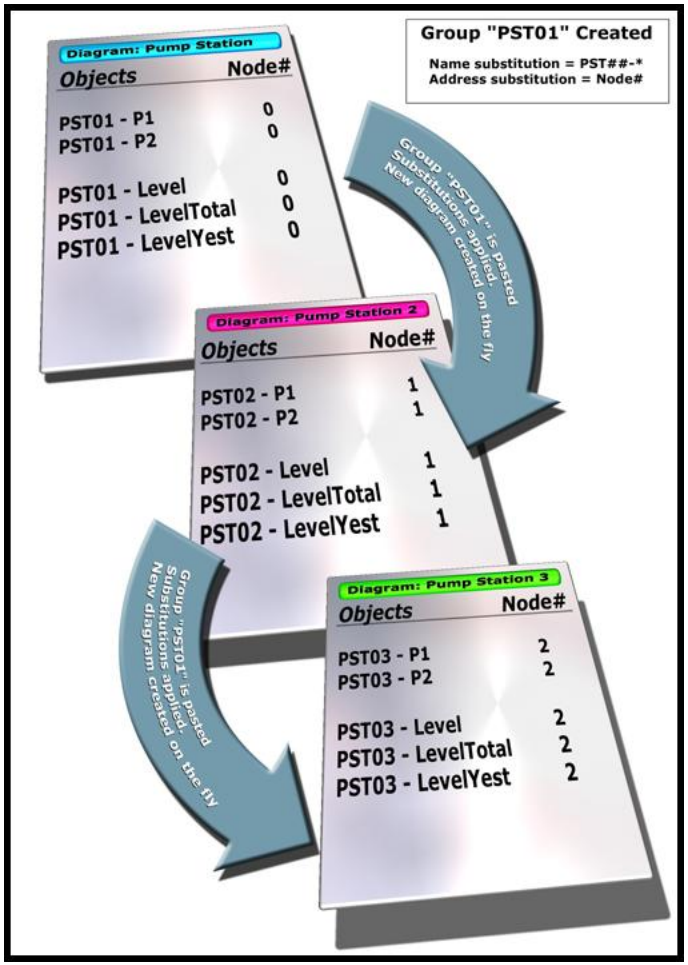


Select all objects in Pump Station 1

STEP 1:
Select all objects on the diagram

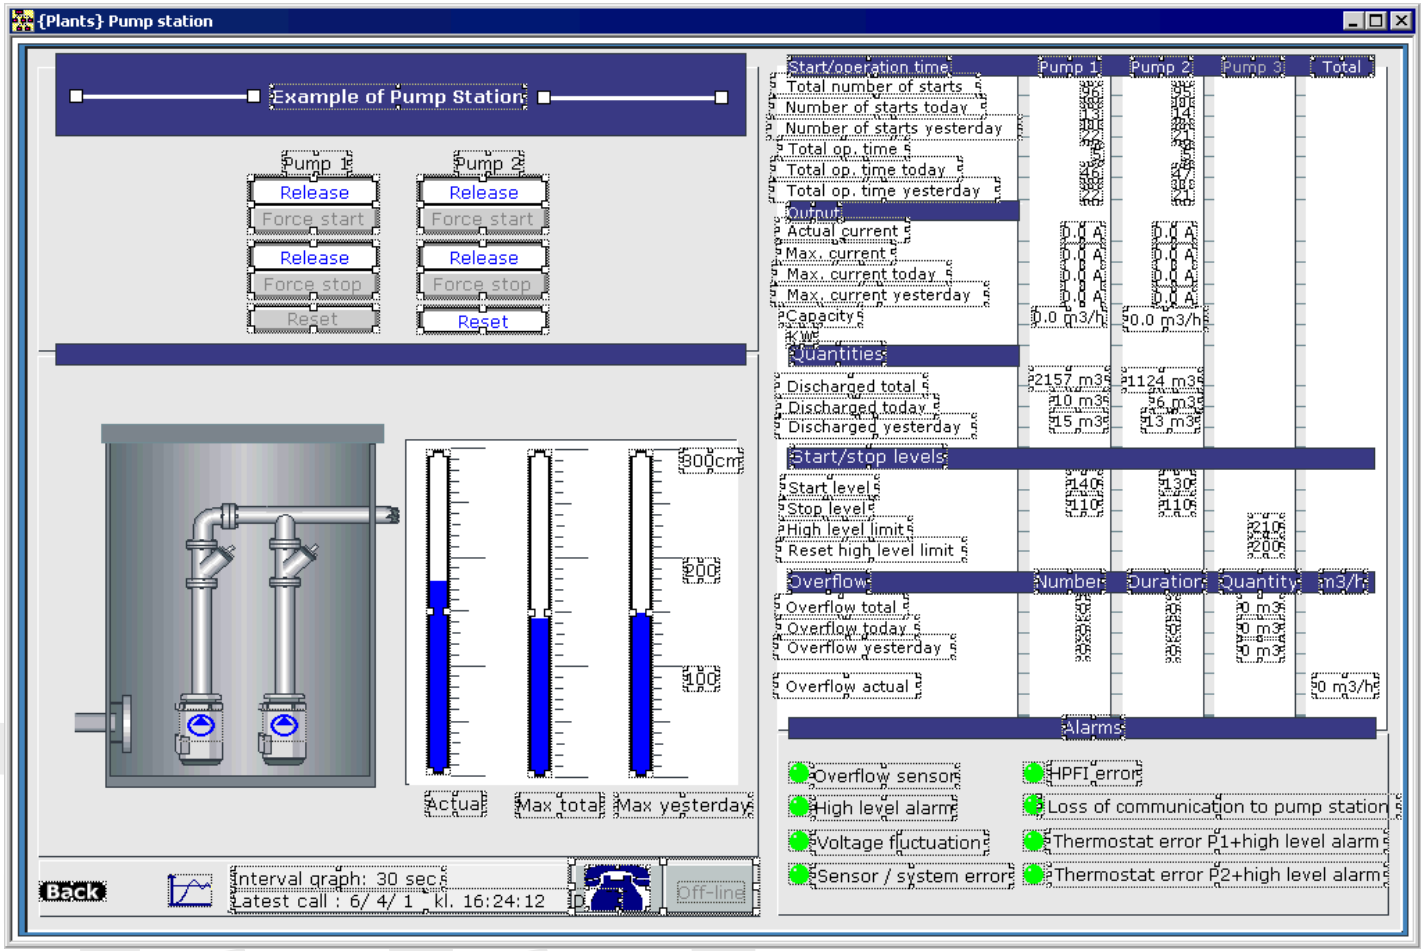


Add the objects to the Group

STEP 2:
In the **Edit** menu, select **Group Manager**.

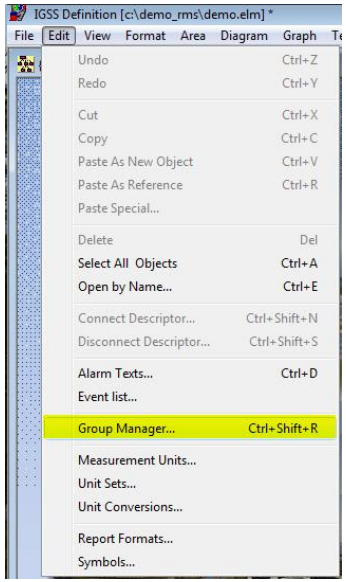


STEP 3:
a. Click **Add Selected Objects.**
b. Click **Copy.**

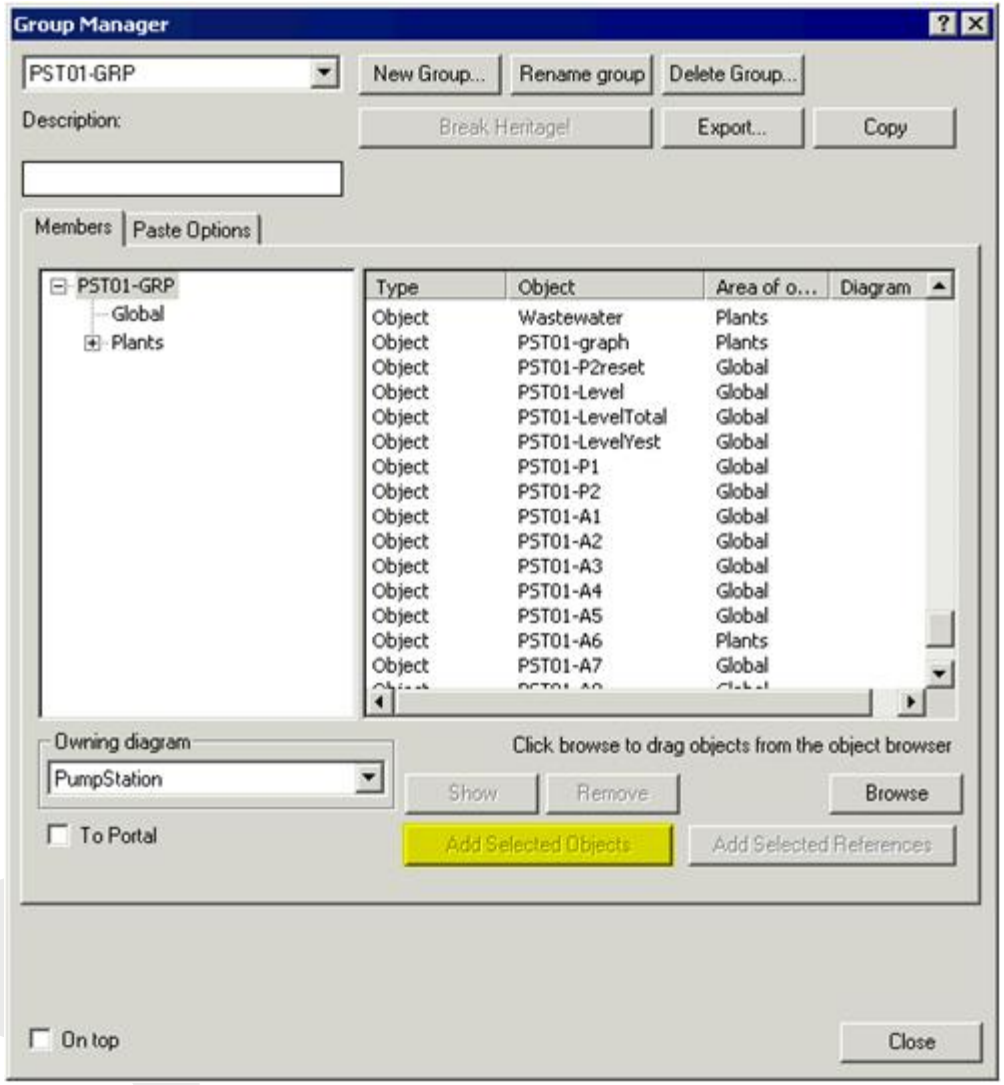


Define rules for the Group

STEP 4:
Define object name and PLC addressing rules

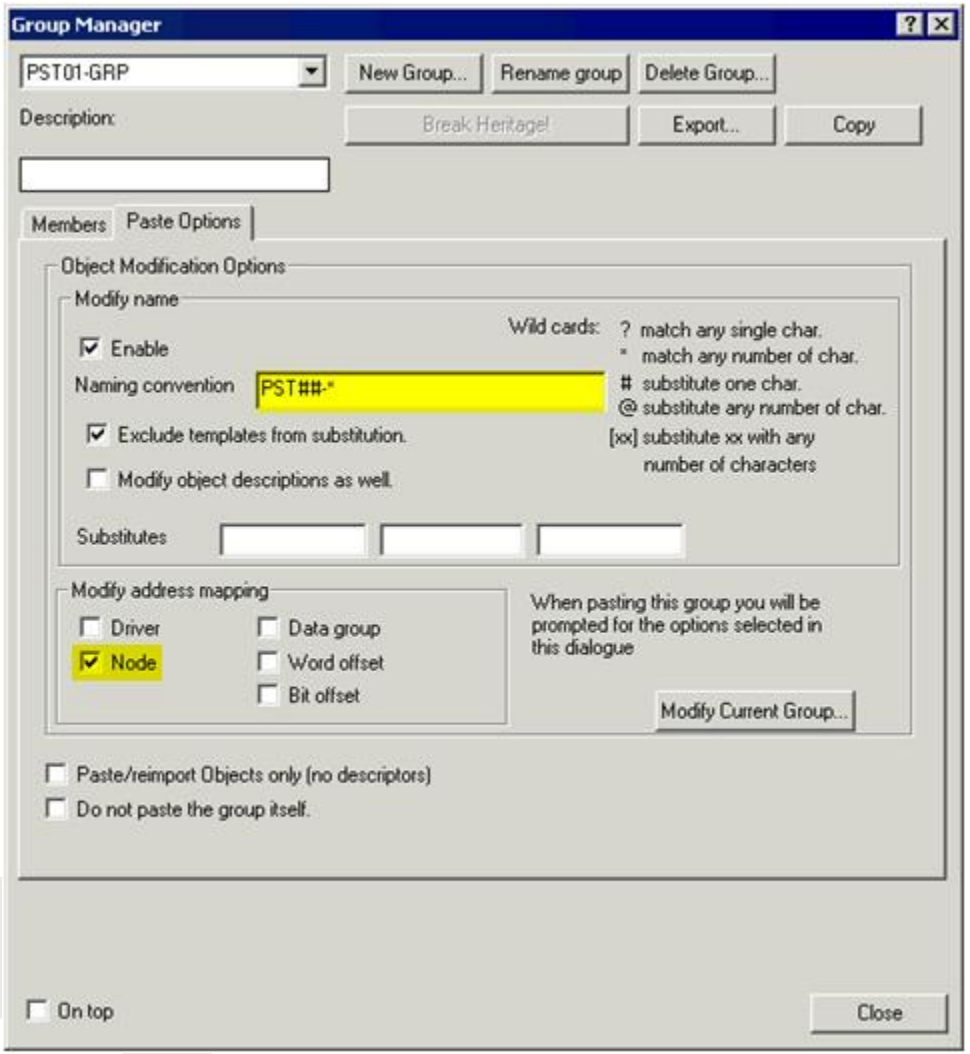

Make a reusable diagram

STEP 5:
Choose ”Reusable diagram” and ”PST01-GRP” as control group

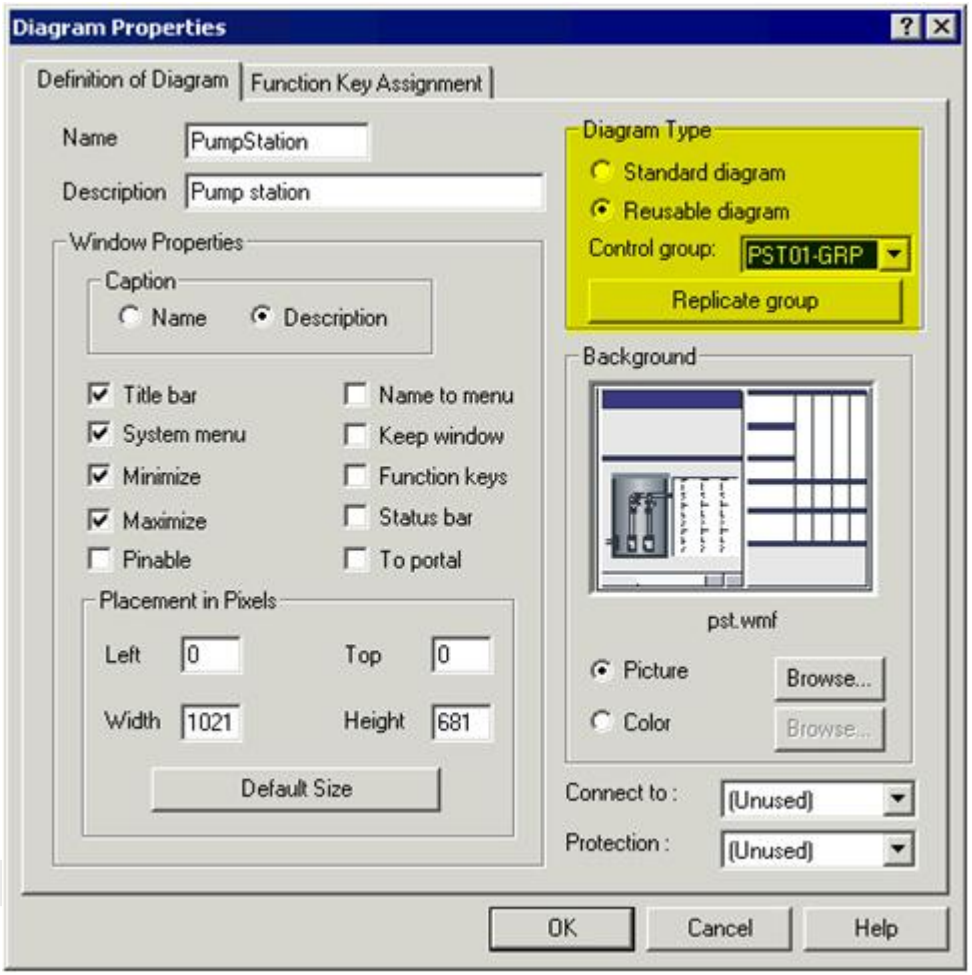



Paste and create Pump Station 2

STEP 6: In the **Edit** menu, choose **Paste Special**.

STEP 7: Type the substitutes for object names and PLC addresses.

STEP 8: Do the same for Pump Station 3.

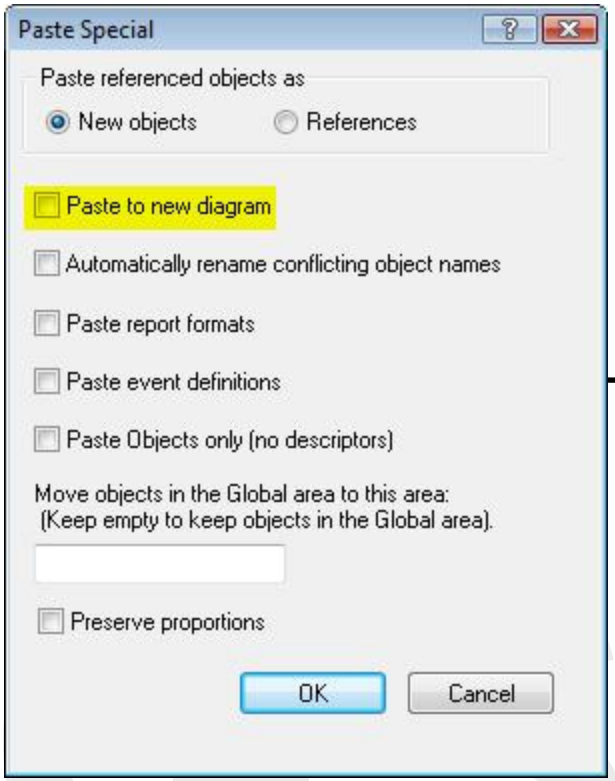


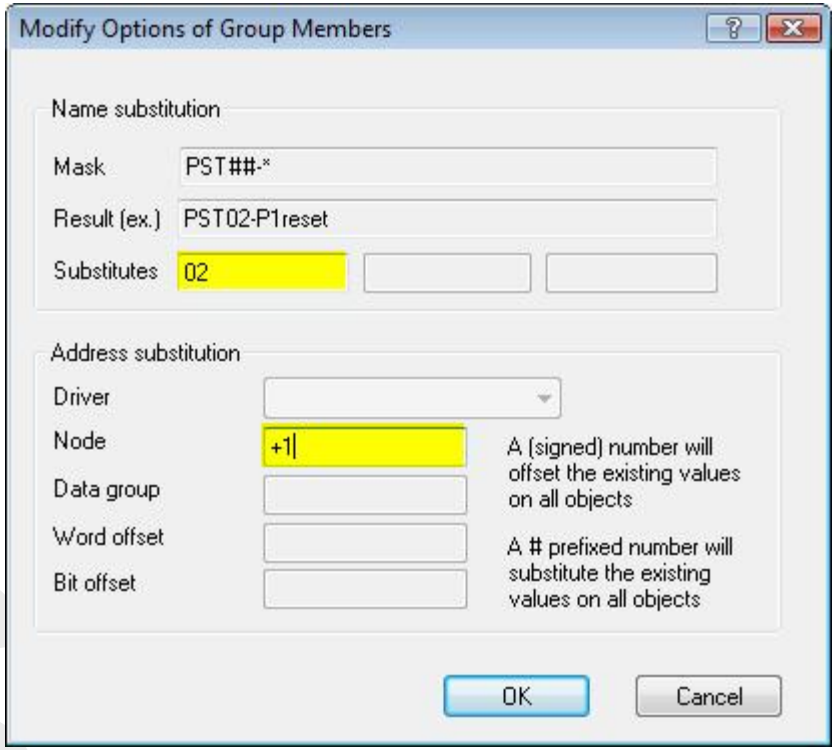

3 pump stations on one diagram

STEP 9:
Press F5 to refresh the diagram.
Choose the pump station
you want to view.

Same dialog box in
Definition and Supervise

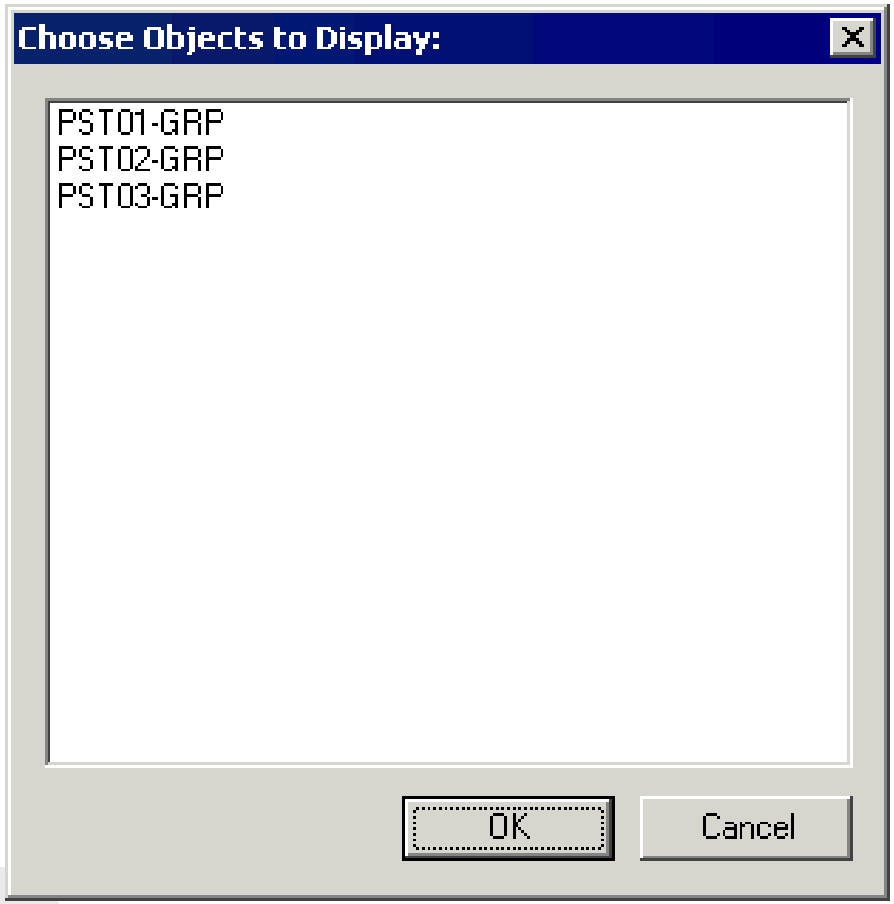



Alternatively, create a Windows
button for each pump station.

Try it yourself ...



Exercise: Work with the Group Object

This exercise requires loading the IGSS Demo configuration.
If you have IGSS FREE50 installed, you must switch license file as follows:

1. Close all IGSS programs.
2. Go the [IGSS InstallPath]\Gss and rename the active license file Options.txt to Options_original.txt.
3. In the same folder, rename the file Options.DEMO to Options.txt.
   (When IGSS is online, it always uses the license file called Options.txt)
4. The Demo license is now active in your system.
   (If you need to go back to FREE50, reverse the naming procedure described above.)
5. In System Configuration, open the **File** menu and choose **Open Demo Configuration**.

www.7t.dk/igss