



SCPS-1

ASSEMBLY INSTRUCTIONS

THANK YOU

for purchasing the Kronos SCPS-1 Super Capacitor Power Supply.

The Kronos SCPS-1 has been designed to provide an exceptionally clean and stable source of DC power for your Kronos turntable. Built without compromise, it combines an advanced AC/DC converter with a sophisticated super capacitor energy storage system to deliver the lowest possible noise and the highest level of performance. Each SCPS-1 is individually crafted, inspected, and tested to ensure years of reliable musical enjoyment.

It is important that you take the time to read this manual before installing and operating your SCPS-1. Installation is straightforward, provided you carefully follow each step. Proper grounding of the system is particularly important to ensure safe operation and to protect the sensitive control electronics from static discharge.

Once correctly installed, the SCPS-1 requires very little attention during normal operation. For optimum performance, we recommend leaving the AC/DC Power Supply powered on whenever possible, except during extended periods when the turntable will not be used.

To achieve the best performance, position the AC/DC Power Supply away from the turntable and other sensitive audio components. This helps minimize transformer-induced noise and allows the SCPS-1 to deliver the quiet, stable power for which it was designed.

The SCPS-1 has been engineered to complement the exceptional performance of your Kronos turntable. By supplying highly regulated, ultra-low-noise DC power, it allows your analog playback system to perform at its full potential, revealing the finest musical detail while maintaining the natural character of vinyl reproduction.

Thank you for choosing KRONOS Audio.

Enjoy.


A handwritten signature in black ink, reading "Louis Desjardins". The signature is fluid and cursive, with a long, sweeping underline that extends to the right.

Louis Desjardins
Designer and CEO of Kronos Audio Products inc.

Important Information

Before installing your SCPS-1, please read the following precautions:


- Disconnect the AC power cord from the existing power supply.
 - Verify that all cable connections are secure before powering on the system.
 - If upgrading an existing Kronos Pro turntable:
 - Disconnect the 3-pin and 4-pin control cable from the Pro motor.
 - Disconnect all ground cable(s) between the turntable and the existing power supply.
- Connect all ground cable(s) to the AC/DC Power Supply only.
- The AC/DC Power Supply must be connected to a properly grounded earth outlet. Do not connect it through a power conditioner, isolation transformer, or power bar that may not provide a true ground.

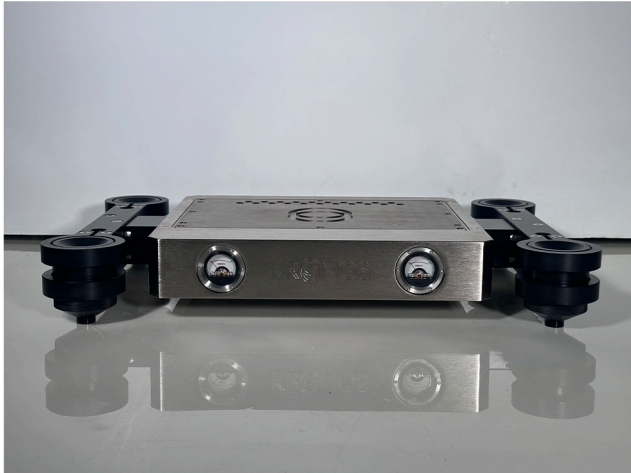

1

Install the SCPS-1 on your equipment rack.

Ensure the SCPS-1 is positioned on a stable and level surface before proceeding

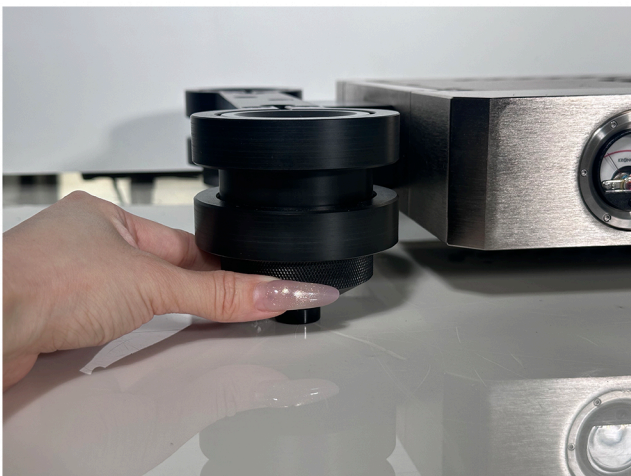

2

Level the SCPS-1 using the four adjustable feet.


Rotate each foot as required until the SCPS-1 is approximately level.



3

Use the precision level supplied with your KRONOS Pro turntable to verify the SCPS-1 is perfectly level.

Adjust the feet as required until the bubble level is centered.

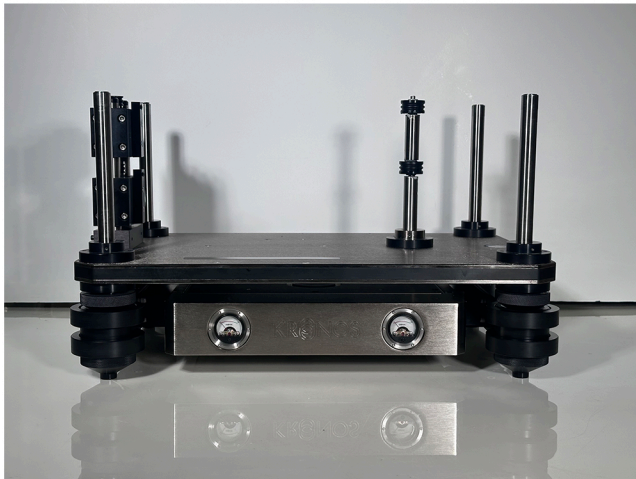

4

**Install the KRONOS Pro base onto the SCPS-1.
Carefully place the KRONOS Pro base onto the SCPS-1.**

Continue the installation by following the **KRONOS Pro Assembly Instructions** until the KRONOS Pro is fully assembled.



5

Connect the supplied DC power cable to the left rear panel of the SCPS-1.


Ensure the connector is fully seated and the locking collar is securely tightened.



6

Connect the control cables to the right rear panel of the SCPS-1.

Ensure the connector is fully seated and the locking collar is securely tightened.

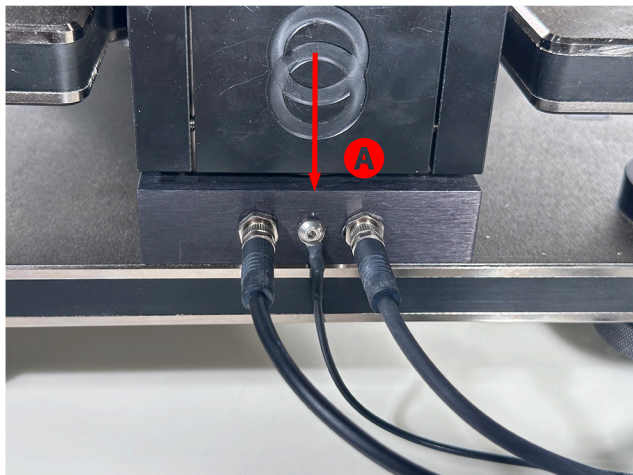


7

Connect the ground cable to the Kronos Pro motor.

Connect the terminal-to-terminal control cable (A) to the Kronos Pro motor.

The terminal-to-terminal cable (A) is supplied with your turntable..

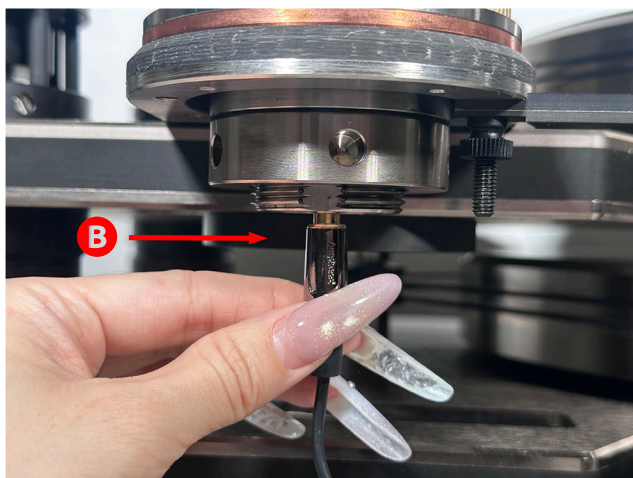

8

Connect the ground cable to the Tonearm.

Connect the terminal-to-3.5 mm control cable (B) to the tonearm.


The terminal-to-3.5 mm cable (B) is supplied with your Kronos RS Tonearm.



9

Connect the other end of the DC power cable to the Power Supply.

Ensure the connector is fully seated and the locking collar is securely tightened.

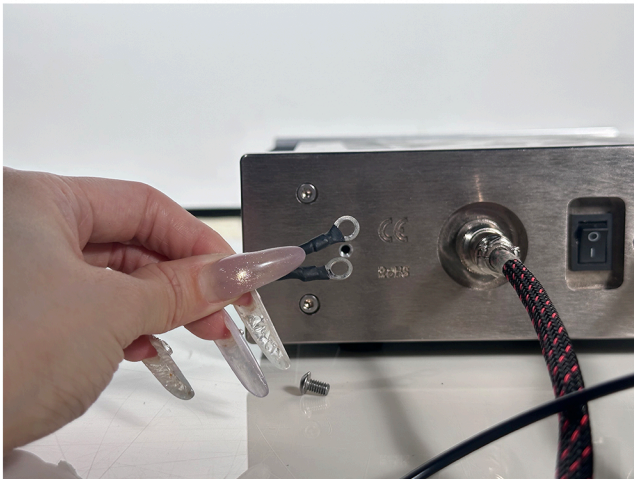

10

Connect the other ends of the ground cables to the power supply

Connect the ends of both **A** and **B** ground cables to the corresponding GND terminals on the Power Supply.



11

Connect the AC power cord.

Do not connect the power supply through a power conditioner, isolation transformer, or ungrounded power bar.



12

Connect the AC power cable directly to a grounded wall outlet.

The AC power cable should be connected directly to a properly grounded wall outlet.

Avoid using power conditioners, power regenerators, isolation transformers, or active grounding systems, as they may affect the performance of the turntable.



13

Power on the Power Supply.

The SCPS-1 will begin charging its internal super capacitor banks.

This will take a few minutes.

Once charging is complete, the system is ready for operation.



14

Control the SCPS-1 illumination.

The switch located on the **underside** of the SCPS-1 turns the front panel illumination ON or OFF.

KRONOS

TIME FOR MUSIC®

4035, rue Saint-Ambroise, suite 414,
Montreal (Quebec) Canada H4C 2E1
www.kronosaudio.com • info@kronosaudio.com
© 2014 Kronos audio