

A

A

B


B

C

C


D

D

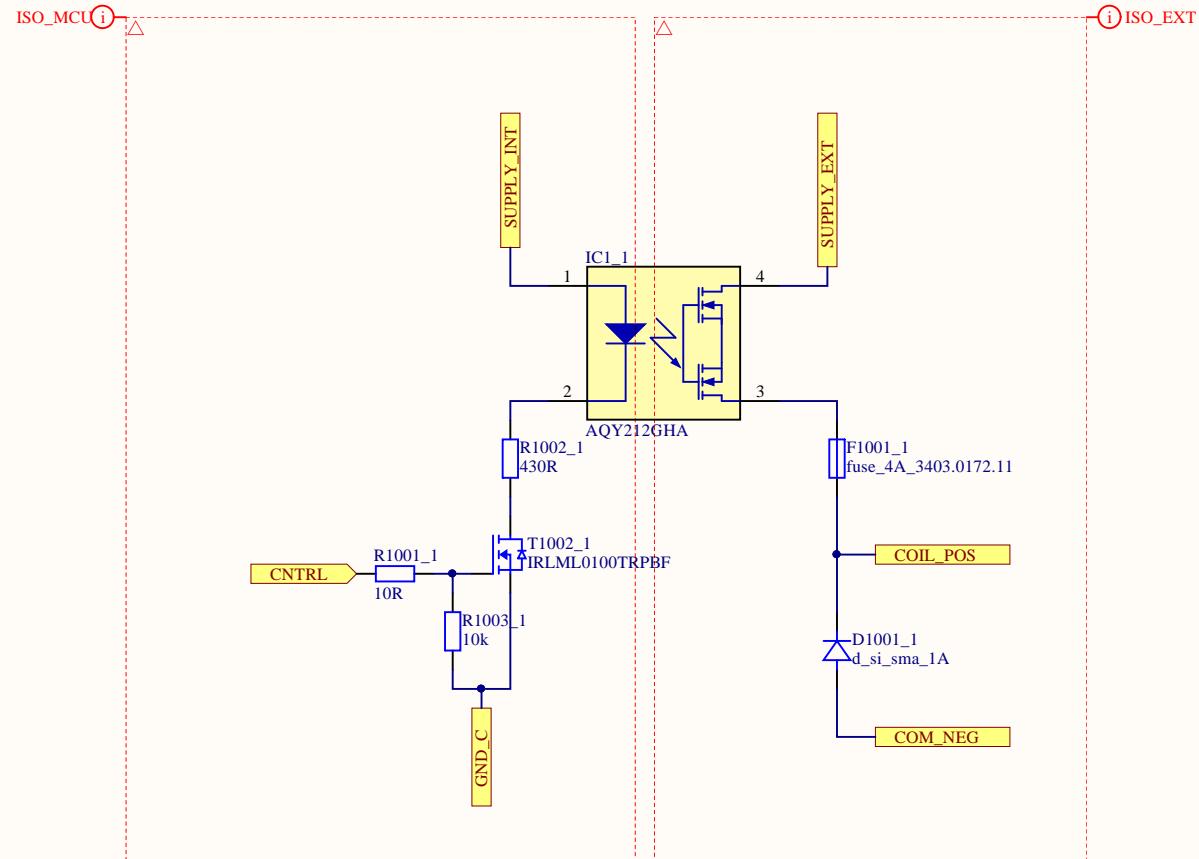

Title

Size	Number	Revision
A4		
Date:	15/07/2019	Sheet of
File:	C:\Sandbox\..\\contactor_single.SchDoc	Drawn By:

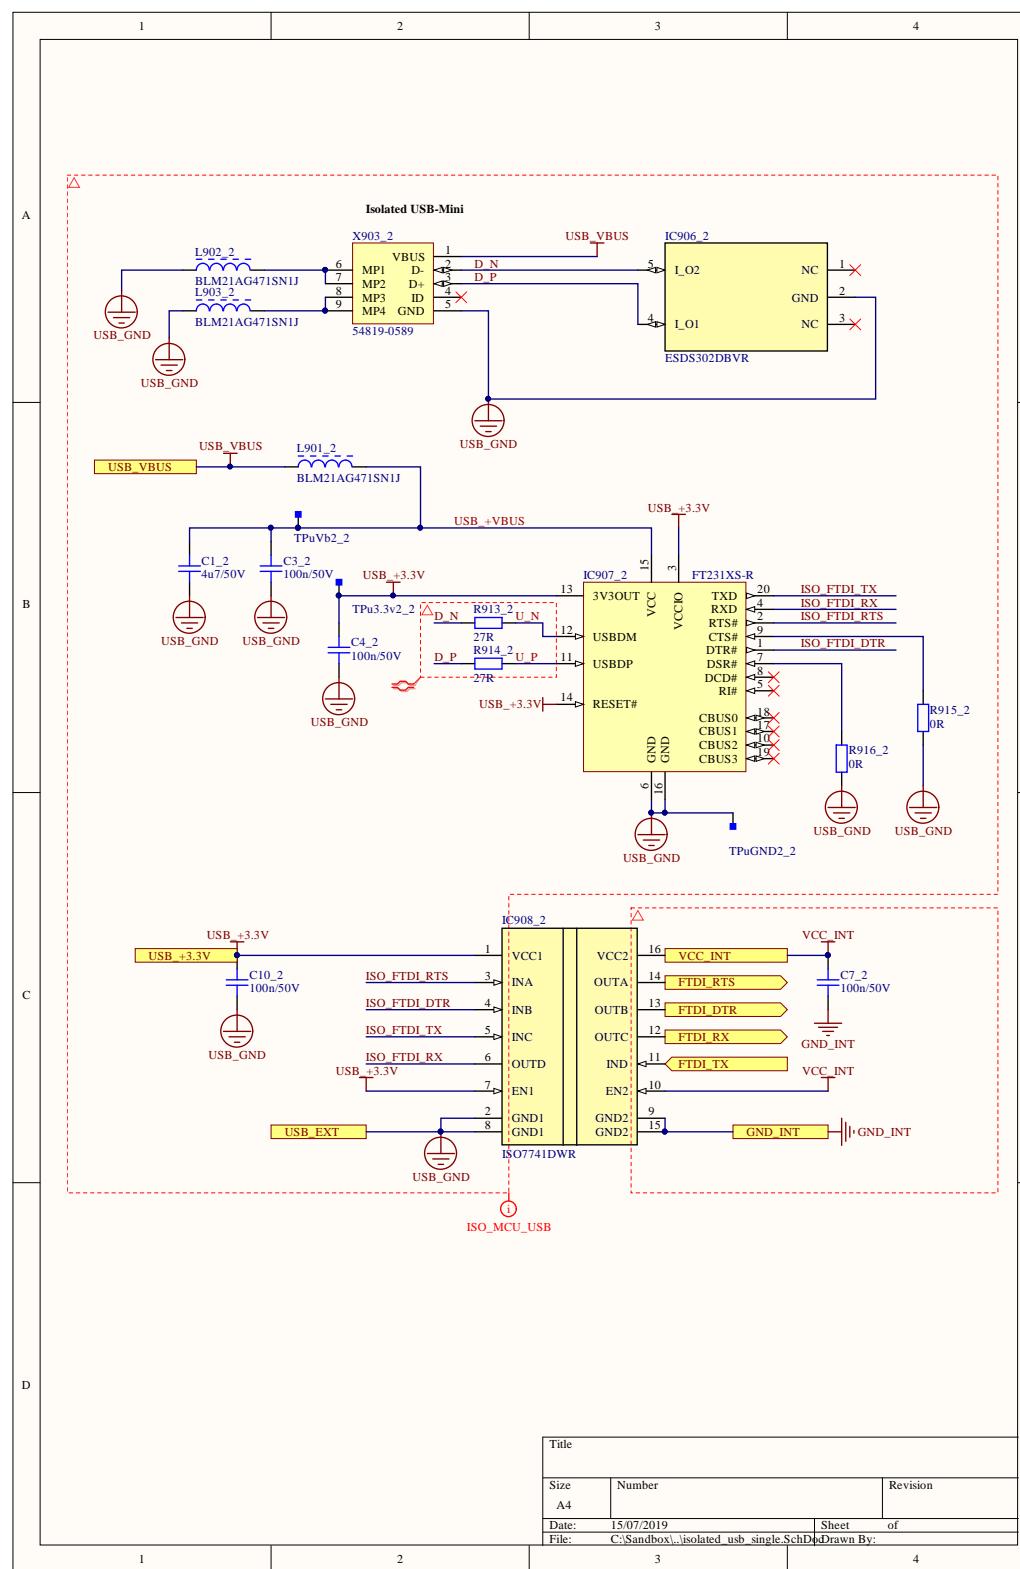

A

A

B


B

C

C

D

D

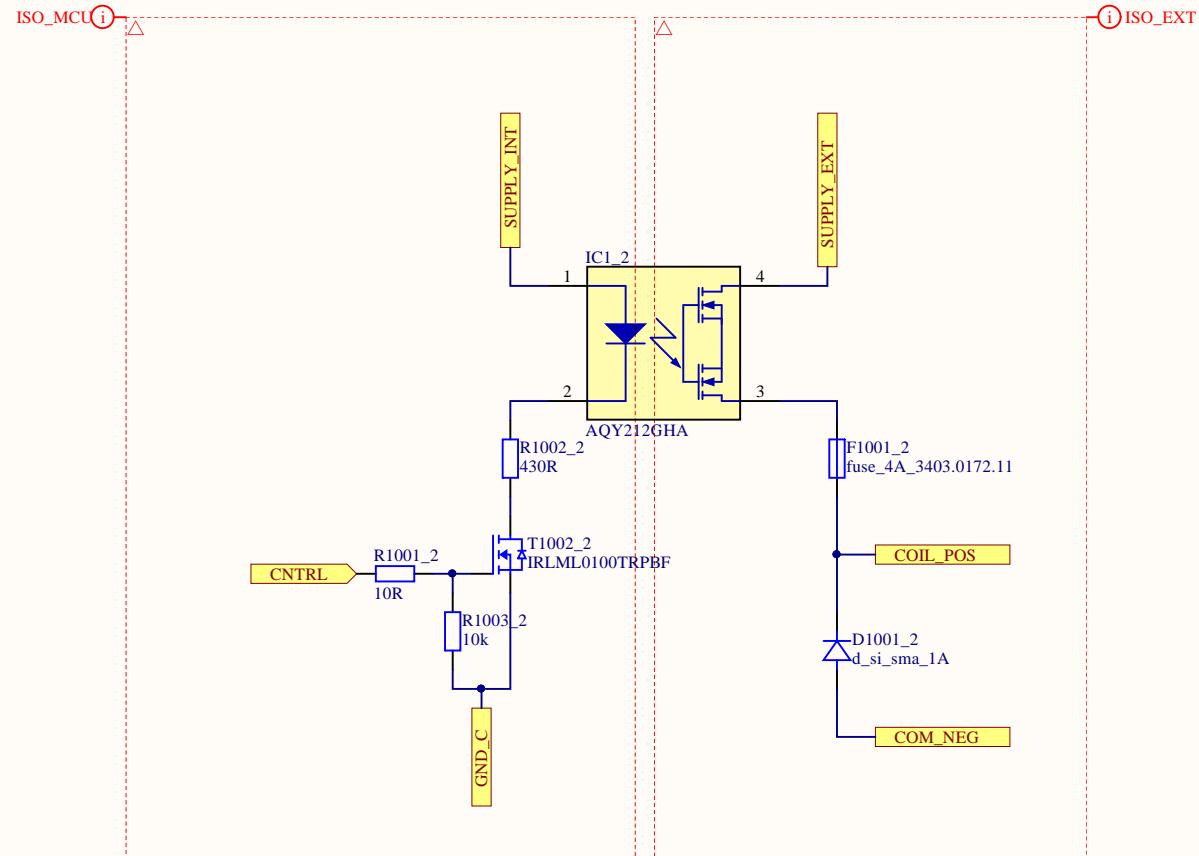

Title		
Size	Number	Revision
A4		
Date: 15/07/2019	Sheet of	
File: C:\Sandbox\..\\contactor_single.SchDoc		Drawn By:

A

A

B


B

C

C

D

D

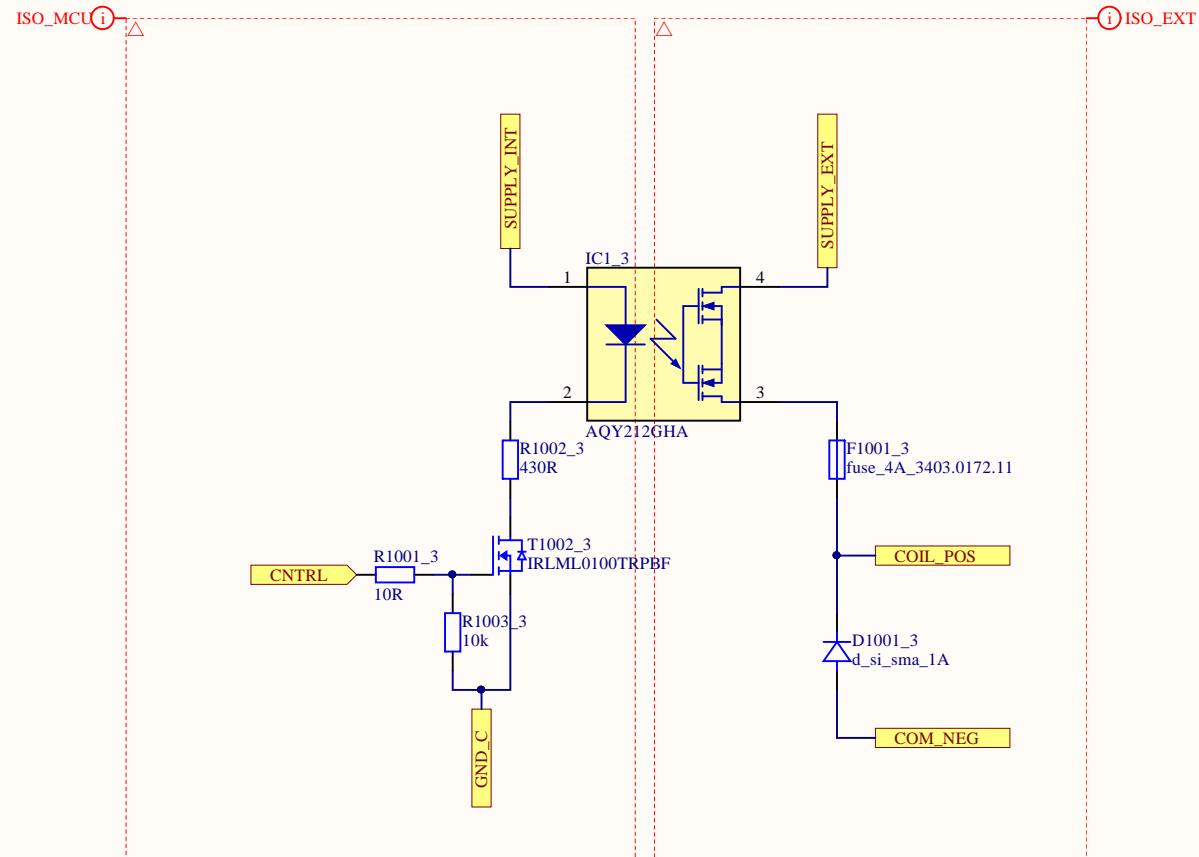

Title

Size	Number	Revision
A4		
Date:	15/07/2019	Sheet of
File:	C:\Sandbox\..\\contactor_single.SchDoc	Drawn By:

A

A

B


B

C

C

D

D

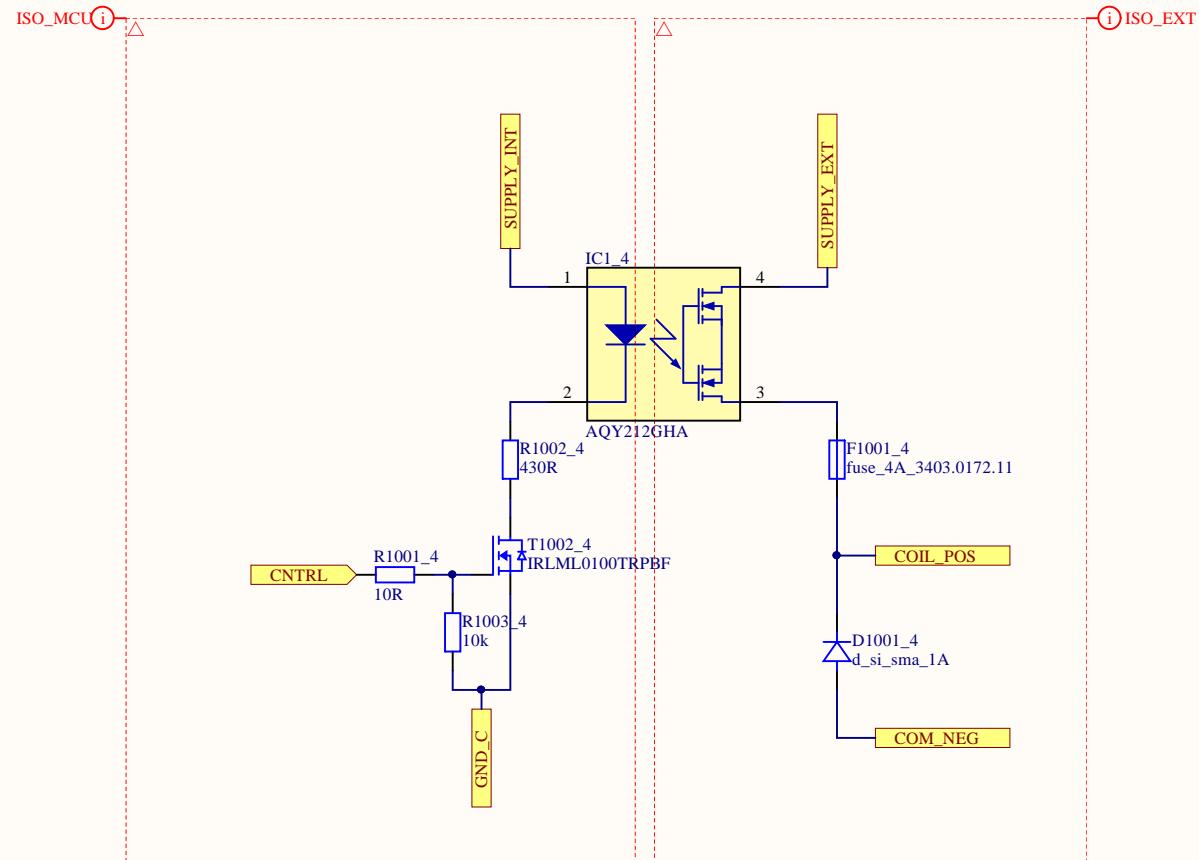

Title

Size	Number	Revision
A4		
Date:	15/07/2019	Sheet of
File:	C:\Sandbox\..\\contactor_single.SchDoc	Drawn By:

A

A

B


B

C

C

D

D

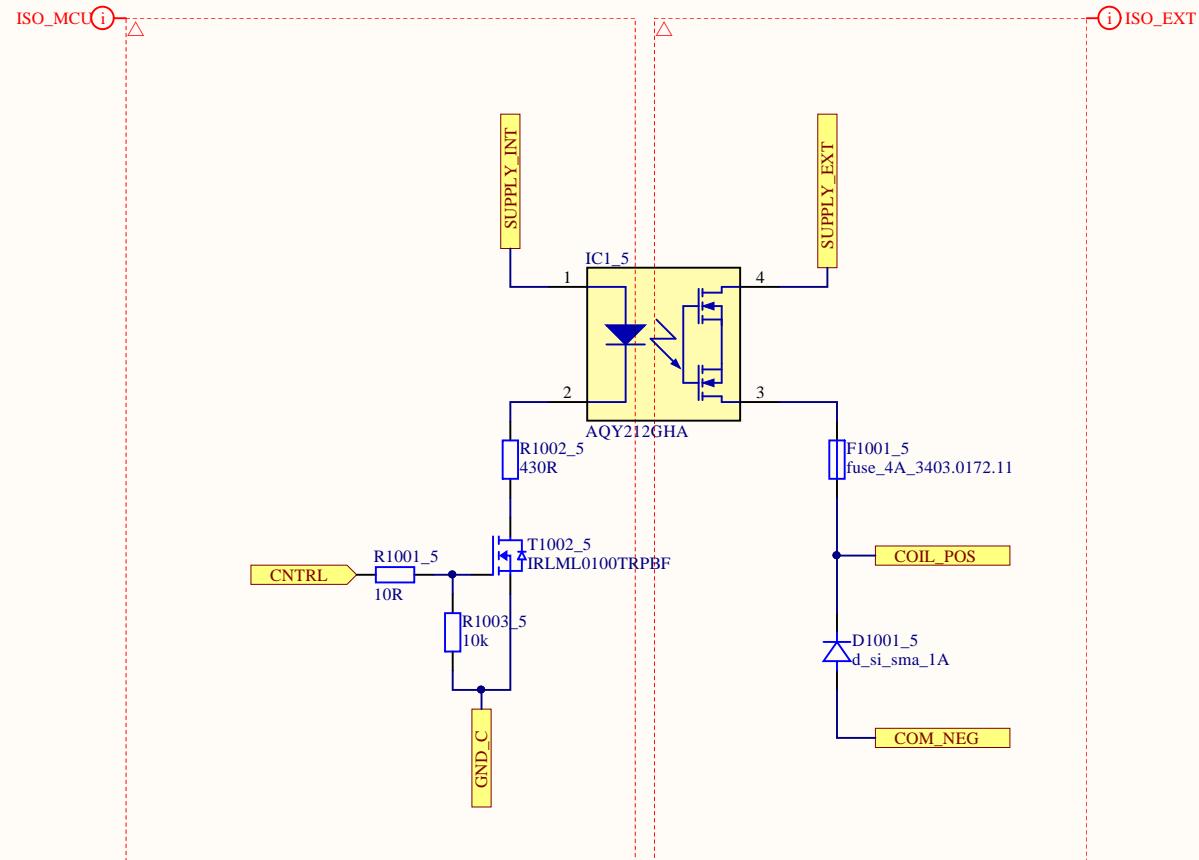

Title		
Size	Number	Revision
A4		
Date: 15/07/2019	Sheet of	
File: C:\Sandbox\..\\contactor_single.SchDoc		Drawn By:

A

A

B


B

C

C


D


D

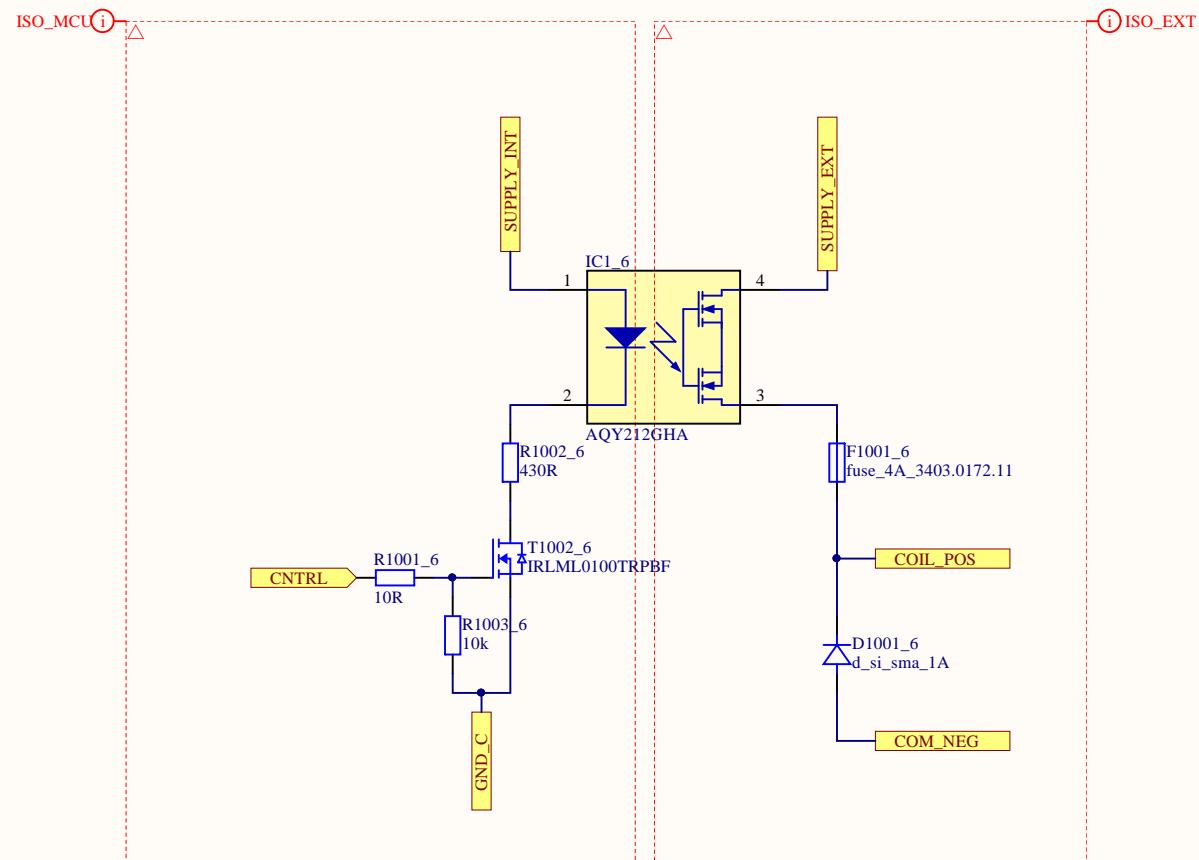



Title


Size	Number	Revision
A4		
Date:	15/07/2019	Sheet of
File:	C:\Sandbox\..\\contactor_single.SchDoc	Drawn By:

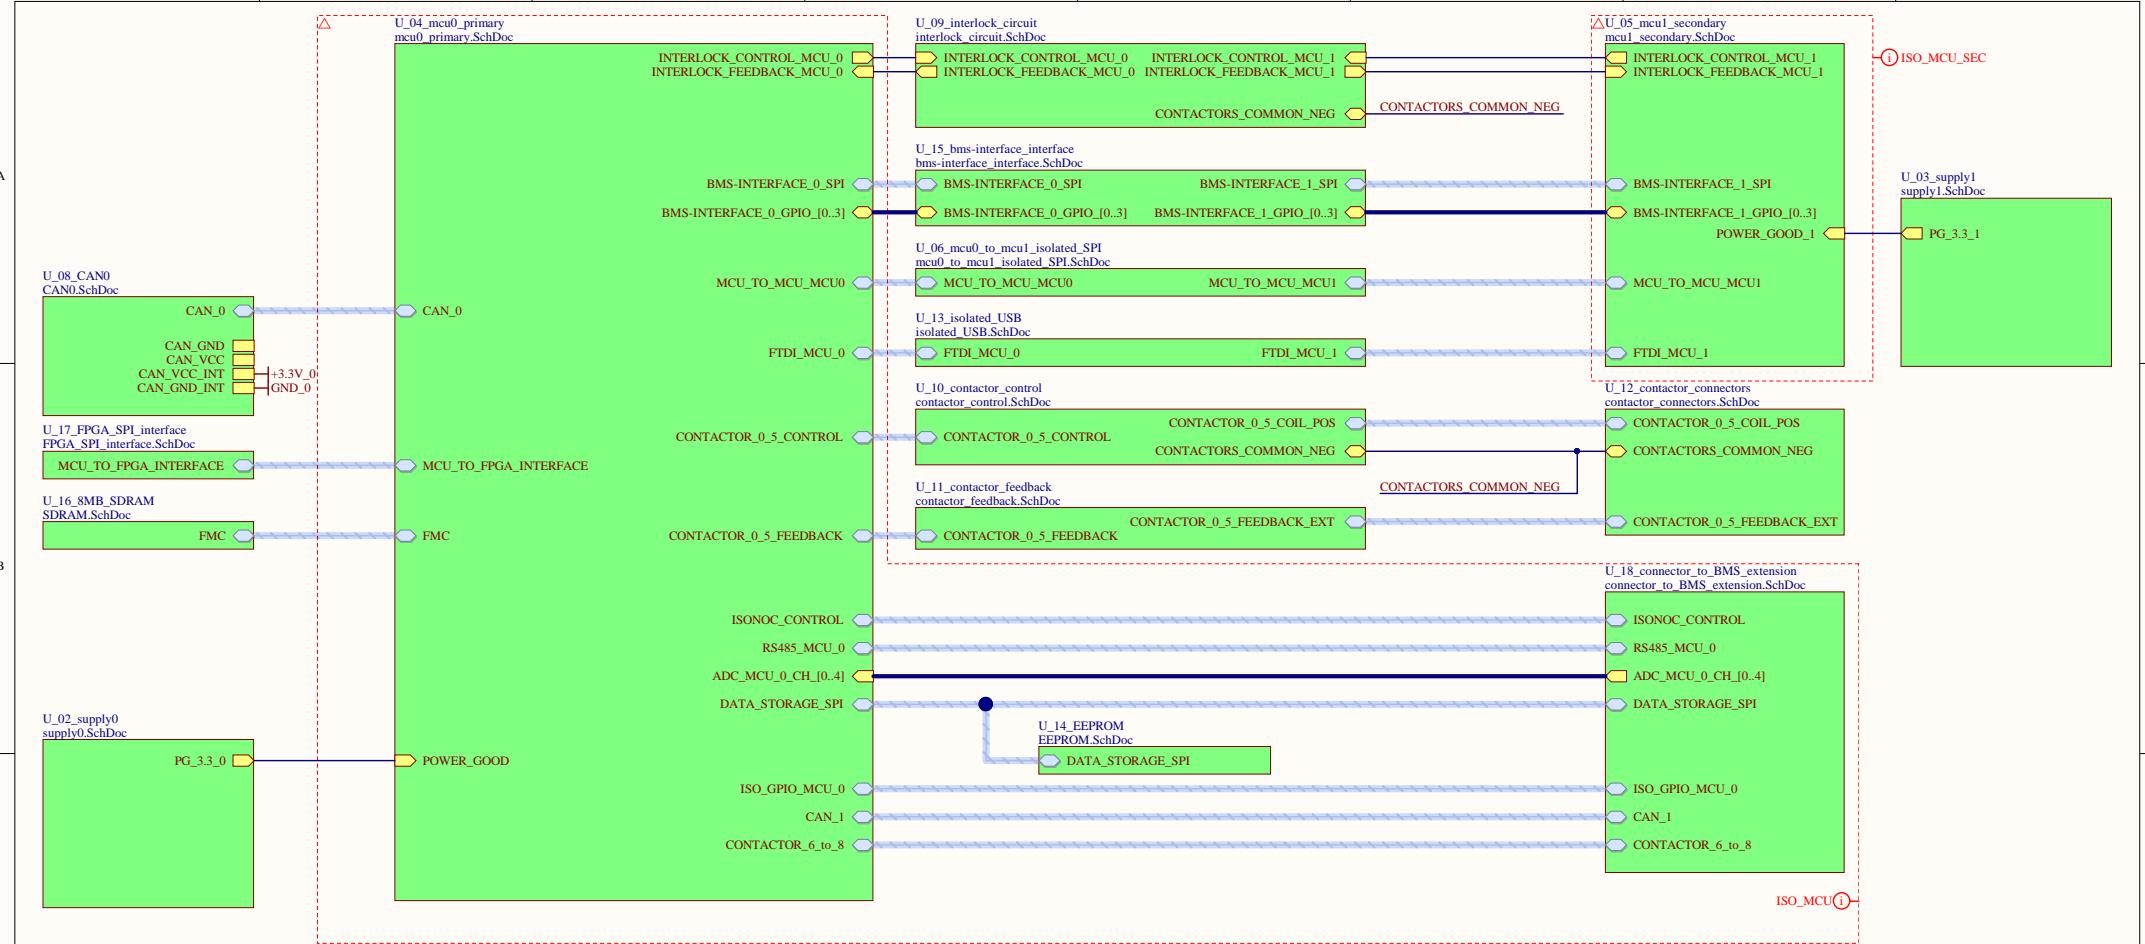

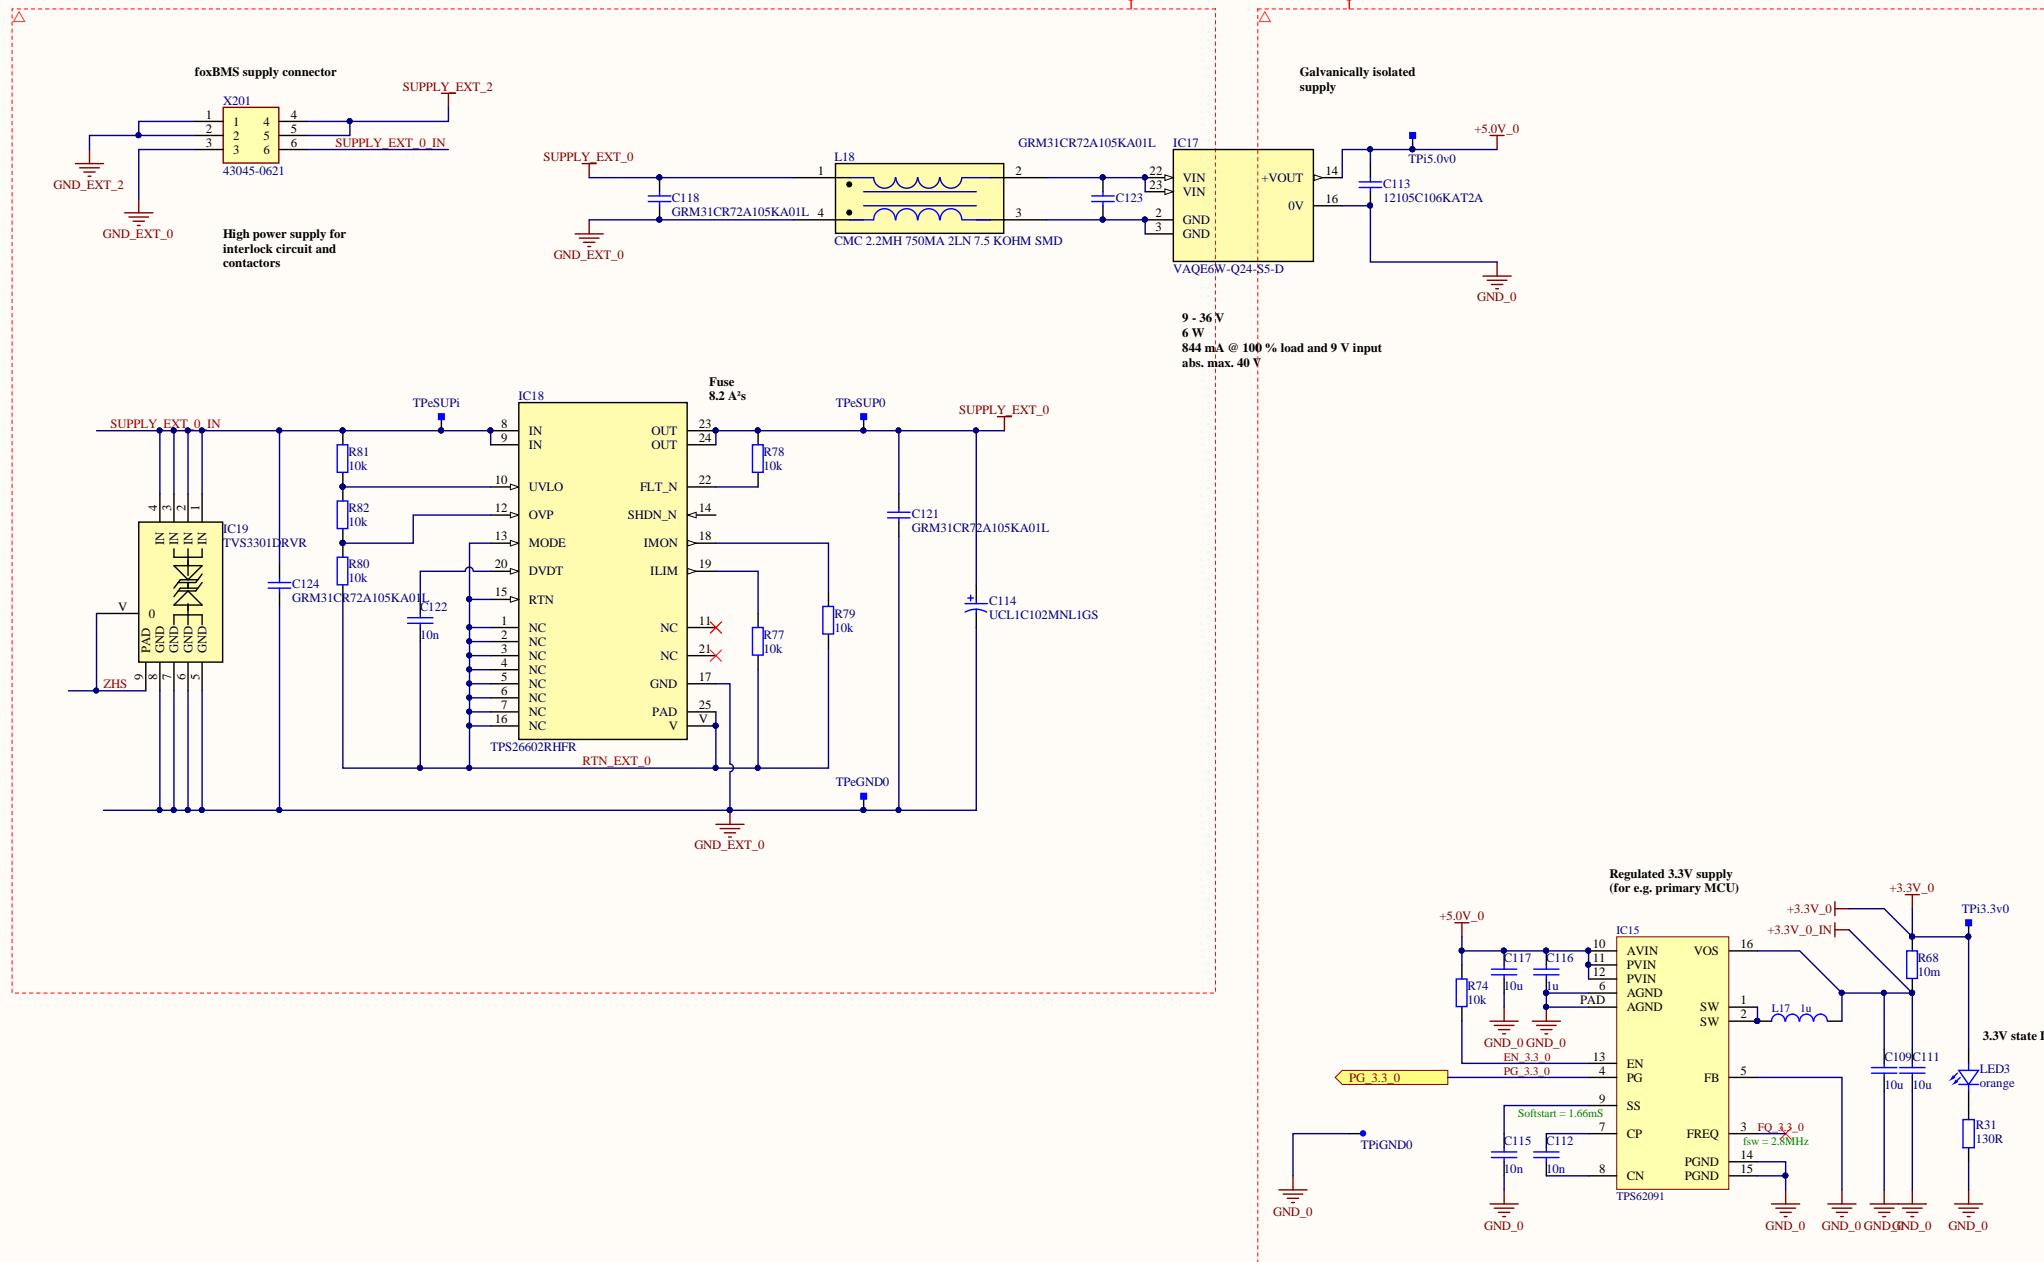

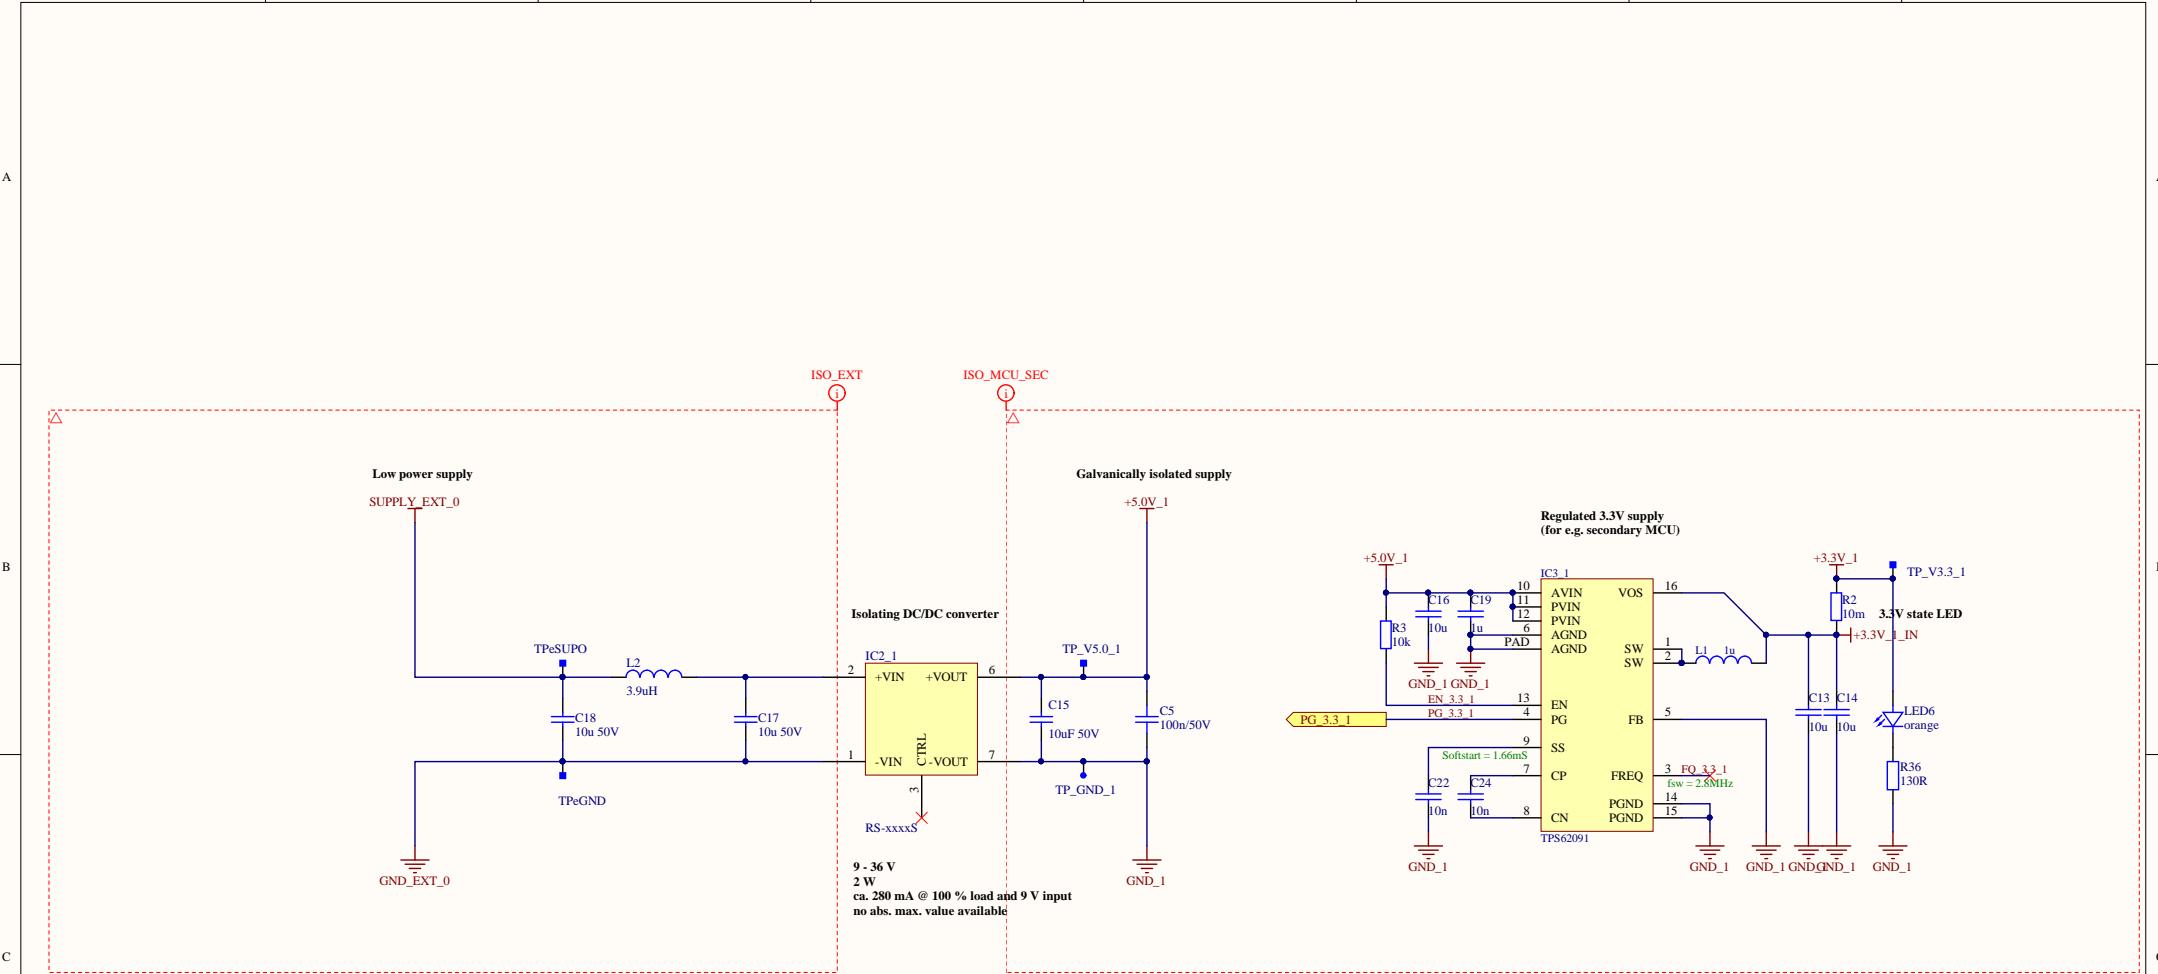

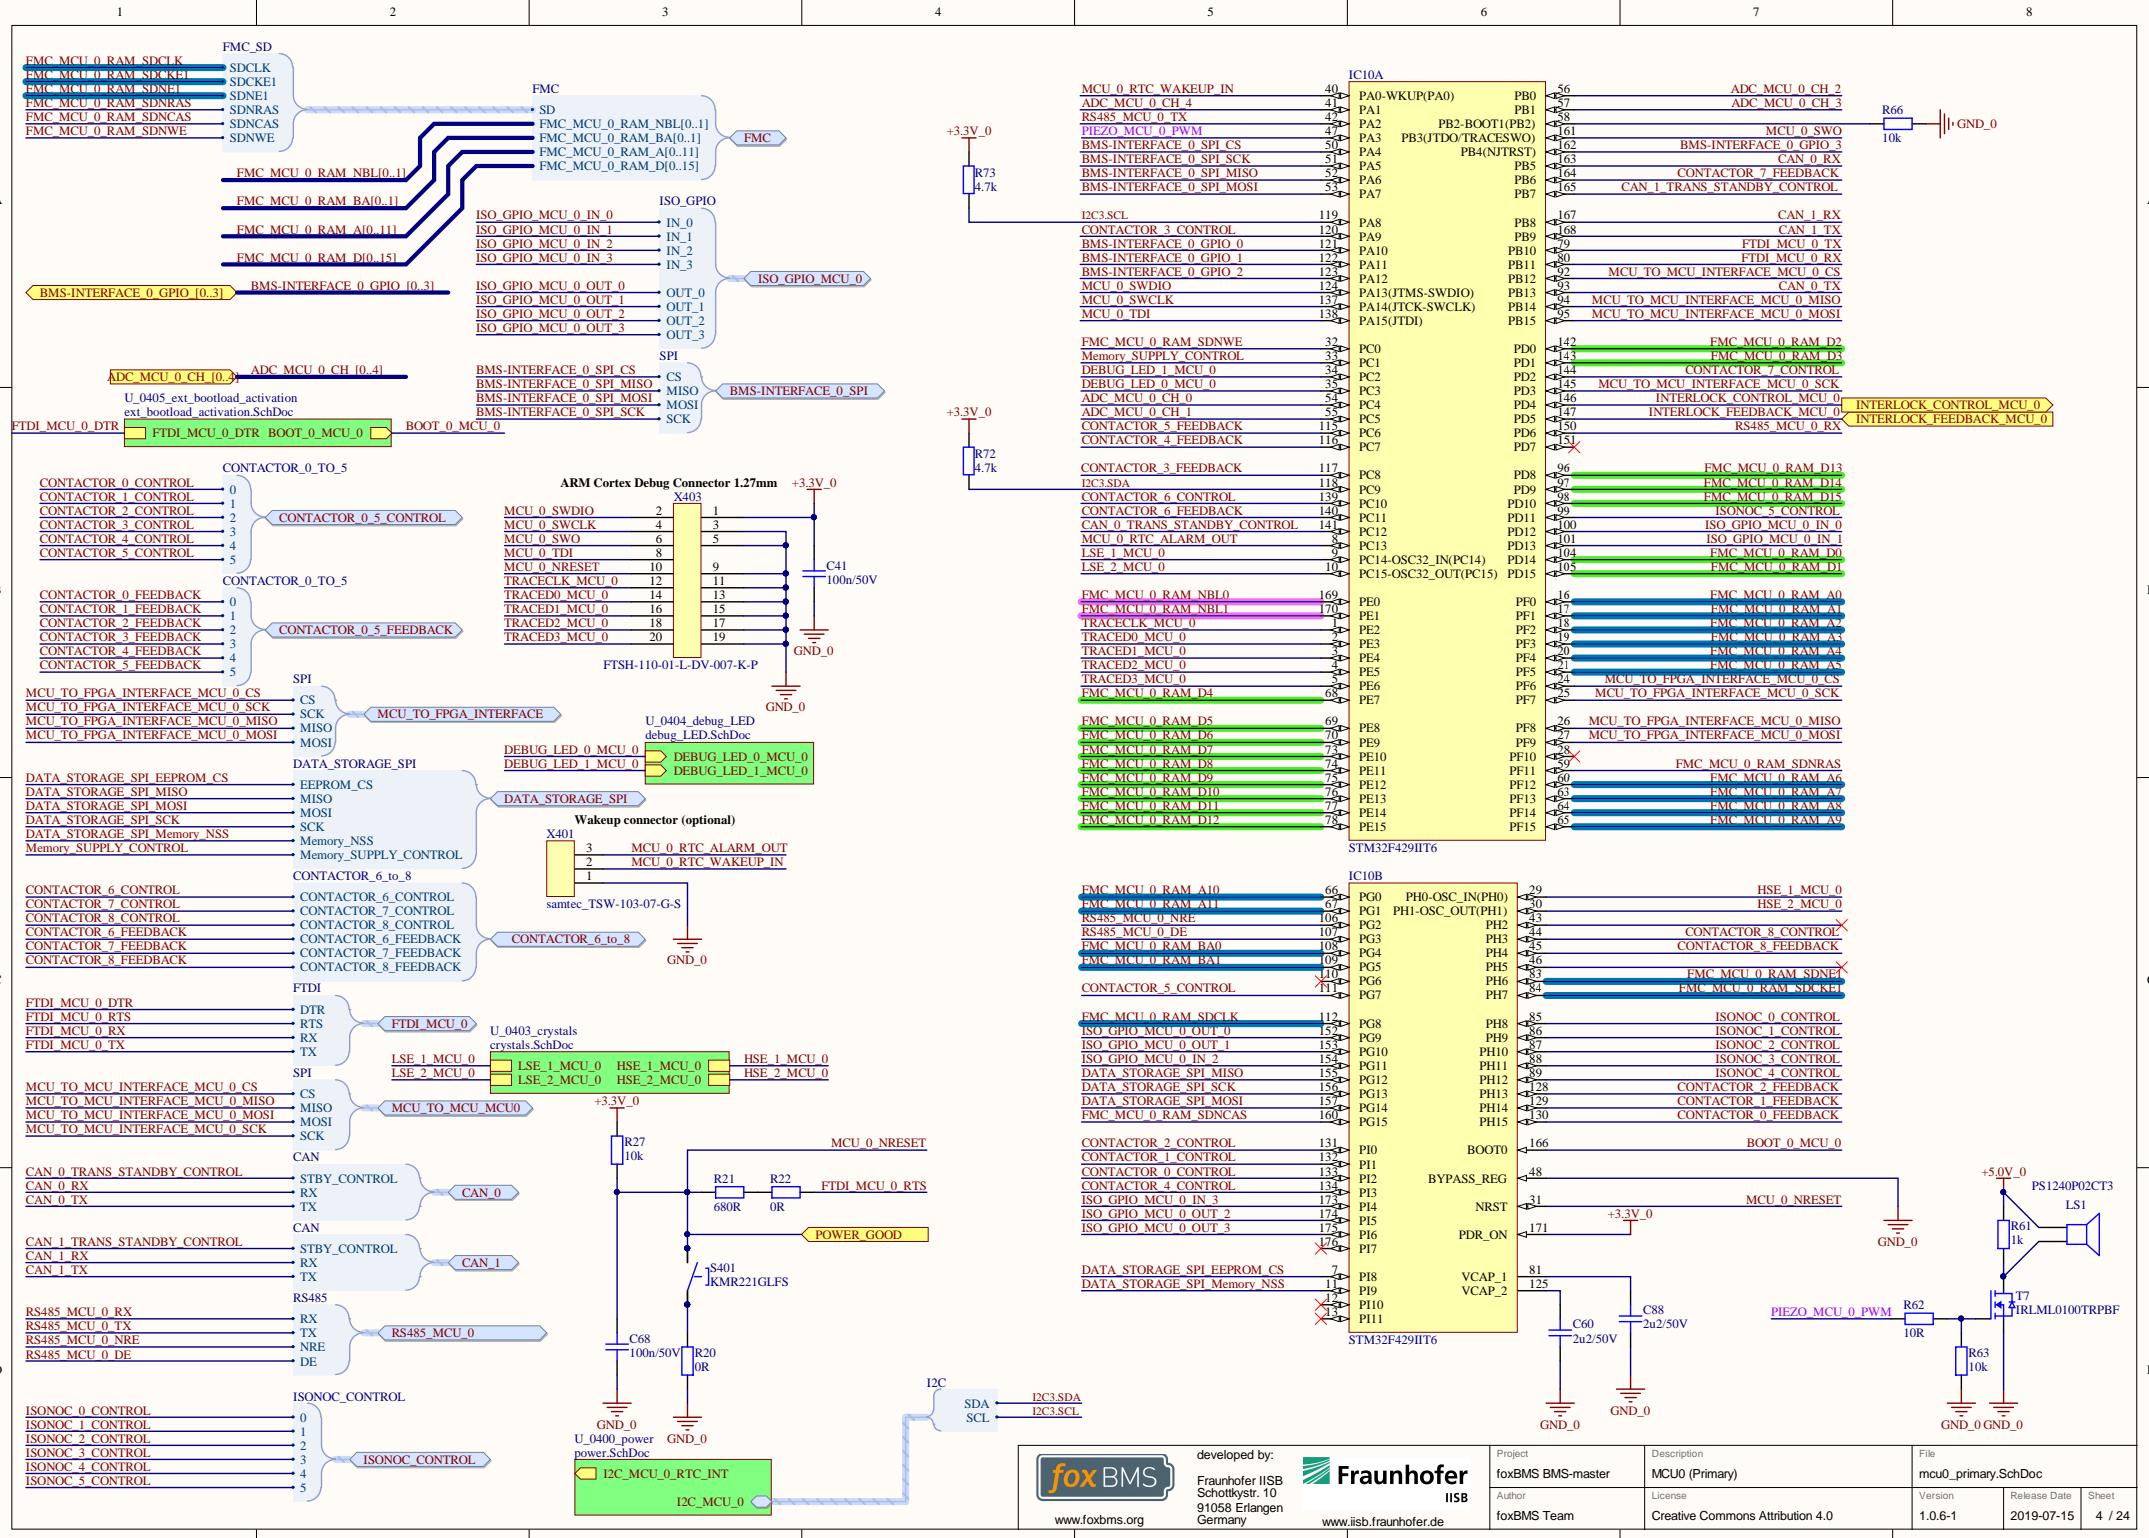

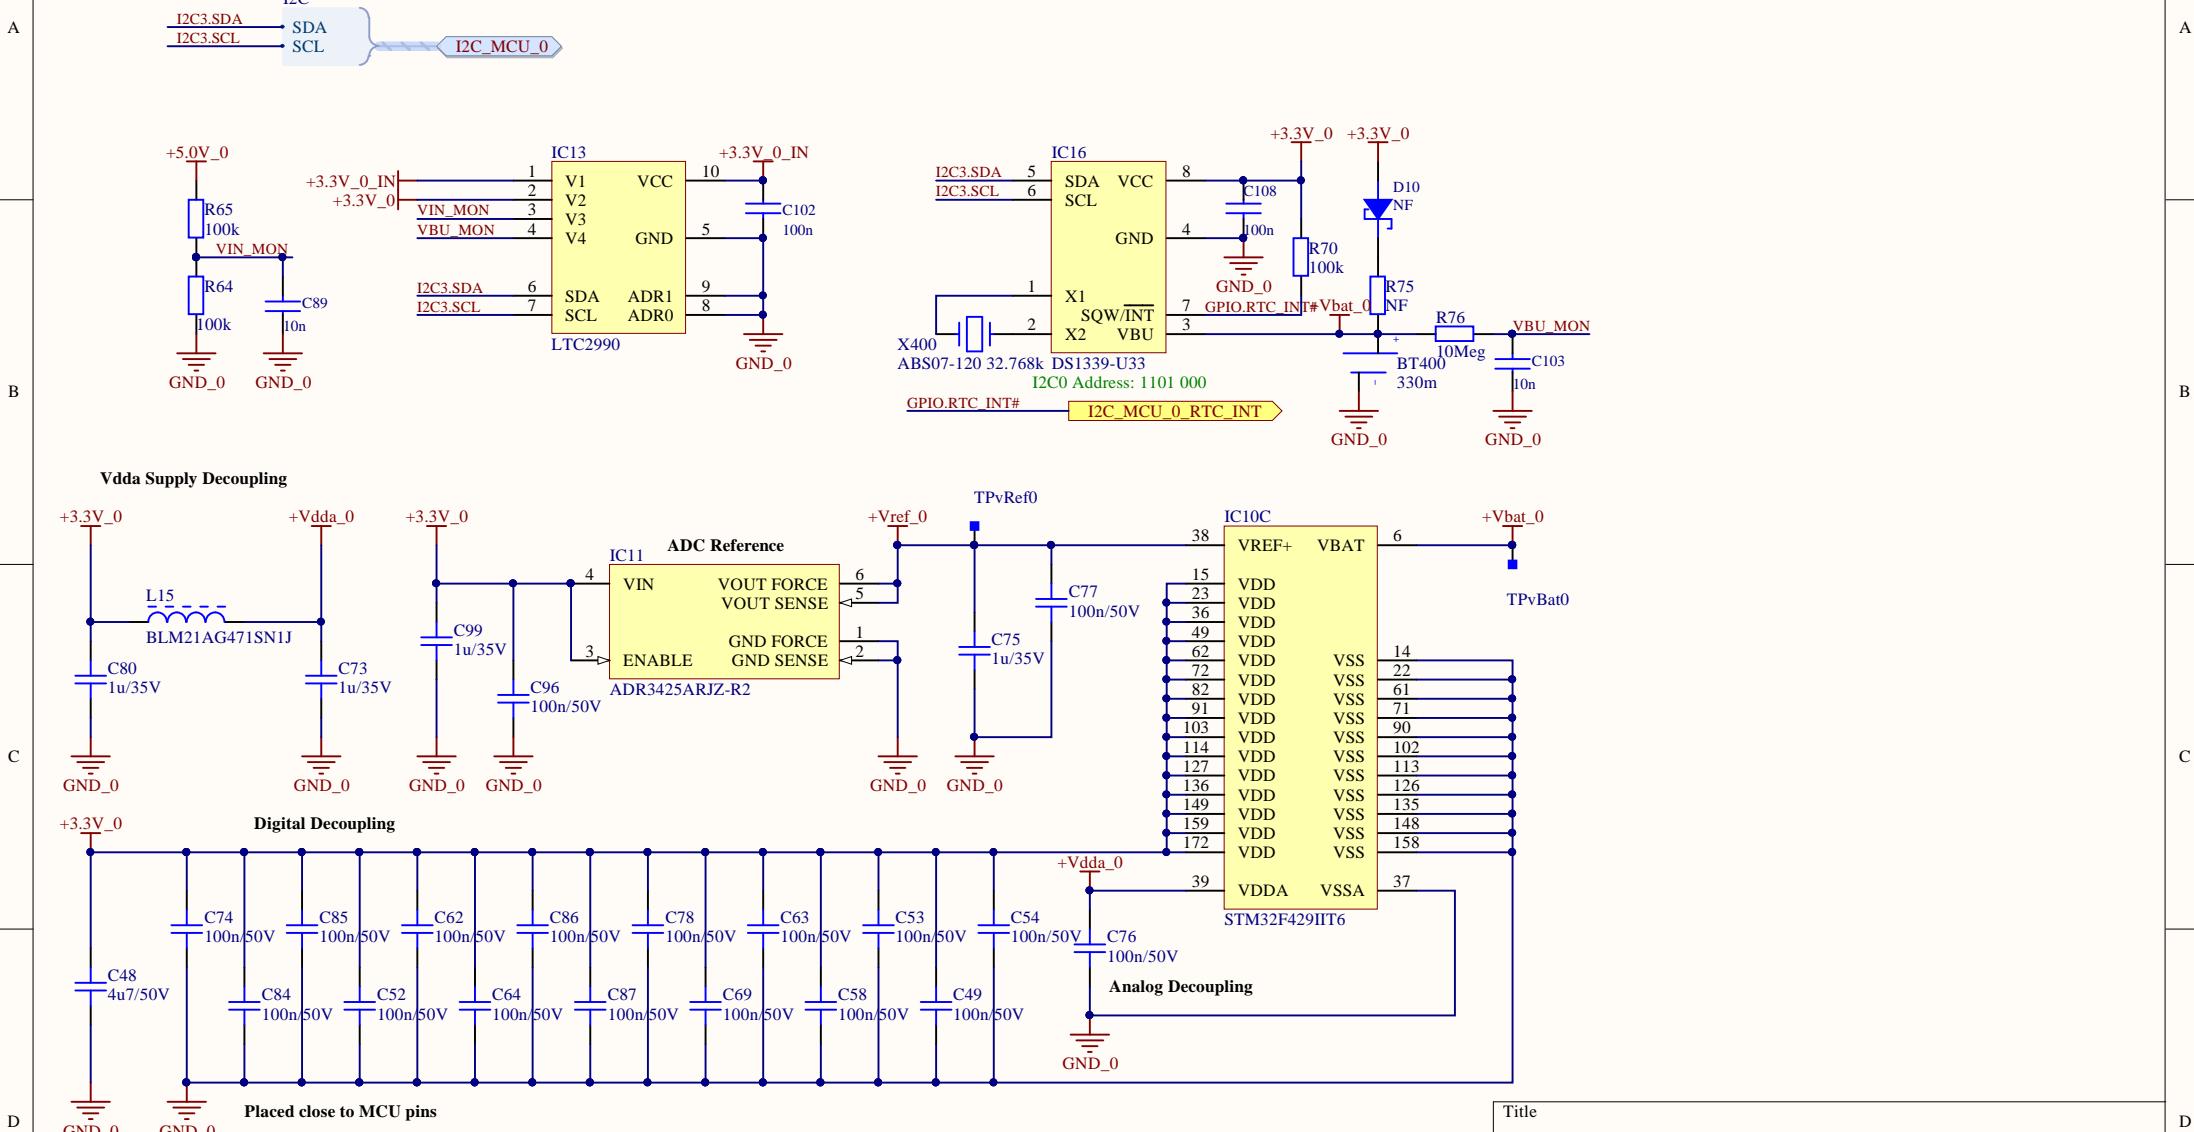

Title		
Size	Number	Revision
A4		
Date: 15/07/2019	Sheet of	
File: C:\Sandbox\power.SchDoc		Drawn By:

A

A

B



B

C

C

D

D

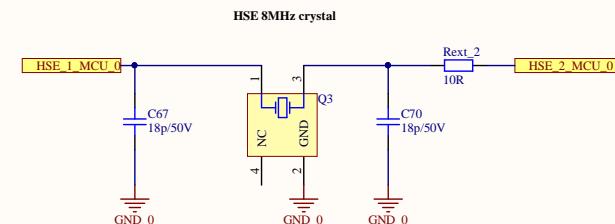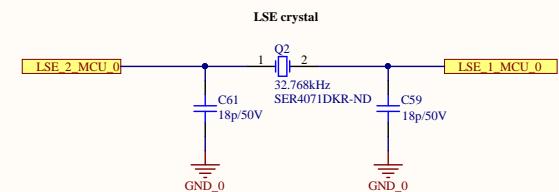

CX2520DB32000D0GEJZ1
FH4000039DKR-ND

A

A

B

B


C

C

D

D

Debug LED

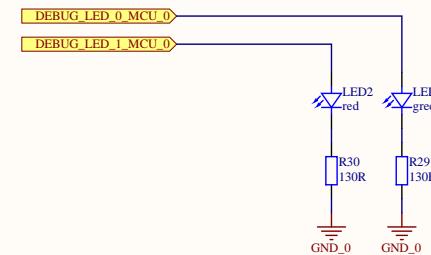

A

A

B

B


C


C

D

D

External bootload activation circuit

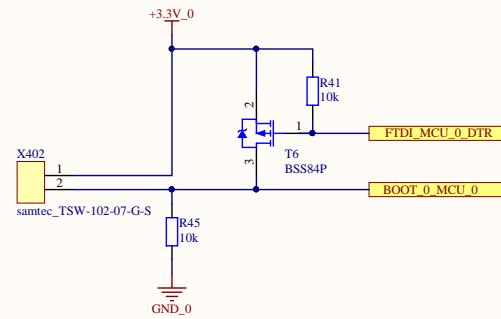

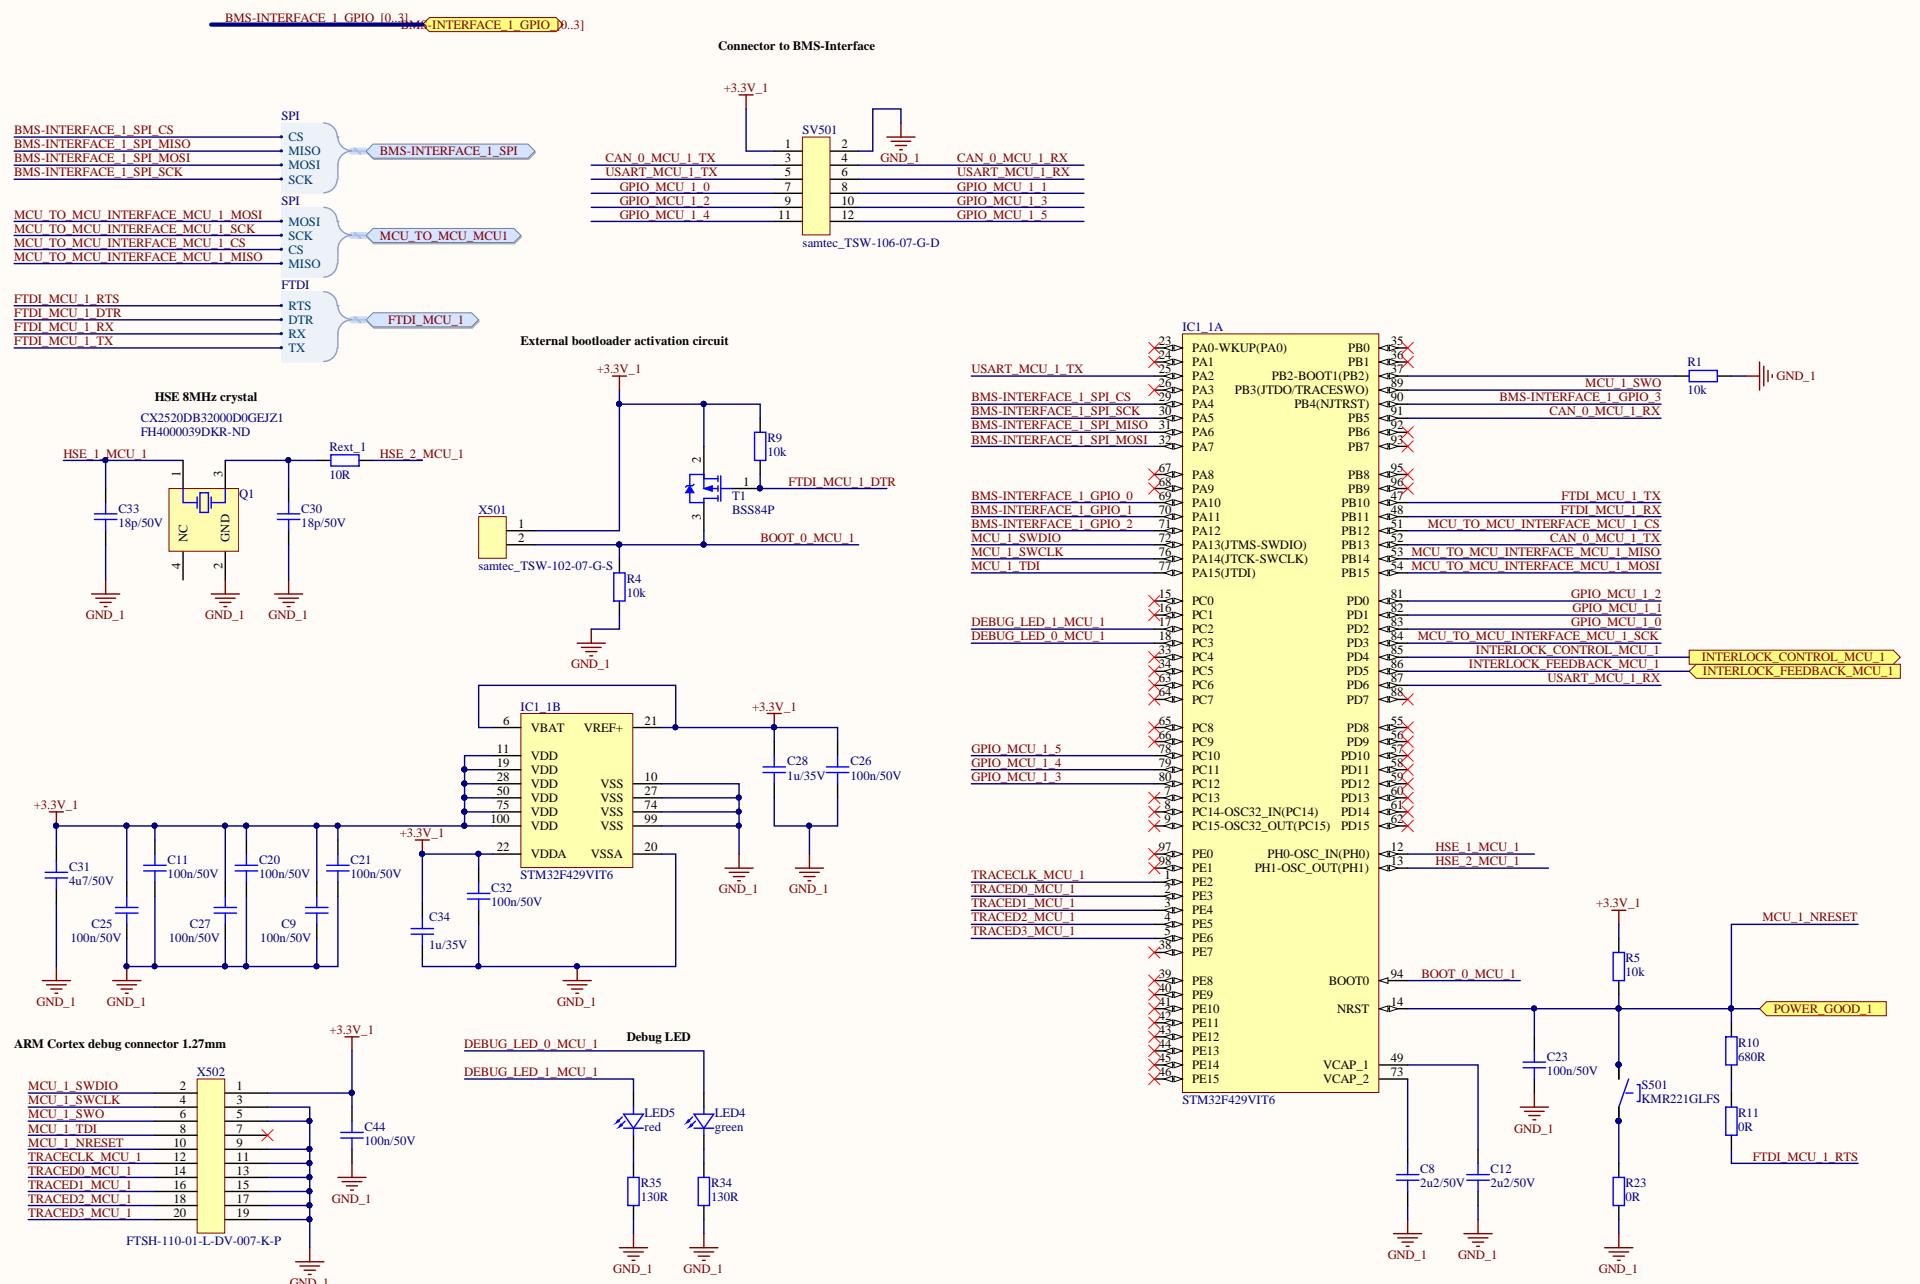


A

A

**Isolated Bidirectional Interface
between MCU_0 (primary) and MCU_1 (secondary)**

SPI up to 45MHz

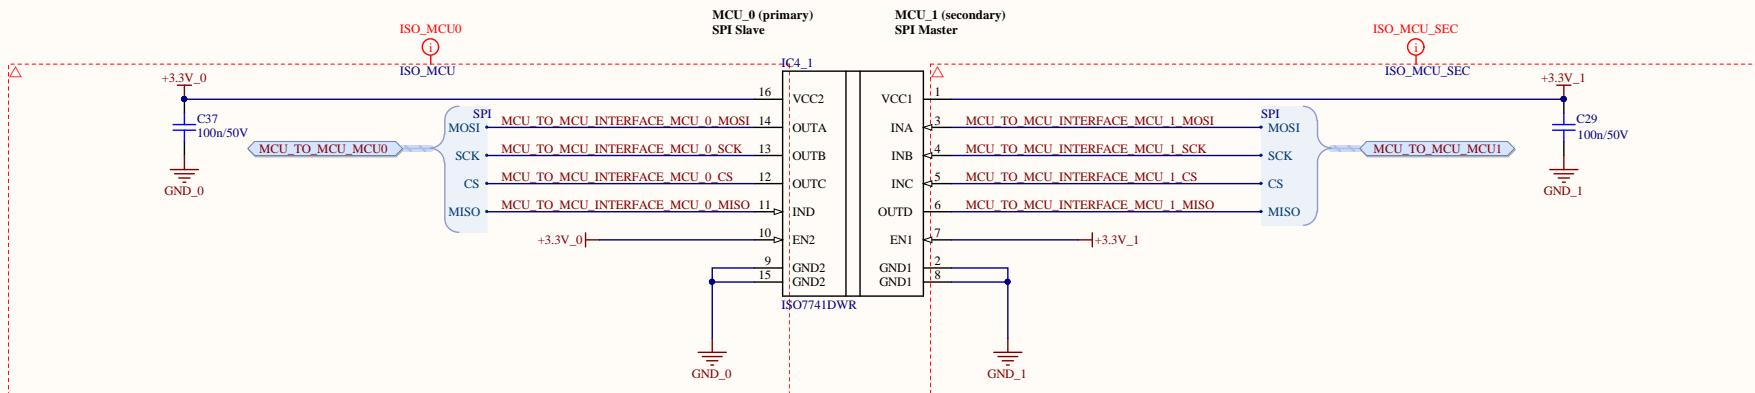

B


B


C

C

D

D

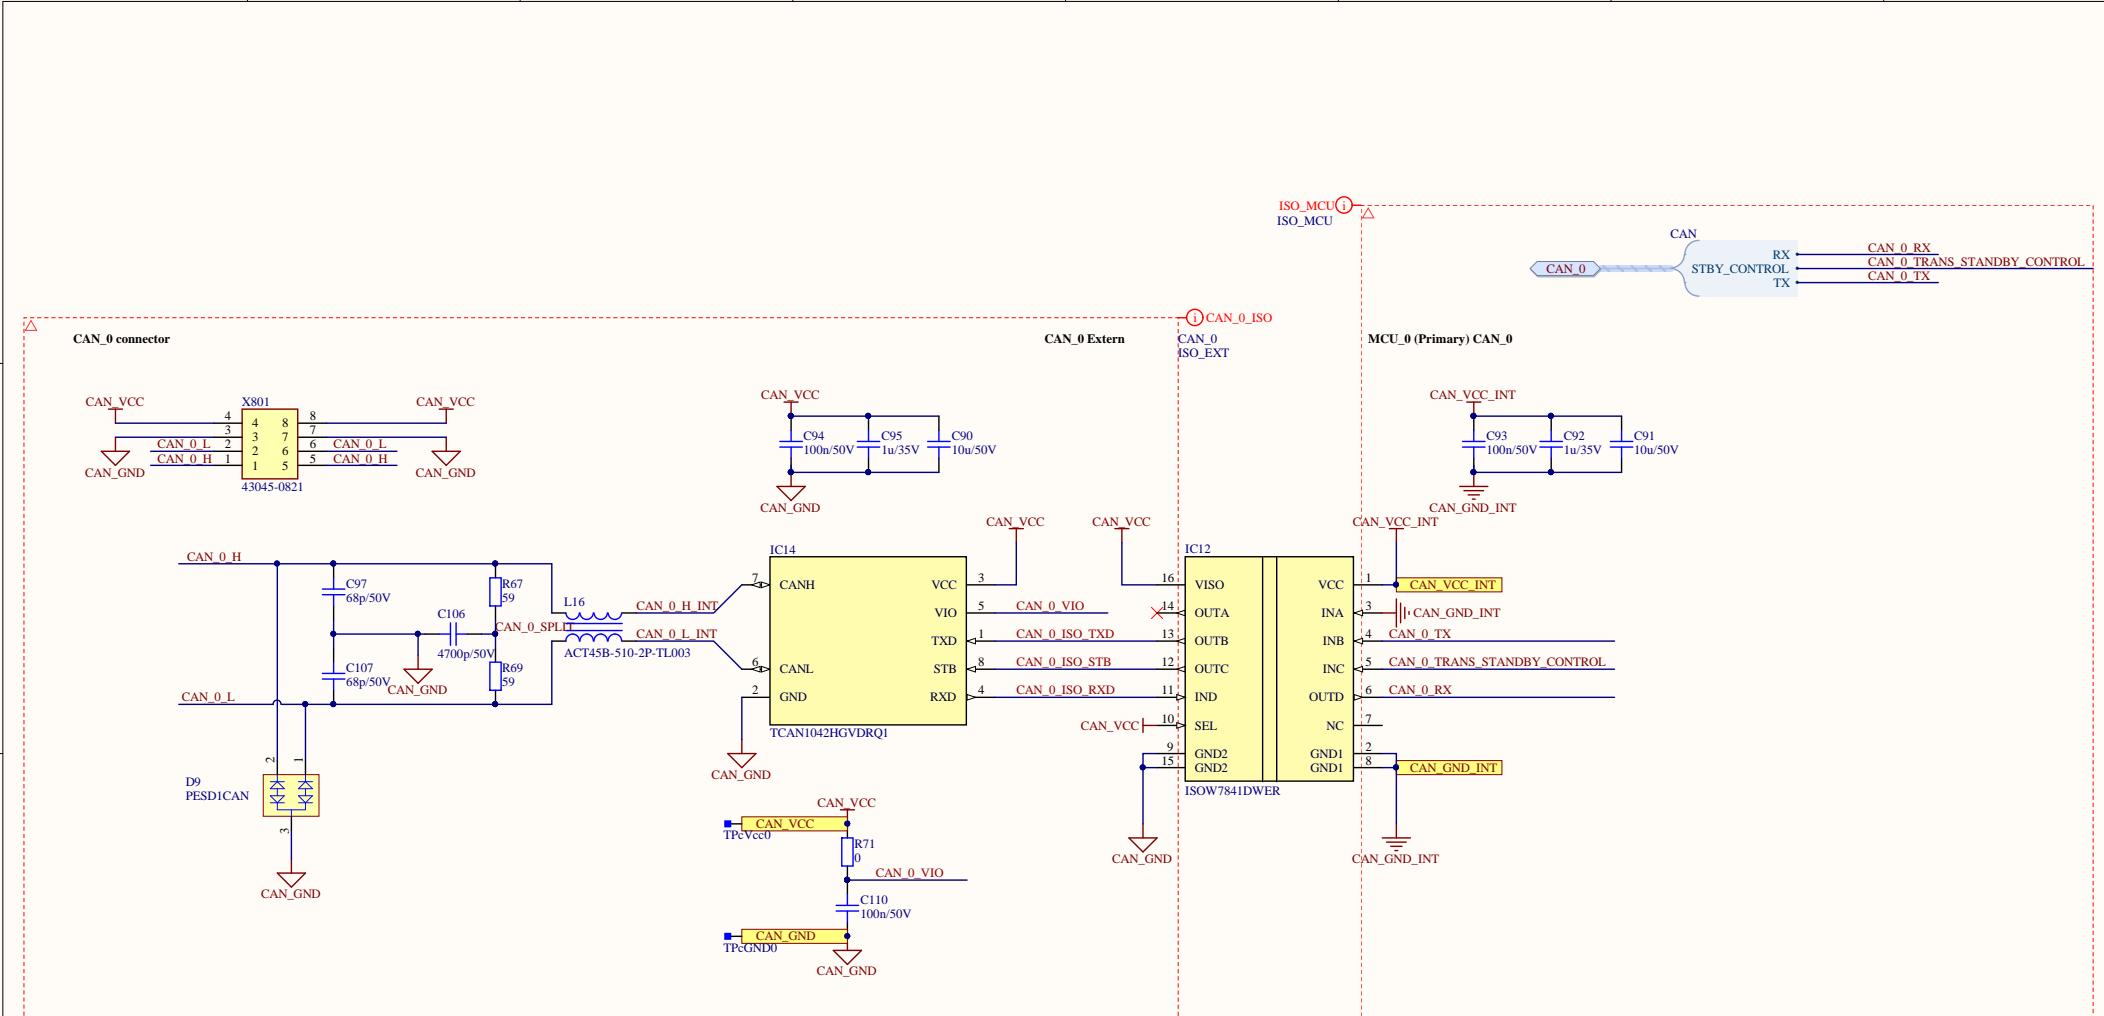


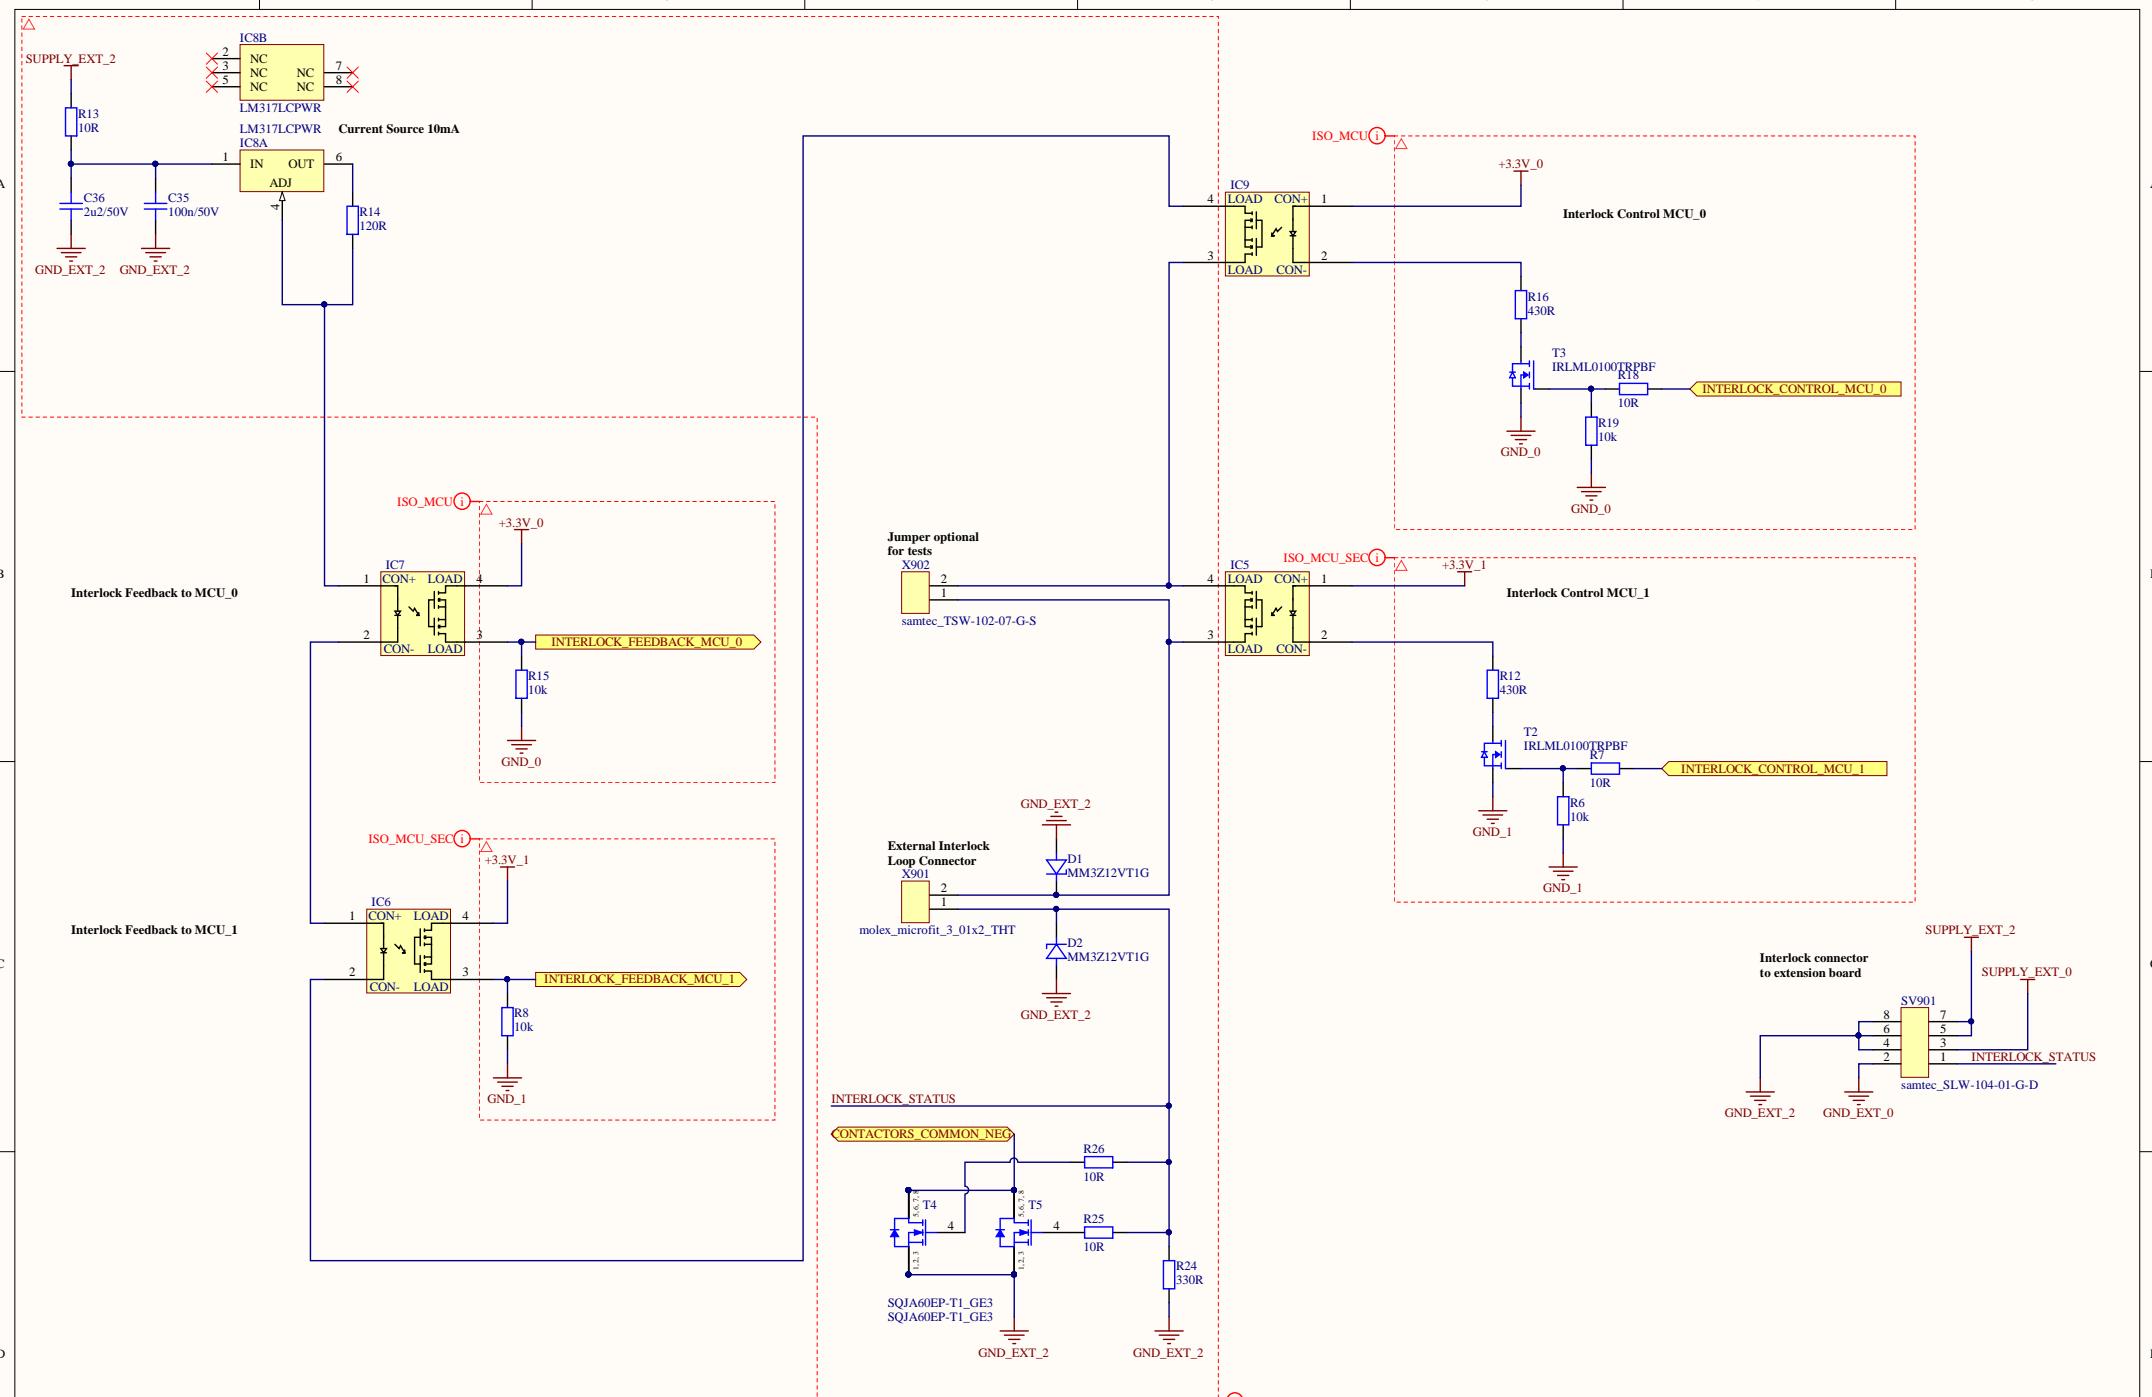


A




B





C

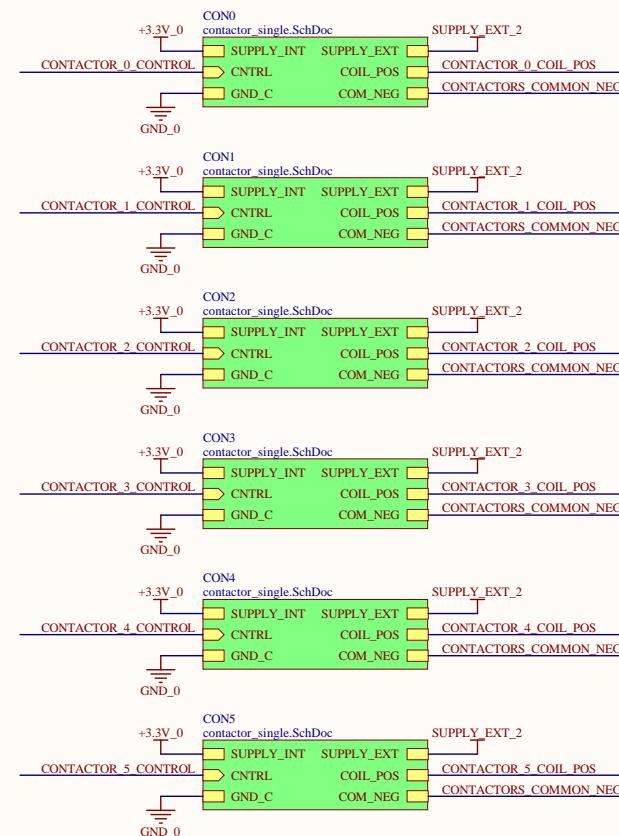

D

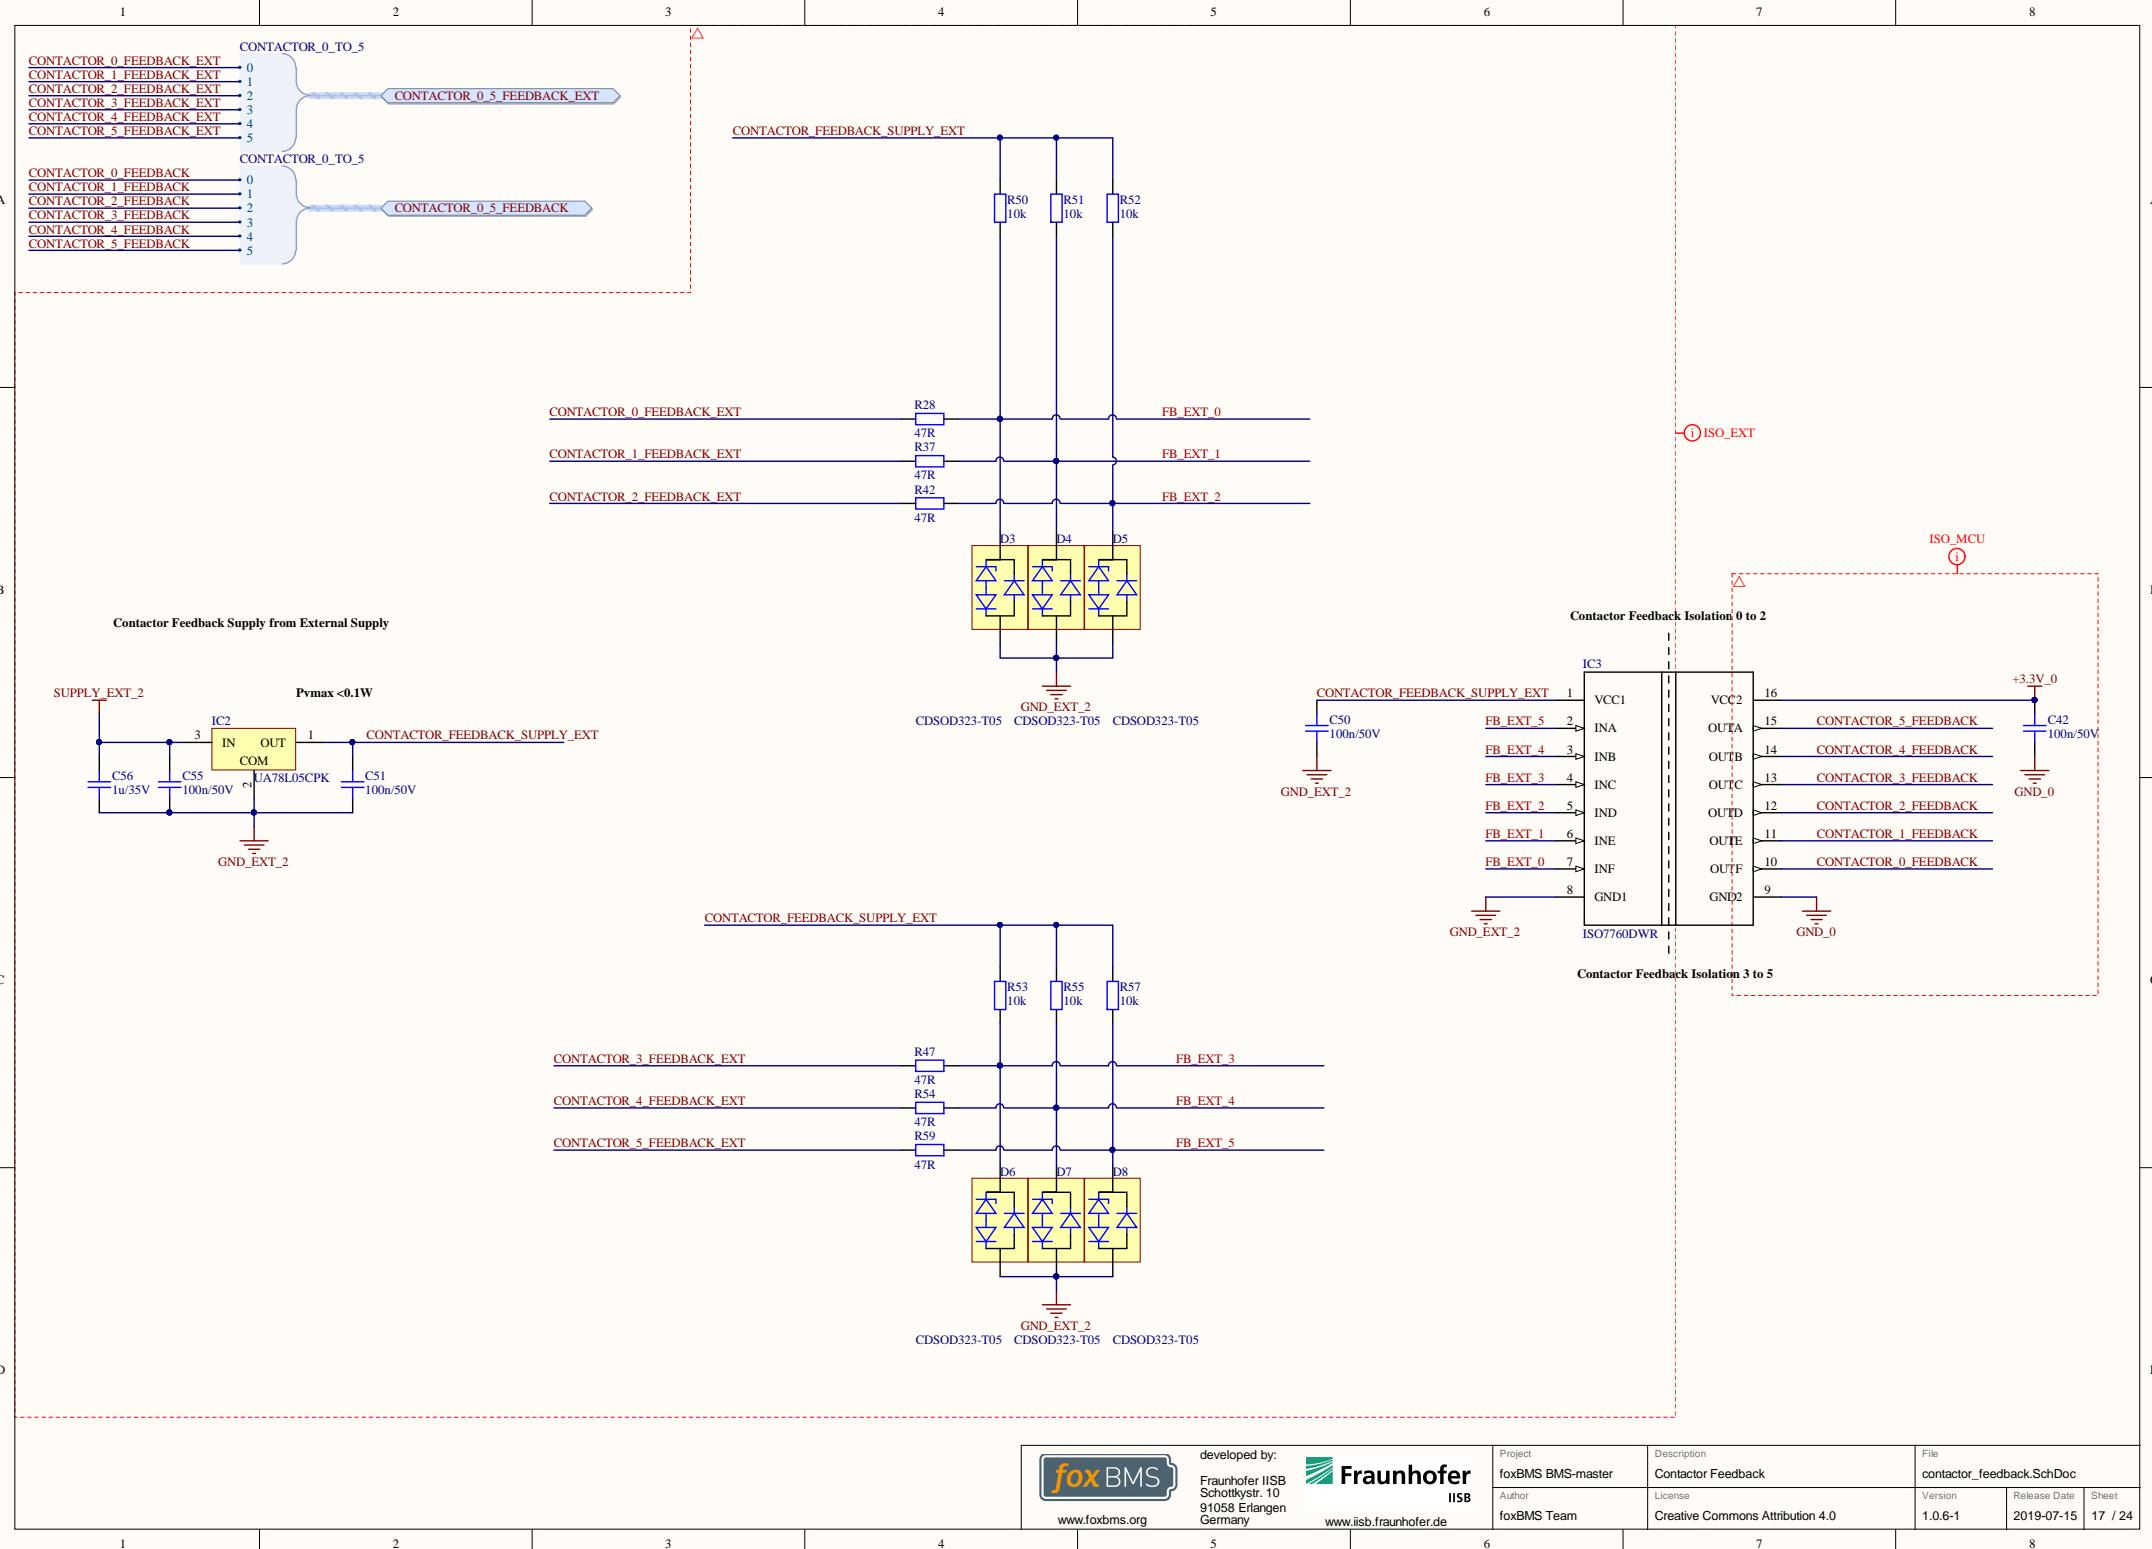

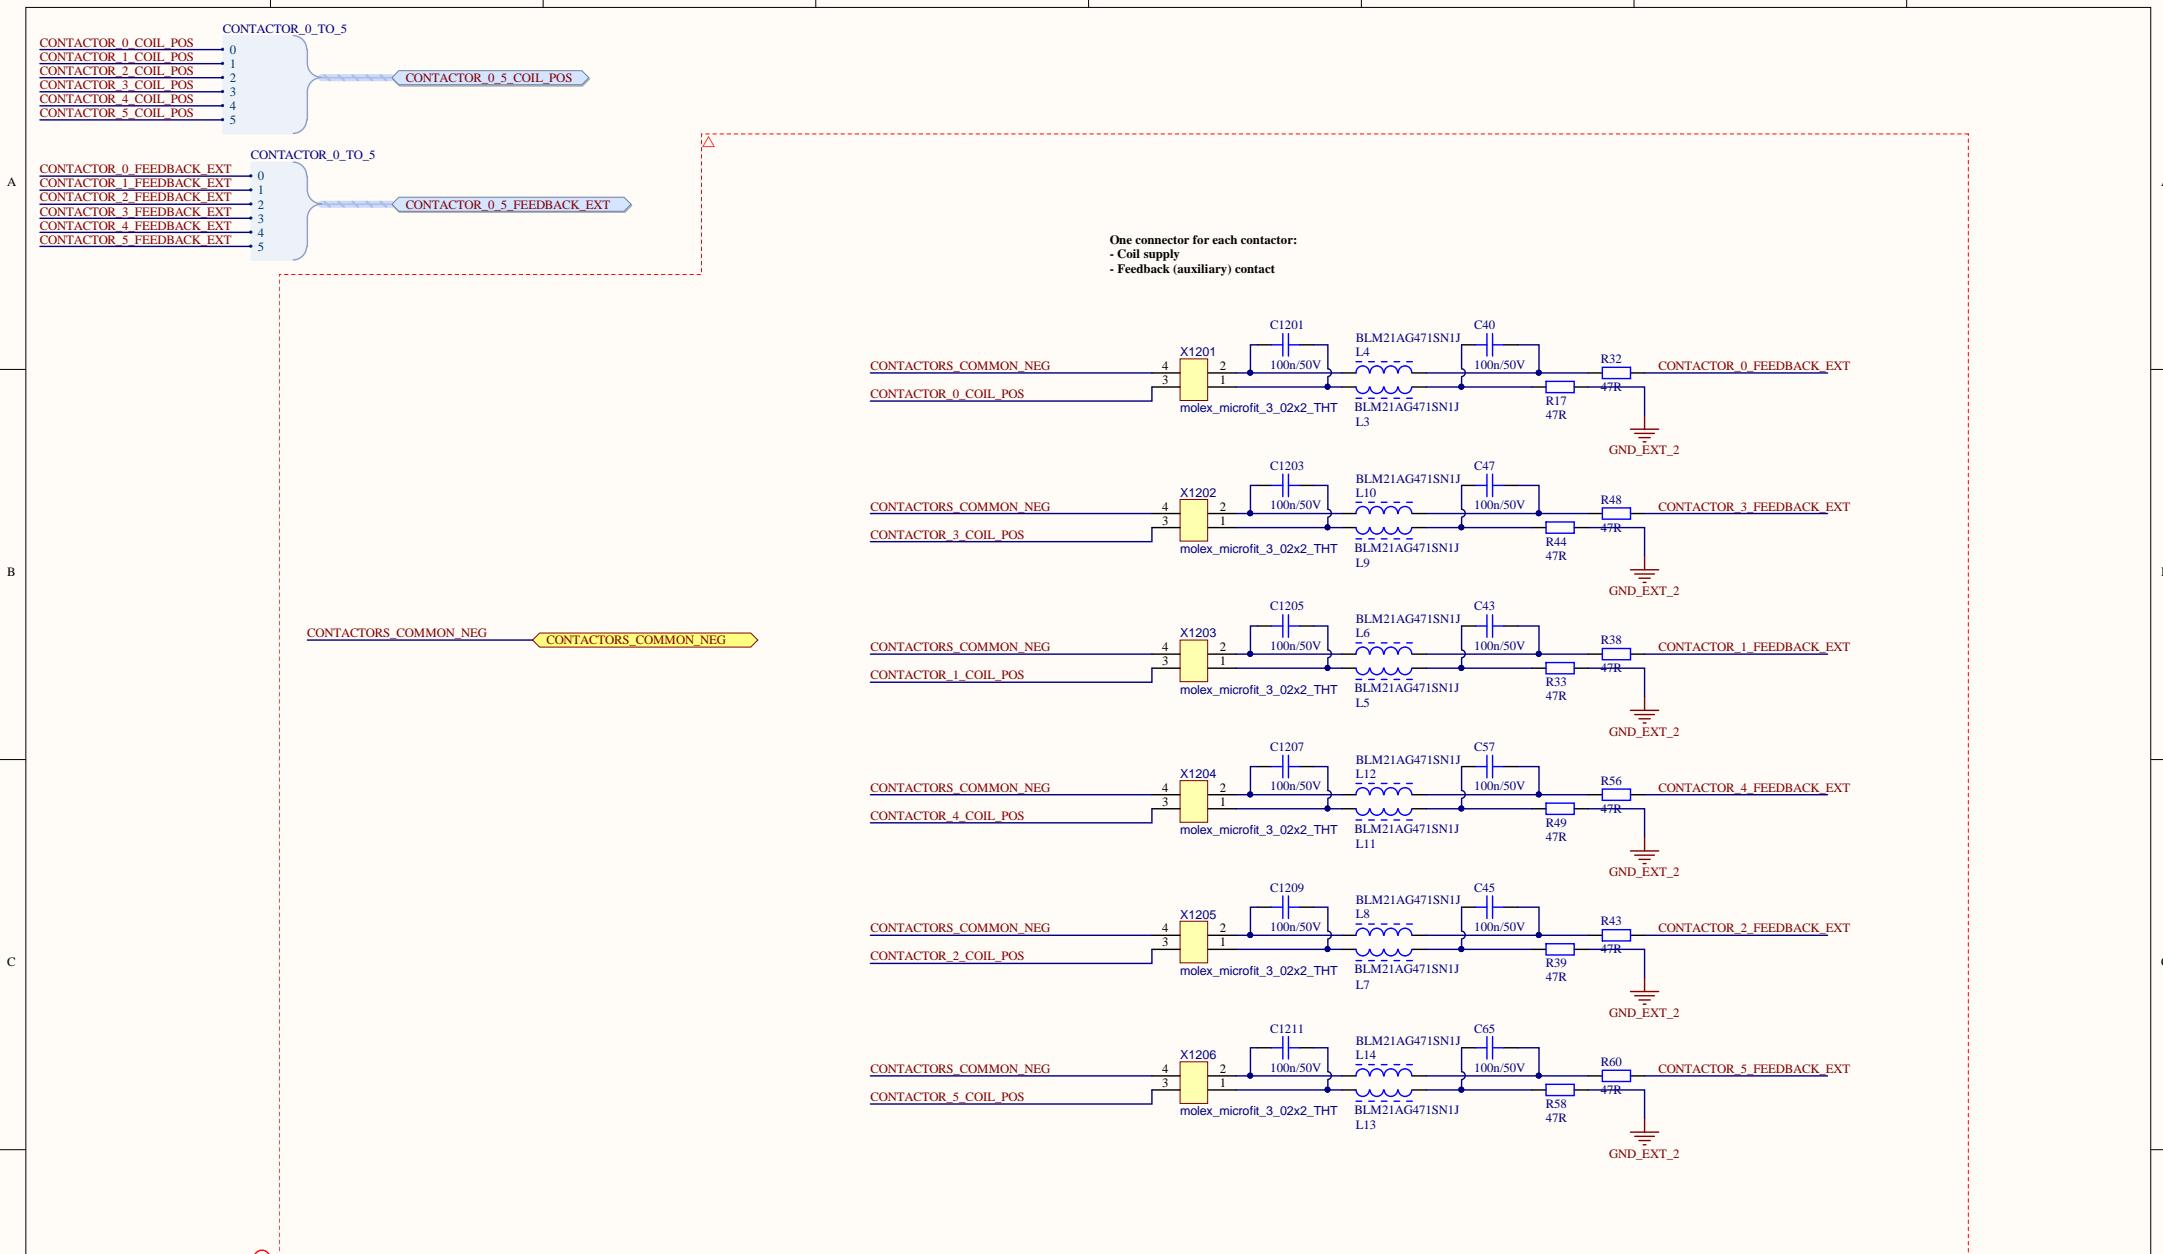


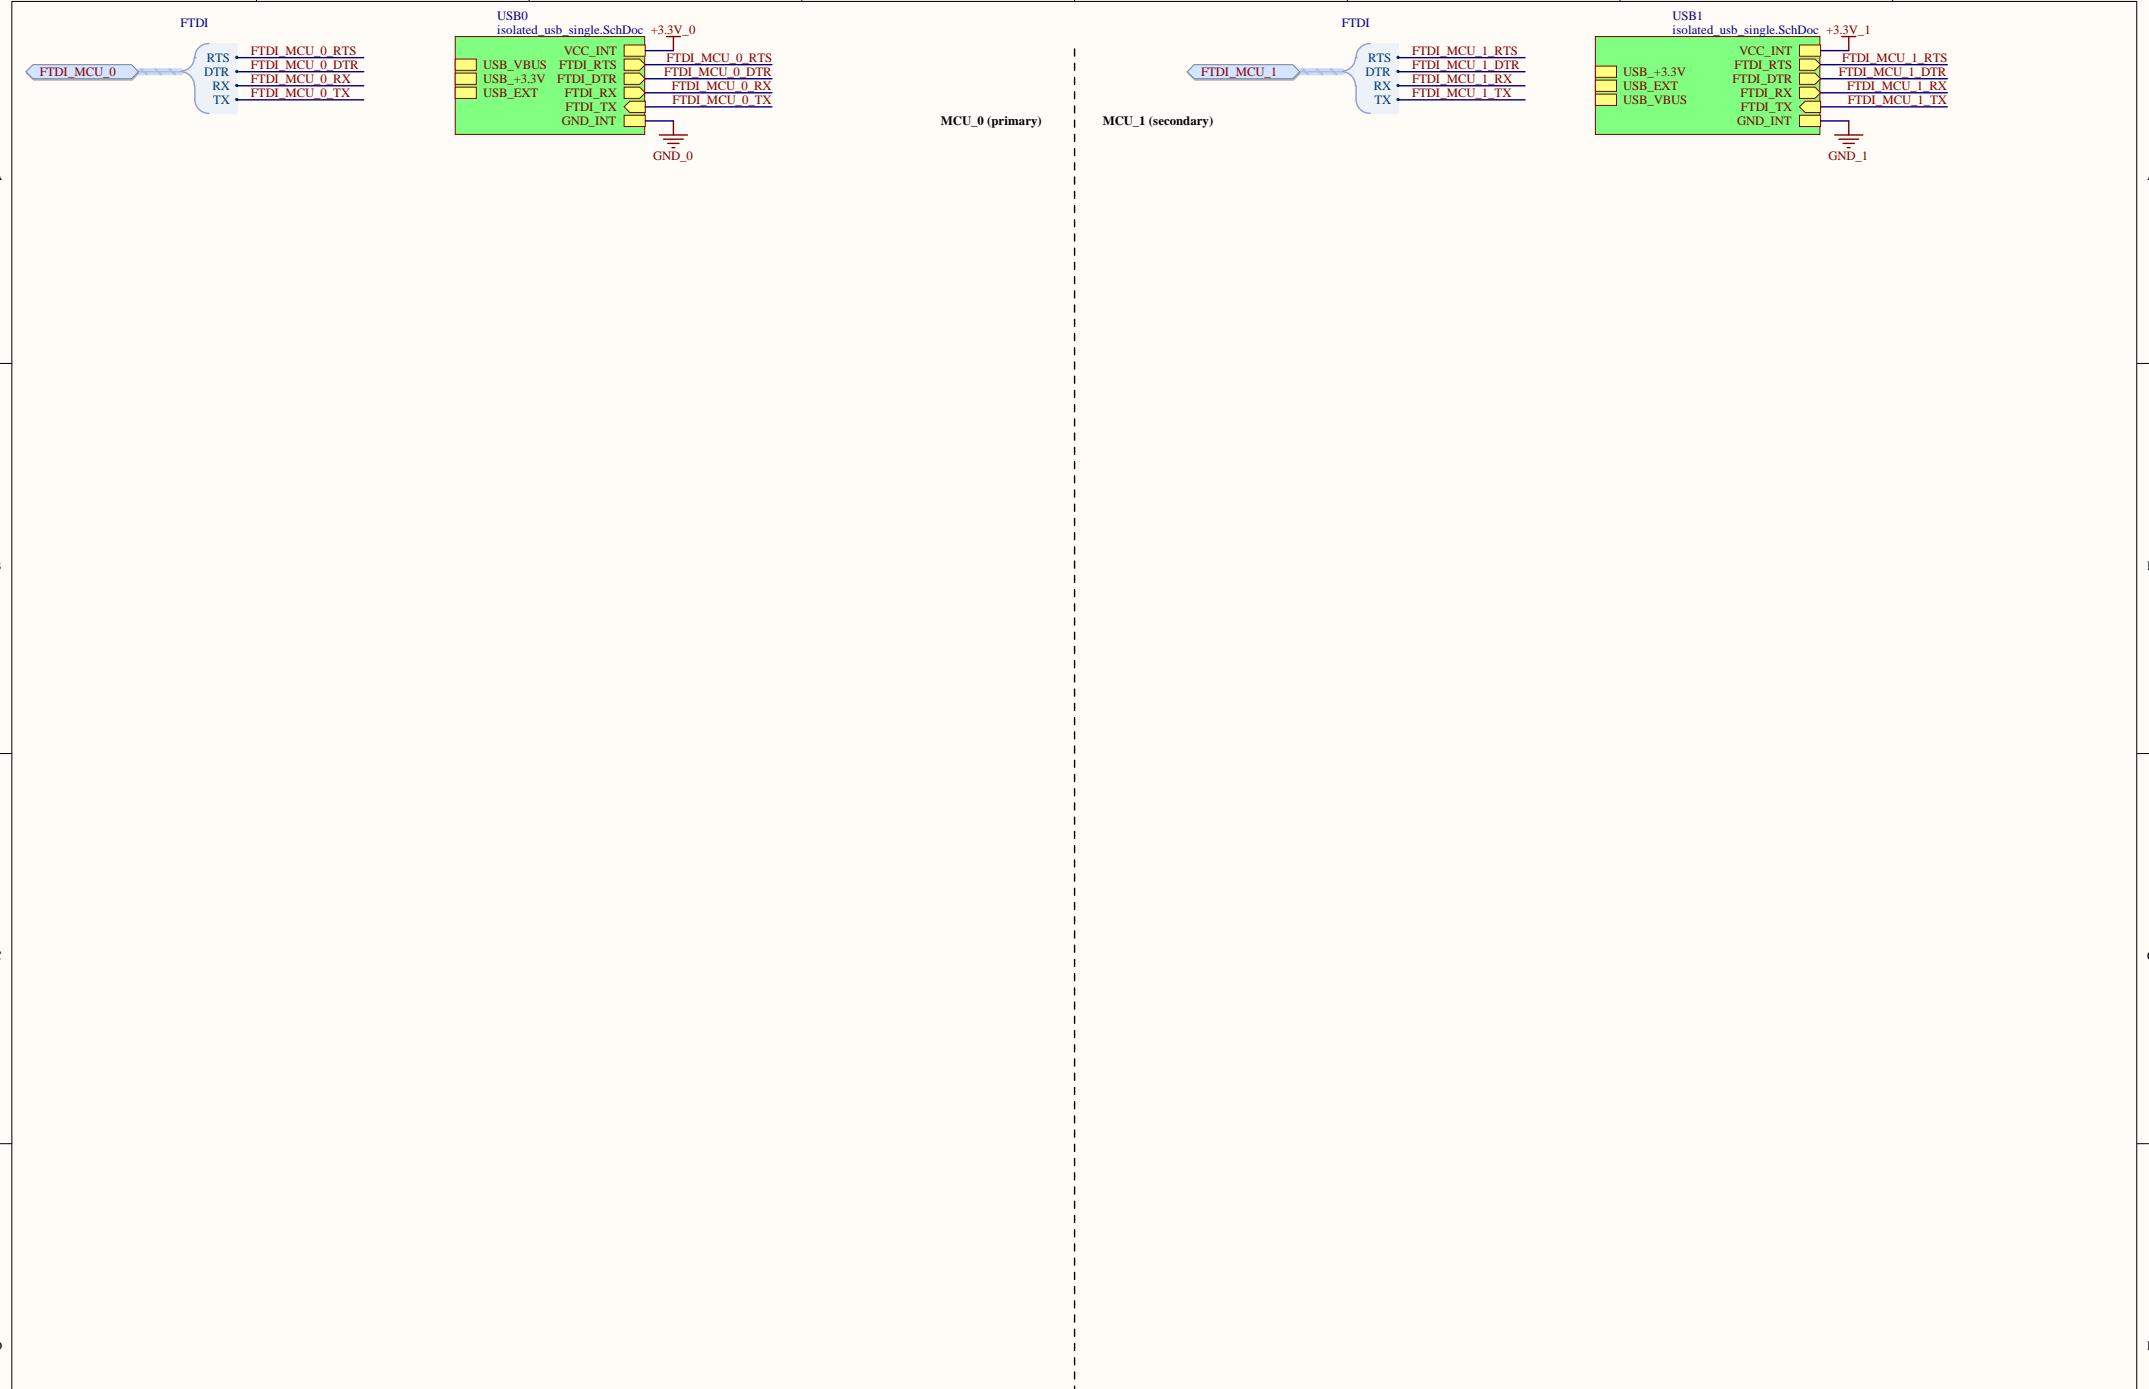

A







B

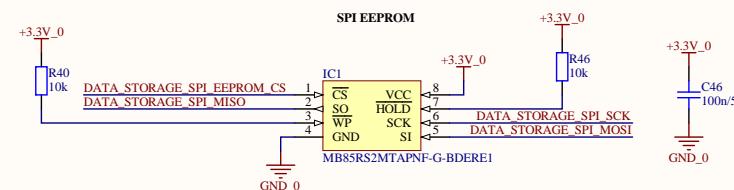

C

D

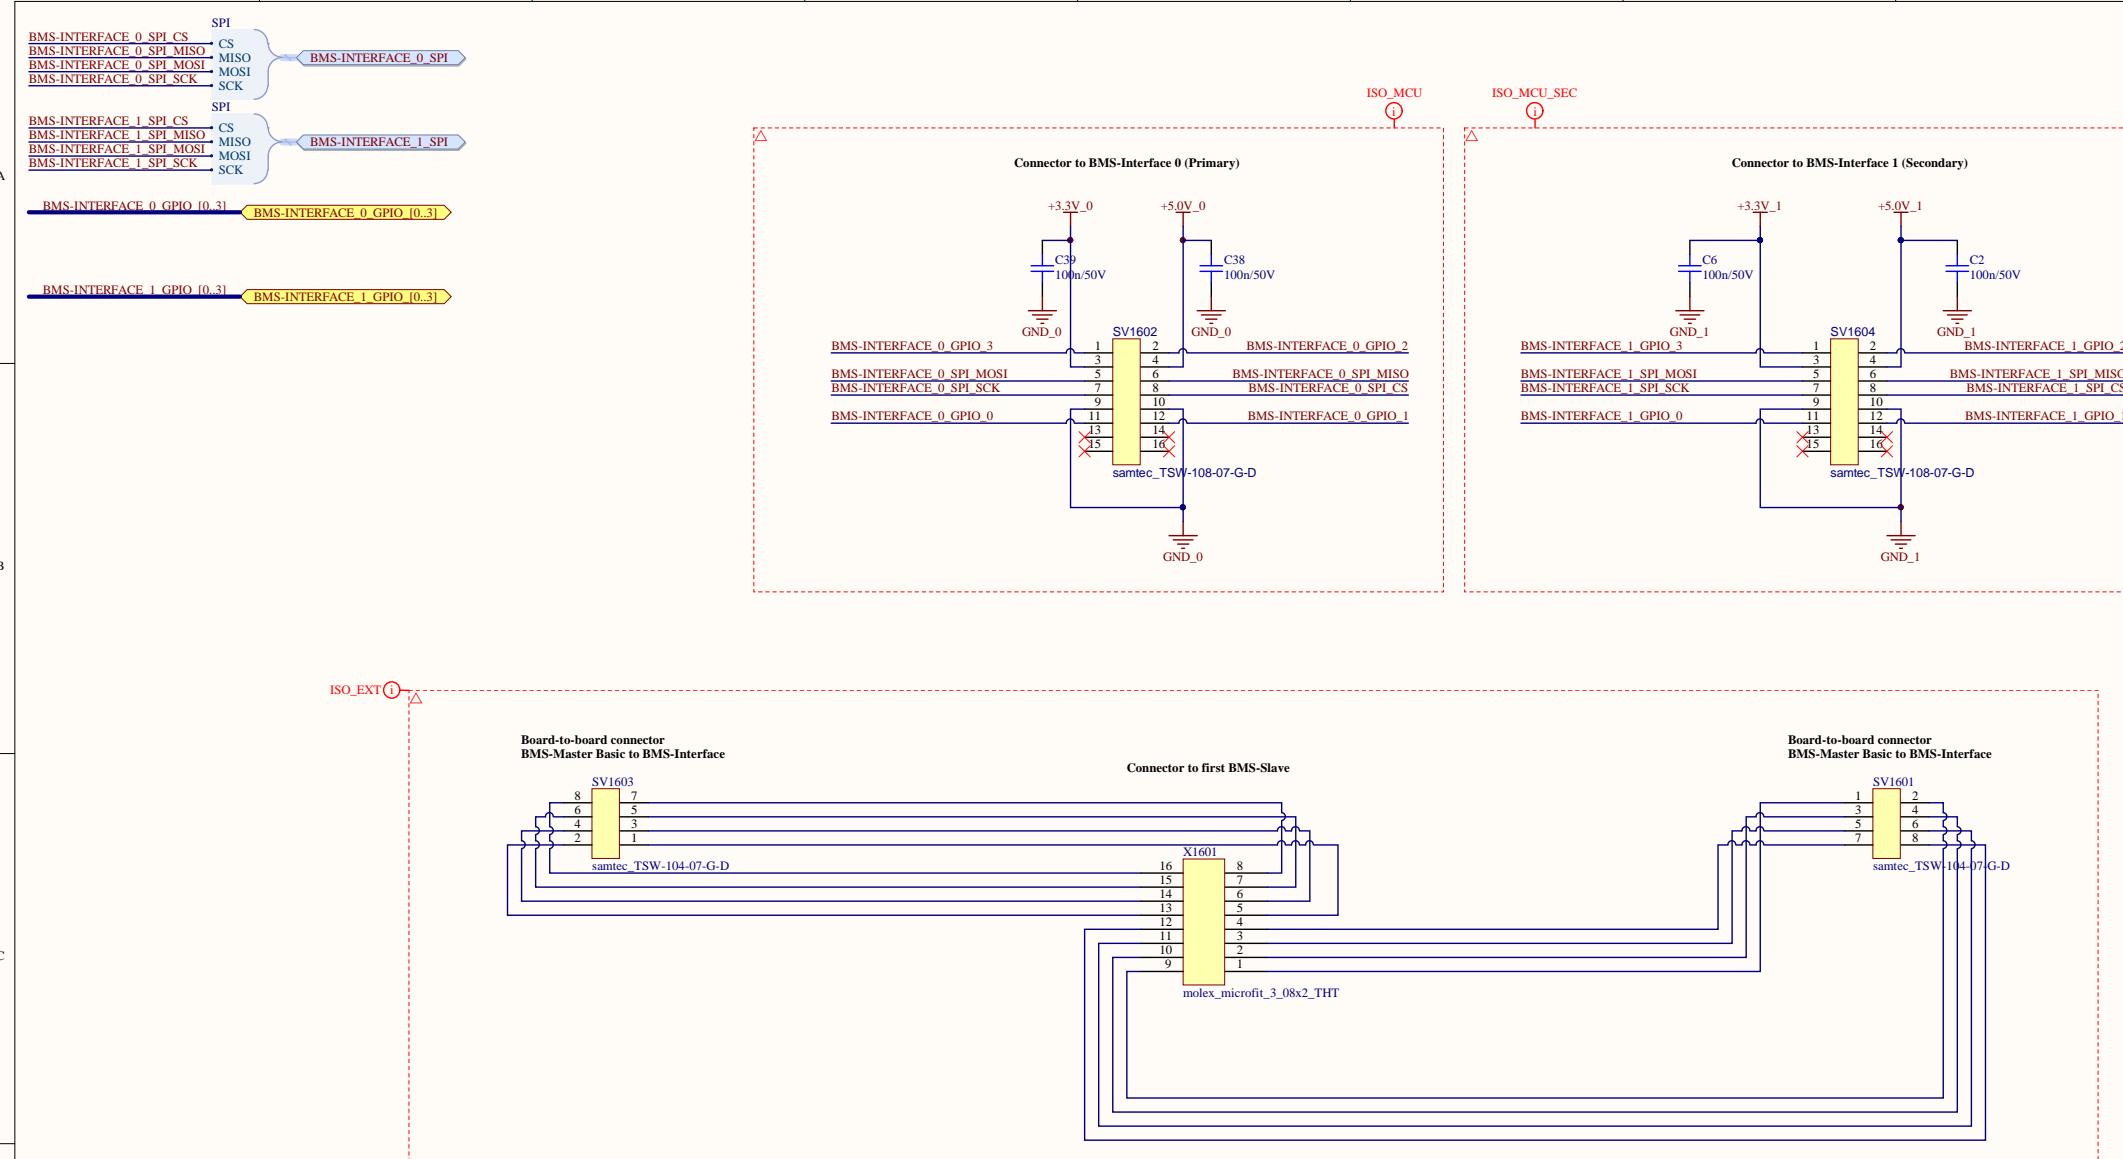

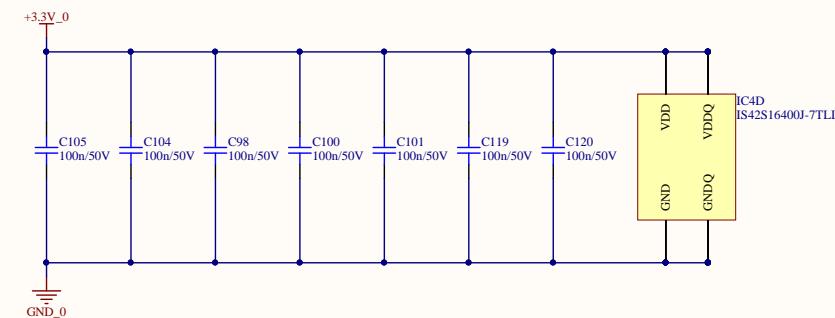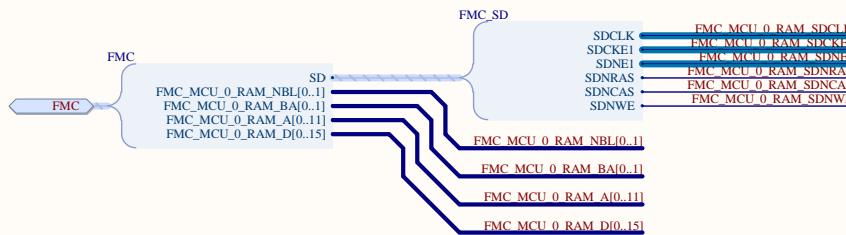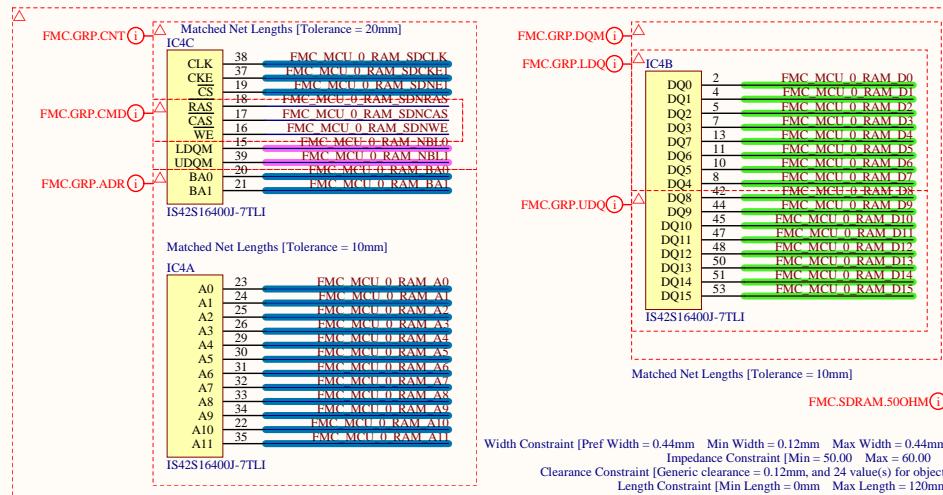

A

A

B

B

C

C

D

D

