
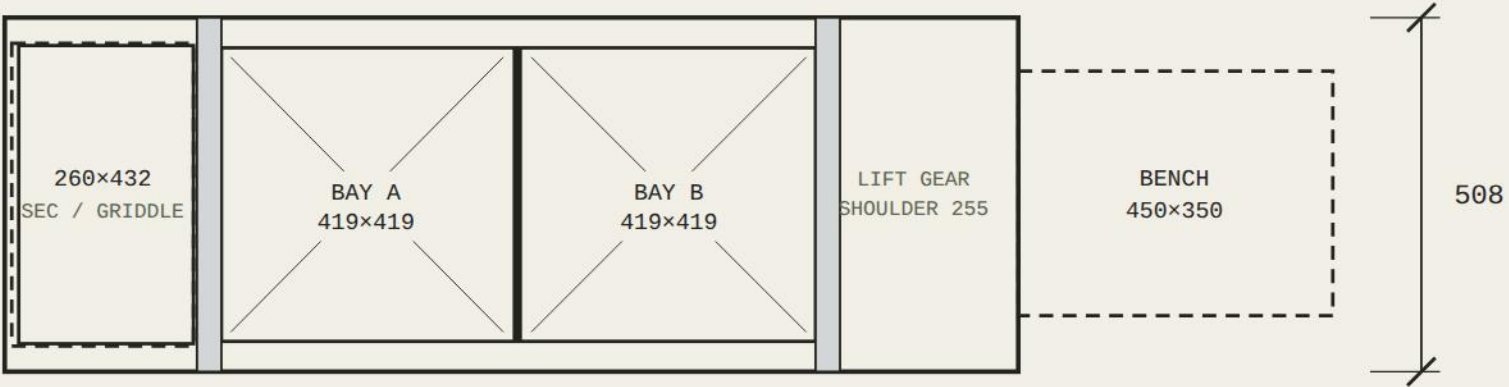
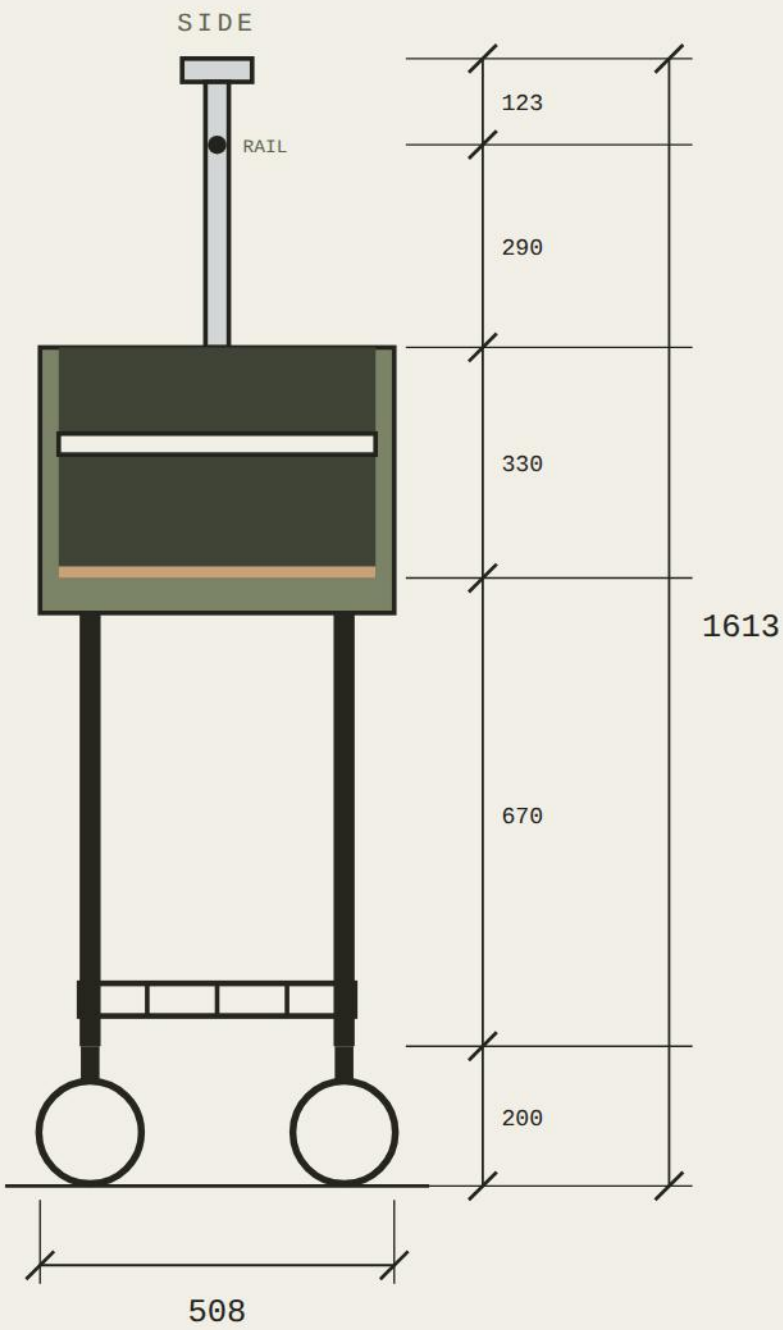


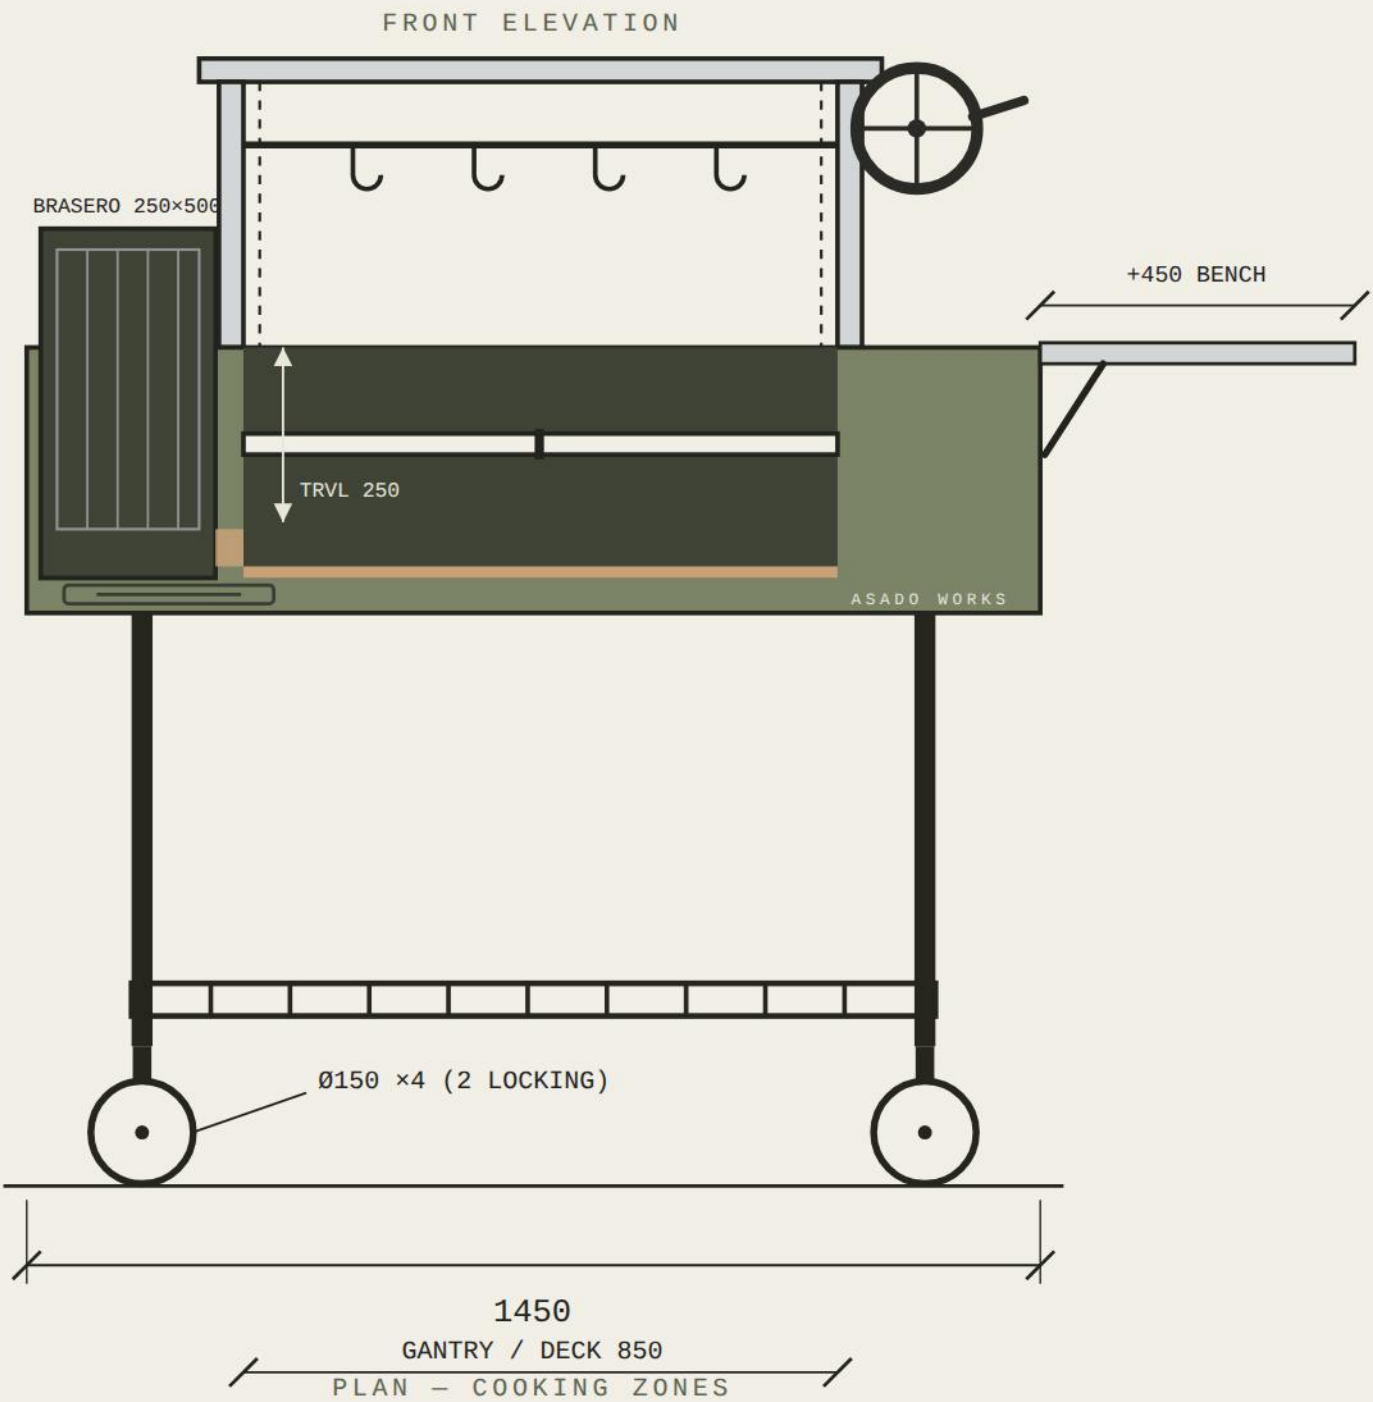


- BODY: CRS 3.2 · PWDR SAGE
- FOOD CONTACT / GANTRY: 304 SS
- CART + SLAT SHELF: PWDR BLACK
- HEARTH: FIREBRICK BTM + SIDES

DATUMS AFL (mm): 0 GND · 200 CART BASE · 290 SLAT SHELF · 820 HEARTH PAN · 870 FIREBOX FLOOR · 950-1200 GRATE TRAVEL (250) · 1200 FIREBOX RIM · 1490 HANG RAIL · 1613 O/A

PLAN: BRASERO TOWER 250 W AT LH END, OUTBOARD OF GANTRY, TOP 1370 · GANTRY POSTS AT 275 AND 1160 – CLEAR SPAN 850 = DECK · RH SHOULDER 255 CARRIES LIFT GEAR + BENCH · LEGS INBOARD AT 150 / 1300, BODY OVERHANGS · SLAT SHELF BOLTED LEG-TO-LEG

DWG AW-PAR-STD-GA01	REV / DATE F · 2026-09-03	UNITS / SCALE mm · 0.3 px/mm	TOLERANCE ±2 U.N.O.	NET WT EST 110 kg	XL VARIANT W +500
------------------------	------------------------------	---------------------------------	------------------------	----------------------	----------------------

SEALED GREEN SIDE, NO VISIBLE GAP. ONE CONTINUOUS SAGE SHELL — ROLLED, LARGE-RADIUS, NO SEAMS ON SHOW, NO FASTENERS ON SHOW, NOTHING SLOTTED IN FROM OUTSIDE. THE FIRE NEVER TOUCHES IT: A **DROP-IN FIRE PAN** CARRIES THE COALS, AND THE ONLY AIR GAP IS **INSIDE**, HIDDEN BEHIND THE PAN WALL AND CAPPED BY ITS FLANGE. THE GAP STOPS BEING A DESIGN FEATURE AND BECOMES A CONCEALED DETAIL.

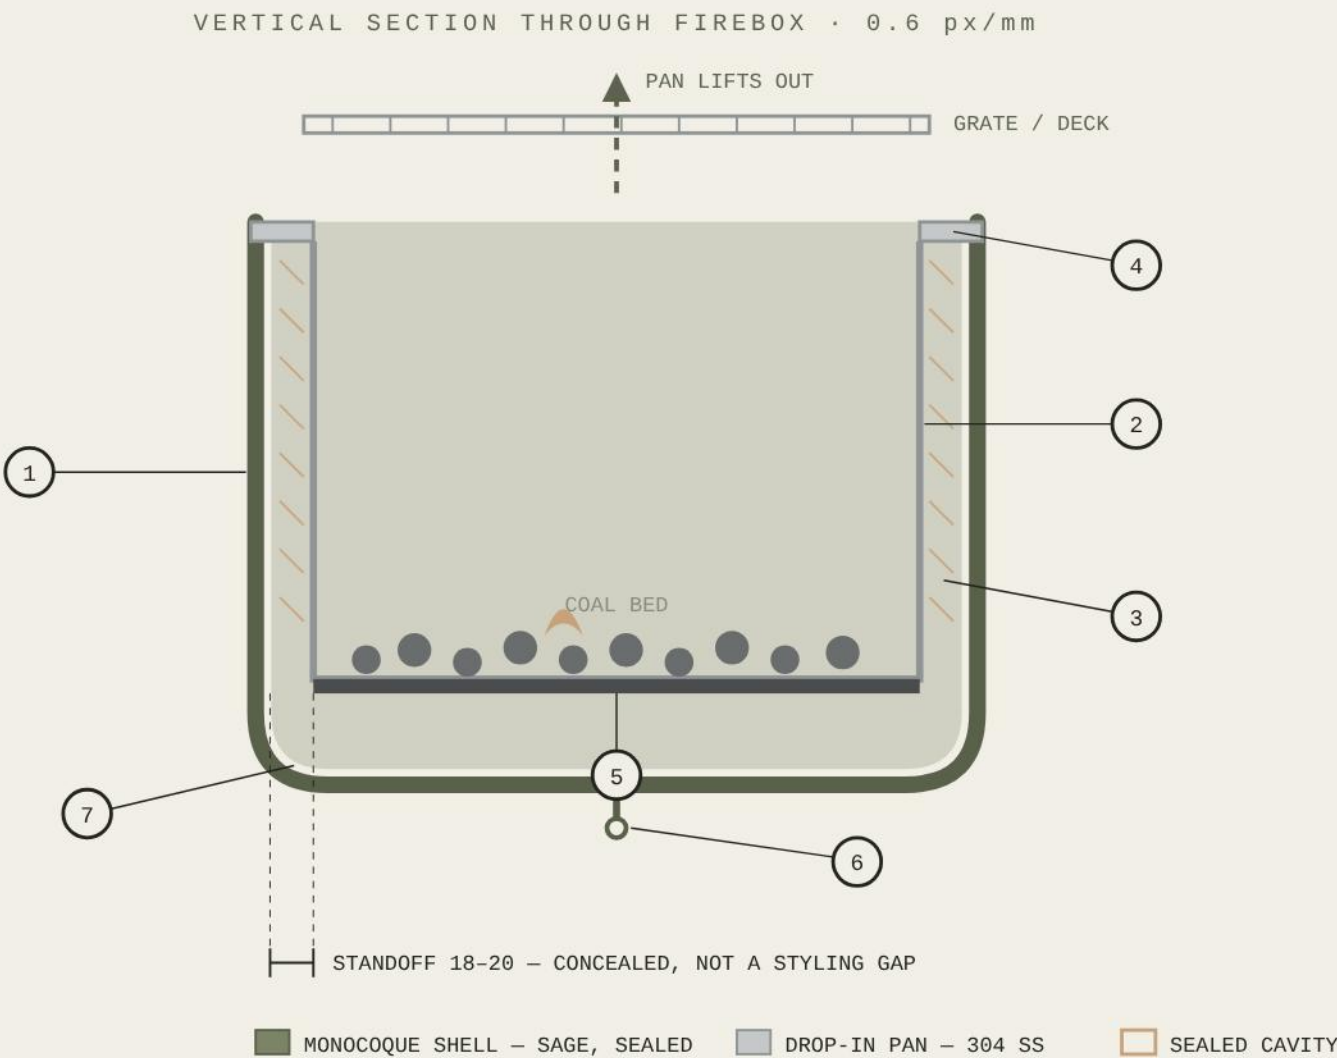

HOW IT WORKS

1 · MONOCOQUE SHELL — 3.2 CRS, ROLLED AS ONE CONTINUOUS PIECE, LARGE-RADIUS CORNERS, SAGE FINISH. **NO SEAM, NO GAP, NO FASTENER VISIBLE ANYWHERE ON THE OUTSIDE.** IT IS STRUCTURE AND SKIN ONLY — IT NEVER MEETS FIRE, SO THE GREEN IS NEVER AT RISK.

2 · DROP-IN FIRE PAN — 304 SS WALLS, LIFTS OUT COMPLETE. THE ONLY PART THE FIRE TOUCHES. NON-POROUS, SO RAIN IS IRRELEVANT. BECOMES A SERVICE PART AND A SELLABLE SPARE — THE ROLE FIREBRICK USED TO PLAY, WITHOUT THE SQUARE GEOMETRY.

3 · SEALED CAVITY, 18-20 — THE AIR GAP IS **INSIDE**, BEHIND THE PAN WALL. INVISIBLE FROM OUTSIDE. OPTIONAL CERAMIC FIBRE BONDED TO THE PAN’S OUTER FACE, SO INSULATION TRAVELS WITH THE REMOVABLE PART AND STAYS CAPTIVE AND DRY.

4 · PAN FLANGE CAPS THE CAVITY — FOLDS OUTWARD OVER THE SHELL RIM. SHEDS RAIN, CLOSES THE VOID, HIDES THE JOINT, AND GIVES A CRISP STAINLESS RIM LINE AGAINST THE SAGE. **THE FLANGE IS THE ONLY VISIBLE TRANSITION AND IT READS AS A DELIBERATE DETAIL.**

5 · 5mm CARBON FLOOR — WELDED INTO THE PAN. MASS AND ABRASION WHERE COALS SIT AND GET RAKED. OIL-SEASONS.

6 · CAVITY DRAIN — ANY WATER THAT PASSES THE FLANGE EXITS THE SHELL BASE. BOM ITEM 10 BECOMES STRUCTURAL.

7 · LARGE-RADIUS BASE — WHAT READS AS “MOULDED” ON THE GOZNEY IS SOFT CORNERS, NOT COMPOUND CURVES. A WIDE-RADIUS TOOL DELIVERS IT WITH NO PRESS TOOLING.

WHAT THIS SOLVES

- SEALED GREEN SIDE, **NO VISIBLE GAP**
- NO BRICK IN A CHANNEL, NO SQUARE CONSTRAINT
- NOTHING POROUS ANYWHERE NEAR FIRE OR RAIN
- MOULDED READ, **ZERO PRESS TOOLING**
- GREEN FINISH NEVER SEES FIRE TEMPERATURE
- CLEANING = LIFT THE PAN, TIP THE ASH
- THE WEAR PART IS REPLACEABLE AND SELLABLE

COST · BATCH 10, vs BASELINE


MONOCOQUE SHELL (ROLLED, 1pc) **\$240**
DROP-IN FIRE PAN (304 + 5mm FLOOR) **\$185**
DELETE: WELDED CARCASS -\$230
DELETE: FIREBRICK LINER SET -\$60

NET +\$135/UNIT · WEIGHT ~-5kg
FEWER WELDS AND NO BRICK-FITTING LABOUR
OFFSET MOST OF THE FORMING COST.

WHAT TO PROVE FIRST

- **PAN WALL TEMP AT THE COAL LINE.** IF THE 304 WALL RUNS HOT ENOUGH TO CONDUCT THROUGH THE STANDOFF, ADD THE FIBRE LAYER TO THE PAN.
- **SHELL SKIN TEMP** AT THE HOTTEST POINT — MUST STAY UNDER THE POWDER’S RATING WITH MARGIN.
- **RAIN-THEN-FIRE TEST** ON UNIT ONE.
- **PAN WALL STIFFNESS** — RIB OR BEAD IT; A FLAT 1.5 SHEET AT 1450 WILL OIL-CAN.
- PRESSBRAKE / ROLL CAPACITY FOR 3.2 AT 1450
- SUPPLIER QUALIFICATION.

DWG AW-PAR-STD-SE09	REV / DATE G · 2026-09-03	SCALE 0.6 px/mm	STANDOFF 18-20 CONCEALED	NET COST +\$135/UNIT	STATUS PROPOSED — REV G
------------------------	------------------------------	--------------------	-----------------------------	-------------------------	----------------------------

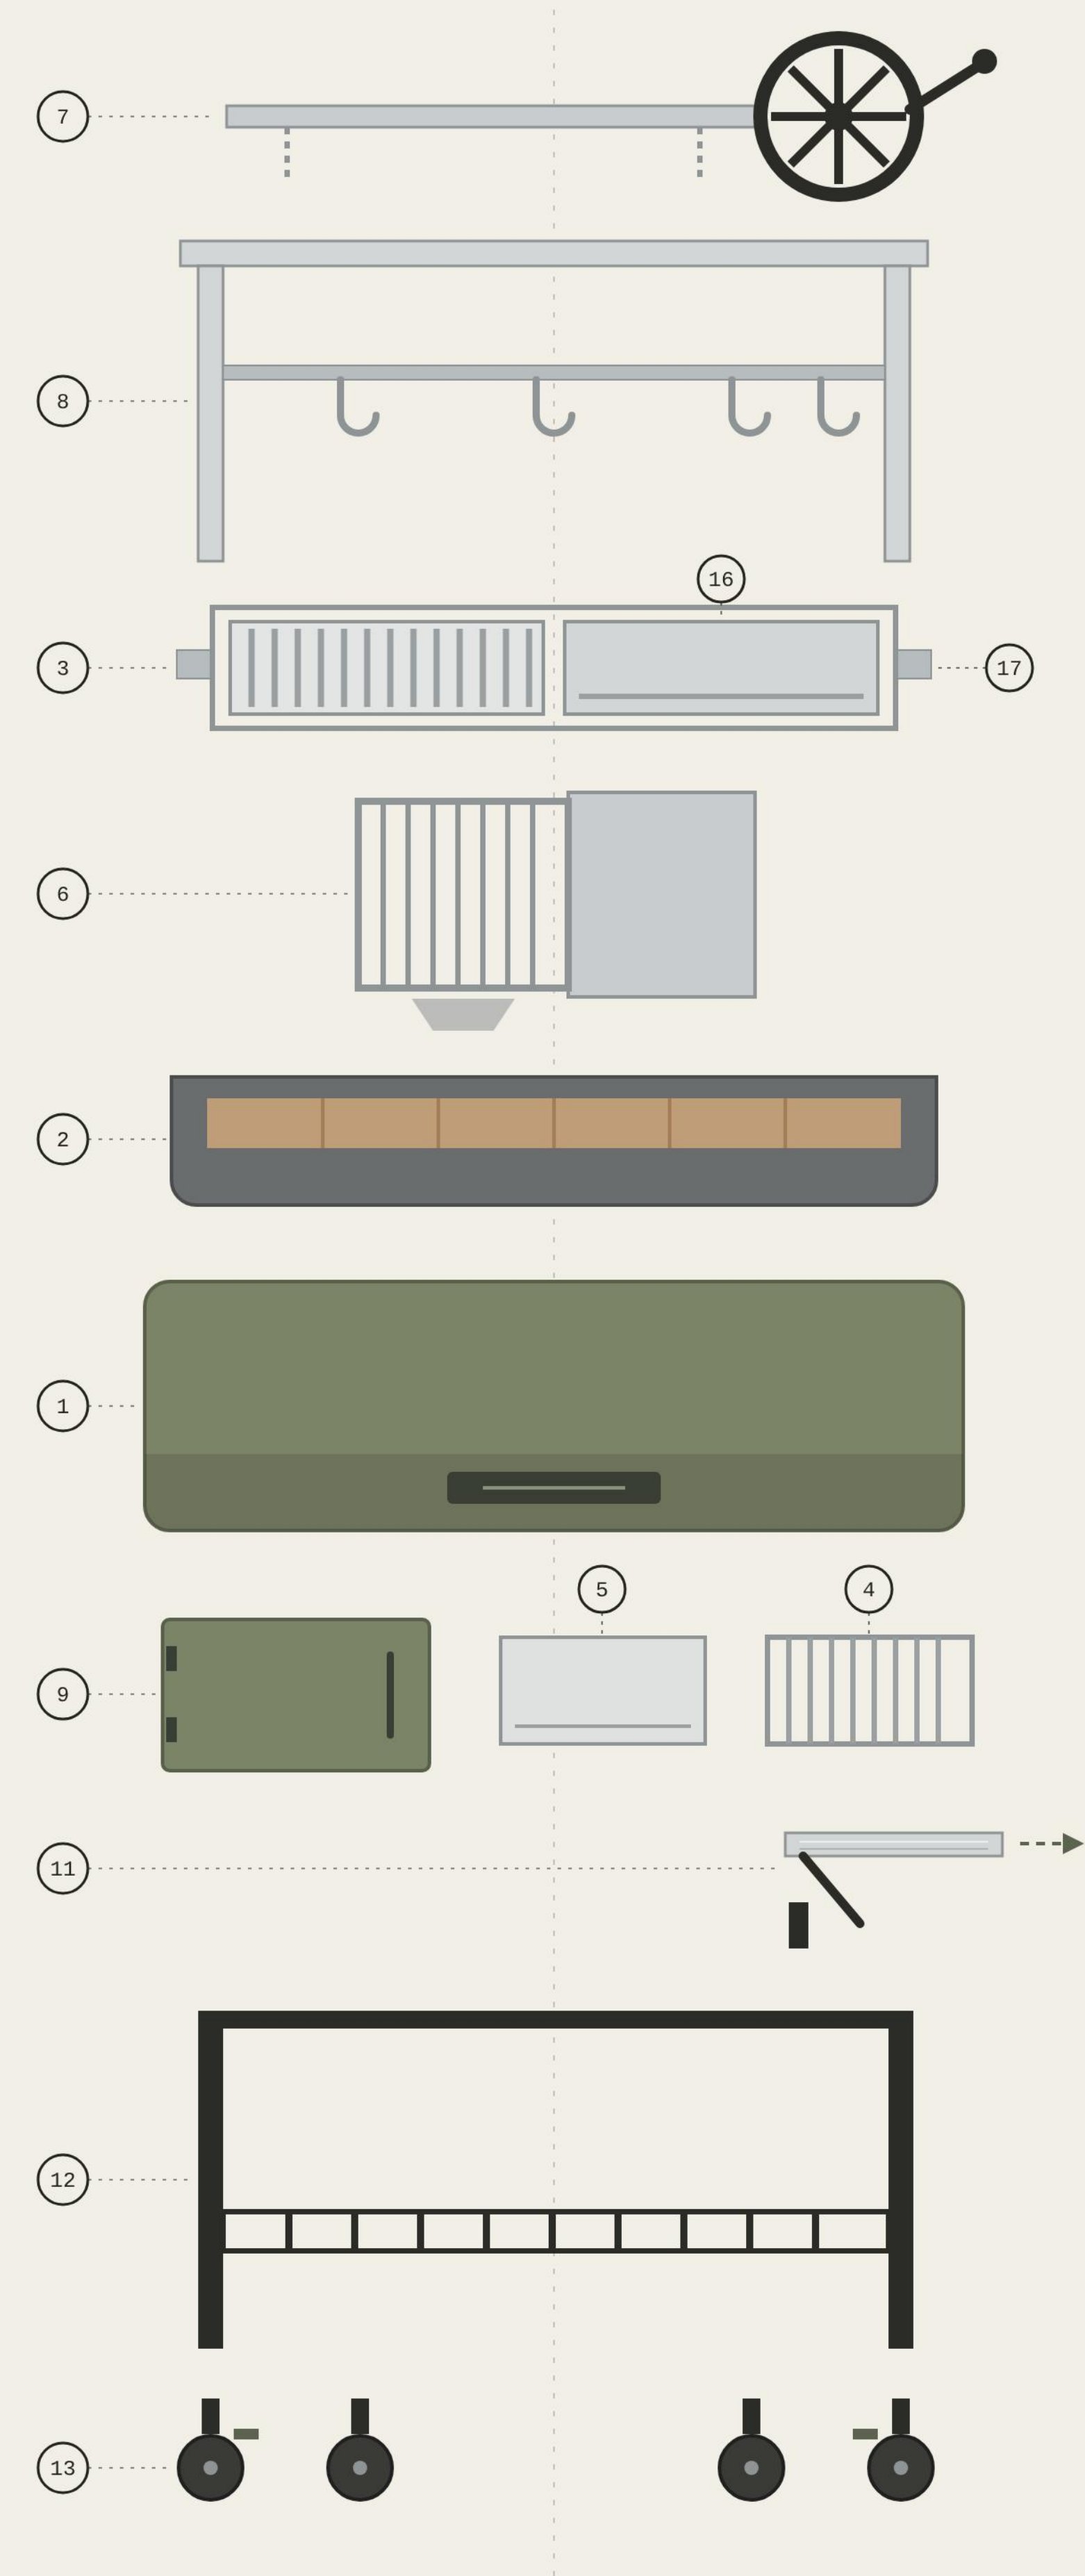

KEY	ITEM	MATERIAL	THK/SECTION
7	LIFT GEAR	CAST IRON + 304 SS	Ø20 SPINDLE
8	RAIL + S-HOOKS ×4	304 SS	SPAN 1450
3	GRILL MODULE ×2	304 SS V-CH	419×419
16	PLANCHA MODULE	304 SS 5.0 PL	419×419
17	MODULE CARRIAGE	2 BAYS	TRAVEL 250
6	BRASERO CAGE, LIFT-OUT	304 SS	250×420×500
2	FIREBRICK LINER	BTM + SIDE WALLS	25 THK
1	BODY CARCASS	CRS 3.2	PWDR SAGE
9	FRONT DOOR	CRS 3.2	PWDR SAGE
5	GRIDDLE	304 SS	3.0 PL · 260×432
4	SEC GRATE	304 SS	260×432
11	SIDE BENCH	304 SS	1.5 · REMOVABLE
12	CART + SLATTED SHELF	CRS 25×25×2	PWDR BLK
13	CASTERS ×4	Ø150	2 LOCKING

ITEMS 10 / 14 / 15 – SEE BOM-03

ITEM	PART	QTY	MATERIAL	THK / SECTION	SIZE (mm)	FINISH
1	BODY CARCASS, FOLDED, INCL. HEARTH PAN + ASH DRAWER	1	COLD-ROLLED STEEL	3.2 (1/8")	ENV 1450×508×1613	HT PWDR – SAGE
2	FIREBRICK LINER – BOTTOM + SIDE WALLS	SET	REFRACTORY BRICK	25	CUT TO HEARTH	–
3	GRILL MODULE, V-CHANNEL, DROP-IN	2	304 SS	V 20×20×1.5 TBC	419×419	BARE
4	SECONDARY GRATE (OVER BRASERO)	1	304 SS	Ø8 ROD TBC	260×432	BARE
5	INTERCHANGEABLE GRIDDLE	1	304 SS	3.0 PLATE	260×432	BARE
6	BRASERO FIRE CAGE, LH BAY, LIFT-OUT	1	304 SS	Ø10 ROD / 3.0 PL	250×420×500	BARE
7	LIFT GEAR: HANDWHEEL, SPINDLE, CHAIN, GUIDES	1	CAST IRON + 304 SS	Ø20 SPINDLE	WHEEL Ø400 DER	BLACK / BARE
8	HANGING RAIL + S-HOOKS	1+4	304 SS	Ø16 RAIL / Ø6 HOOK	SPAN 1450 · HT 1490	BARE
9	FRONT SAFETY DOOR	1	COLD-ROLLED STEEL	3.2	FIT FRONT OPENING	HT PWDR – SAGE
10	WATER DRAIN + ASH MANAGEMENT	1	304 SS / CRS	–	–	–
11	SIDE BENCH, RH, REMOVABLE, TOOL-FREE (+450 W FITTED)	1	304 SS	1.5 SHEET	450×350 TBC	BRUSHED
12	CART FRAME + SLATTED BOTTOM SHELF	1	CRS TUBE	25×25×2.0	FIT ENVELOPE	PWDR – BLACK
13	CASTERS, SWIVEL, 2 LOCKING	4	STEEL FORK / RUBBER	Ø150 (6")	–	ZINC
14	TOOL SET: SHOVEL + POKER	1 EA	304 SS	–	–	BARE
15	EXPORT CRATE	1	PLYWOOD	–	FIT ENV 1450×508×1613	–
16	PLANCHA MODULE, DROP-IN, GREASE GROOVE	1	304 SS ALT: CARBON STEEL	5.0 PL ALT 6.0 CS	419×419	BARE
17	MODULE CARRIAGE, 2-BAY, CRANK-LIFTED	1	304 SS	25×25×2.0 TBC	851×419 · TRAVEL 250	BARE


RFQ CONDITIONS

- QUOTE: 1 PROTOTYPE + BATCH 10 + BATCH 50 · EXW AND FOB · STANDARD AND XL (W +500)
- GOLDEN SAMPLE / QUALITY BENCHMARK: TAGWOOD BBQ03SI – MATCH OR EXCEED BUILD QUALITY, WELDS & FINISH
- MODULAR DECK: 2× 419×419 BAYS · ANY MODULE ANY BAY · CONFIGS: 2×GRATE / GRATE+PLANCHA
- PLANCHA (16): PRICE BOTH 304 SS 5.0 AND CARBON STEEL 6.0 · SEPARATE LINE ITEM
- OPTION: SECOND LIFT GEAR FOR INDEPENDENT BAY HEIGHT – QUOTE SEPARATELY
- 304 SS WITH MILL CERTS · NO 201 / 430 SUBSTITUTION · SS PASSIVATED AFTER WELD
- BODY 3.2 CRS · NO GAUGE REDUCTION WITHOUT WRITTEN APPROVAL
- POWDER: HIGH-TEMP RATED · COLOUR PER FN-04 · COATED SAMPLE PLATE BEFORE BATCH
- PRE-SHIP: PHOTOS OF EVERY ITEM + MATERIAL THICKNESS MEASUREMENTS ON CALLOUT POINTS
- DIMS mm · TOL ±2 U.N.O. · DRAWINGS GA-01 / EX-02 GOVERN · REF MODEL BBQ03SI · NET WT EST 110 kg
- ARCHITECTURE PER GA-01: GANTRY POSTS AT 275 / 1160 (CLEAR SPAN 850) · BRASERO TOWER OUTBOARD LH · LEGS INBOARD 150 / 1300 · SLAT SHELF BOLTED LEG-TO-LEG
- DATUMS PER GA-01: FIREBOX FLOOR 870 AFL · RIM 1200 · GRATE TRAVEL 950–1200 · RAIL 1490
- "DER" = DERIVED FROM PUBLISHED PARRILLA PLANS – VERIFY ON PROTOTYPE BEFORE BATCH


DWG AW-PAR-STD-BOM03	REV / DATE F · 2026-09-03	UNITS mm	ITEMS 17	TBC BEFORE RFQ 3·4·5·11·17	XL VARIANT W +500
-------------------------	------------------------------	-------------	-------------	-------------------------------	----------------------




SAGE · HIGH-TEMP POWDER COAT
#7C8468 · RAL TBC BY SWATCH · ITEMS 1, 9



BLACK · POWDER COAT
#26261F · ITEM 12

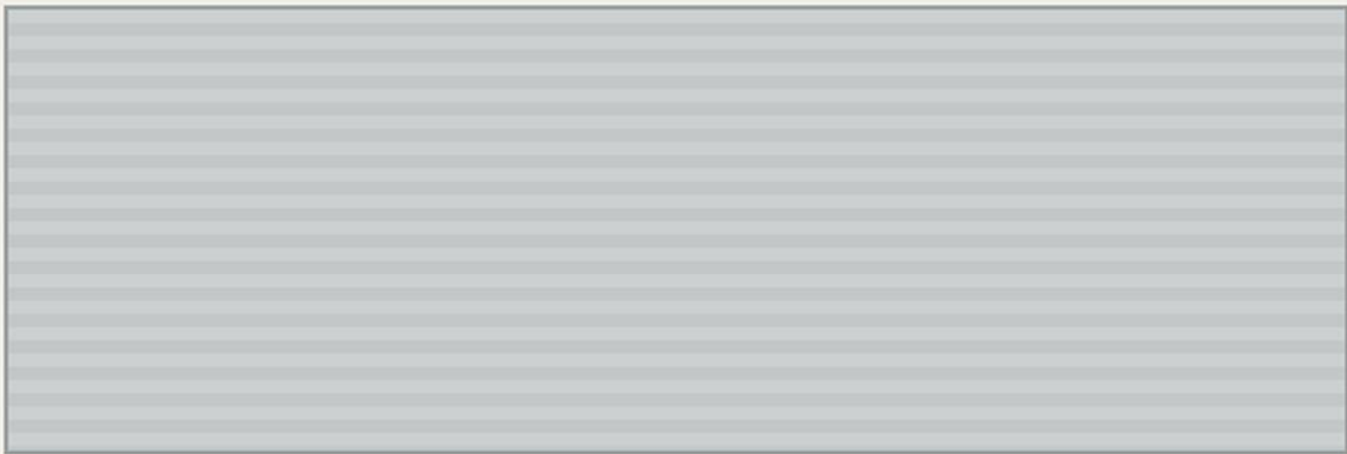

304 SS · BRUSHED / BARE
BRUSHED: 11 · BARE: 3, 4, 5, 6, 8, 14, 16, 17



FIREBRICK
ITEM 2 · BTM + SIDE WALLS · REPLACEABLE

- COATED SAMPLE PLATE REQUIRED FOR COLOUR APPROVAL BEFORE BATCH
- POWDER: HIGH-TEMP RATED ON ITEMS 1, 9 · NO WET PAINT SUBSTITUTION
- ITEM 7 WHEEL: MATTE BLACK, HEAT-RESISTANT · ITEM 13 FORKS: ZINC PLATE

01 – SPECIFIED BUILD

ASSEMBLY	SUBSTRATE	FINISH	DRIVER
CART, LEGS, SLAT SHELF	CRS 25×25×2 TUBE HOT-DIP GALV / Zn-RICH PRIMER	POWDER – CHARCOAL BLACK	RUST, NOT HEAT. GALV GIVES CATHODIC PROTECTION AT EVERY SCRATCH.
BODY PANELS + DOOR	CRS 3.2, Zn-RICH PRIMER	HIGH-TEMP SILICONE POWDER, 250°C+ – SAGE	SITS BEHIND FIREBRICK. RUNS 80–150°C, NOT FIRE TEMP.
HEARTH PAN / FIREBOX	MILD STEEL 5.0 PLATE	UNCOATED, FIREBRICK LINED, OIL-SEASONED	MASS + BRICK BEAT ALLOY. THICK CARBON CYCLES BETTER THAN THIN SS.
GRATES, PLANCHA, BRASERO, RAIL, BENCH	304 SS	BARE / BRUSHED	FOOD CONTACT. POWDER COAT IS NOT FOOD SAFE – NEVER COAT THESE.

02 – TEMPERATURE REALITY

THE FIREBRICK LINER IS A THERMAL BREAK. COALS RUN 400–700°C AT THE HEARTH; THE COLOURED OUTER PANELS SIT BEHIND BRICK + AIR GAP AND RUN 80–150°C. THE PANELS BEING COLOURED NEVER SEE THE TEMPERATURES ENAMEL IS SOLD ON.

CORRECTION WORTH RECORDING: WEBER’S “1500°F” IS THE KILN THE ENAMEL IS FIRED IN, NOT THE SERVICE TEMPERATURE. A WEBER KETTLE RUNS 150–370°C.

FINISH	SERVICE TEMP	FOOD SAFE
BARE STEEL + FIREBRICK	UNLIMITED	N/A – BEHIND BRICK
PORCELAIN ENAMEL	~500–600°C (FIRED AT 815°C)	YES
HIGH-TEMP SILICONE POWDER – SPECIFIED	250–550°C	NO – EXTERNAL ONLY
STANDARD POLYESTER POWDER	~200°C	NO

03 – COST: POWDER vs ENAMEL CASING · AUD/UNIT

QTY	POWDER ROUTE	ENAMEL CASING + POWDER CART	DELTA	×
1 (PROTO)	\$444	\$2,130	+\$1,686	4.8×
10	\$228	\$582	+\$354	2.5×
50	\$209	\$444	+\$235	2.1×
200	\$206	\$418	+\$212	2.0×

AREAS EXACT FROM GA-01: CASING 1.608m² ONE FACE / 3.216m² BOTH FACES · CART 1.425m² · SS LINER OPTION 2.202m²

ENAMEL PRICES AT DOUBLE THE AREA – A PANEL CANNOT BE ENAMELLED ONE SIDE (WARPS, AND THE BACK RUSTS).

POWDER RATES SOURCED – AU JOB SHOP \$14–50/m², ~\$35+GST TYPICAL. ENAMEL FIGURES ARE ESTIMATES (\$90/m² + \$1,600 FIXTURES + 12% REJECT). NO PUBLIC RATE EXISTS – VALIDATE BY QUOTE BEFORE RELYING ON THEM.

04 – WHY NOT ENAMEL HERE

- **GEOMETRY, NOT CHEMISTRY.** A WEBER KETTLE IS A DEEP-DRAWN SINGLE PRESSING: NO WELDS, NO CORNERS, EVEN WALL. THIS IS A FOLDED BOX WITH WELDED CORNERS – WHERE ENAMEL COVERAGE THINS AND CHIPS START.
- **A CHIP HAS NO DEFENCE.** POWDER OVER GALV SELF-PROTECTS AT A SCRATCH. AN ENAMEL CHIP IS BARE STEEL. THIS IS A WHEELED CART LOADED WITH FIREWOOD.
- **DIFFERENT STEEL.** ENAMELLING GRADE IS DECARBURISED LOW-CARBON – NOT THE 3.2 CRS SPECIFIED. CHANGES THE WHOLE QUOTE.
- **COLOUR WILL NOT MATCH POWDER.** IF ENAMELLED, THOSE PANELS MUST NOT SIT ADJACENT TO POWDER IN THE SAME COLOUR.

05 – 304 vs 316 MARINE

- 316’s MOLYBDENUM BUYS CHLORIDE / PITTING RESISTANCE AT **MODERATE** TEMPERATURE. AT 425–870°C IT IS **NOT MEANINGFULLY BETTER THAN 304** FOR OXIDATION.
- BOTH GRADES SENSITISE IN THE 425–850°C BAND. A FIREBOX SITS IN THAT WINDOW EITHER WAY.
- 316 COSTS ~1.4–1.6× 304. ON HOT PARTS THAT IS A PREMIUM FOR A PROPERTY NEVER USED.
- **316 EARNS IT ON SALTY-BUT-COOL PARTS:** CART, LEGS, BENCH, GANTRY, FASTENERS.
- IF A STAINLESS FIREBOX IS EVER REQUIRED, THE CORRECT GRADES ARE **309 / 310**, NOT 316. WITH FIREBRICK, NEITHER IS NEEDED.

OPTION – COASTAL EDITION SKU

316 ON THE COLD-BUT-EXPOSED PARTS ONLY: CART, LEGS, BENCH, GANTRY, ALL EXTERNAL FASTENERS. STANDARD BUILD STAYS 304 + GALV.

A LEGITIMATE PREMIUM SKU FOR AU COASTAL BUYERS – AND A STORY CUSTOMERS UNDERSTAND. HOT PARTS STAY 304 REGARDLESS.

DURABILITY SPEND, RANKED

1. THICKNESS ON THE HEARTH PAN – 5mm CARBON, NOT THIN SS
 2. FIREBRICK – KEEPS FIRE OFF STEEL ENTIRELY
 3. HOT-DIP GALV UNDER THE POWDER ON THE CART
 4. WELD QUALITY + POST-WELD PASSIVATION
 5. GRADE SELECTION (304 HOT / 316 SALTY-COOL)
- CHEAP BUILDS FAIL AT WELDS AND PREP, NOT AT ALLOY GRADE.

ASK EVERY SUPPLIER – SO QUOTES ARE COMPARABLE

- PRICE 3 WAYS: (A) HIGH-TEMP POWDER OVER Zn-RICH PRIMER · (B) SAME OVER HOT-DIP GALV · (C) PORCELAIN ENAMEL ON THE 4 BODY PANELS + DOOR
- POWDER BRAND, PRODUCT CODE AND **RATED CONTINUOUS SERVICE TEMPERATURE**
- SALT-SPRAY HOURS TO ASTM B117 – 500h MINIMUM, GOOD SUPPLIERS QUOTE 1000h
- FOR ENAMEL: KILN ENVELOPE, FIXTURE / TOOLING COST, MOQ, REJECT RATE, LEAD TIME (EXPECT 8–12 WEEKS)
- COASTAL EDITION: 316 DELTA ON CART / BENCH / GANTRY / FASTENERS AS A SEPARATE LINE ITEM

DWG AW-PAR-STD-FN06	REV / DATE F · 2026-09-03	AREAS EXACT PER GA-01	POWDER RATES SOURCED (AU)	ENAMEL RATES ESTIMATE – QUOTE	RECOMMENDATION POWDER + GALV
------------------------	------------------------------	--------------------------	------------------------------	----------------------------------	---------------------------------

THESE ARE BALLPARK ESTIMATES, NOT QUOTES. BUILT TO SIZE THE OPPORTUNITY AND TO GIVE SUPPLIER QUOTES SOMETHING TO BE TESTED AGAINST. AREAS AND DIMENSIONS ARE EXACT PER GA-01; PART PRICES ARE JUDGEMENT. REPLACE EVERY FIGURE WITH REAL QUOTES BEFORE ANY COMMITMENT.

01 – FOB BUILD COST · BATCH 10

NO	ITEM	AUD
1	BODY CARCASS, FOLDED + WELDED, 3.2 CRS	230
2	FIREBRICK LINER SET	60
3	GRILL MODULE ×2, 304 V-CHANNEL 419×419	190
4	SECONDARY GRATE 304, 260×432	45
5	GRIDDLE 304 3.0 PLATE, 260×432	55
6	BRASERO CAGE 304, 250×420×500	130
7	LIFT GEAR: WHEEL, SPINDLE, CHAIN, GUIDES	150
8	HANGING RAIL + 4 S-HOOKS, 304	45
9	FRONT DOOR, CRS 3.2	50
10	WATER DRAIN + ASH MANAGEMENT	35
11	SIDE BENCH 304 1.5, 450×350	60
12	CART FRAME + SLATTED SHELF, CRS TUBE	150
13	CASTERS ×4 Ø150, 2 LOCKING	60
14	TOOL SET: SHOVEL + POKER, 304	40
16	PLANCHA MODULE 304 5.0, 419×419	110
17	MODULE CARRIAGE, 2-BAY, 304	140
–	FASTENERS / HARDWARE	40
–	COATING: HT POWDER SAGE + BLACK OVER GALV	228
15	EXPORT CRATE	70
–	ASSEMBLY / QC / PASSIVATION	120
FOB SUBTOTAL		2,008

02 – LANDED, AUSTRALIA

FOB	2,008
SEA FREIGHT, LCL (~1.6m³ CRATED)	260
DUTY – CHAFTA CHINA ORIGIN	0
MARINE INSURANCE	25
PORT / CUSTOMS / CARTAGE	90
LANDED ex-GST	2,383
GST (RECOVERABLE)	238

03 – VOLUME SENSITIVITY

QTY	FOB	LANDED	NOTE
1	\$4,317	\$4,692	PROTOTYPE – TOOLING + SETUP ABSORBED
10	\$2,008	\$2,383	BASELINE
50	\$1,727	\$2,102	TOOLING AMORTISED
200	\$1,566	\$1,941	TOOLING + MATERIAL BREAKS

04 – RRP POSITIONING · FROM LANDED \$2,383

×	RRP inc GST	GM	POSITION
2.0	\$5,240	50%	THIN / WHOLESALE-LED
2.5	\$6,550	60%	TYPICAL DTC PREMIUM HARDWARE
3.0	\$7,860	67%	STRONG BRAND MARGIN

FINDING 1 – THE MATHS DOES NOT CLOSE AT BATCH 10

TAGWOOD BBQ03SI RETAILS ~AUD 4,500–5,500. AT BATCH 10, LANDED \$2,383 SUPPORTS ONLY A 2.0× RRP OF \$5,240 – TOP OF TAGWOOD’S RANGE, ON 50% GM, WITH NO ROOM FOR WHOLESALE, DISCOUNTING OR RETURNS.

BATCH 50 IS THE REALISTIC FIRST PRODUCTION RUN, NOT 10. IT IS ALSO WHY QUOTES MUST BE TAKEN AT 1 / 10 / 50 / 200 – THE SHAPE OF THE CURVE DECIDES THE BUSINESS, NOT THE UNIT PRICE.

FINDING 2 – THE MODULAR DECK IS 22% OF BUILD COST

ITEMS 3 + 16 + 17 (GRILL MODULES, PLANCHA, 2-BAY CARRIAGE) = \$440 OF \$2,008 FOB. THE SINGLE LARGEST COST BLOCK, AND ALSO THE ONLY REAL DIFFERENTIATOR AGAINST TAGWOOD.

DO NOT VALUE-ENGINEER IT AWAY. IF COST MUST COME OUT, TAKE IT FROM THE CARCASS AND CART FIRST – OR SELL THE PLANCHA MODULE AS A PAID ACCESSORY AND SHIP THE BASE UNIT WITH TWO GRATES.

ASSUMPTIONS TO CHALLENGE

- PART PRICES ARE FOB CHINA, BATCH-10 JUDGEMENT. NOT QUOTED. THE WHOLE MODEL MOVES ON THESE.
- FREIGHT ASSUMES LCL SEA AT ~1.6m³ CRATED, ~110kg. A 20FT CONTAINER HOLDS ~16 UNITS – FCL AT VOLUME CUTS THIS SHARPLY.
- DUTY TAKEN AS NIL UNDER CHAFTA FOR CHINA-ORIGIN GOODS – **CONFIRM TARIFF CLASSIFICATION WITH A CUSTOMS BROKER.**
- GST SHOWN AS RECOVERABLE (REGISTERED IMPORTER). NOT A COST, BUT IT IS CASHFLOW AT LANDING.
- EXCLUDES: TOOLING AMORTISATION AS A SEPARATE LINE, WARRANTY / FAILURE RESERVE, LOCAL WAREHOUSING, LAST-MILE DELIVERY TO CUSTOMER (SIGNIFICANT AT 110 kg), MARKETING AND PAYMENT FEES.
- LAST-MILE ON A 110kg CRATED ITEM IS A REAL NUMBER IN AU – MODEL IT BEFORE SETTING RRP OR OFFERING FREE FREIGHT.

DWG AW-PAR-STD-CS07	REV / DATE F · 2026-09-03	CURRENCY AUD	BASIS FOB CHINA, BATCH 10	STATUS ESTIMATE – NOT QUOTED	MIN VIABLE RUN 50 UNITS
------------------------	------------------------------	-----------------	------------------------------	---------------------------------	----------------------------

THE GOVERNING INSIGHT. A PARRILLA IS AN **OPEN FIRE** – THE HEAT THAT MATTERS LEAVES **UPWARD** TO THE GRATE. THE SIDE WALLS HAVE THREE JOBS ONLY: DO NOT WARP, DO NOT COOK THE OUTER SKIN, HOLD THE COALS IN. **THERE IS NO REQUIREMENT TO STORE THERMAL ENERGY.**

AND THE PLACEMENT RULE: INSULATION BELONGS **SEALED IN THE WALL CAVITY**, NOT ON THE FIRE FACE. OONI AND GOZNEY BOTH ENCAPSULATE CERAMIC FIBRE BETWEEN TWO SKINS SO NEITHER FLAME NOR RAIN EVER REACHES IT. AN INSULATING BOARD USED AS THE VISIBLE LINER IS EXPOSED TO BOTH.

A SEALED PIZZA OVEN (GOZNEY, OONI) IS THE OPPOSITE CASE: RETAINED HEAT *IS* THE PRODUCT, SO MASS AND INSULATION ARE LOAD-BEARING. COPYING THEIR STACK MEANS CARRYING WEIGHT AND COST FOR A PROPERTY THIS PRODUCT NEVER USES. **FIREBRICK ON THE WALLS IS A THERMAL-MASS ANSWER TO WHAT IS ACTUALLY AN INSULATION QUESTION.**

01 – FIRE-FACE MATERIALS · WATER EXPOSURE IS THE GOVERNING TEST

THIS IS AN OPEN-TOP FIREBOX THAT LIVES OUTDOORS AND WILL BE RAINED INTO. ANY POROUS OR HYGROSCOPIC MATERIAL ON THE FIRE FACE ABSORBS WATER, THEN SPALLS WHEN THE TRAPPED MOISTURE FLASHES TO STEAM ON THE NEXT FIRE. THAT RULES OUT MOST STOVE-LINER PRACTICE, WHICH ASSUMES A DRY INDOOR APPLIANCE.

MATERIAL ON FIRE FACE	RATING	WEIGHT	WET RISK	VERDICT
304 SS WALL SKIN, RIBBED, AIR GAP BEHIND <i>recommended – walls</i>	oxidation OK to 870 °C intermittent	~8 kg	NONE	NON-POROUS: WATER CANNOT BE ABSORBED. THIN, SO GEOMETRY IS FREE – ROLLS AND CURVES. RIB OR BEAD IT FOR STIFFNESS. WILL HEAT-TINT – TREAT AS PATINA, NOT A FAULT. REAL WORLD: OONI KARU / KODA, GOZNEY DOME INNER SHELL.
5mm CARBON PLATE <i>recommended – floor</i>	unlimited w/ mass	~20 kg	NONE	COALS SIT AND GET RAKED HERE – NEEDS MASS AND ABRASION RESISTANCE, NOT INSULATION. OIL-SEASONS LIKE A PAN. SHEDS WATER.
DENSE FIRECLAY FIREBRICK <i>traditional</i>	~1300 °C	~35 kg	LOW-MED	DENSE AND LOW-POROSITY ENOUGH TO SURVIVE OUTDOORS – PROVEN BY THOUSANDS OF OUTDOOR PIZZA OVENS AND BY TAGWOOD. BUT HEAVY, AND FORCES SQUARE GEOMETRY. STILL A VALID FLOOR OPTION.
CORDIERITE STONE	excellent thermal shock	~14 kg	MED	GOZNEY’S FLOOR CHOICE (30mm). BEST THERMAL-SHOCK RESISTANCE OF THE REFRACTORIES – BUT STILL POROUS: A SOAKED STONE FIRED HARD CAN CRACK. ACCEPTABLE UNDER COVER, NOT EXPOSED.
DENSE CASTABLE REFRACTORY	~1400 °C	HEAVY	LOW-MED	MOULDS TO ANY GEOMETRY AND LOW-POROSITY GRADES HANDLE WEATHER. HEAVY AND SLOW TO CURE.
VERMICULITE BOARD	~1100 °C	~10 kg	FAILS	REJECTED FOR THIS PRODUCT. HYGROSCOPIC – ABSORBS WATER LIKE A SPONGE, THEN CRACKS WHEN HEATED WET. VIABLE ONLY SEALED INSIDE A DRY INDOOR STOVE. NOT AN OPEN OUTDOOR FIREBOX.

RECOMMENDED STACK – NOTHING POROUS EXPOSED

FLOOR – 5mm CARBON PLATE (OR DENSE FIREBRICK). MASS + ABRASION WHERE COALS SIT.

WALLS – 304 SS SKIN, RIBBED, NON-POROUS.

CAVITY – CERAMIC FIBRE **SEALED BETWEEN INNER AND OUTER SKIN** – NEVER EXPOSED TO FIRE OR WEATHER. THIS IS THE OONI / GOZNEY ARRANGEMENT.

DRAINAGE – BOM ITEM 10 WATER DRAIN IS NOW STRUCTURAL, NOT OPTIONAL. AN OPEN FIREBOX MUST SHED RAIN.

RESULT: ~85kg vs 110kg, GEOMETRY FREED FROM SQUARE BRICK, **ZERO WATER-ABSORBENT MATERIAL ANYWHERE ON THE FIRE FACE.**

THE MOULDED LOOK – WITHOUT PRESS TOOLING

COMPOUND CURVES LIKE THE GOZNEY DOME NEED DEEP-DRAW TOOLING – DEAD AT TEN UNITS.

BUT WHAT READS AS “MOULDED” IS **LARGE-RADIUS CORNERS, NOT COMPOUND CURVES.** A WIDE-RADIUS PRESSBRAKE TOOL OR A ROLL-FORMED WRAP GETS IT AT NEAR-ZERO TOOLING.

BIG SOFT RADII + CERAMIC COATING + NO VISIBLE FASTENERS WILL READ AS MOULDED. **CAST ALUMINIUM IS THE ONLY TRULY MOULDABLE ROUTE – REAL TOOLING MONEY, PAYS ONLY IN THE HUNDREDS.**

POLYMER / SAND-FILLED COMPOSITES: NOT VIABLE. ANY PLASTIC IS GONE BY 200°C.

CERAMIC BONDED FINISH AT LOW VOLUME – WHY IT IS THE VIABLE PREMIUM

CERAMIC IS **SPRAY-APPLIED AND AIR / LOW-BAKE CURED:** NO KILN, NO PER-PART FIXTURES, NO MINIMUM FIRING LOAD. ENAMEL NEEDS AN 815°C KILN LARGE ENOUGH FOR A 1450 PANEL PLUS PART-SPECIFIC JIGS.

AT **BATCH 10:** POWDER \$228 · **CERAMIC \$323** · ENAMEL \$582 · COASTAL 316 \$408.
AT **BATCH 50:** POWDER \$209 · **CERAMIC \$266** · ENAMEL \$444 · COASTAL 316 \$389.

CERAMIC COSTS ONLY **~\$95/UNIT OVER POWDER AT TEN UNITS** – AND CAN BE APPLIED BY A LICENSED AU APPLICATOR RATHER THAN THE FACTORY, SO BRAND COLOUR IS CONTROLLED LOCALLY AND EVERY PART IS SEEN BEFORE ASSEMBLY. **TRADE: ~5yr SERVICE LIFE vs 20yr+ FOR POWDER, AND A NARROW COLOUR RANGE.**

DWG AW-PAR-STD-TH08	REV / DATE F · 2026-09-03	STATUS OPTION – NOT YET SPECIFIED	WEIGHT SAVING ~25 kg	PROTOTYPE ACTION SKIN TEMP + RAIN TEST	LIVE MODEL BUILD METHOD TOGGLES
------------------------	------------------------------	---	-------------------------	---	------------------------------------



FINISH + PROPORTION REFERENCE ONLY · DIMS PER GA-01 · STRUCTURE REF BBQ03SI