Fig. 4.5 A line (a) in image space; (b) in parameter space.

4.3 THE HOUGH METHOD FOR CURVE DETECTION

The classical Hough technique for curve detection is applicable if little is known about the location of a boundary, but its shape can be described as a parametric curve (e.g., a straight line or conic). Its main advantages are that it is relatively unaffected by gaps in curves and by noise.

To introduce the method [Duda and Hart 1972], consider the problem of detecting straight lines in images. Assume that by some process image points have been selected that have a high likelihood of being on linear boundaries. The Hough technique organizes these points into straight lines, basically by considering all possible straight lines at once and rating each on how well it explains the data.

Consider the point $\mathbf{x}'$ in Fig. 4.5a, and the equation for a line $y = mx + c$. What are the lines that could pass through $\mathbf{x}'$? The answer is simply all the lines with m and c satisfying $y' = mx' + c$. Regarding (x', y') as fixed, the last equation is that of a line in $m-c$ space, or parameter space. Repeating this reasoning, a second point $(\mathbf{x}'', \mathbf{y}'')$ will also have an associated line in parameter space and, furthermore, these lines will intersect at the point (m', c') which corresponds to the line AB connecting these points. In fact, all points on the line AB will yield lines in parameter space which intersect at the point (m', c'), as shown in Fig. 4.5b.

This relation between image space $\mathbf{x}$ and parameter space suggests the following algorithm for detecting lines:

Algorithm 4.1: Line Detection with the Hough Algorithm
1. Quantize parameter space between appropriate maximum and minimum values for c and m.

2. Form an accumulator array $A(c, m)$ whose elements are initially zero.

3. For each point (x,y) in a *gradient* image such that the strength of the gradient

exceeds some threshold, increment all points in the accumulator array along the appropriate line, i.e.,

$$A(c, m) := A(c, m) + 1$$

for m and c satisfying $c = -mx + y$ within the limits of the digitization.

4. Local maxima in the accumulator array now correspond to collinear points in the image array. The values of the accumulator array provide a measure of the number of points on the line.

This technique is generally known as the Hough technique [Hough 1962].

Since m may be infinite in the slope-intercept equation, a better parameterization of the line is $x \sin\theta + y\cos\theta = r$. This produces a sinusoidal curve in (r, θ) space for fixed x, y, but otherwise the procedure is unchanged.

The generalization of this technique to other curves is straightforward and this method works for any curve $f(\mathbf{x}, \mathbf{a}) = 0$, where a is a parameter vector. (In this chapter we often use the symbol f as various general functions unrelated to the image gray-level function.) In the case of a circle parameterized by

$$(x - a)^2 + (y - b)^2 = r^2 \qquad (4.1)$$

for fixed $\mathbf{x}$, the modified algorithm 4.1 increments values of a, b, r lying on the surface of a cone. Unfortunately, the computation and the size of the accumulator array increase exponentially as the number of parameters, making this technique practical only for curves with a small number of parameters.

The Hough method is an efficient implementation of a generalized matched filtering strategy (i.e., a template-matching paradigm). For instance, in the case of a circle, imagine a template composed of a circle of 1's (at a fixed radius R) and 0's everywhere else. If this template is convolved with the gradient image, the result is the portion of the accumulator array $A(a, b, R)$.

In its usual form, the technique yields a set of parameters for a curve that best explains the data. The parameters may specify an infinite curve (e.g., a line or parabola). Thus, if a finite curve segment is desired, some further processing is necessary to establish end points.

4.3.1 Use of the Gradient

Dramatic reductions in the amount of computation can be achieved if the gradient direction is integrated into the algorithm [Kimme et al. 1975]. For example, consider the problem of detecting a circle of fixed radius R.

Without gradient information, all values a, b lying on the circle given by (4.1) are incremented. With the gradient direction, only the points near (a, b) in Fig. 4.6 need be incremented. From geometrical considerations, the point (a, b) is given by

Contents of accumulator tray

Gradient direction information for artifact $\Delta\phi = 45$

☐ Denotes a pixel in P($\underline{x}$) superimposed on accumulator tray
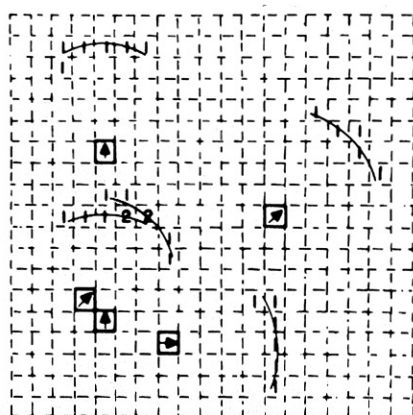
↗ Denotes the gradient direction

Fig 4.6 Reduction in computation with gradient information

$$a = x - r \sin\phi \qquad (4.2)$$
$$b = y + r \cos\phi$$

where $\phi(x)$ is the gradient angle returned by an edge operator. Implicit in these equations is the assumption that the circle is the boundary of a disk that has gray levels greater than its surroundings. These equations may also be derived by differentiating (4.2), recognizing that $dy/dx = \tan\phi$, and solving for a and b between the resultant equation and (4.2). Similar methods can be applied to other conics. In each case, the use of the gradient saves one dimension in the accumulator array.

The gradient magnitude can also be used as a heuristic in the incrementing procedure. Instead of incrementing by unity, the accumulator array location may be incremented by a function of the gradient magnitude. This heuristic can balance the magnitude of brightness change across a boundary with the boundary length, but it can lead to detection of phantom lines indicated by a few bright points, or to missing dim but coherent boundaries.

4.3.2 Some Examples

The Hough technique has been used successfully in a variety of domains. Some examples include the detection of human hemoglobin fingerprints [Ballard et al. 1975], the detection of tumors in chest films [Kimme et al. 1975], the detection of storage tanks in aerial images [Lantz et al. 1978], and the detection of ribs in chest radiographs [Wechsler and Sklansky 1977]. Figure 4.7 shows the tumor-detection application. A section of the chest film (Fig. 4.7b) is searched for disks of radius 3 units. In Fig. 4.7c, the resultant accumulator array $A[a, b, 3]$ is shown in a pictoral fashion, by interpreting the array values as gray levels. This process is repeated for various radii and then a set of likely circles is chosen by setting a radius-dependent threshold for the accumulator array contents. This result is shown in Fig. 4.7d. The
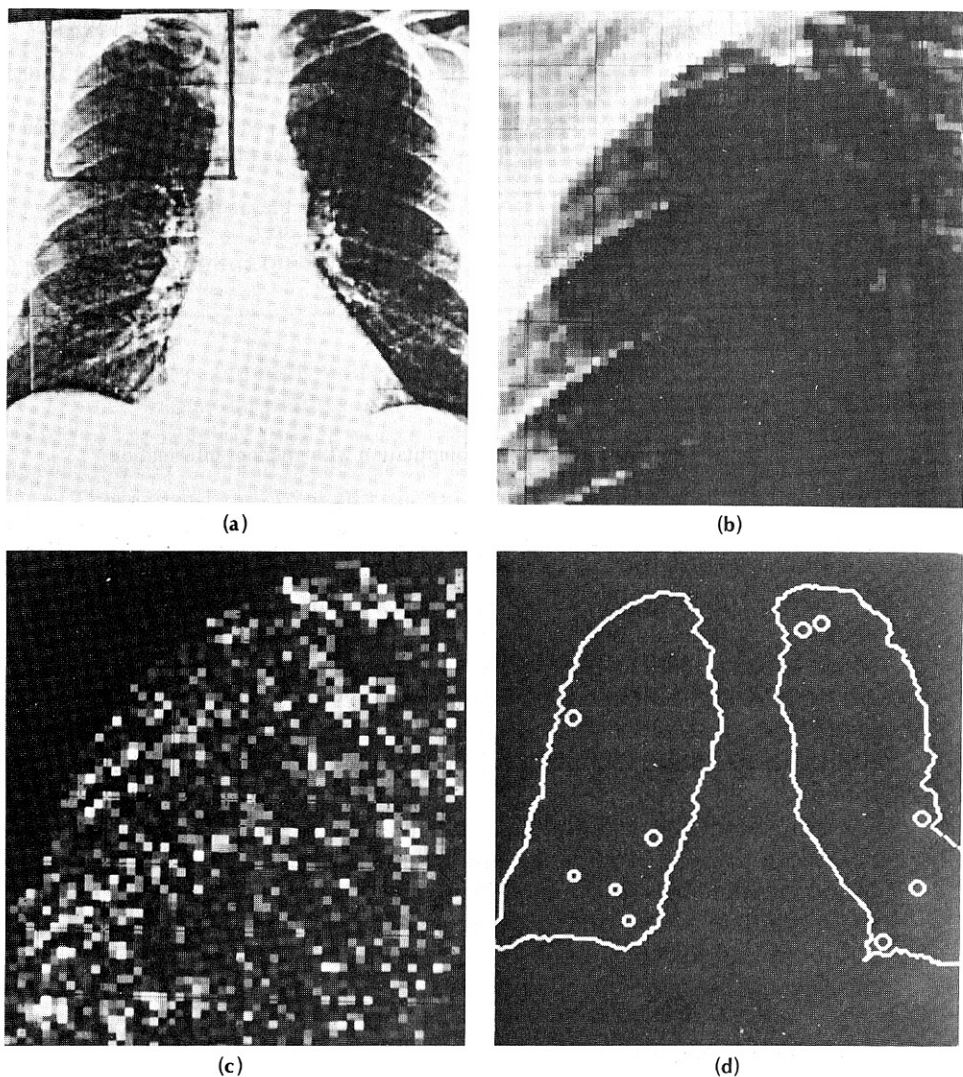
Fig. 4.7 Using the Hough technique for circular shapes. (a) Radiograph. (b) Window. (c) Accumulator array for $r = 3$. (d) Results of maxima detection.

circular boundaries detected by the Hough technique are overlaid on the original image.

4.3.3 Trading Off Work in Parameter Space for Work in Image Space

Consider the example of detecting ellipses that are known to be oriented so that a principal axis is parallel to the x axis. These can be specified by four parameters. Using the equation for the ellipse together with its derivative, and substituting for the known gradient as before, one can solve for two parameters. In the equation

$$\frac{(x - x_0)^2}{a^2} + \frac{(y - y_0)^2}{b^2} = 1 \tag{4.3}$$

x is an edge point and x_0, y_0, a, and b are parameters. The equation for its derivative is

$$\frac{(x - x_0)}{a} + \frac{(y - y_0)^2}{b^2} \frac{dy}{dx} = 0 \tag{4.4}$$

where $dy/dx = \tan\phi(x)$. The Hough algorithm becomes:

Algorithm 4.2: Hough technique applied to ellipses

For each discrete value of x and y, increment the point in parameter space given by a, b, x_0, y_0, where

$$x = x_0 \pm \frac{a}{(1 + b^2/a^2 \tan^2\phi)^{1/2}} \tag{4.5}$$

$$y = y_0 \pm \frac{b}{(1 + a^2 \tan^2\phi/b^2)^{1/2}} \tag{4.6}$$

that is,

$$A(a, b, x_0, y_0) := A(a, b, x_0, y_0) + 1$$

For a and b each having m values the computational cost is proportional to m^2.

Now suppose that we consider all pairwise combinations of edge elements. This introduces two additional equations like (4.3) and (4.4), and now the four-parameter point can be determined exactly. That is, the following equations can be solved for a unique x_0, y_0, a, b.

$$\frac{(x_1 - x_0)^2}{a^2} + \frac{(y_1 - y_0)^2}{b^2} = 1 \tag{4.7a}$$

$$\frac{(x_2 - x_0)^2}{a^2} + \frac{(y_2 - y_0)^2}{b^2} = 1 \tag{4.7b}$$

$$\frac{x_1 - x_0}{a^2} + \frac{y_1 - y_0}{b^2} \frac{dy}{dx} = 0 \tag{4.7c}$$

$$\frac{x_2 - x_0}{a^2} + \frac{y_2 - y_0}{b^2} \frac{dy}{dx} = 0 \tag{4.7d}$$

$$\frac{dy}{dx} = \tan\phi \qquad (\frac{dy}{dx} \text{ is known from the edge operator})$$

Their solution is left as an exercise. The amount of effort in the former case was proportional to the product of the number of discrete values of a and b, whereas this case involves effort proportional to the square of the number of edge elements.

4.3.4 Generalizing the Hough Transform

Consider the case where the object being sought has no simple analytic form, but has a particular silhouette. Since the Hough technique is so closely related to template matching, and template matching can handle this case, it is not surprising that the Hough technique can be generalized to handle this case also. Suppose for the moment that the object appears in the image with known shape, orientation, and scale. (If orientation and scale are unknown, they can be handled in the same way that additional parameters were handled earlier.) Now pick a reference point in the silhouette and draw a line to the boundary. At the boundary point compute the gradient direction and store the reference point as a function of this direction. Thus it is possible to precompute the location of the reference point from boundary points given the gradient angle. The set of all such locations, indexed by gradient angle, comprises a table termed the R-table [Ballard 1981]. Remember that the basic strategy of the Hough technique is to compute the possible loci of reference points in parameter space from edge point data in image space and increment the parameter points in an accumulator array. Figure 4.8 shows the relevant geometry and Table 4.1 shows the form of the R-table. For the moment, the reference point coordinates (x_c, y_c) are the only parameters (assuming that rotation and scaling have been fixed). Thus an edge point (x, y) with gradient orientation ϕ constrains the possible reference points to be at $\{x + r_1(\phi) \cos [\alpha_1(\phi)], \ y + r_1(\phi) \sin [\alpha_1(\phi)]\}$ and so on.
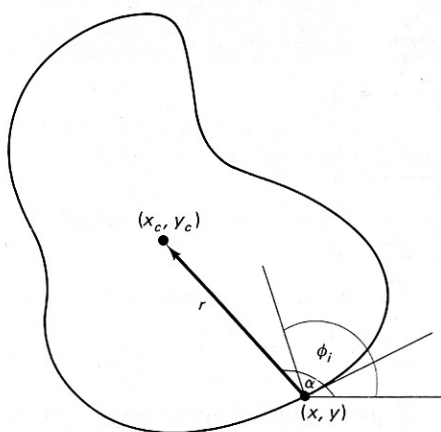

Fig. 4.8   Geometry used to form the R-Table.

Table 4.1

INCREMENTATION IN THE GENERALIZED HOUGH CASE

Angle measured from figure boundary to reference point	Set of radii $\{r^k\}$ where $r = (r, \alpha)$
ϕ_1	$r_1^1, r_2^1, \ldots, r_{n_1}^1$
ϕ_2	$r_1^2, r_2^2, \ldots, r_{n_2}^2$
.	.
.	.
.	.
ϕ_m	$r_1^m, r_2^m, \ldots, r_{n_m}^m$

The generalized Hough algorithm may be described as follows:

Algorithm 4.3:   Generalized Hough

Step 0.   Make a table (like Table 4.1) for the shape to be located.

Step 1.   Form an accumulator array of possible reference points $A(x_{c\min}:x_{c\max}, y_{c\min}:y_{c\max})$ initialized to zero.

Step 2.   For each edge point do the following:

Step 2.1.   Compute $\phi(x)$

Step 2.2a.   Calculate the possible centers; that is, for each table entry for ϕ, compute

$$x_c := x + r\,\phi\,\cos[\alpha(\phi)]$$

$$y_c := y + r\,\phi\,\sin[\alpha(\phi)]$$

Step 2.2b.   Increment the accumulator array

$$A(x_c, y_c) := A(x_c, y_c) + 1$$

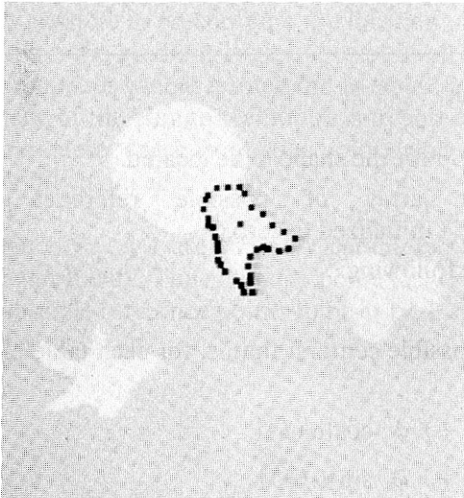Step 3.   Possible locations for the shape are given by maxima in array A.

The results of using this transform to detect a shape are shown in Fig. 4.9. Figure 4.9a shows an image of shapes. The R-table has been made for the middle shape. Figure 4.9b shows the Hough transform for the shape, that is, $A(x_c, y_c)$ displayed as an image. Figure 4.9c shows the shape given by the maxima of
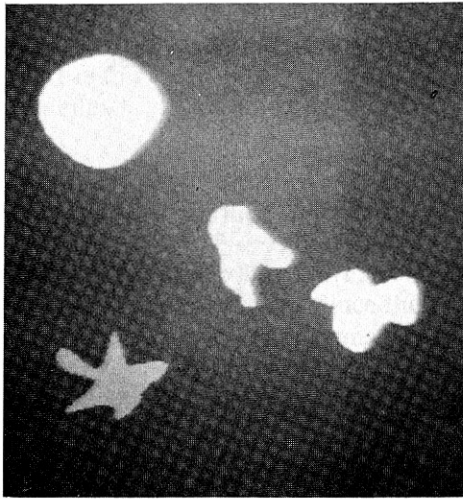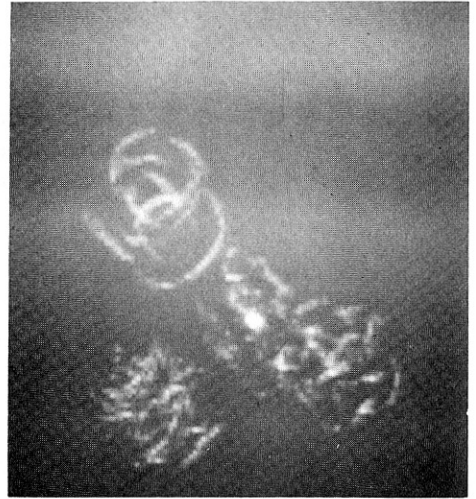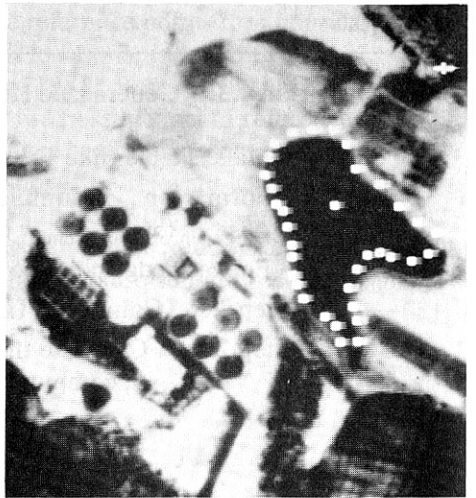
Fig. 4.9 Applying the Generalized Hough technique. (a) Synthetic image. (b) Hough Transform $A(x_c, y_c)$ for middle shape. (c) Detected shape. (d) Same shape in an aerial image setting.

$A(x_c, y_c)$ overlaid on top of the image. Finally, Fig. 4.9d shows the Hough transform used to detect a pond of the same shape in an aerial image.

What about the parameters of scale and rotation, S and θ? These are readily accommodated by expanding the accumulator array and doing more work in the incrementation step. Thus in step 1 the accumulator array is changed to

$$(x_{c\min} : x_{c\max}, y_{c\min} : y_{c\max}, S_{\min} : S_{\max}, \theta_{\min} : \theta_{\max})$$

and step 2.2a is changed to

$$\text{for each table entry for } \phi \text{ do}$$

$$\text{for each } S \text{ and } \theta$$

$$x_c := x + r(\phi) S \cos [\alpha(\phi) + \theta]$$

$$y_c := y + r(\phi) S \sin [\alpha(\phi) + \theta]$$

Finally, step 2.2b is now

$$A(x_c, y_c, S, \theta) := A(x_c, y_c, S, \theta) + 1$$

4.4 EDGE FOLLOWING AS GRAPH SEARCHING

A graph is a general object that consists of a set of nodes $\{n_i\}$ and arcs between nodes $<n_i, n_j>$. In this section we consider graphs whose arcs may have numerical weights or *costs* associated with them. The search for the boundary of an object is cast as a search for the lowest-cost path between two nodes of a weighted graph.

Assume that a gradient operator is applied to the gray-level image, creating the magnitude image $s(\mathbf{x})$ and direction image $\phi(\mathbf{x})$. Now interpret the elements of the direction image $\phi(\mathbf{x})$ as nodes in a graph, each with a weighting factor $s(\mathbf{x})$. Nodes $\mathbf{x}_i$, $\mathbf{x}_j$ have arcs between them if the contour directions $\phi(\mathbf{x}_i)$, $\phi(\mathbf{x}_j)$ are appropriately aligned with the arc directed in the same sense as the contour direction. Figure 4.10 shows the interpretation. To generate Fig. 4.10b impose the following restrictions. For an arc to connect from $\mathbf{x}_i$ to $\mathbf{x}_j$, $\mathbf{x}_j$ must be one of the three possible eight-neighbors in front of the contour direction $\phi(\mathbf{x}_i)$ and, furthermore, $g(\mathbf{x}_i)$
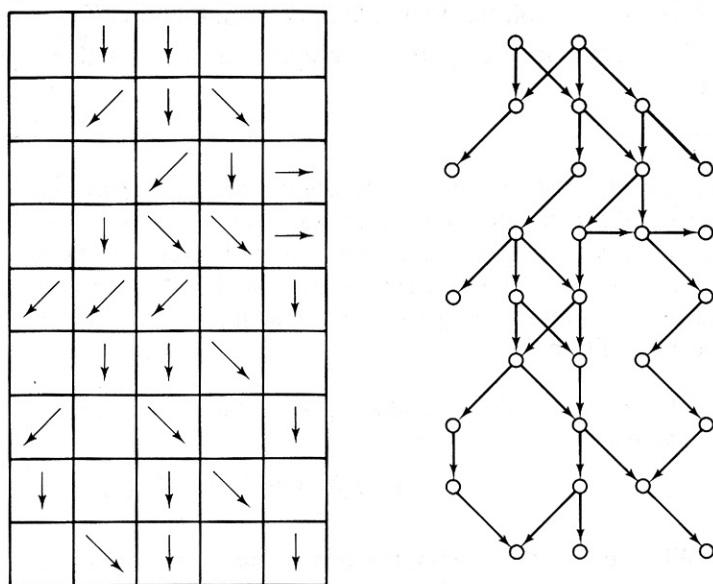

Fig. 4.10 Interpreting a gradient image as a graph (see text).