




USB-C

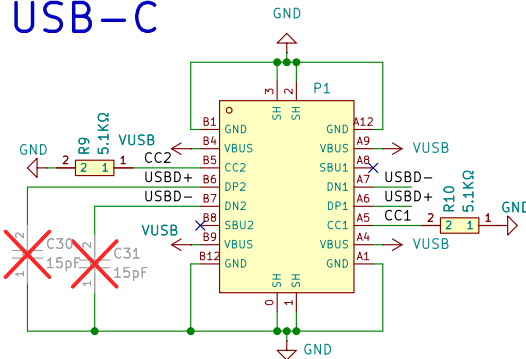


Crystal & RF

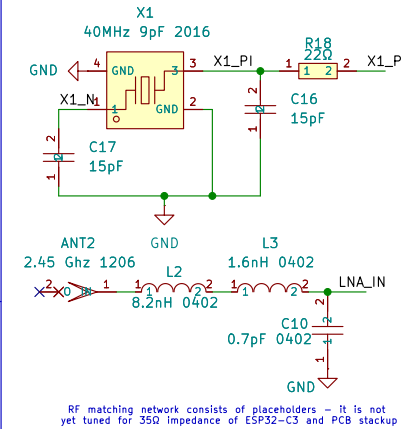


ESP32-C3FH4

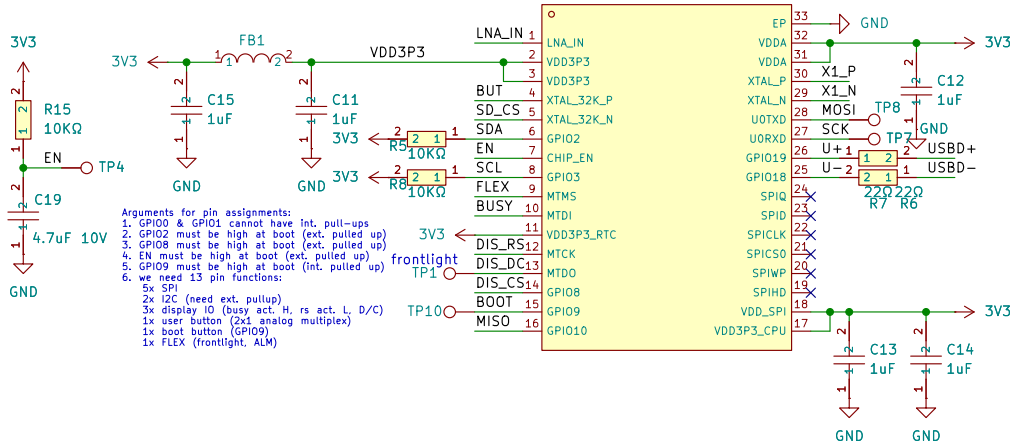


ESD

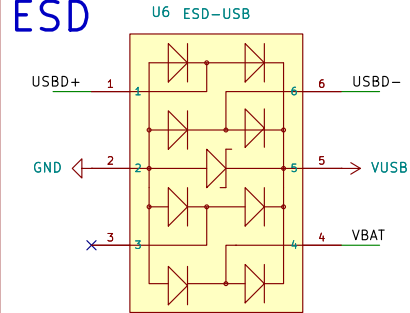


Buttons

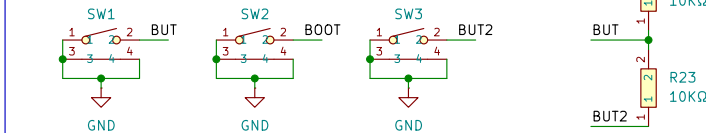


E-ink 24-pin FPC

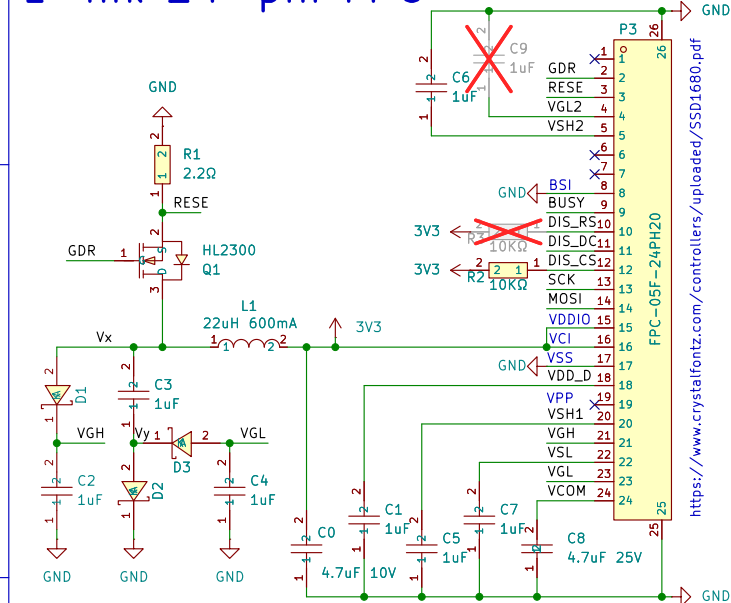


micro-SD

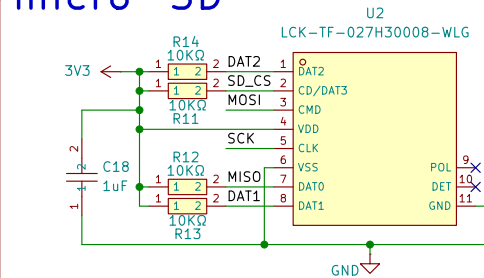

Fuel Gauge

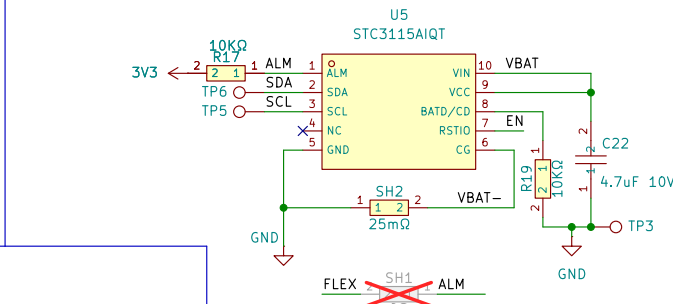

Power

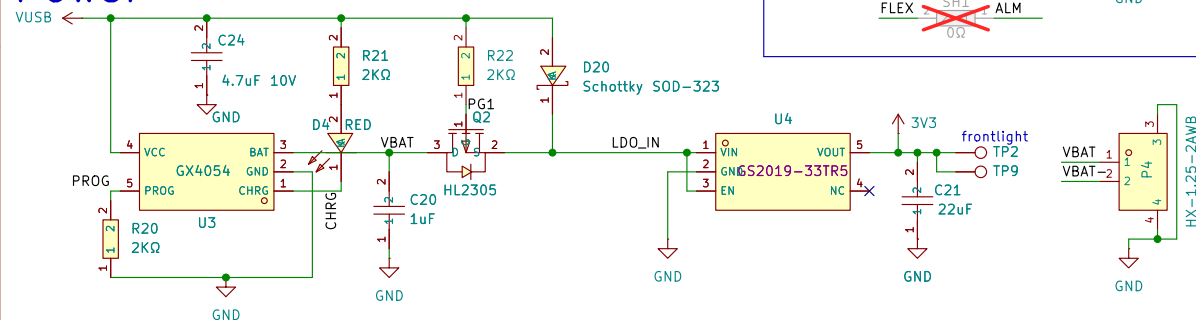

Drawn by: Quinten Luyten

Luyten Prototyping

Sheet: /

File: Pocket 2.66.kicad_sch

Title: Pocket 2.13 / 2.66 Mainboard

Size: A4 Date: 2026-05-12

KiCad E.D.A. 10.0.0

Rev: 1.0

Id: 1/1

<https://www.crystallfontz.com/controllers/uploaded/SSD1680.pdf>

Pocket 2.66 BOM with MPN

Reference	Qty	Value	DNP	Footprint	Manufacturer	LCSC	Description	JLC Type	MPN
ANT2	1	2.45 Ghz 1206		LCSC:SMD_ANT_1206	Unictron	C8569546	Unictron H2U38D1E1B0100	Extended	H2U38D1E1B0100
C0,C19,C22,C24	4	4.7uF 10V		LCSC:C0402	Samsung Electro-Mechanics	C23733	4.7uF (475) ±20% 10V		CL05A4475MP5NRNC
C1,C2,C3,C4,C5,C6,C7,C11,C12,C13,C14,C15,C18,C20	14	1uF		LCSC:C0402	Samsung Electro-Mechanics	C52923	1uF (105) ±10% 25V		CL05A105KA5NQNC
C8	1	4.7uF 25V		LCSC:C1779_C0805	Samsung Electro-Mechanics	C1779	4.7uF (475) ±10% 25V		CL21A475KAQNNNE
C9	1	1uF	DNP	LCSC:C0402	Samsung Electro-Mechanics	C52923	1uF (105) ±10% 25V		CL05A105KA5NQNC
C10	1	0.7pF 0402		LCSC:C0402	muRata	C397301	GJM1555C1HR70WB01D	Extended	GJM1555C1HR70WB01D
C16,C17	2	15pF		LCSC:C0402	FH	C1548	15pF (150) ±5% 50V		0402CG150J500NT
C21	1	22uF		LCSC:C59461_C0603	Samsung Electro-Mechanics	C59461	CL10A226MQ8NRNC		CL10A226MQ8NRNC
C30,C31	2	15pF	DNP	LCSC:C0402	FH	C1548	15pF (150) ±5% 50V		0402CG150J500NT
D1,D2,D3,D20	4	Schottky SOD-323		LCSC:C191023_SOD-323_L1_8-W1_3-LS2_5-RD	Guangdong Hottech	C191023	1N5819WS		1N5819WS
D4	1	RED		LCSC:C2286_LED0603-RD	Hubei KENTO Elec	C2286	603	Basic	KT-0603R
FB1	1	BLM18PG121SN1D_C14709		LCSC:C14709_L0603	muRata	C14709	BLM18PG121SN1D_C14709		BLM18PG121SN1D
L1	1	22uH 600mA		LCSC:C48689518_L1008	SOREDE	C48689518	SRTC.252010.YB220MT00		SRTC.252010.YB220MT00
L2	1	8.2nH 0402		LCSC:L0402	muRata	C84404	LQW15AN8N2G00D	Extended	LQW15AN8N2G00D
L3	1	1.6nH 0402		LCSC:L0402	muRata	C341686	LQW15AN1N6C00D	Extended	LQW15AN1N6C00D
P1	1	USB-TYPE-C-018		LCSC:C2927038_USB-C_SMD-TYPE-C-31-M-12	DEALON	C2927038	USB-TYPE-C-018	Extended	USB-TYPE-C-018
P3	1	FPC-05F-24PH20		LCSC:C2856805_FPC-SMD_24P-P0_50_FPC-05F-24PH20	XUNPU	C2856805	FPC-05F-24PH20	Extended	FPC-05F-24PH20
P4	1	HX-1.25-2AWB		LCSC:C52016406_CONN-SMD_2P-P1_25_HX-1_25-2AWB	hanxia	C52016406	HX-1.25-2AWB	Extended	HX-1.25-2AWB
Q1	1	HL2300		LCSC:SOT23-3	R+O	C7420343	HL2300_C7420343	Promotional	HL2300
Q2	1	HL2305		LCSC:SOT23-3	R+O	C28646261	HL2305	Promotional	HL2305
R1	1	2.2Ω		LCSC:R0603	UNI-ROYAL	C22939	2.2Ω (2R20) ±1%		0603WAF220KT5E
R2,R5,R8,R11,R12,R13,R14,R15,R16,R17,R19,R23	12	10KΩ		LCSC:R0402	UNI-ROYAL	C25744	10KΩ (1002) ±1%		0402WGF1002TCE
R3	1	10KΩ	DNP	LCSC:R0402	UNI-ROYAL	C25744	10KΩ (1002) ±1%		0402WGF1002TCE
R6,R7,R18	3	22Ω		LCSC:R0402	UNI-ROYAL	C25092	22Ω (22R0) ±1%	Basic	0402WGF220JTCE
R9,R10	2	5.1KΩ		LCSC:R0402	UNI-ROYAL	C25905	5.1KΩ (5101) ±1%		0402WGF5101TCE
R20,R21,R22	3	2KΩ		LCSC:R0402	UNI-ROYAL	C4109	2KΩ (2001) ±1%		0402WGF2001TCE
SH2	1	25mΩ		LCSC:R0603	YAGEO	C859739	25mΩ 0603 ±1%	Extended	RL0603FR-070R025L
SW1,SW2,SW3	3	TS-24CA-S16		LCSC:C42420265_SW-SMD_L4_7-W3_5-P3_35-EH	JXTCONN	C42420258	TS-24CA-S26	Extended	TS-24CA-S16
U1	1	ESP32-C3FH4		LCSC:C2858491_QFN-32_L5_0-W5_0-P0_50-TL-EP3_7	ESPRESSIF	C2858491	ESP32-C3FH4	Extended	ESP32-C3FH4
U2	1	LCK-TF-027H30008-WLG		LCSC:C50380692_TF-SMD_HYCW104-TF08-375B	LCKELEC	C50380692	LCK-TF-027H30008-WLG	Extended	LCK-TF-027H30008-WLG
U3	1	GX4054		LCSC:SOT-23-5	GUOXIN JIAPIN SEMICONDUCTOR	C5259235	GX4054	Extended	GX4054
U4	1	GS2019-33TR5		LCSC:SOT-23-5	Gainsil	C41419378	GS2019-33TR5	Extended	GS2019-33TR5
U5	1	STC3115AIQT		LCSC:C2688637_DFN-10_L3_0-W2_0-P0_50-BL	ST Microelectronics	C2688637	STC3115AIQT	Extended	STC3115AIQT
U6	1	ESD-USB		LCSC:C85364_SOT-23-6_L2_9-W1_6-P0_95-LS2_8-BR	PROTEK	C85364	SRV05-4-P-T7	Promotional	SRV05-4-P-T7
X1	1	40MHz 9pF 2016		LCSC:C49304717_CRYSTAL-SMD_4P-L2_0-W1_6-BL	YXC Crystal Oscillators	C49304717	XL7EL89CLI-111YLC-40M		XL7EL89CLI-111YLC-40M