


# EZP1 Stainless Steel Precleaner with White ConShear™ Blade

## Simple, Quick and Effective for Corrosive Environments

The EZP1 Precleaner is not your average solid-blade belt cleaner that mounts on the head pulley. It features a unique uni-blade design that combines simple, do-it-yourself installation, quick maintenance, and effective cleaning results with the added advantage of corrosion-resistant stainless steel components.

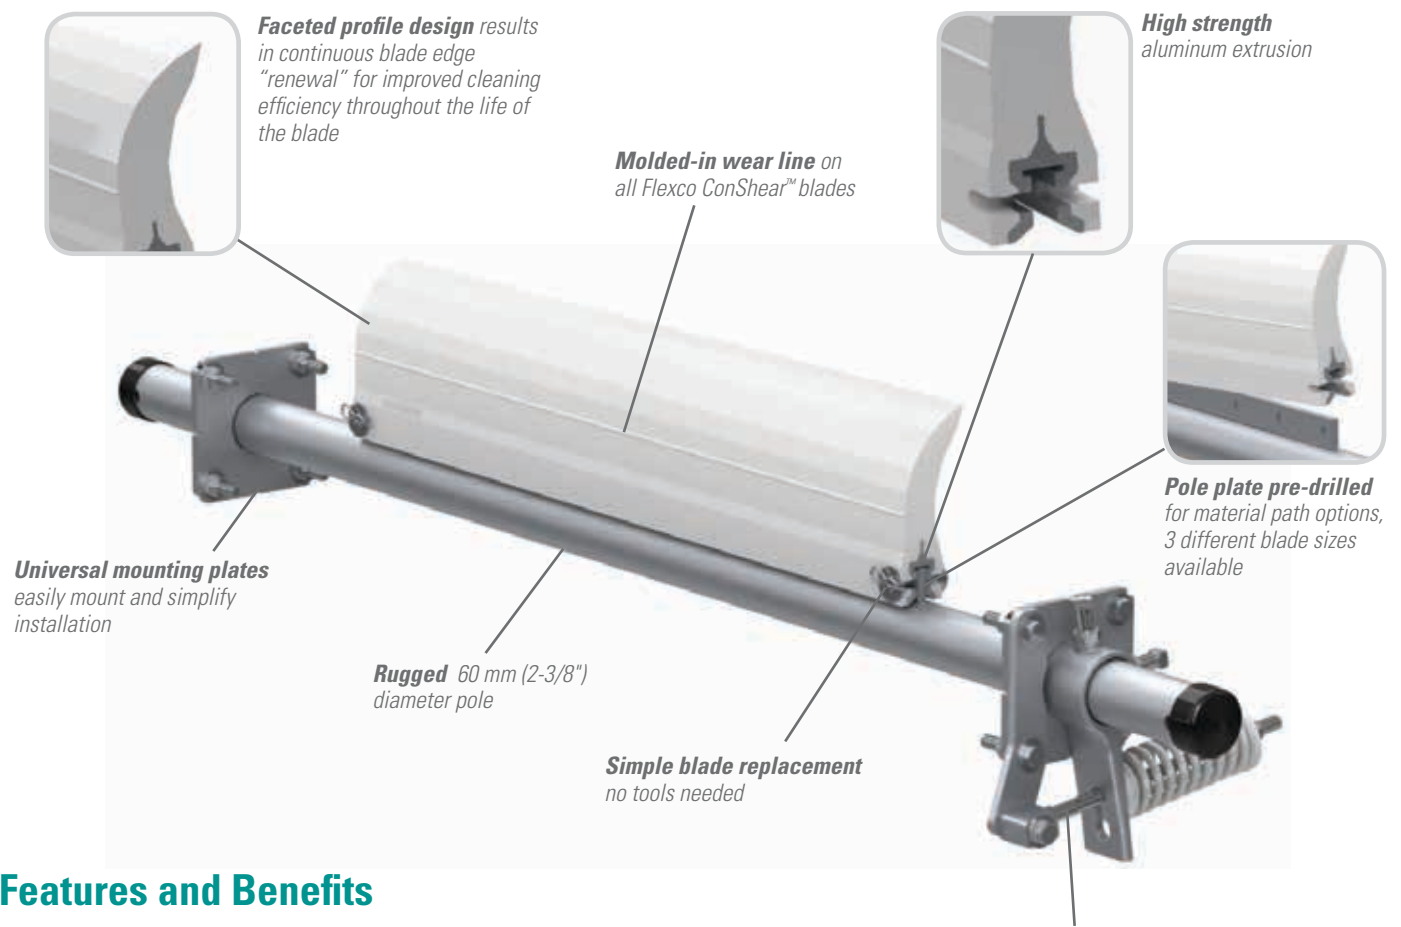

## Features and Benefits

- **White food-grade ConShear™ Precleaner** is chemical resistant, and all ingredients used in urethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.
- **Stainless Steel.** Corrosive environments wear on any component, but stainless steel can protect against this.
- **Works with Flexco mechanical splices.** The spring tensioner allows the blade to quickly move away from the belt when a splice passes. The polyurethane blade material easily glides over the splice without damage and with minimal cleaning disruption.
- **Compact, streamlined design.** The Stainless Steel EZP1 Precleaner requires only 100 mm (4") of horizontal clearance for correct installation. Its streamlined contours prevent material buildup on the blade or the pole.
- **Can be used on reversing belts.** Installing cleaners on both pulleys gives superior cleaning results on belts that run in both directions.
- **Fits most conveyor structures.** Available for belt widths from 300-1800 mm (12" to 72").

# EZP1 Stainless Steel Precleaner

## with White ConShear™ Blade

### Specifications and Guidelines


- **Maximum Belt Speed**  
3.5 M/sec (700 FPM)
- **Temperature Rating**  
-35°C to 82°C (-30°F to 180°F)
- **Minimum Pulley Diameter**  
250 mm (10")
- **Blade Height**  
185 mm (7-1/4")
- **Usable Blade Wear Length**  
100 mm (4")
- **Blade Material**  
Urethane 83 durometer  
Chemical resistant/food grade\*
- **Available for Belt Widths**  
300 to 1800 mm (12" to 72")
- **CEMA Cleaner Rating**  
Class 2
- **Horizontal Clearance Required**  
100 mm (4")
- **Vertical Clearance Required**  
238 mm (9-1/2")
- **Pole Length**  
Cleaner size up to 1200mm (48") + 750mm (30")  
Cleaner size over 1200mm (48") + 850mm (34")
- **Maximum Conveyor Span**  
Cleaner size up to 1200mm (48") + 625mm (25")  
Cleaner size over 1200mm (48") + 725mm (29")

\* All ingredients used in urethane formulation comply with the relevant requirements of 21 CFR (FDA Code of Federal Regulations) for use in repeated bulk dry food applications.

### Ordering Information

EZP1 S/S Precleaners Belt Width - 2" (50mm) White Blade					
Belt Width		Blade Coverage		Ordering Number	Item Code
mm	in.	mm	in.		
300	12	250	10	CFG-212	78838
450	18	400	16	CFG-218	78839
600	24	550	22	CFG-224	78840
750	30	700	28	CFG-230	78841
900	36	850	34	CFG-236	78842
1050	42	1000	40	CFG-242	78843
1200	48	1150	46	CFG-248	78844
1350	54	1300	52	CFG-254	78845
1500	60	1450	58	CFG-260	78846
1800	72	1750	70	CFG-272	78847


EZP1 Mild Steel Precleaners Belt Width - 2" (50mm) White Blade					
Belt Width		Blade Coverage		Ordering Number	Item Code
mm	in.	mm	in.		
300	12	250	10	EZP1-212W	78934
450	18	400	16	EZP1-218W	78935
600	24	550	22	EZP1-224W	78936
750	30	700	28	EZP1-230W	78937
900	36	850	34	EZP1-236W	78938
1050	42	1000	40	EZP1-242W	78939
1200	48	1150	46	EZP1-248W	78940
1350	54	1300	52	EZP1-254W	78941
1500	60	1450	58	EZP1-260W	78942
1800	72	1750	70	EZP1-272W	78943

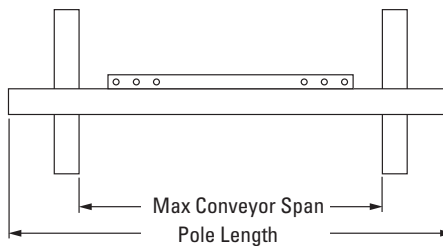

EZP1 S/S Precleaners Belt Width - 8" (200mm) White Blade					
Belt Width		Blade Coverage		Ordering Number	Item Code
mm	in.	mm	in.		
300	12	-	-	N/A	N/A
450	18	250	10	CFG-818	78924
600	24	400	16	CFG-824	78925
750	30	550	22	CFG-830	78926
900	36	700	28	CFG-836	78927
1050	42	850	34	CFG-842	78928
1200	48	1000	40	CFG-848	78929
1350	54	1150	46	CFG-854	78930
1500	60	1300	52	CFG-860	78931
1800	72	1600	64	CFG-872	78932

ConShear™ White Replacement Blades			
Blade Width		Ordering Number	Item Code
mm	in.		
250	10	CRB-W10	78471
400	16	CRB-W16	78472
550	22	CRB-W22	78473
700	28	CRB-W28	78474
850	34	CRB-W34	78475
1000	40	CRB-W40	78476
1150	46	CRB-W46	78477
1300	52	CRB-W52	78478
1450	58	CRB-W58	78479
1600	64	CRB-W64	78480
1750	70	CRB-W70	78481

### Pole Location Specs

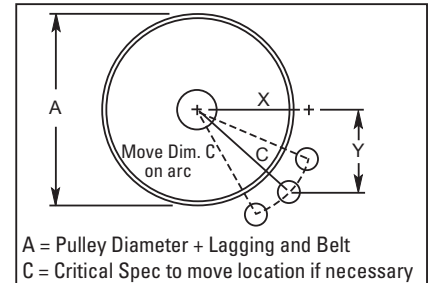

### Pole Location Chart - Metric

A	X	Y	C
250	74	230	242
300	108	230	254
350	146	230	273
400	179	230	291
450	207	230	309
500	235	230	329
550	266	230	352
600	299	230	377
650	330	230	402
700	360	230	427
750	389	230	452
800	417	230	477
850	446	230	501
900	474	230	526

### Pole Location Chart - Imperial

A	X	Y	C
10"	3"	9"	9-1/2"
12"	4-3/8"	9"	10"
14"	5-7/8"	9"	10-3/4"
16"	7-1/8"	9"	11-1/2"
18"	8-1/4"	9"	12-1/4"
20"	9-3/8"	9"	13"
22"	10-3/4"	9"	14"
24"	12"	9"	15"
26"	13-1/4"	9"	16"
28"	14-3/8"	9"	17"
30"	15-5/8"	9"	18"
32"	16-3/4"	9"	19"
34"	17-7/8"	9"	20"
36"	19"	9"	21"

Authorized Distributor:

2 Woodlands Sector 1 • #01-21 • Woodlands Spectrum I • Singapore 738068  
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: [asiasales@flexco.com](mailto:asiasales@flexco.com)

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.

©2016 Flexible Steel Lacing Company. 01/16. For reorder: X3912

