

**EARLY DETECTION OF LITHIUM
DENDRITE RISK IN EV BATTERIES
USING QUANTUM SUPPORT VECTOR
MACHINES**

by

VISHAK SENTHILKUMAR	2023103019
ARAVINDHAN S	2023103034
MANESH RAM	2023103037

*in partial fulfillment of the requirements for
the award of the degree of*

BACHELOR OF ENGINEERING

in

COMPUTER SCIENCE AND ENGINEERING



**DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING**

ANNA UNIVERSITY, CHENNAI – 25

APRIL 2027

BONAFIDE CERTIFICATE

Certified that this project report titled **EARLY DETECTION OF LITHIUM DENDRITE RISK IN EV BATTERIES USING QUANTUM SUPPORT VECTOR MACHINES** is the *bonafide* work of **VISHAK SENTHILKUMAR (2023103019)**, **ARAVINDHAN S (2023103034)** and **MANESH RAM (2023103037)** who carried out the project work under my supervision, for the fulfillment of the requirements for the award of the degree of Bachelor of Engineering in Computer Science and Engineering. Certified further that to the best of my knowledge, the work reported herein does not form part of any other thesis or dissertation on the basis of which a degree or an award was conferred on an earlier occasion on these or any other candidates.

Place: Chennai

Dr. S. Chitrakala

Date:

Professor

Department of Computer Science and Engineering
Anna University, Chennai – 25

COUNTERSIGNED

Head of the Department,
Department of Computer Science and Engineering,
Anna University Chennai,
Chennai – 600025

ACKNOWLEDGEMENT

I would like to express my sincere gratitude to my project guide **Dr. S. Chitrakala**, Professor, Computer Science Engineering, for their valuable guidance, constant encouragement, and insightful suggestions throughout the course of this project. Their expertise and support were instrumental in the successful completion of this work.

I extend my heartfelt thanks to **Dr. V. Mary Anita Rajam**, Head of the Department, Computer Science Engineering , for providing the necessary facilities and a supportive academic environment to carry out this project.

I am also grateful to the members of the project review committee **Dr. R. Baskaran**, and **Dr. V. Vetriselvi**, for their constructive feedback and suggestions, which greatly helped in improving the quality of this work.

I would like to thank all the faculty members of the department for their continuous support and cooperation during my academic journey. Finally, I express my sincere appreciation to my family and friends for their constant motivation, patience, and encouragement throughout the project.

Vishak Senthilkumar

Aravindhan S

Manesh Ram

ABSTRACT

The overall number of electric vehicles (EVs) on the roads is increasing and the need for the safety and reliability of their batteries is becoming more important. Dendrite formation is one of the most critical issues facing an electric vehicle's battery and can cause not only safety hazards but also destruction of the battery itself. This project offers a unique procedure for spotting battery dendrite risk early, using a hybrid machine learning model that merges both classical and quantum computing methods. Quantum Support Vector Machines classify the health of the battery time-series data, which consists of voltage, current and temperature. The sensors that are placed on the battery gather continuous data for a certain period of time and this data is then divided into smaller segments using a sliding window technique of pre-processing. For each segment, various statistics including average, variance and rate of change are computed to identify potential features in the battery's behavior. Features that have been selected are subsequently provided to the hybrid model where the QSVM further pushes the feature transformation process making it easier to detect very slight abnormalities which are signs of dendrite growth. It is the objective of this model to generate real-time, very precise predictions of dendrite risk that will facilitate quick actions taken and thus better management of the overall battery. The fusion of quantum computing and traditional machine learning techniques is what marks a key milestone for the EVs battery health monitoring sector.

ABSTRACT

TABLE OF CONTENTS

ABSTRACT – ENGLISH	iii
ABSTRACT – TAMIL	iv
TABLE OF CONTENTS	v
LIST OF FIGURES	viii
LIST OF TABLES	ix
LIST OF ABBREVIATIONS	x
1 Introduction	1
1.1 Background of the Study	1
1.2 Problem Statement	2
1.3 Objectives of the Project	2
1.4 Scope of the Work	3
1.5 Motivation	4
1.6 Outline of the Thesis	4
2 LITERATURE REVIEW	5
2.1 Quantum Kernel Methods in Support Vector Machines	5
2.2 Quantum Feature Mapping for Classification	6
2.3 Hybrid Classical-Quantum Learning Frameworks	7
2.4 Quantum Machine Learning for Battery Monitoring	7
2.5 Research Gap	8
3 SYSTEM DESIGN	10
3.1 Design Overview	10
3.2 System Overview	10

3.3	Data Acquisition	13
3.4	Data Preprocessing	13
3.5	Classical Feature Engineering	14
3.6	Quantum-Inspired Feature Mapping	15
3.7	Hybrid QSVM Classification	16
3.8	Risk Assessment and Output Generation	17
3.9	System Design Summary	17
4	Implementation and Results	19
4.1	Data Preparation and Experimental Setup	19
4.1.1	Implementation Environment	19
4.1.2	Dataset Description	20
4.1.3	Data Loading	20
4.1.4	Train-Test Split	21
4.2	Test Cases	21
4.3	Results	21
4.3.1	Timestamp Alignment	21
4.3.2	Missing Value Handling	22
4.3.3	Statistical Feature Engineering	22
4.3.4	Dendrite-Oriented Feature Engineering	23
4.3.5	Sliding Window Modelling	24
4.3.6	Window-Level Feature Construction	24
4.3.7	Quantum Feature Mapping	25
4.3.8	Quantum Kernel Support Vector Machine	26
4.3.9	Risk Assessment	27
4.4	Performance Metrics	28

4.4.1	Accuracy	28
4.4.2	Recall	28
4.4.3	Feature Space Separability	29
4.4.4	Variance Amplification Ratio	29
4.4.5	Performance Evaluation of QSVM	29
4.5	Summary of Results	30
5	CONCLUSION AND FUTURE WORK	31
5.1	Quantum Machine Learning Enhancements	31
5.1.1	Expand Qubit Count	31
5.1.2	Advanced Quantum Feature Maps	31
5.1.3	Hybrid Variational Quantum Circuits	31
5.2	Classical Machine Learning Enhancements	32
5.2.1	Improved Label Design	32
5.2.2	Enhanced Feature Engineering	32
5.2.3	Classical Baseline Comparison	32
5.3	Data and Scalability	32
5.4	System Integration and Deployment	32
5.5	Multi-Chemistry Extension	33
	REFERENCES	34

LIST OF FIGURES

3.1	Architecture of the Proposed QSVM-Based EV Battery System	12
3.2	Classical Feature Engineering	15
3.3	Quantum-Inspired Feature Mapping	16
3.4	Hybrid Quantum Support Vector Machine Classification . .	16
4.1	Timestamp Alignment Across Battery Cycles	22
4.2	Handling Missing Values in Battery Dataset	22
4.3	Statistical Features Extracted from Battery Cycles	23
4.4	Dendrite-Specific Features Extracted from Battery Cycles . .	24
4.5	Sliding Window Segmentation for Temporal Degradation Analysis	24
4.6	Feature Extraction from Sliding Window Segments	25
4.7	Quantum Kernel Circuit Used for QSVM Feature Encoding .	26
4.8	Predicted Risk Distribution Analysis	27
4.9	Prediction Confidence Distribution Analysis	28
4.10	Confusion Matrix of the QSVM Model	30

LIST OF TABLES

3.1	Battery Risk Level Categories	17
4.1	Software Environment Used for Implementation	19
4.2	Dataset Summary	20
4.3	Dataset Split	21
4.4	Test Case Examples	21

LIST OF ABBREVIATIONS

QSVM	Quantum Support Vector Machine
QML	Quantum Machine Learning
SVM	Support Vector Machine
EV	Electric Vehicle
QAOA	Quantum Approximate Optimization Algorithm
NISQ	Noisy Intermediate-Scale Quantum
PCA	Principal Component Analysis
SOC	State of Charge
CE	Coulombic Efficiency
Re	Electrolyte Resistance
Rct	Charge Transfer Resistance
BMS	Battery Management System
NASA	National Aeronautics and Space Administration

CHAPTER 1

Introduction

1.1 BACKGROUND OF THE STUDY

Electric vehicles have become an important part of modern transportation due to their potential to reduce carbon emissions and dependence on fossil fuels. Lithium-ion batteries serve as the primary energy storage system in most electric vehicles because they provide high energy density, longer cycle life, and efficient charging characteristics. However, maintaining the safety and reliability of these batteries remains a significant challenge.

One of the major safety concerns in lithium-ion batteries is the formation of lithium dendrites. Dendrites are microscopic needle-like structures that can develop inside the battery during repeated charging and discharging cycles. Over time, these structures may grow and eventually cause internal short circuits, which can lead to battery degradation, thermal instability, or even failure.

Battery management systems are commonly used to monitor battery behavior through sensors that record parameters such as voltage, current, temperature, and capacity. These measurements form time-series data that can be analyzed to detect abnormal patterns. Traditional monitoring techniques rely on threshold-based rules or classical machine learning models. While these approaches are useful, they may not always capture complex nonlinear relationships that exist in battery sensor data.

Recent developments in quantum computing and quantum machine learning have introduced new techniques for representing and processing data in high-dimensional feature spaces. Quantum Support Vector Machines (QSVM) combine classical machine learning methods with quantum feature mapping to improve pattern recognition capabilities. This project explores the use of a hybrid classical and quantum learning framework to detect early signs of lithium dendrite formation in electric vehicle batteries.

1.2 PROBLEM STATEMENT

Lithium dendrite formation poses a serious threat to the safety and performance of electric vehicle batteries. Early detection of such degradation patterns is essential in order to prevent battery failure and ensure reliable operation.

Most existing battery monitoring systems rely on classical data analysis techniques that may not fully capture the complex interactions between battery parameters. As a result, subtle degradation patterns may remain undetected until the battery reaches a critical condition.

Therefore, there is a need for an intelligent monitoring system that can analyze multivariate battery sensor data and identify early signs of abnormal battery behavior. This project addresses this challenge by developing a hybrid quantum machine learning framework that applies quantum support vector machines to detect lithium dendrite risk in EV batteries.

1.3 OBJECTIVES OF THE PROJECT

The main objectives of this project are as follows:

1. To analyze battery sensor data including voltage, current, temperature, and capacity obtained from lithium-ion battery cycles.

2. To preprocess and extract meaningful statistical and electrochemical features from the battery dataset.
3. To apply dimensionality reduction techniques to prepare the features for quantum encoding.
4. To implement a quantum feature mapping approach using quantum circuits.
5. To develop a Quantum Support Vector Machine model for classifying battery degradation risk levels.
6. To evaluate the performance of the proposed model using appropriate classification metrics.

1.4 SCOPE OF THE WORK

The scope of this project focuses on developing a hybrid quantum-classical machine learning framework for battery health monitoring. The system processes time-series battery data and transforms it into structured features that represent battery behavior over different operational cycles.

The study uses the NASA lithium-ion battery dataset for training and evaluation. Data preprocessing techniques such as timestamp alignment, missing value handling, and sliding window segmentation are applied to prepare the dataset for analysis. Statistical and electrochemical features are extracted from the processed data and used as inputs for the machine learning model.

The proposed system integrates classical feature engineering with quantum feature mapping and QSVM classification. The model predicts different battery risk levels, ranging from normal operation to critical degradation conditions.

1.5 MOTIVATION

Battery safety is a critical requirement for the widespread adoption of electric vehicles. Failures caused by battery degradation can lead to costly damage and serious safety risks. Detecting early signs of battery deterioration allows preventive actions to be taken before critical failures occur.

Advances in machine learning provide powerful tools for analyzing large volumes of sensor data generated by battery systems. At the same time, quantum computing research has introduced new approaches that can potentially improve machine learning models by enabling richer feature representations.

The motivation behind this project is to explore the integration of quantum machine learning techniques with classical data analysis methods for battery monitoring applications.

1.6 OUTLINE OF THE THESIS

The remainder of this thesis is organized as follows:

1. Chapter 2 presents the literature review related to quantum machine learning and battery anomaly detection.
2. Chapter 3 describes the system design and architecture of the proposed QSVM-based battery monitoring framework.
3. Chapter 4 explains the implementation details, dataset preparation process, and experimental results.
4. Chapter 5 concludes the study and discusses future research directions.

CHAPTER 2

LITERATURE REVIEW

Electric vehicles rely heavily on lithium-ion batteries for energy storage. Ensuring the safety and reliability of these batteries is therefore a critical research problem. One of the major challenges in battery management is the early detection of abnormal behaviour such as lithium dendrite formation. Detecting these patterns requires analyzing large amounts of time-series sensor data, including voltage, current, temperature, and state-of-charge measurements.

In recent years, machine learning techniques have been widely used for battery health monitoring and anomaly detection. At the same time, advances in quantum computing have introduced new approaches for improving machine learning models through quantum feature mapping and quantum kernel methods. This chapter reviews the existing research related to quantum support vector machines, hybrid quantum-classical learning frameworks, and anomaly detection in battery systems.

2.1 QUANTUM KERNEL METHODS IN SUPPORT VECTOR MACHINES

Support Vector Machines are commonly used for classification tasks due to their ability to construct decision boundaries between different classes of data. Traditional SVM models rely on classical kernel functions such as polynomial or radial basis kernels to map data into higher dimensional feature spaces.

Recent work by Abdulsalam and Ahmad explored the use of quan-

tum kernels within the SVM framework [1]. Their study compared classical kernel functions with quantum kernel functions and analyzed their performance across several classification tasks. The results showed that quantum kernels can sometimes improve the separability of complex datasets by mapping data into richer feature spaces.

The findings from this work provide useful insights into how kernel functions influence classification performance. In the proposed project, this concept is adopted by using a quantum-inspired kernel within a QSVM model to improve the separability of battery degradation patterns extracted from sensor data.

2.2 QUANTUM FEATURE MAPPING FOR CLASSIFICATION

An important component of quantum machine learning models is the process of encoding classical data into quantum states. Different quantum feature maps can significantly influence how well a QSVM classifier performs.

Pramanik and Jha evaluated multiple quantum feature maps for classification tasks using QSVM [4]. Their research investigated Pauli-based feature maps and analyzed their effectiveness for binary classification problems. The study demonstrated that selecting an appropriate feature encoding method plays an important role in improving model accuracy.

This work motivates the use of quantum-inspired feature mapping in the proposed system. By encoding classical battery features into a higher dimensional quantum feature space, the QSVM classifier can better capture nonlinear relationships within the sensor data.

2.3 HYBRID CLASSICAL-QUANTUM LEARNING FRAMEWORKS

Several researchers have proposed hybrid architectures that combine classical machine learning techniques with quantum models. In such systems, classical algorithms perform preprocessing and feature extraction, while quantum models perform the final classification.

Yi proposed a hybrid quantum-classical framework for traffic state classification [6]. In this work, classical feature extraction techniques were applied to traffic sensor data, and the processed features were then used as inputs for a QSVM classifier. The results showed that combining classical preprocessing with quantum classification can improve performance for complex datasets.

Similarly, Roth et al. introduced the AutoQML framework, which automates the design of quantum machine learning pipelines [5]. The framework automatically selects quantum feature maps, tunes model parameters, and constructs hybrid learning pipelines. Although this approach simplifies the model development process, it also introduces additional computational overhead.

These studies demonstrate that hybrid quantum-classical architectures can provide flexible and powerful learning systems. The proposed work follows a similar hybrid approach by combining classical feature engineering with quantum-inspired feature mapping and QSVM classification.

2.4 QUANTUM MACHINE LEARNING FOR BATTERY MONITORING

Machine learning methods have also been explored for battery monitoring and anomaly detection applications. In particular, researchers have begun investigating quantum machine learning tech-

niques for analyzing battery sensor data.

A study by P., V., and G. proposed a real-time quantum machine learning approach for detecting defective cells in lithium-ion battery packs [3]. Their system used quantum-enhanced clustering techniques to identify abnormal battery behaviour using voltage, current, and temperature measurements. Although their approach demonstrated promising results, it relied primarily on clustering-based anomaly detection rather than supervised classification models.

Another related work by Dutta et al. explored the use of quantum kernel based support vector machines with Quantum Approximate Optimization Algorithm embedding for medical data classification [2]. Their results showed that quantum feature embedding can improve classification performance when compared with traditional SVM models.

The proposed project takes inspiration from these works by applying QSVM classification to battery degradation analysis. Instead of clustering methods, the system uses supervised classification to predict battery risk levels based on engineered features derived from battery sensor data.

2.5 RESEARCH GAP

Although existing research demonstrates the potential of quantum machine learning models, several limitations still remain. Many studies rely on simulated quantum environments rather than real quantum hardware, which limits their practical evaluation. Additionally, several approaches focus on clustering-based anomaly detection instead of supervised classification techniques that can provide clearer decision boundaries.

Another limitation is that many quantum machine learning studies evaluate their models on relatively small or domain-specific datasets.

Real-world battery monitoring systems generate large amounts of multivariate time-series data, which require specialized preprocessing and feature engineering techniques.

To address these challenges, the proposed work develops a hybrid classical-quantum framework for early detection of lithium dendrite risk in EV batteries. The system integrates classical feature extraction, quantum-inspired feature mapping, and QSVM classification to analyze battery degradation patterns and predict risk levels.

CHAPTER 3

SYSTEM DESIGN

3.1 DESIGN OVERVIEW

The proposed system design aims at developing a dependable hybrid Quantum Support Vector Machine (QSVM) based system for detecting anomalies and assessing risks in electric vehicle (EV) battery charging systems. The architecture is inspired by existing quantum machine learning-based battery anomaly detection solutions, particularly those based on unsupervised clustering algorithms such as K-means.

Although clustering-based methods can identify coarse deviations in battery behaviour, they often fail to detect subtle early-stage anomalies and lack clear decision margins. To overcome these limitations, the proposed system replaces clustering with a margin-based hybrid QSVM classifier combined with a risk-oriented decision layer.

The system follows a modular pipeline architecture in which each module performs a specific transformation and passes its output to the next stage. This design improves interpretability, scalability, and ease of integration with existing battery management systems.

3.2 SYSTEM OVERVIEW

The proposed EV battery monitoring framework follows a sequential processing pipeline that transforms raw sensor measurements into battery risk predictions.

The overall workflow of the system is illustrated in Figure 3.1.

The process begins with acquiring battery sensor measurements and proceeds through preprocessing, feature engineering, quantum feature transformation, and QSVM-based classification.

The major stages of the workflow are summarized as follows:

1. **Data Acquisition:** Battery sensor data such as voltage, current, temperature, and state of charge are collected during charging and discharging cycles.
2. **Data Preprocessing:** Raw measurements are filtered to remove noise, normalized to maintain consistent scales, and segmented using sliding windows to capture short-term battery behaviour.
3. **Feature Engineering:** Statistical and electrochemical features are extracted from each window to represent battery behaviour in a structured feature space.
4. **Quantum Feature Mapping:** Classical feature vectors are mapped into a higher-dimensional Hilbert space using quantum-inspired encoding techniques.
5. **QSVM Classification:** A hybrid Quantum Support Vector Machine classifier learns decision boundaries between different battery risk levels.
6. **Risk Assessment:** The predicted QSVM output is interpreted and mapped to battery risk categories, producing monitoring reports and confidence scores.

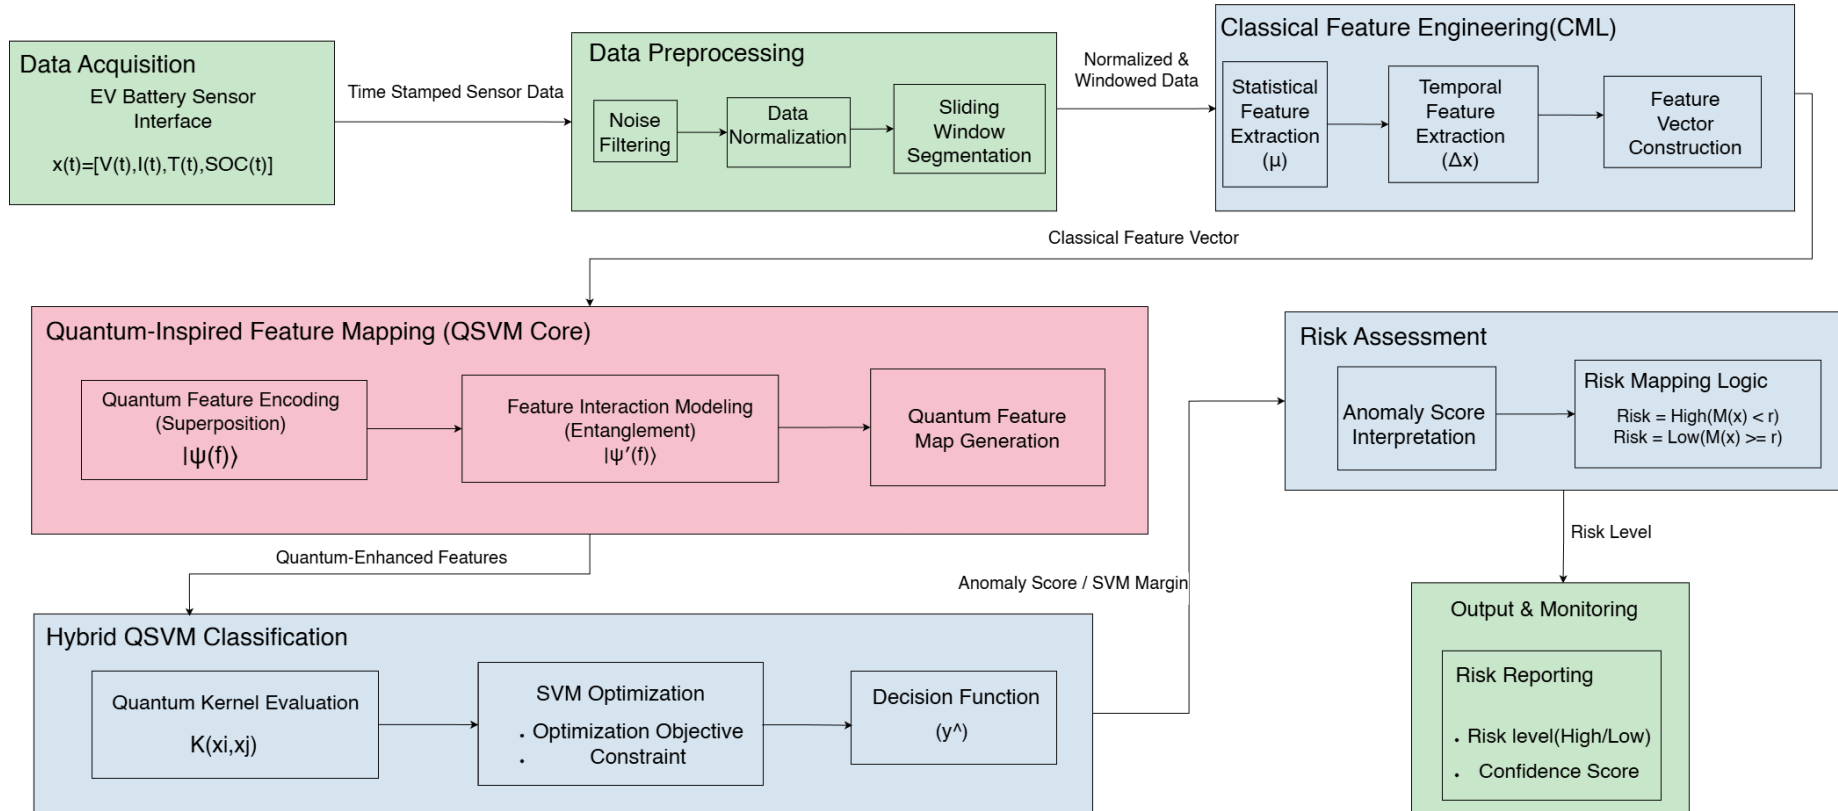


Figure 3.1 Architecture of the Proposed QSVM-Based EV Battery System

3.3 DATA ACQUISITION

The data acquisition module gathers time-stamped sensor data from EV battery packs during charging cycles. Each record contains synchronized measurements of:

- Voltage
- Current
- Temperature
- State of Charge (SOC)

These parameters collectively form a multivariate time-series representation of battery behaviour. Since battery anomalies often result from interactions between multiple parameters rather than single threshold violations, collecting multiple sensor signals provides a more comprehensive monitoring framework.

Algorithm 1 Battery Data Loading

Input: NASA battery .mat files

Output: Structured dataset D

for each battery file B_i **do**

Load B_i using MATLAB reader

Extract cycle structure

Separate discharge, charge, impedance cycles

Store structured data in D

end for

return D

3.4 DATA PREPROCESSING

Raw sensor data may contain noise, outliers, and variations in measurement scales. Therefore, preprocessing is necessary before feature extraction.

The preprocessing module performs:

- Noise filtering

- Data normalization
- Sliding window segmentation

Noise filtering reduces sensor disturbances, normalization ensures comparable feature ranges, and sliding window segmentation divides the time-series data into fixed-length windows that represent short-term charging behaviour.

Algorithm 2 Sliding Window Degradation Modeling

Input: Feature matrix F

Output: Windowed dataset W

Define window size w and stride s

for each battery b **do**

for each window segment **do**

 Compute capacity trend (slope)

 Compute capacity change (last - first)

 Compute impedance trend

 Compute degradation variance

 Store window features

end for

end for

return W

3.5 CLASSICAL FEATURE ENGINEERING

After preprocessing, statistical feature engineering is applied to extract meaningful descriptors from each window.

Typical features include:

- Mean
- Variance
- Rate of change
- Stability indicators

These features form a structured classical feature vector representing the battery behaviour within a time window. This stage reduces the

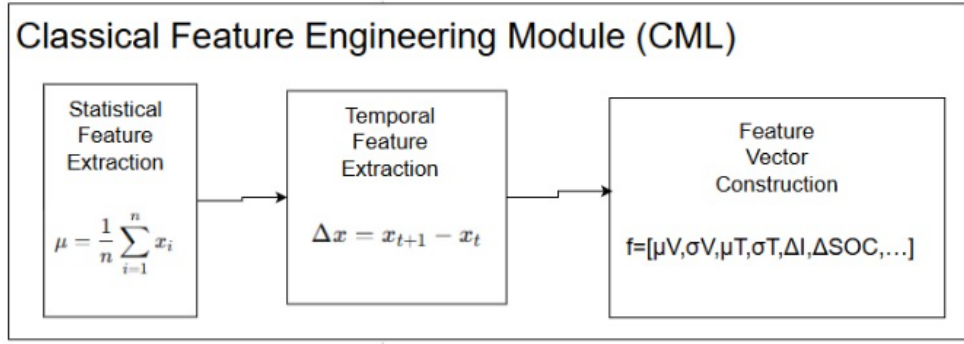


Figure 3.2 Classical Feature Engineering

dimensionality of raw sensor data and provides interpretable inputs for further analysis.

Algorithm 3 Statistical and Electrochemical Feature Extraction

Input: Dataset D

Output: Feature matrix F

for each discharge cycle c in D **do**

 Extract capacity

 Compute voltage statistics (mean, std, min, max, range)

 Compute current statistics (mean, std)

 Compute temperature statistics (mean, std, min, max)

 Extract impedance parameters (Re, Rct)

end for

Compute Coulombic Efficiency:

$$CE = \frac{Q_{discharge}}{Q_{charge}}$$

Merge all features into F

return F

As illustrated in Figure 3.2, the classical feature engineering stage extracts statistical and temporal features from battery sensor data.

3.6 QUANTUM-INSPIRED FEATURE MAPPING

The quantum-inspired feature mapping module converts classical feature vectors into a higher-dimensional Hilbert space using quantum encoding techniques.

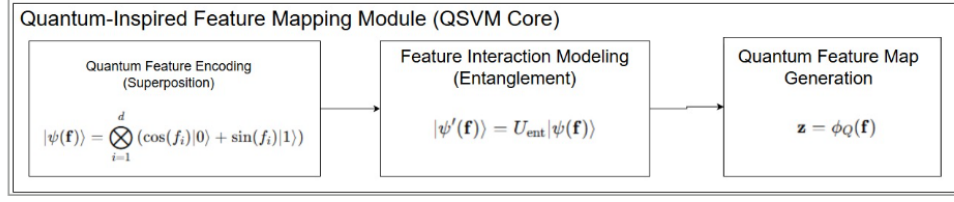


Figure 3.3 Quantum-Inspired Feature Mapping

Initially, classical features are encoded using superposition-based representations, allowing multiple components to be represented simultaneously. Entanglement-inspired transformations are then applied to capture interactions between features.

These transformations increase the expressive capability of the feature space without requiring physical quantum hardware.

3.7 HYBRID QSVM CLASSIFICATION

The proposed system uses a hybrid QSVM classifier to detect anomalous charging behaviour.

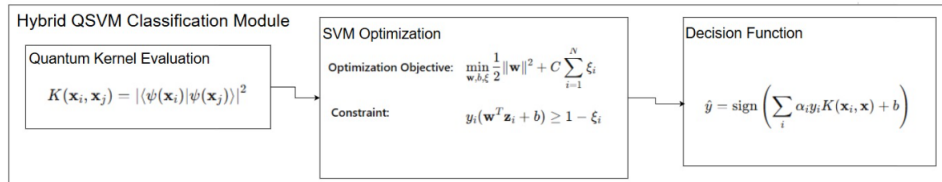


Figure 3.4 Hybrid Quantum Support Vector Machine Classification

Unlike clustering-based approaches, QSVM learns a margin-based decision boundary that separates different battery degradation patterns in the transformed feature space.

The similarity between feature vectors is computed using a quantum kernel:

$$K(x_i, x_j) = |\langle \psi(x_i) | \psi(x_j) \rangle|^2$$

The QSVM combines quantum kernel feature mapping with classical SVM optimization.

3.8 RISK ASSESSMENT AND OUTPUT GENERATION

The system includes a risk assessment module that interprets the QSVM output to classify battery charging behaviour into different risk levels.

The classification output generated by the QSVM model is mapped to predefined battery health categories based on degradation patterns.

The battery state is categorized into the following risk levels:

Table 3.1 Battery Risk Level Categories

Class Label	Risk Level
0	Very Low Risk
1	Low Risk
2	Medium Risk
3	High Risk
4	Critical Risk

These categories represent increasing levels of battery degradation and potential dendrite formation.

The final system outputs include:

- Predicted risk level
- Confidence score
- Monitoring reports

3.9 SYSTEM DESIGN SUMMARY

The proposed system extends existing battery anomaly detection frameworks by incorporating quantum-inspired feature mapping within a classical machine learning pipeline. The use of a hybrid QSVM classifier enables better separation between normal and abnormal bat-

tery behaviour while maintaining interpretability and computational efficiency.

CHAPTER 4

Implementation and Results

4.1 DATA PREPARATION AND EXPERIMENTAL SETUP

This section presents the experimental setup used for implementing and evaluating the proposed system. It provides an overview of the dataset used in the study, including its source and key characteristics. The procedures for data loading and preprocessing are described to ensure proper preparation of the data for model training. Furthermore, the strategy used to divide the dataset into training and testing subsets is explained.

4.1.1 Implementation Environment

The implementation was carried out using the Python programming language with several scientific computing and quantum computing libraries.

Table 4.1 Software Environment Used for Implementation

Tool / Library	Purpose
Python	Core programming language
NumPy	Numerical computation
Pandas	Data processing
Scikit-learn	Classical machine learning utilities
Matplotlib / Seaborn	Data visualization
Qiskit	Quantum circuit simulation
Qiskit Machine Learning	Quantum kernel and QSVM implementation
Google Colab	Development and execution environment

The implementation was executed using the Google Colab platform, which allows integration of Python libraries and cloud-based computational resources.

4.1.2 Dataset Description

The NASA Lithium-Ion Battery Dataset was used for this study. The dataset consists of battery cycle measurements collected during laboratory experiments.

Each battery file contains multiple operational cycles including:

- Charge cycles
- Discharge cycles
- Impedance measurements

Battery measurements include the following parameters:

- Voltage
- Current
- Temperature
- Capacity
- Time

Table 4.2 Dataset Summary

Parameter	Value
Total Battery Files	35
Valid Batteries Processed	33
Total Cycles Loaded	7313
Discharge Cycles Used	4600
Valid Cycles after Filtering	2667

4.1.3 Data Loading

Battery data stored in MATLAB (.mat) format was loaded using the `scipy.io` library. The MATLAB structures were parsed to extract discharge cycle measurements.

Only discharge cycles were used because they contain the relevant electrochemical behavior needed to analyze battery degradation patterns.

4.1.4 Train-Test Split

The dataset was divided into training and testing sets to evaluate the model performance.

Table 4.3 Dataset Split

Dataset Portion	Percentage
Training Set	80%
Testing Set	20%

4.2 TEST CASES

Several test scenarios were created to validate the ability of the model to detect different battery degradation states.

Table 4.4 Test Case Examples

Test Case	Input Condition	Expected Risk Level
TC1	Stable voltage and temperature	Very Low Risk
TC2	Slight voltage fluctuation	Low Risk
TC3	Moderate degradation trend	Medium Risk
TC4	Rapid capacity decline	High Risk
TC5	Severe degradation indicators	Critical Risk

4.3 RESULTS

4.3.1 Timestamp Alignment

Battery cycles contain time arrays representing measurements recorded during each cycle. These timestamps were aligned with cycle indices to maintain consistency across multiple battery datasets.

```
Aligning timestamps across batteries...  
Timestamp alignment complete: 7,313 cycles aligned
```

Figure 4.1 Timestamp Alignment Across Battery Cycles

Timestamp alignment enables proper comparison of degradation patterns across batteries.

4.3.2 Missing Value Handling

Different cycle types contain different measurement fields. Therefore, missing values were handled using safe extraction techniques.

```
... Extracting raw data with missing value handling...  
Raw data extraction complete: 4,600 cycles  
  
Missing value summary:  
capacity: 2692 missing  
voltage: 0 missing  
current: 0 missing  
temperature: 0 missing  
time: 0 missing
```

Figure 4.2 Handling Missing Values in Battery Dataset

Median-based imputation was applied to fill missing entries while preserving statistical characteristics of the dataset.

4.3.3 Statistical Feature Engineering

Time-series battery signals were transformed into statistical descriptors to provide structured inputs for machine learning models.

The following statistical features were extracted:

- Mean
- Standard deviation
- Minimum value
- Maximum value
- Median

```

=====
EXTRACTING FEATURES
=====

Extraction Statistics:
  Total discharge cycles: 2692
  Capacity extracted: 2667
  Success rate: 99.1%

Capacity Value Distribution:
  Min: 0.0000 Ahr
  Max: 2.6401 Ahr
  Mean: 1.3323 Ahr
  Median: 1.4419 Ahr

DataFrame created: 2692 rows x 17 columns

Data Availability:
  capacity: 2667/2692 (99.1%)
  voltage_mean: 2692/2692 (100.0%)
  temp_max: 2692/2692 (100.0%)
  current_mean: 2692/2692 (100.0%)

Dropped 25 rows with missing capacity

Final DataFrame: 2667 rows x 17 columns

```

Figure 4.3 Statistical Features Extracted from Battery Cycles

Electrochemical impedance parameters such as resistance components were also extracted to capture degradation behavior.

4.3.4 Dendrite-Oriented Feature Engineering

Additional electrochemical indicators were extracted to detect early signs of dendrite formation.

One important feature used is the differential capacity curve defined as

$$\frac{dQ}{dV} \quad (4.1)$$

Changes in the differential capacity curve can indicate structural degradation within the battery.

These features capture subtle variations in battery behavior that may indicate early dendrite growth.

```

Computing dendrite-specific features...
  Dendrite features computed: 2692 cycles x 3 features
  New features added: ['coulombic_efficiency']

✓ Merged feature set: 18 total features

```

Figure 4.4 Dendrite-Specific Features Extracted from Battery Cycles

4.3.5 Sliding Window Modelling

Battery degradation is a gradual process. To capture temporal degradation patterns, sliding window segmentation was applied across battery cycles.

```

Window parameters calculated:
  Average degradation per cycle: -1.7310%
  Optimal window size: 10 cycles, stride: 3 cycles

Multi-scale configuration:
  Scale 1: Window= 5, Stride= 2, Overlap= 60.0%
  Scale 2: Window= 10, Stride= 3, Overlap= 70.0%
  Scale 3: Window= 20, Stride= 6, Overlap= 70.0%
Creating sliding windows for 33 batteries...
  Progress: 5/33 batteries
  Progress: 10/33 batteries
  Progress: 15/33 batteries
  Progress: 20/33 batteries
  Progress: 25/33 batteries
Sliding windows created: 352 windows

```

Figure 4.5 Sliding Window Segmentation for Temporal Degradation Analysis

Within each window, degradation trends such as capacity slope and degradation variance were computed.

4.3.6 Window-Level Feature Construction

For each sliding window segment, several degradation trend features were extracted.

These window-level features represent temporal degradation pat-

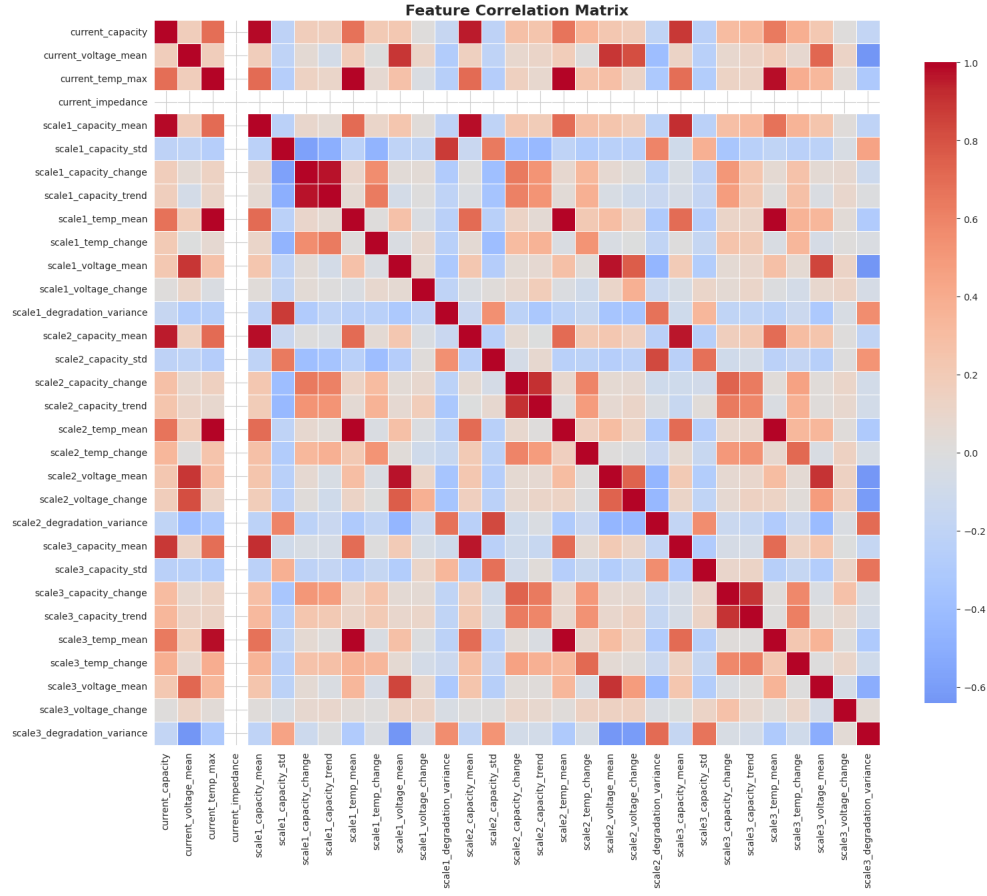


Figure 4.6 Feature Extraction from Sliding Window Segments

terns observed in battery cycles.

4.3.7 Quantum Feature Mapping

Principal Component Analysis (PCA) was used to reduce the dimensionality of the classical feature space before quantum encoding.

The original feature space was reduced to four principal components. These components were normalized to the interval $[0, \pi]$ for quantum circuit rotations.

Quantum feature encoding was then applied using parameterized quantum gates and entanglement operations.

The quantum circuit used for kernel generation in the QSVM model is shown in Figure 4.7.

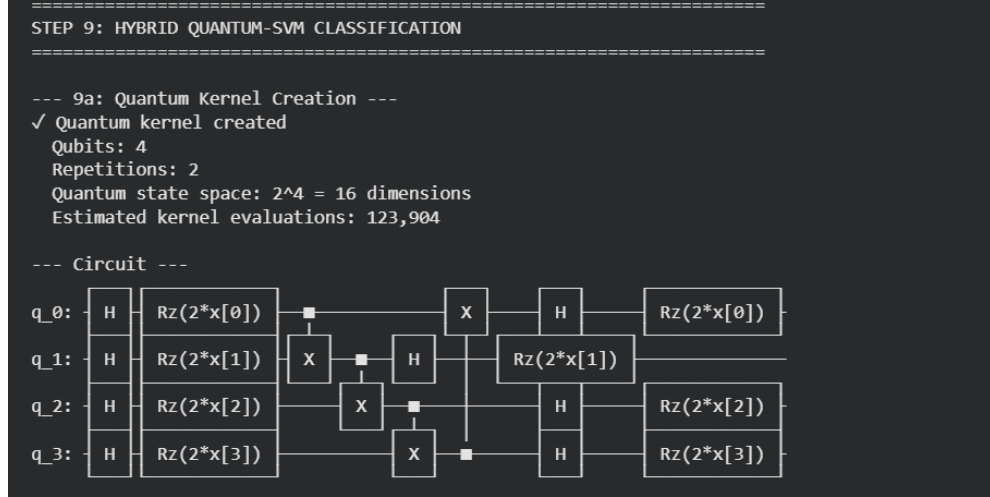


Figure 4.7 Quantum Kernel Circuit Used for QSVM Feature Encoding

4.3.8 Quantum Kernel Support Vector Machine

The classification stage uses a Quantum Kernel Support Vector Machine (QSVM).

The quantum feature map transforms classical feature vectors into quantum states as follows:

$$|\psi(x)\rangle = U_\phi(x)|0\rangle \quad (4.2)$$

The similarity between two samples is computed using the quantum kernel function:

$$K(x_i, x_j) = |\langle \psi(x_i) | \psi(x_j) \rangle|^2 \quad (4.3)$$

The resulting quantum kernel matrix is used by a classical SVM classifier to separate battery risk categories.

The hybrid quantum-classical framework successfully identified degradation patterns within the battery dataset. The quantum feature transformation improved the separability of battery health states in the feature space.

4.3.9 Risk Assessment

The risk assessment results illustrate the distribution of batteries across different predicted risk categories obtained from the QSVM model. The risk distribution graph highlights the number of samples classified into each risk level, providing an overview of the model's prediction outcomes. The prediction confidence plot further shows the confidence scores associated with each predicted class, indicating the reliability of the model's classification results.

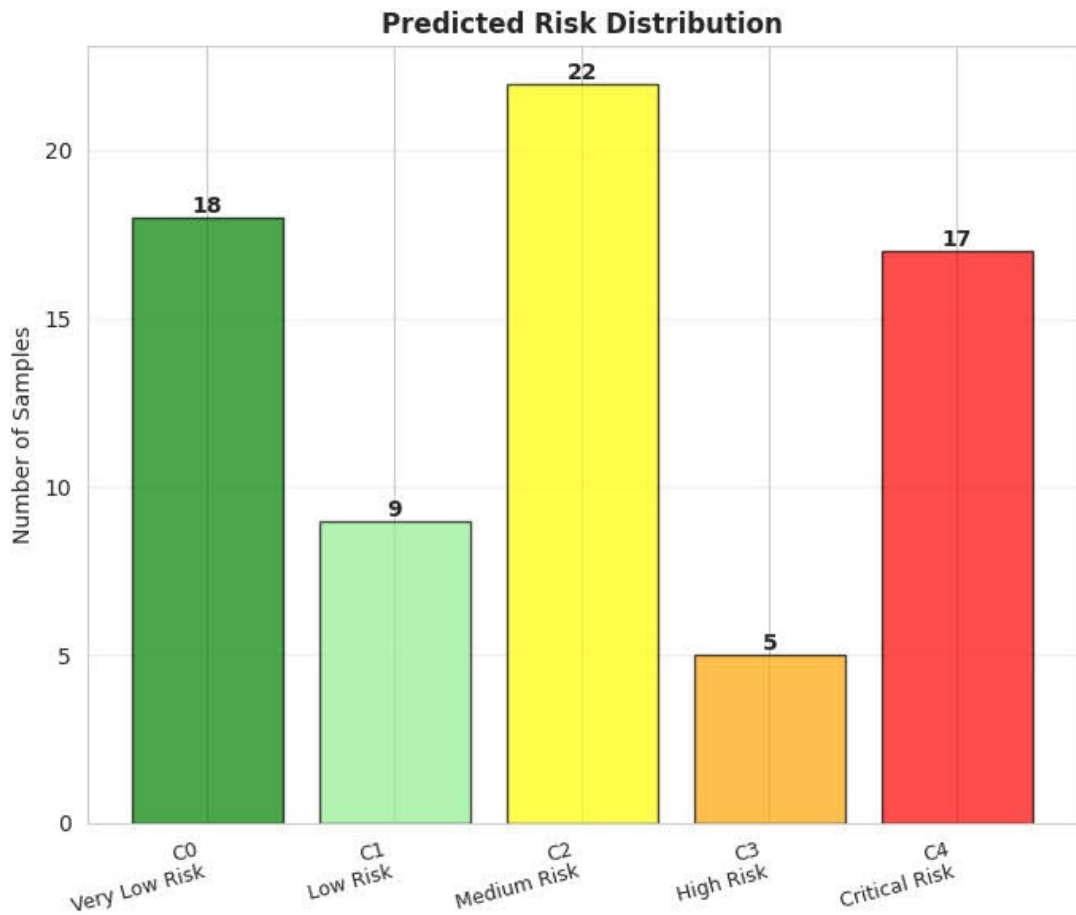


Figure 4.8 Predicted Risk Distribution Analysis

The predicted risk distribution and confidence levels obtained from the QSVM model are shown in Figure 4.8 and Figure 4.9, respectively.

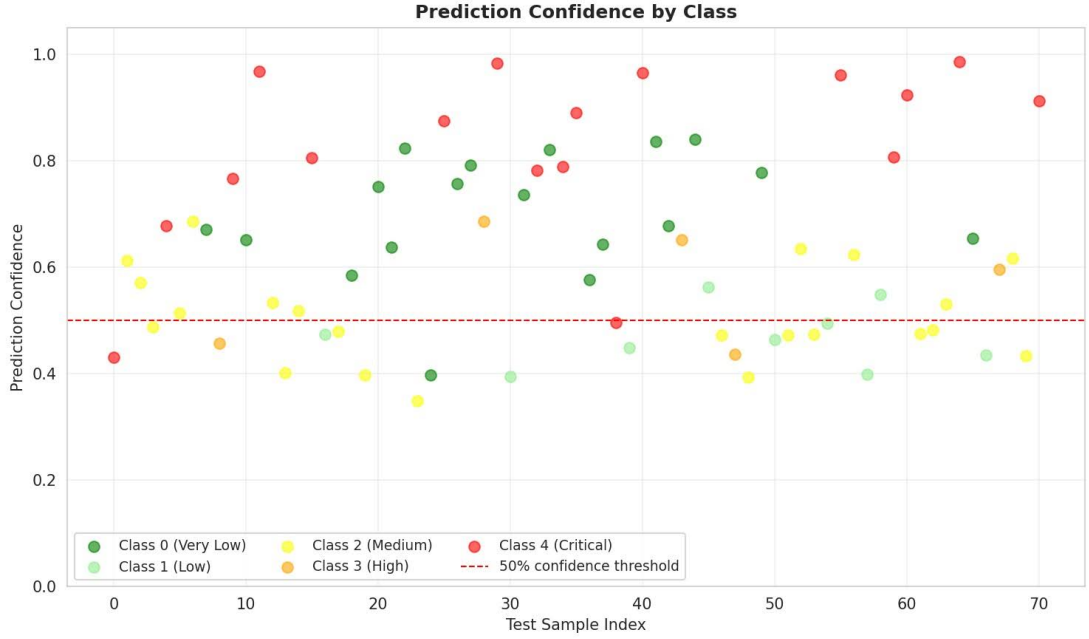


Figure 4.9 Prediction Confidence Distribution Analysis

4.4 PERFORMANCE METRICS

To evaluate the effectiveness of the proposed system, several performance metrics were used.

4.4.1 Accuracy

Accuracy measures the proportion of correctly classified samples among all test instances.

$$Accuracy = \frac{TP + TN}{TP + TN + FP + FN} \quad (4.4)$$

where TP , TN , FP , and FN denote true positives, true negatives, false positives, and false negatives respectively.

4.4.2 Recall

Recall evaluates the model's ability to correctly identify actual anomalous battery conditions.

$$Recall = \frac{TP}{TP + FN} \quad (4.5)$$

High recall is critical in EV battery monitoring because missing an anomaly may lead to severe safety risks.

4.4.3 Feature Space Separability

Feature Space Separability (FSS) measures the separation between normal and anomalous samples after quantum feature transformation.

$$FSS = \frac{\|\mu_{normal} - \mu_{anomaly}\|_2}{\sigma_{normal} + \sigma_{anomaly}} \quad (4.6)$$

Higher values of FSS indicate better class separability.

4.4.4 Variance Amplification Ratio

Variance Amplification Ratio (VAR) quantifies the increase in feature variance produced by the quantum transformation.

$$VAR = \frac{Var(Q(x))}{Var(x)} \quad (4.7)$$

where x represents the classical feature vector and $Q(x)$ represents the quantum-transformed feature vector.

Figure 4.10 presents the confusion matrix of the QSVM classifier.

4.4.5 Performance Evaluation of QSVM

- Accuracy: 63.84% with 6 kernels
- Recall: 0.7509
- FSS: 0.4929
- VAR: 0.4032

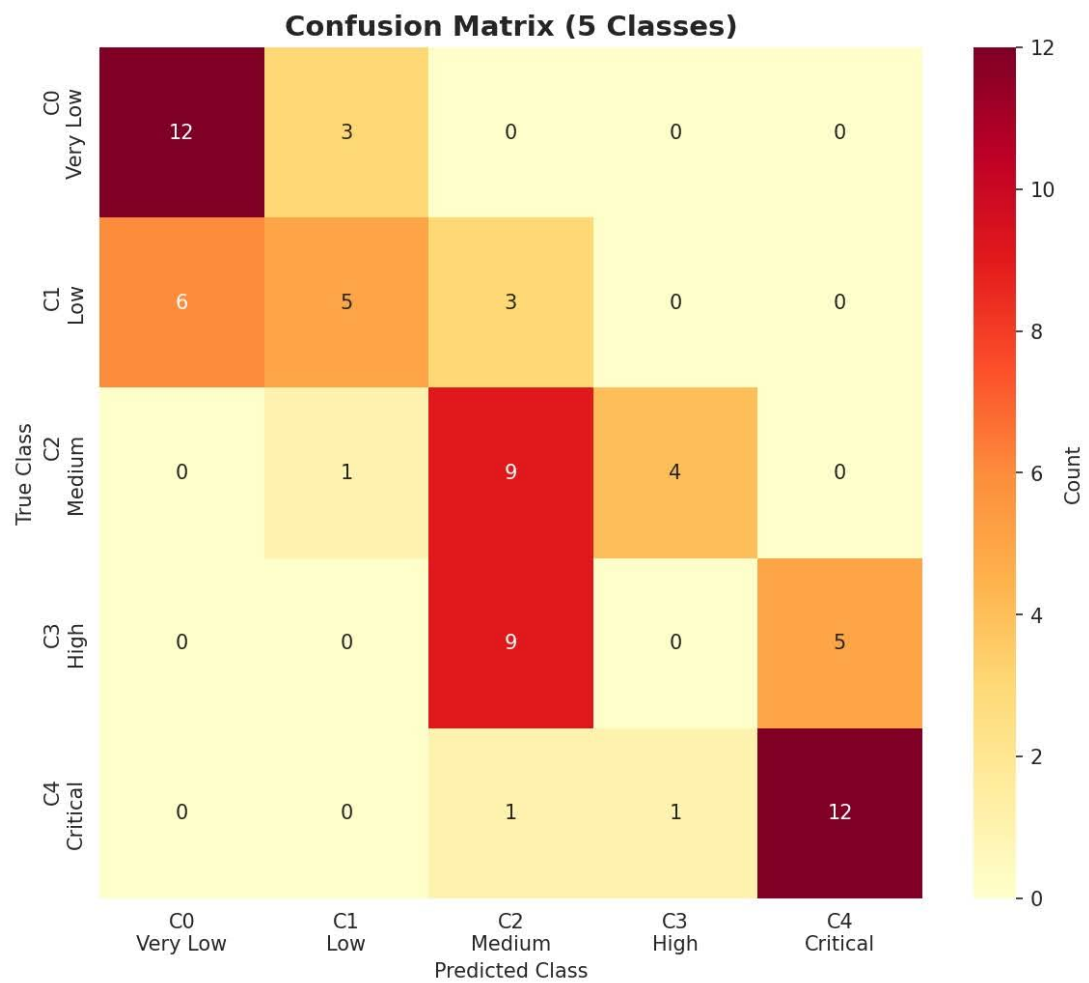


Figure 4.10 Confusion Matrix of the QSVM Model

4.5 SUMMARY OF RESULTS

The results demonstrate that the hybrid quantum-classical learning framework improves the representation of battery degradation patterns and enables early detection of lithium dendrite risk.

CHAPTER 5

CONCLUSION AND FUTURE WORK

5.1 QUANTUM MACHINE LEARNING ENHANCEMENTS

Future improvements to the system can enhance quantum feature representation and classification performance.

5.1.1 Expand Qubit Count

Increasing the number of qubits from 4 to 6-8 would expand the feature space to 64-256 dimensions.

Maintaining PCA variance between 80-90% may improve kernel expressiveness and reduce support vector ratios.

5.1.2 Advanced Quantum Feature Maps

Future implementations may replace the existing feature map with advanced circuits such as:

- Pauli Feature Maps
- IQP circuits

Trainable quantum kernels can also be introduced to maximize class separability.

5.1.3 Hybrid Variational Quantum Circuits

Variational Quantum Eigensolver (VQE) or Quantum Neural Networks may be integrated before the SVM classifier to learn latent quantum representations.

5.2 CLASSICAL MACHINE LEARNING ENHANCEMENTS

5.2.1 Improved Label Design

Future work may incorporate physics-based thresholds such as State of Health (SOH) limits instead of statistical quantile labels.

5.2.2 Enhanced Feature Engineering

Additional electrochemical features such as Electrochemical Impedance Spectroscopy (EIS) parameters may be included.

Wavelet transforms can also be used to extract multi-frequency degradation signatures.

5.2.3 Classical Baseline Comparison

Benchmarking against classical models such as:

- Random Forest
- XGBoost
- LSTM

can help evaluate the practical advantages of quantum models.

5.3 DATA AND SCALABILITY

Future experiments may include larger datasets from NASA and CALCE battery repositories to improve generalization.

Testing on real quantum hardware using IBM Quantum devices can also evaluate practical quantum advantage.

5.4 SYSTEM INTEGRATION AND DEPLOYMENT

The risk prediction module can be integrated into Battery Management Systems (BMS) as a REST API microservice.

Real-time dashboards can visualize battery risk levels and trigger alerts when critical thresholds are reached.

Explainability methods such as SHAP can be used to interpret feature contributions in the model predictions.

5.5 MULTI-CHEMISTRY EXTENSION

Future systems may extend the methodology to other battery chemistries such as lithium-sulfur or solid-state batteries, enabling broader battery safety monitoring applications.

REFERENCES

- [1] G. Abdulsalam and I. Ahmad, “Comparative investigation of quantum and classical kernel functions applied in support vector machine algorithms”, *Quantum Information Processing*, vol. 24, p. 109, April 2025.
- [2] S. S. Dutta, S. Sandeep, S. Sridevi, M. R. Sridhar, and C. Singh, “Quantum kernel based support vector machine with quantum approximate optimization algorithm embedding for improved lung cancer prediction”, In *2024 15th International Conference on Computing Communication and Networking Technologies (ICCCNT)*, pp. 1–6, Kamand, India, 2024.
- [3] S. P., J. V., and S. G., “Real-time quantum machine learning-based anomaly detection for lithium-ion battery packs and identification of defective cell”, In *2025 7th International Conference on Energy, Power and Environment (ICEPE)*, pp. 1–6, Sohra (Cherrapunjee), India, 2025.
- [4] S. Pramanik and A. K. Jha, “Assessment of quantum feature map for binary forest classification using qsvm”, In *IGARSS 2025 - 2025 IEEE International Geoscience and Remote Sensing Symposium*, pp. 2635–2639, Brisbane, Australia, 2025.
- [5] M. Roth et al., “Autoqml: A framework for automated quantum machine learning”, In *2025 IEEE International Conference on Quantum Software (QSW)*, pp. 81–91, Helsinki, Finland, 2025.
- [6] H. Yi, “Hybrid quantum–classical framework for urban traffic state classification”, *IEEE Access*, vol. 13, pp. 156628–156638, 2025.