



CAT 6 FLASHER 12 V OPERATING VOLTAGE TEST REPORT

DATE: 17.05.2026

PAGE NO.: 1/3

Part Name	CAT 6 FLASHER 12 V	Application	COMMERCIAL APPLICATION
Customer Part No.	B00 861 544 00 32	Customer	FORCE MOTOR
UCAL Part No.	400230122002	Report No	R&D/CAT6/12VF/DUR/26/031

INTRODUCTION:

UCAL is currently supplying 12V CAT 6 Flashers to Force Motor for commercial applications. This validation plan has been prepared to define the test requirements and validation activities for the current production parts of the respective product. The testing will be carried out as per the approved validation plan to verify product performance, functional reliability, and compliance with specified requirements under defined test conditions.

PURPOSE:

To evaluate the 12 V flashers assembly after **Operating voltage test**.

TEST SPECIFICATION:

Test standard as per JASO D001-94 CL5.1. Sample to be put in to testing with a voltage 13.5 V.

ACCEPTANCE CRITERIA:

The DUT should function normally during and after the test (**Function Status A**). There should not be any deformation, discoloration, fire, smoke, or crack during and after the test.

RESULT:

SAMPLE NO	PERFORMANCE	APPEARANCE	JUDGEMENT
S:03	O	O	O
S:04	O	O	O

O: OK

X: NG

Δ: To be confirmed

CONCLUSION:

The performance of the Flasher assembly is acceptable after test. The samples are met the requirements.

 Mr. Rahul Bongarden	 Mr. Karthikeyan N
Prepared By	Approved By



CAT 6 FLASHER 12 V OPERATING VOLTAGE TEST REPORT

DATE: 17.05.2026

PAGE NO.: 2/3


PERFROMACE TEST SPECIFICATIONS:

SNO	PARAMETERS	SPECIFICATIONS
1	Operating voltage	10 V~16 V
2	Test voltage	13.5 V
3	Flash rate(Turn signal/Hazard warning)	60~120 Flashes/Minute
4	One lamp failure flashing rate	>140 Flashes/Min(or)1.8 times of flash rate whichever is greater
5	Duty Cycle	40% ~60%

TEST PROCEDURE:

Connect to power supply device, input device & loading device, to the test specimen, and apply voltage within the range from 9V to 16V (12V system) respectively to the test specimen. The specimen shall be tested for its characteristics respectively at the lowest voltage, highest voltage, and any voltage between such highest & lowest voltage within the range.

TEST SETUP:

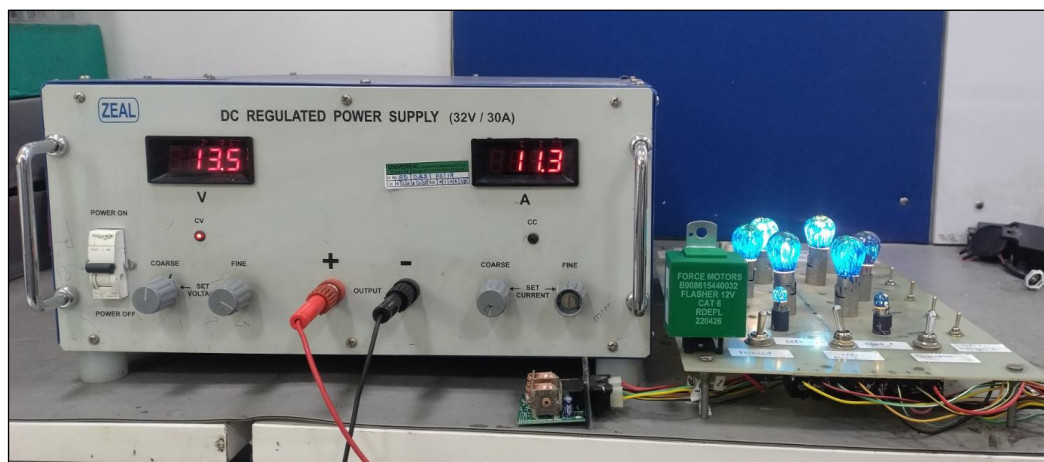

TURN SIGNALS & HAZARD SIGNALS:

LEFT SIGNAL	RIGHT SIGNAL	HAZARD SIGNAL




CAT 6 FLASHER 12 V OPERATING VOLTAGE TEST REPORT

DATE: 17.05.2026

PAGE NO.: 3/3

WAVEFORM DATA:

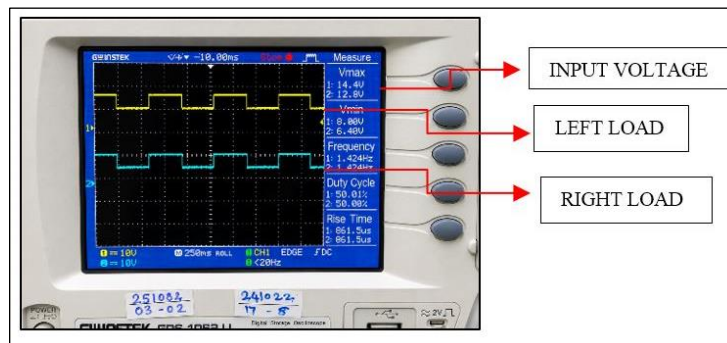

Test Observation:

Description	Load	Observations(at 12 V)	Remark
	LED& CLUSTER	Sample No:03&04	
Turn Signal RH	3 x 21 W Lamp + 1x 2W LED	85	OK
Turn Signal LH	3 x 21 W Lamp + 1x 2W LED	85	OK
Hazard Mode	6 x 21 W Lamp + 2x 2 W LED+	85	OK
Fault condition Any one 21W Lamp failure	2 x 21 W Lamp + 1x 2 W LED	170	OK
Duty cycles for RH&LH	3 x 21 W Lamp + 1x 2 W LED	50%	OK
Duty cycles for Hazard Mode	6 x 21 W Lamp + 1x 2 W LED	50.1%	OK

NOTE: The observed flashes are within the specifications & the samples met the performance requirements.

TESTED SAMPLES PHOTOS:

BEFORE TEST SAMPLE – S:03,04	AFTER TEST SAMPLE – S:03,04

OBSERVATION:

There is no significant change in the electrical performance of the flasher samples. The functionality remains satisfactory. The observed flashes are within the specified requirements & the samples met the performance requirements. All function of the Flasher performs as designed before & after the test (Class A).