



AL FLASHER 24 V OVER VOLTAGE TEST REPORT

DATE:16.04.2026

PAGE NO.: 1/3

Part Name	AL FLASHER 24 V	Application	COMMERCIAL APPLICATION
Customer Part No.	FGG00700	Customer	ASHOK LEYLAND
UCAL Part No.	RDEPL/AL/16	Report No	R&D/AL/24VF/VAL/26/008

INTRODUCTION:

UCAL is currently supplying 24V AL Flashers to Ashok Leyland for commercial applications. This validation plan has been prepared to define the test requirements and validation activities for the current production parts of the respective product. The testing will be carried out as per the approved validation plan to verify product performance, functional reliability, and compliance with specified requirements under defined test conditions.

PURPOSE:

To evaluate the 24 V flashers assembly after **Over Voltage Test**

TEST SPECIFICATION:

Test standard as per **ISO 16750-2:2023**. DUT should operate within specified functional parameters.

ACCEPTANCE CRITERIA:

Class A: All function of the flasher performs as designed during and after the test.

RESULT:

SAMPLE NO	PERFORMANCE	APPEARANCE	JUDGEMENT
S:05	O	O	O


O: OK

X: NG

Δ: To be confirmed

CONCLUSION:

The performance of the Flasher assembly is acceptable after test. The samples are met the requirements.

 Mr. Rahul Bongarde	 Mr. Hussain Merchant
Prepared By	Approved By

PERFROMACE TEST SPECIFICATIONS:

SNO	PARAMETERS	SPECIFICATIONS
1	Operating voltage	18 V~32 V
2	Test voltage	32V
3	Flash rate(Turn signal/Hazard warning)	60~120 Flashes/Minute
4	One lamp failure flashing rate	>140 Flashes/Min(or)1.8 times of flash rate whichever is greater
5	Duty Cycle	40% ~60%

TEST PROCEDURE:

The test performed with all electrical connections with a lamp load of 2x (2 x 21 W Lamp + 1x 3.5 W LED) & cluster loads and a voltage of 32V is applied for the duration of 60 min.

TEST SETUP:



TURN SIGNALS & HAZARD SIGNALS:

LEFT SIGNAL	RIGHT SIGNAL	HAZARD SIGNAL
		



AL FLASHER 24 V OVER VOLTAGE TEST REPORT

DATE:16.04.2026


PAGE NO.: 3/3

TEST OBSERVATION:

Description	Load	Observations(at 24 V)	Remark
	LED& CLUSTER	Sample No:01	
Turn Signal RH	2 x 21 W Lamp + 1x 3.5 W LED+ 2 W Cluster Signal	85	OK
Turn Signal LH	2 x 21 W Lamp + 1x 3.5 W LED+ 2 W Cluster Signal	85	OK
Hazard Mode	2x (2 x 21 W Lamp + 1x 3.5 W LED+ 2 W Cluster Signal)	85	OK
Fault condition Any one 21W Lamp failure	2 x 21 W Lamp + 1x 3.5 W LED+ 2 W Cluster Signal	171	OK
Duty cycles for RH&LH	2 x 21 W Lamp + 1x 3.5 W LED+ 2 W Cluster Signal	49%	OK
Duty cycles for Hazard Mode	2x (2 x 21 W Lamp + 1x 3.5 W LED+ 2 W Cluster Signal)	49%	OK

NOTE: The observed flashes are within the specifications & the samples met the performance requirements.

TESTED SAMPLES PHOTOS:

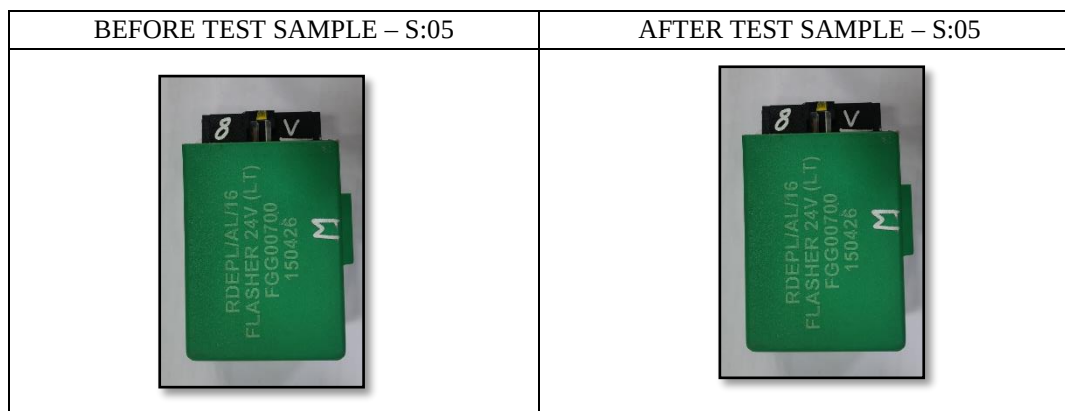

OBSERVATION:

There is no significant change in the electrical performance of the flasher samples. The functionality remains satisfactory. The observed flashes are within the specified requirements & the samples met the performance requirements. All function of the Flasher performs as designed during & after the test (Class A).