
NEXASTORE

Technical Support Knowledge

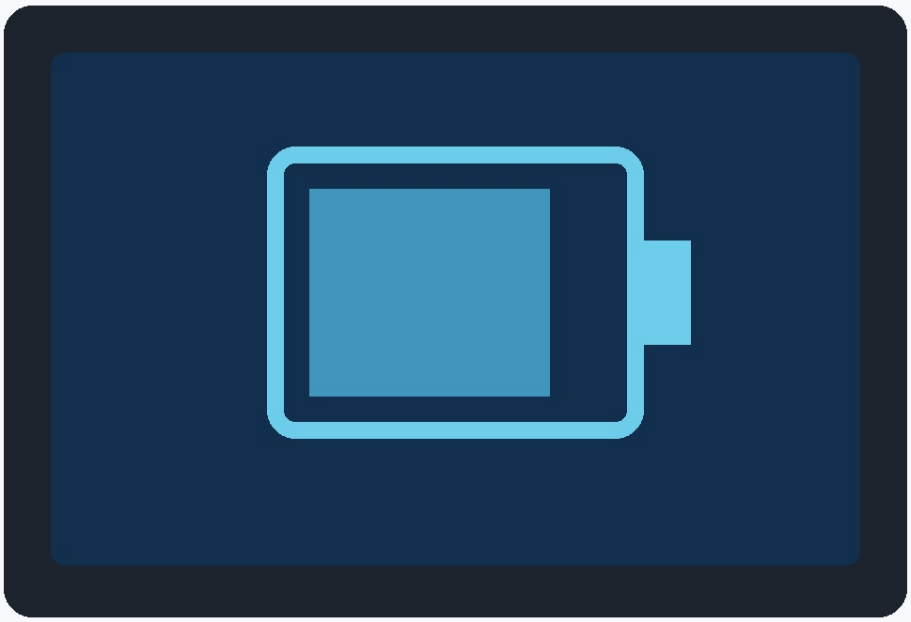

BATTERY

NexaBook Battery and Charging Troubleshooting

Diagnose charging, runtime, battery health and power issues

NexaStore Support Library • 2026 Edition

1. Safety First

Stop using and disconnect the laptop if the battery is swollen, the chassis is deforming, there is smoke or a burning odor, or the device becomes unusually hot while idle. Do not puncture, compress or attempt to service a lithium battery yourself.

2. Charging Symptoms

Symptom	First checks	Likely direction
No charging indicator	Test outlet; inspect charger/cable; remove dock; connect directly	Adapter, cable, port or power path
Plugged in, not charging	Check charge limit, temperature, supported adapter wattage	Battery protection setting or insufficient power
Charges very slowly	Use correct adapter; stop heavy GPU workload; test direct connection	Low-wattage charger or high system load
Stops near 80%	Check battery-preservation/charge-limit setting	May be intentional battery-health behavior
Battery drains while plugged in	Check adapter wattage and GPU/CPU load	System demand may exceed available adapter power

3. Battery Runtime

Cause	Effect / check
High display brightness	Can materially reduce runtime
Discrete GPU active	AI/gaming/creator workloads can consume power rapidly
Background containers / VMs	Sustained CPU and memory activity reduces battery life
High refresh rate	May use more power than lower refresh settings
Battery aging	Usable capacity naturally declines over charge cycles
Wireless/peripherals	External devices and radios add incremental load

4. Battery Health vs Defect

Observation	Interpretation
Gradual runtime decline over years	Often normal aging; review battery-health report
Sudden major capacity loss	Run diagnostics and check firmware/OS reporting
Battery not detected	Power reset and diagnostics; service may be required
Swelling	Stop use and escalate immediately
Unexpected shutdown at high percentage	Diagnostics recommended; battery or calibration issue possible

5. USB-C Charging

Where a NexaBook model supports USB-C Power Delivery, the charger and cable must support adequate power for the device. A phone charger may power a sleeping laptop yet be insufficient for charging during heavy use. Model manuals are authoritative for supported ports and power requirements.

6. Support-Agent Retrieval

Question	Source
'Why does it stop at 80%?'	This guide + model power settings documentation
'What charger wattage came with my model?'	Exact NexaBook model manual / product data
'Is my battery under warranty?'	Warranty entitlement service
'Book a battery replacement'	Authorized service workflow
'Can I keep using a swollen battery?'	No - safety escalation; do not continue normal troubleshooting

Educational notice

This fictional support guide is for the NexaStore course case study.