

microSD

SDMMC2_CK=PD6
SDMMC2_CMD=PD7
SDMMC2_D0=PB14
SDMMC2_D1=PB15
SDMMC2_D2=PG11
SDMMC2_D3=PB4

PWM

PWM1=TIM5_CH4=PI0
PWM2=TIM5_CH3=PH12
PWM3=TIM5_CH2=PH11
PWM4=TIM5_CH1=PH10
PWM5=TIM4_CH2=PD13
PWM6=TIM4_CH3=PD14
PWM7=TIM12_CH1=PH6
PWM8=TIM12_CH2=PH9

ADC

BATT_V1=PA0=ADC1_16
BATT_I1=PA4=ADC1_18

RSSI=PB0=ADC1_9
ADC_5V=PB1=ADC1_5
ADC_3V3=PC0=ADC1_10

ADC1_3V3=PF12=ADC1_6
ADC1_6V6=PF13=ADC2_2

PPM_IN()

PPM_IN=PI5=TIM8_CH1

EN

CAN1_EN=PC12
CAN2_EN=PG2
SD3V3_EN=PG3
IMU3V3=PG6
VDD_5V_HIPOWER_EN=PE9
VDD_5V_HIPOWER_OC=PE10
VDD_5V_PERIPH_OC=PA15
VDD_5V_PERIPH_OC=PD2
I2C_BAT1_EN=PD15
I2C_CAN_EN=PF10

CAN1()

CAN1_RX=PD0
CAN1_TX=PD1

CAN2()

CAN2_RX=PB12
CAN2_TX=PB13

I2C1(GPS+MAG)

I2C1_SDA=PB9
I2C1_SCL=PB8

I2C2(GPS+MAG)

I2C2_SCL=PF1
I2C2_SDA=PF0

I2C3()

I2C3_SCL=PA8
I2C3_SDA=PH8

I2C4(ICP20100)

I2C4_SCL=PF14
I2C4_SDA=PF15

EN

CAN1_EN=PC12
CAN2_EN=PG2
SD3V3_EN=PG3
IMU3V3=PG6
VDD_5V_HIPOWER_EN=PE2
VDD_5V_HIPOWER_OC=PE10
VDD_5V_PERIPH_OC=PA15
VDD_5V_PERIPH_OC=PD2
I2C_BAT1_EN=PD15
I2C_CAN_EN=PF10

USART1(GPS1+MAG)

USART1_TX=PB6
USART1_RX=PB7

TELEM1(USART2)

USART2_TX=PD5
USART2_RX=PA3
USART2_RTS=PD4
USART2_CTS=PD3

TELEM2(USART3)

USART3_TX=PD8
USART3_RX=PD9
USART3_RTS=PD12
USART3_CTS=PD11

UART4(GPS2+MAG)

UART4_TX=PH13
UART4_RX=PH14

USART6(IOMCU)

USART6_TX=PC6
USART6_RX=PC7

UART7(DEBUG)

UART7_RX=PE7
UART7_TX=PE8

UART8()

UART8_RX=PE0
UART8_TX=PE1

LED

关LED=PD10

PF

BZ=PF9

ETH

ETH_MDC=PC1
ETH_MDIO=PA2
ETH_RMII_RXD0=PC4
ETH_RMII_RXD1=PC5
ETH_RMII_TXD0=PG13
ETH_RMII_TXD1=PG12
ETH_RMII_TX_EN=PB11
ETH_RMII_CRS_DV=PA7
ETH_RMII_REF_CLK=PA1

SPI1_ICM20689(IMU3)

SPI1_SCK=PA5
SPI1_MOSI=PB5
SPI1_MISO=PG9
SPI1_CS_ICM20689=PI9

SPI2_BMP581

SPI2_SCK=PI1
SPI2_MISO=PI2
SPI2_MOSI=PI3
SPI2_CS_BMP_581=PH5
DRDY6_BMP581=PA10

SPI3_BMI088(IMU1)

SPI3_MOSI=PB2
SPI3_SCK=PC10
SPI3_MISO=PC11
SPI3_CS1_BMI088_A=PI4
SPI3_CS2_BMI088_G=PI8
DRDY1_BMI088_ACC1=PH3
DRDY2_BMI088_ACC2=PH4
DRDY3_BMI088_GYRO1=PI6
DRDY4_BMI088_GYRO2=PI7

SPI4_ICM-42688-P(IMU2)


SPI4_SCK=PE12
SPI4_MISO=PE13
SPI4_MOSI=PE14
SPI4_CS_ICM_42688=PH15
DRDY5_ICM_42688=PF3

SPI5_FRAM



SPI5_SCK=PF7
SPI5_MISO=PH7
SPI5_MOSI=PF11
SPI5_CS_FRAM=PG7

SPI6


SPI6_SCK_PB3
SPI6_MISO_PA6
SPI6_MOSI_PG14
SPI6_EXT1=PC2
SPI6_EXT2=PC3

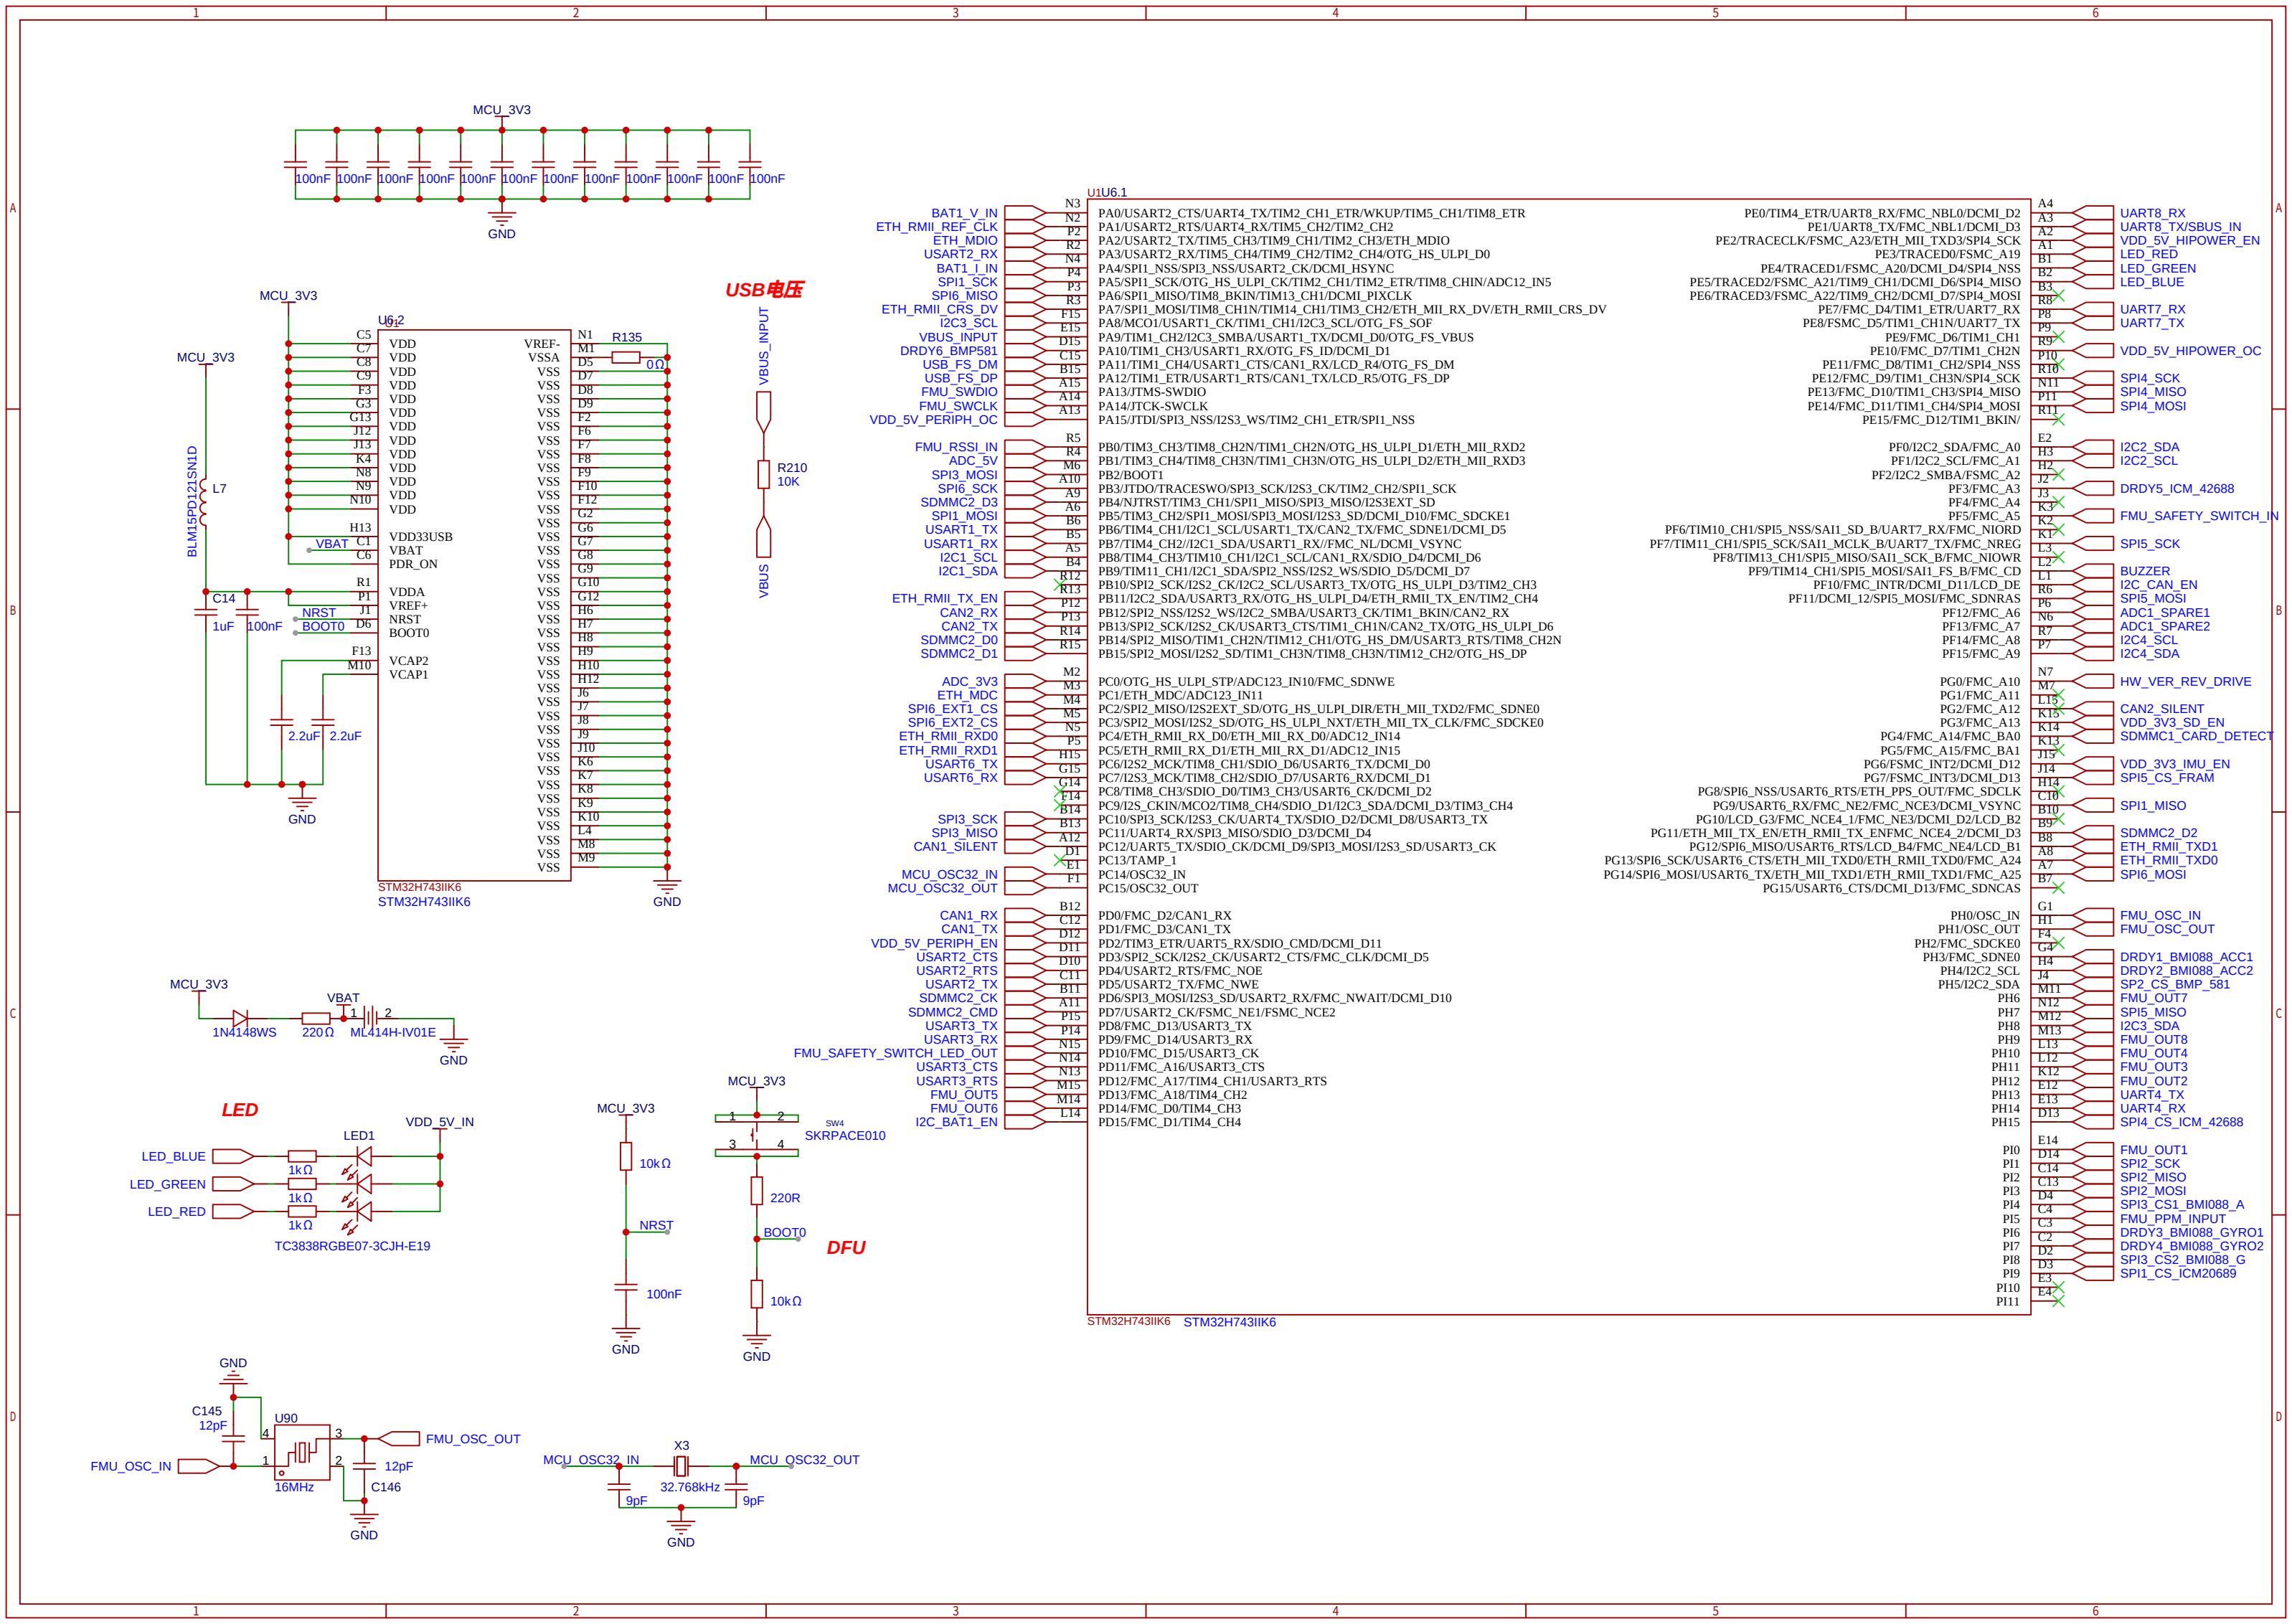


TF卡

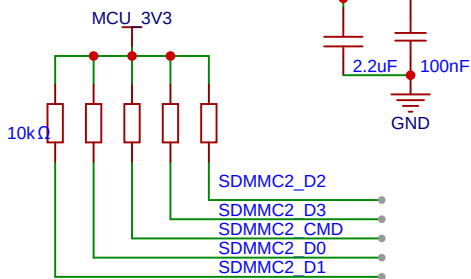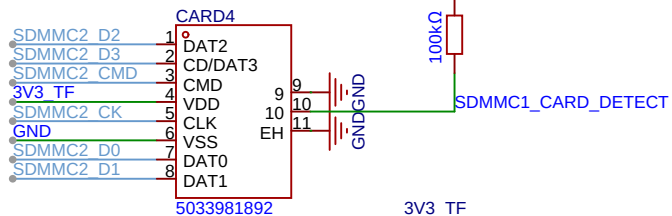


FRAM


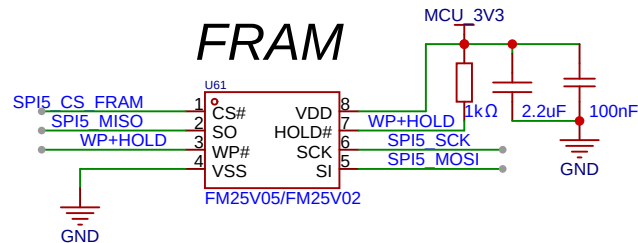









Base_eeprom

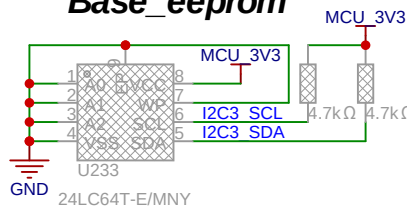


imu_eeprom

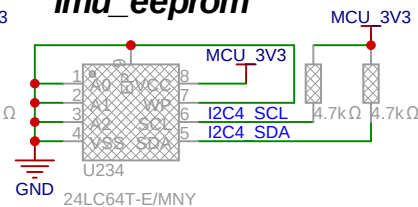


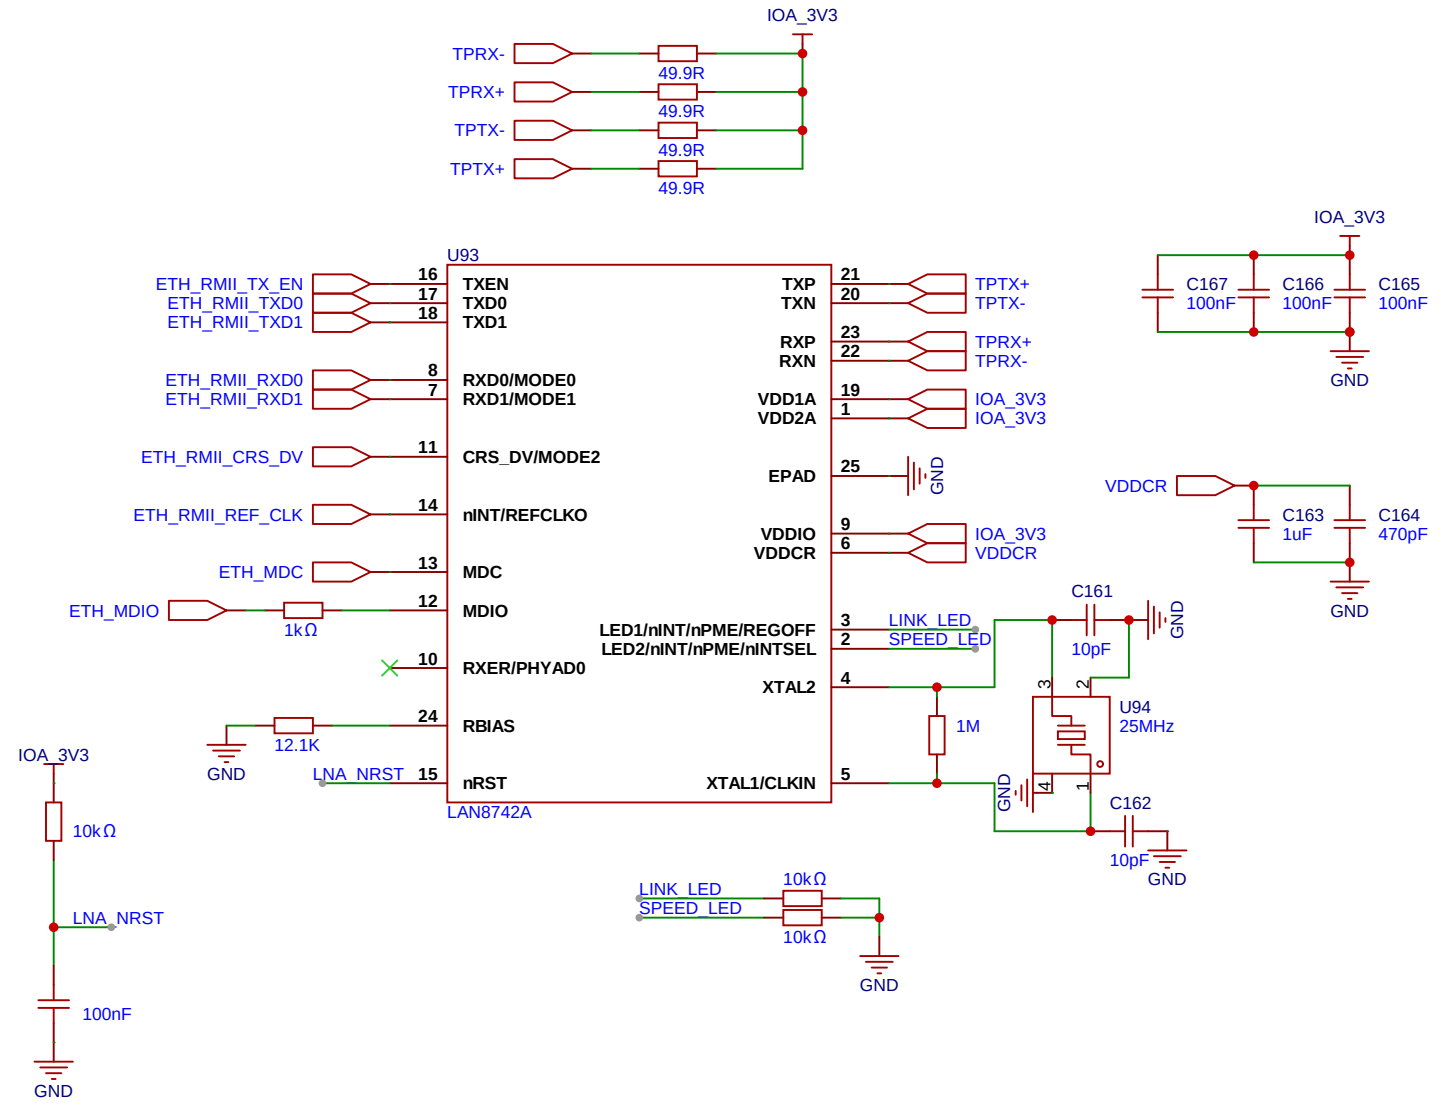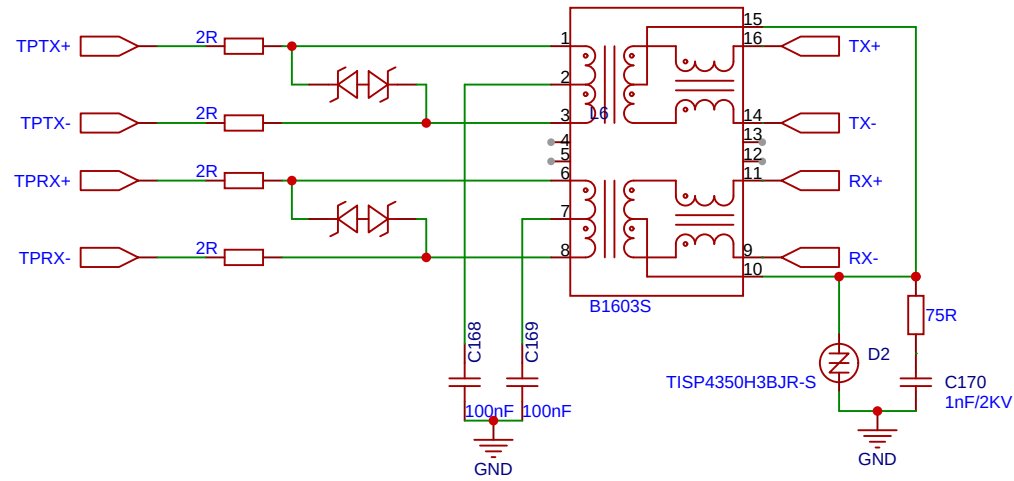

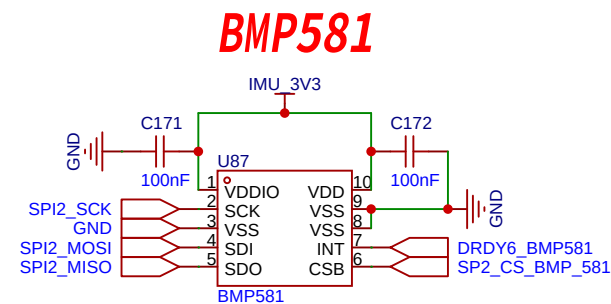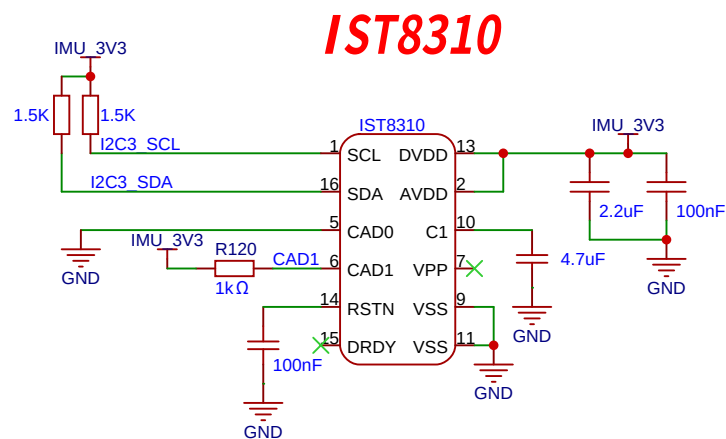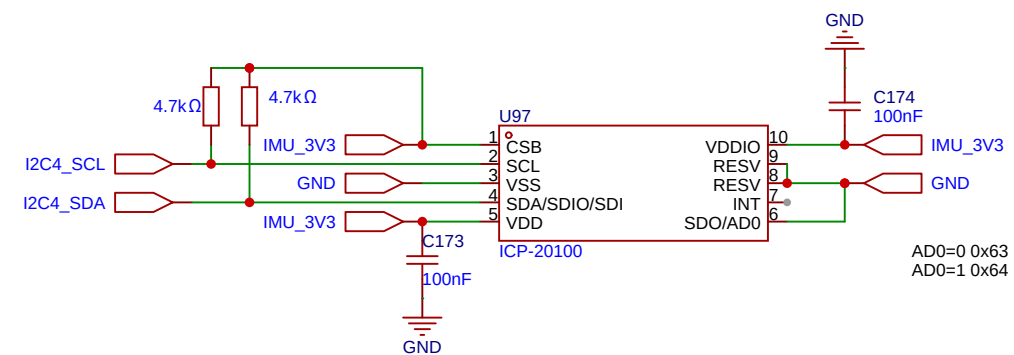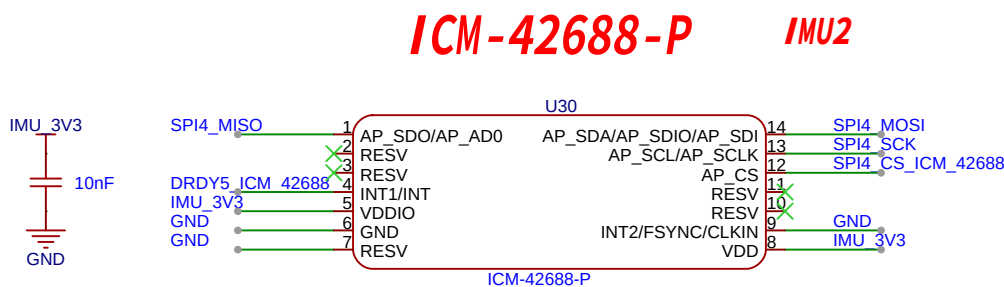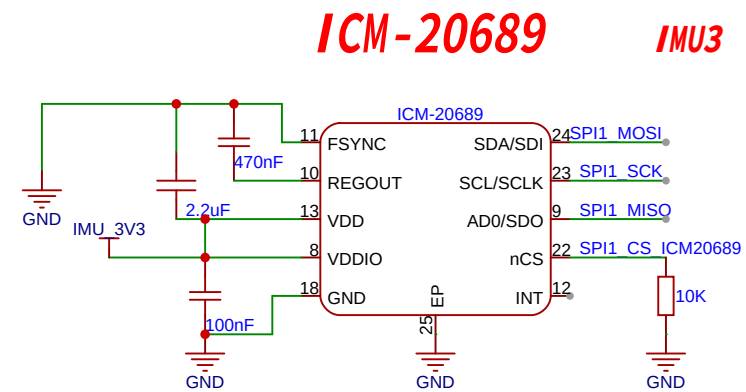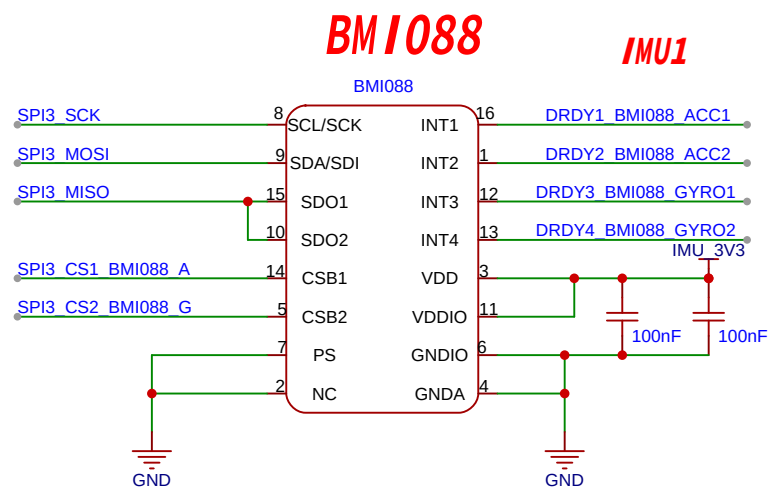


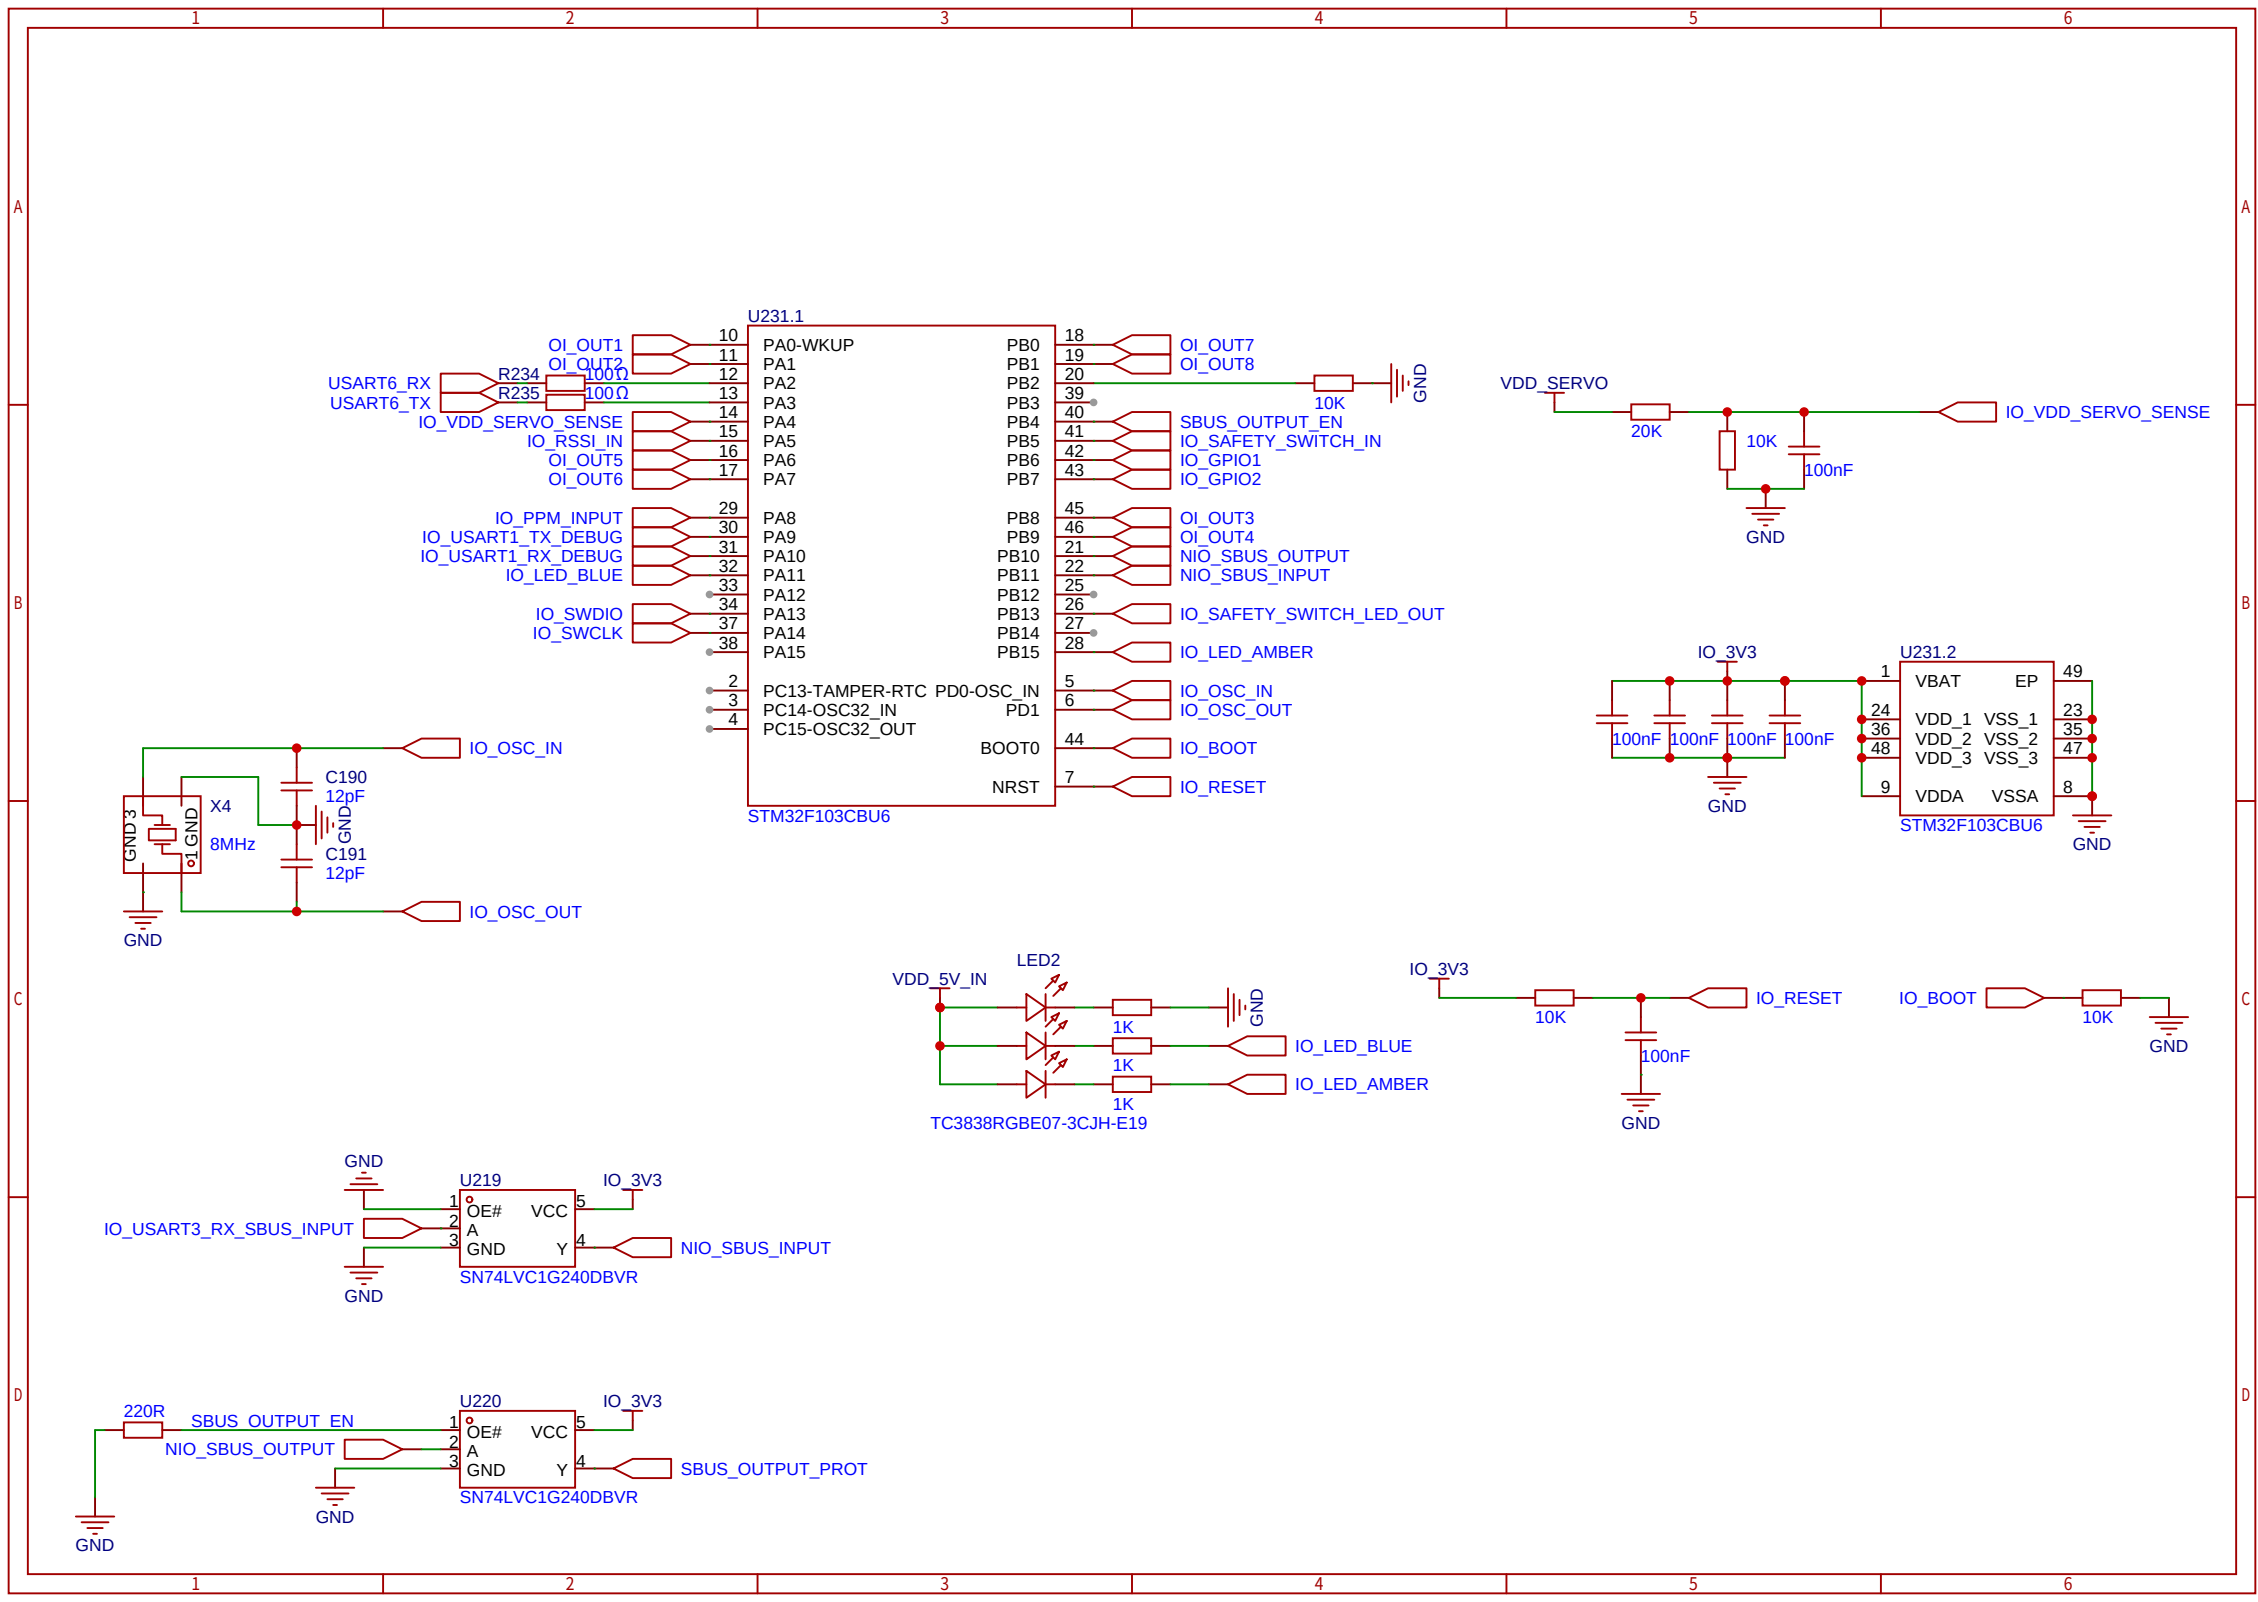


MCU_3V3 FMU_MCU

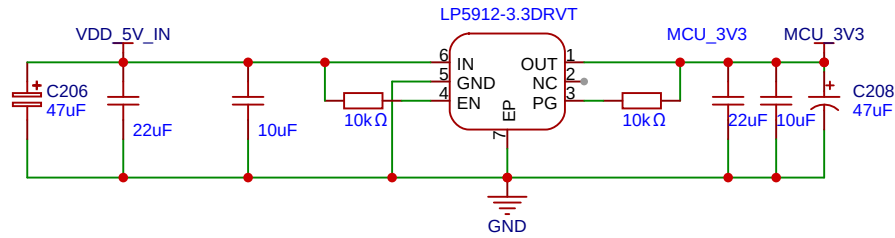


VDD_5V_OUT2

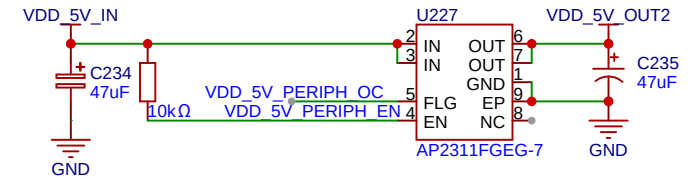



3V3_TF & IMU_3V3

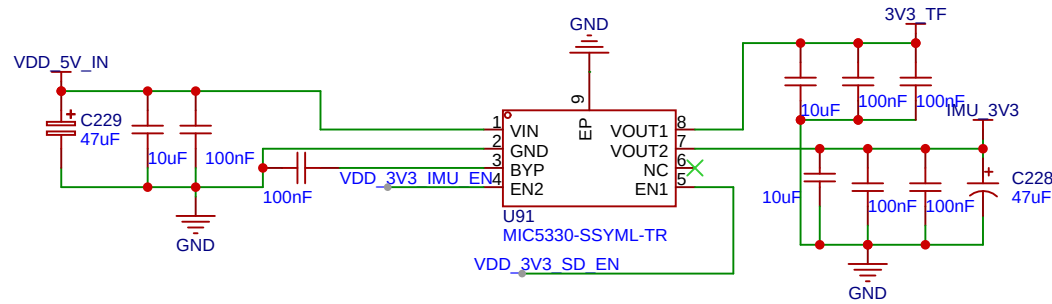

VDD_5V_OUT1 GPS

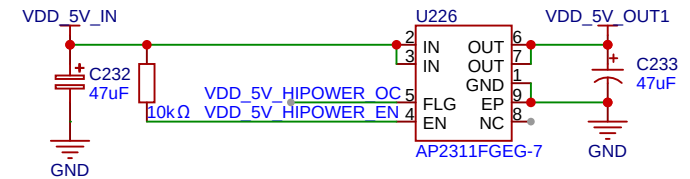


IO_3V3 IO_MCU OA_3V3

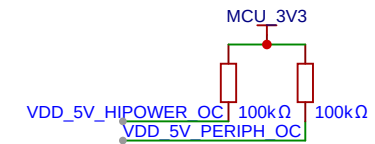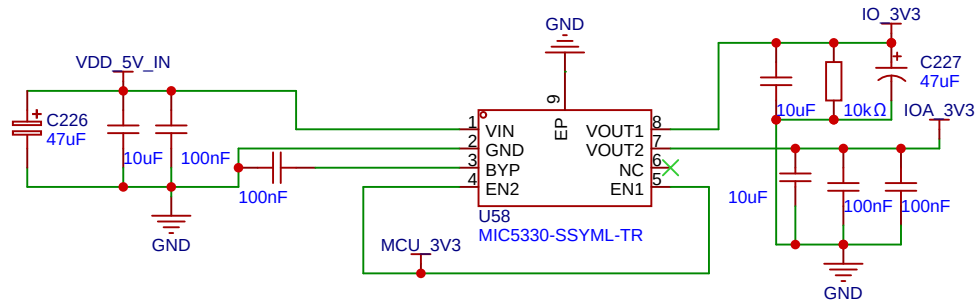


CAN1


CANFD

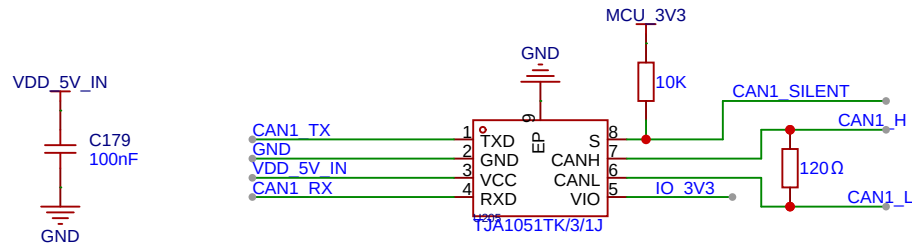




CAN2

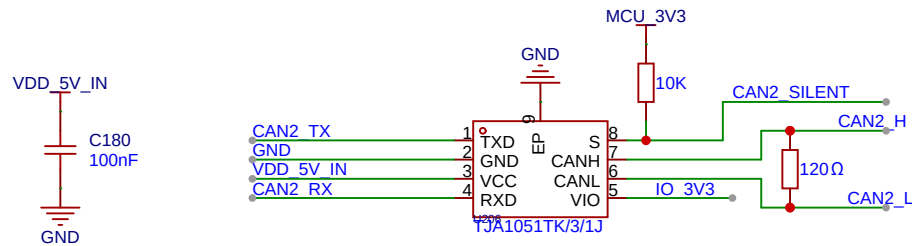


USB&ESD

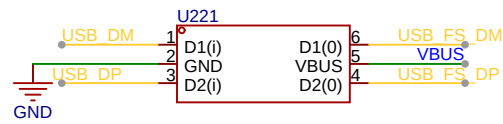



PMU1

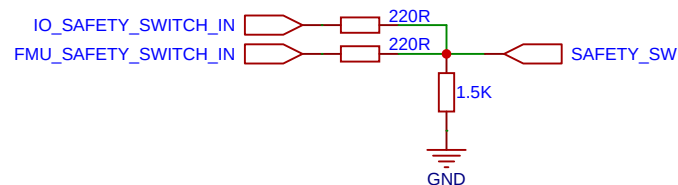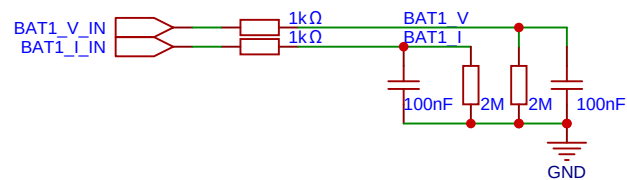



RSSI

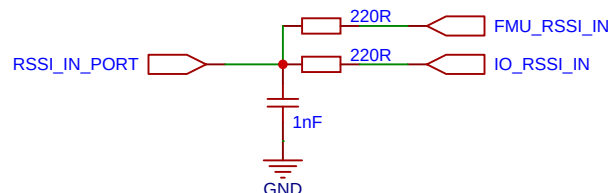




3V3/6V6_ADC

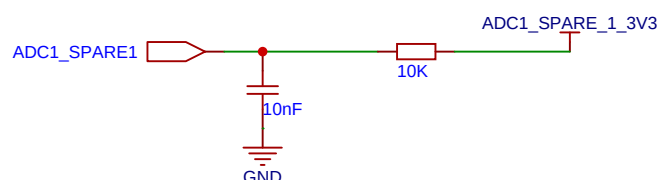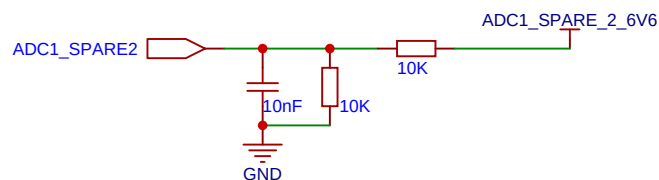


DSM&SBUS_IN&PPM_IN



5V/3V3


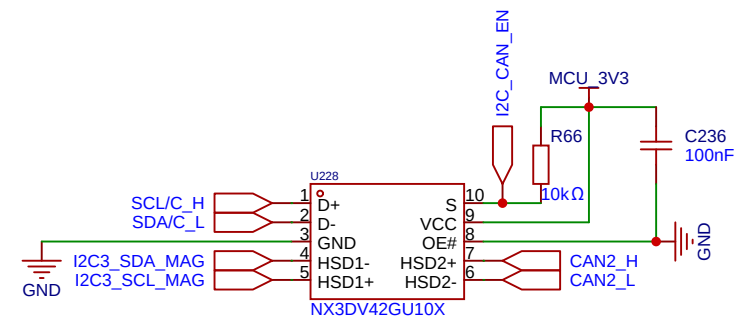
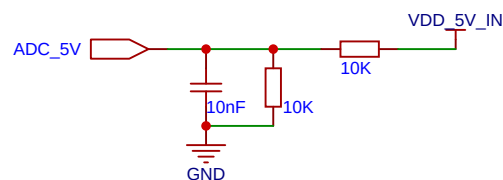
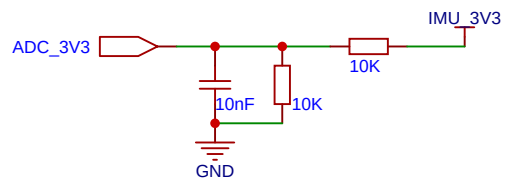


High=CAN2
Low=I2C3

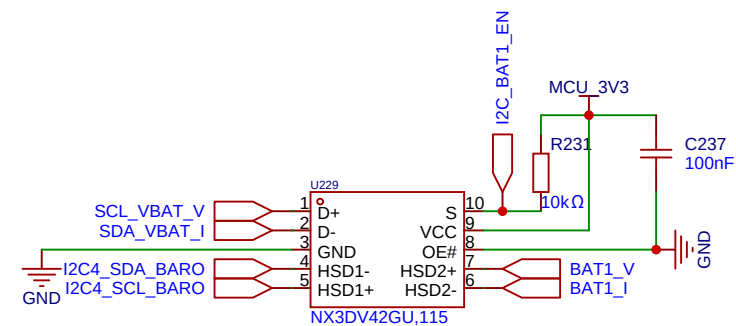


High=BAT1
Low=I2C4


I2C

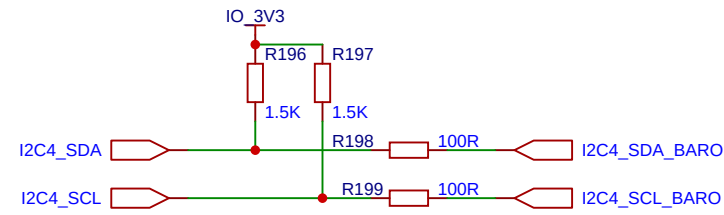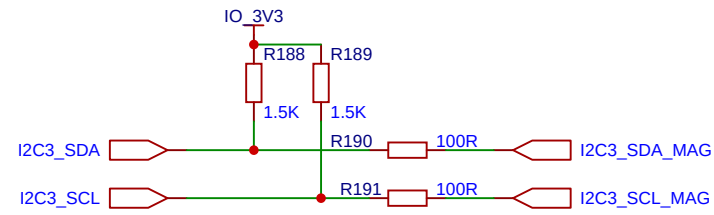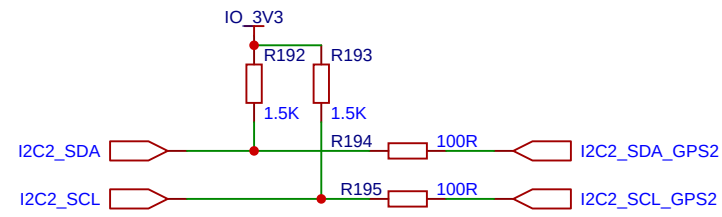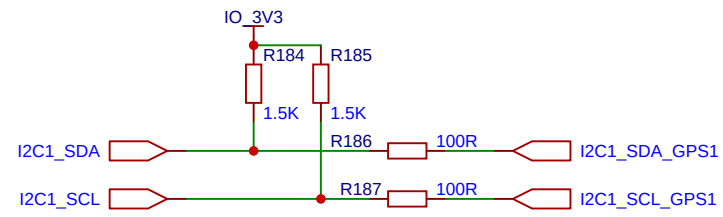


FMU_PWM

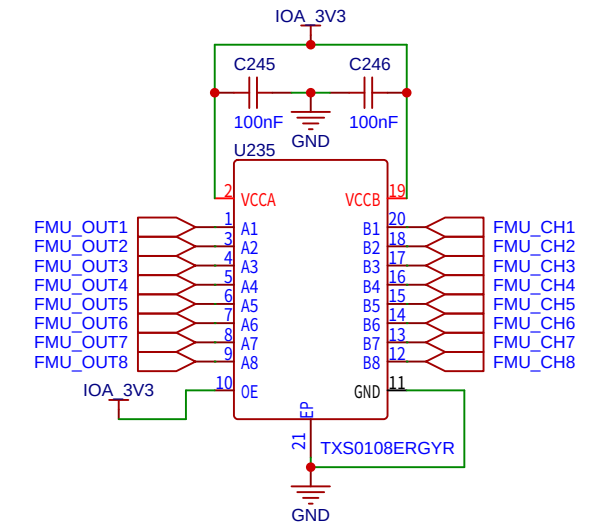

TELEM 1

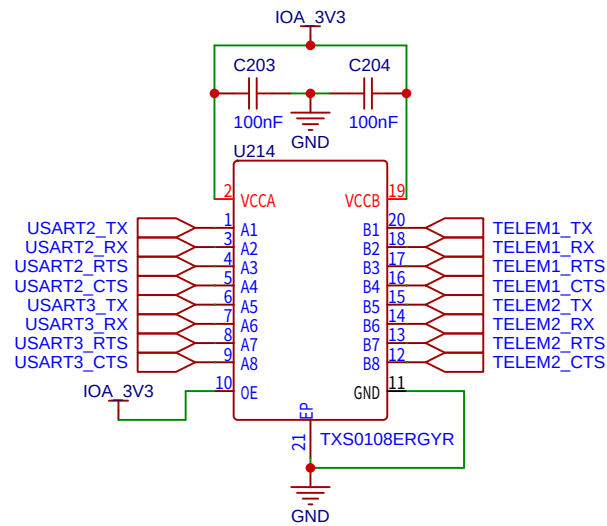

TELEM 2

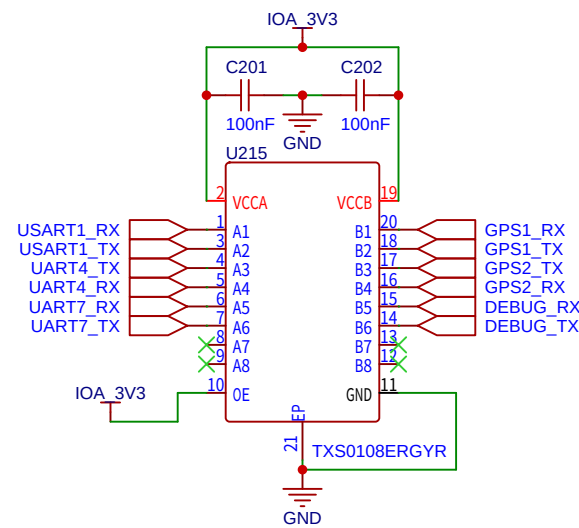

IO_PWM(5V,PWM)

