Synthetic RGB-D of a manufacturing cell with a RealSense D435 depth model

Ravi Kola

November 2026

1 Overview

A humanoid robot in a manufacturing cell picks an angle bracket from a table next to an aluminium profile, using its head depth camera. We take the Unitree G1 as the robot and its head camera, an Intel RealSense D435, as the reference sensor. The D435 is an active infrared stereo camera, documented in Intel's datasheet [1] and depth tuning guide [2], and its stereo failure modes are the ones small metal features are expected to provoke. The work centres on the camera's depth model; the downstream task is deliberately simple.

We render labelled RGB-D frames of the cell in two simulators from one scene description, corrupt the ideal depth with an analytical D435 model built from published numbers, and run a depth-only pipeline on it: detect the bracket's top hole in 6D, fit the bracket's CAD model, and grasp the bracket with the jaws approaching along the hole axis. On 30 held-out test scenes, all of which succeed with ideal depth, the full camera model lowers hole detection from 100 % to 54 %. The CAD fit still finds the bracket in 99 % of the cases, but displaced by about 11 mm, and every grasp that is executed lifts the bracket; grasp success falls to 69 %, close to the 77 % that the grasp planner reaches with noise-free depth rounded to the D435's 1 mm unit. All code runs on a laptop.

2 Synthetic data pipeline and downstream task

Scene. The parts are manufacturer CAD models from item (Line 8, 40×40): a profile cut to 200 mm and an angle bracket with its cover cap, simplified to free Ø8.5 mm holes. The table is sized to the G1's reach from an inverse-kinematics reachability map, which places the parts 0.47–0.68 m from the camera. Each random seed defines a scene: both parts lie in stable resting poses sampled by their probability, and the arms are raised to the sides so that the head camera sees the table unobstructed (Fig. 2).

Rendering and labels. A backend-independent scene description is rendered by PyBullet (CPU, about 2 s per frame) and by Isaac Sim 5.1 (RTX). The two agree on the parts' depth to 0.00 mm median, so the experiments use PyBullet, which reviewers can run on a laptop. Each frame holds an RGB image, ideal z-depth (848×480, the D435's recommended depth resolution, $f = 447$ px), an instance mask, and the camera intrinsics, camera pose and 6D part poses as ground truth. The camera model operates on saved frames and is therefore independent of the simulator. Building the pipeline exposed three rendering errors that would have biased the results: a half-pixel offset in PyBullet's image grid, Isaac ignoring a focal length given in stage units (rendering at 25° instead of 87° field of view), and the G1's waist sagging under soft joint drives so that the head camera moved while rendering.

Downstream robot task. The robot has to pick the bracket by its top hole, the feature a screw or pin goes through in assembly. Perception estimates the hole's 6D pose from depth alone: its centre and its axis (the rotation about the axis is undefined for a round hole). The task has three stages, each using only the output of the previous one and no ground truth.

Hole detection. The detector removes the table plane, peels planar faces off the remaining clusters with RANSAC, and accepts as a hole a round gap of the right size enclosed by a face. The hole's centre is where the gap's pixel rays meet the face plane, its axis is the face normal, and the top hole is the one whose axis points most upward. The thresholds (points within 1 mm of a plane, 1.5 mm above the table) were set on ideal depth.

Pose fit (ICP). The CAD fit recovers the full 6D pose of the bracket. Each upward hole candidate fixes five degrees of freedom; a search over the rotation about the hole axis scores how well the visible model surface matches the measured depth, and ICP refines the best match. All candidates are tried and the one with the best match is kept.

Grasping. The Dex1 parallel jaws approach along the hole axis, close across the bracket's 40 mm width at an antipodal grasp point on the fitted CAD, and lift the part by 10 cm. Inverse kinematics plans a pre-grasp, a straight approach, the closing and the lift for either arm; a plan is rejected if the arm comes within 10 mm of the robot's own body anywhere along the motion, since PyBullet does not simulate self-collision. The plan is executed in PyBullet with physics. A grasp succeeds if the bracket rises above 50 mm with both jaws in contact after a one-second hold.

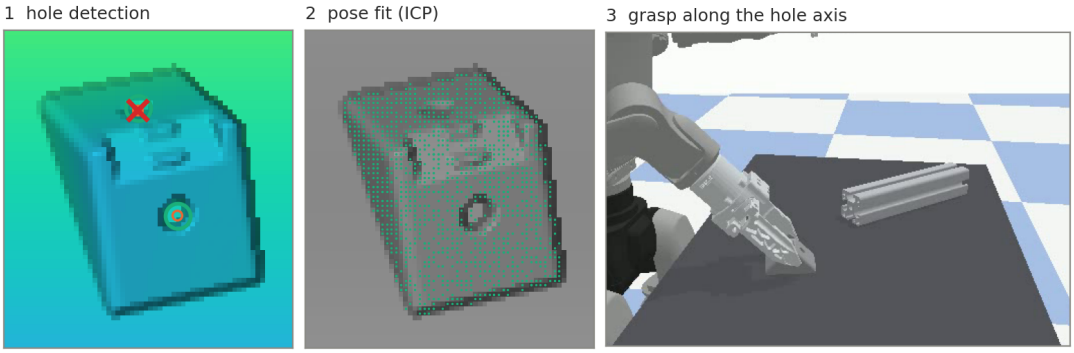


Figure 1: The three stages on ideal depth (seed 432). Detection: hole candidates (orange), true openings (green rings) and the chosen top hole (red ×). Pose fit: the fitted CAD model's visible points. Grasp: the jaws approach along the hole axis.

A stand-in for a learned model. In a real cell this step would more likely be a learned pose estimator or an end-to-end robot policy. We considered a model-based network (FoundationPose), but it needs a GPU stack and pretrained weights, against the requirement that everything run on a laptop. The geometric pipeline is a deliberate surrogate for it. It relies on the same depth cues a network uses, whether for pose estimation or inside a policy: planar faces, depth edges, small holes a few pixels wide, and surface normals. If the camera model destroys or shifts these cues, a model that depends on them is likely to be affected as well. Its thresholds play a role similar to learned parameters: tuned on ideal synthetic depth, they resemble the weights of a network trained only on ideal synthetic data and then deployed on the real sensor. Unlike a network, the pipeline is transparent, so failures can be traced to the camera effect that caused it. The limitation is that a network trained on noisy depth may learn to tolerate some of the effects; the pipeline therefore measures how sensitive the cues are, not how a particular network would perform.

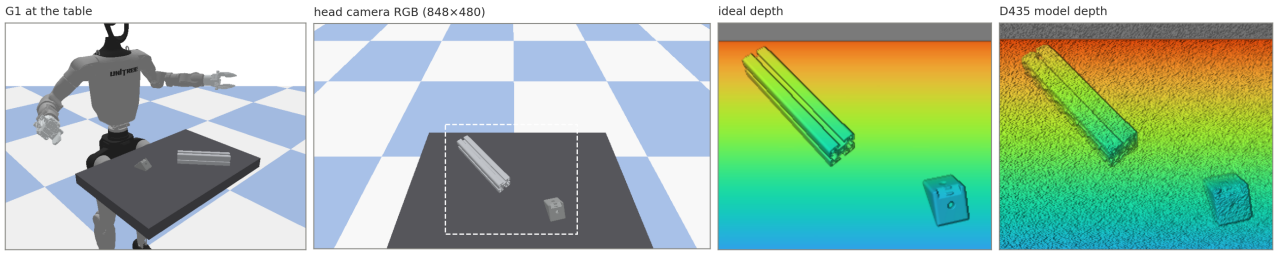


Figure 2: The cell and one frame (seed 432). From left: the G1 at the table in its observation pose, the head camera's RGB image, and the ideal and D435-model depth of the marked region.

3 D435 camera model

Approach. We corrupt the ideal depth with closed-form models, one effect at a time, so that each effect can be switched on alone and its downstream consequence measured. A physics-based simulation of the infrared stereo pair would be more faithful, but the D4 matcher's parameters are undocumented and the simulation

would itself need validation against real data. Learned noise models need real D435 depth of similar scenes; we found no released D435 noise generator. The scope rule is that every modelled effect has a published number, so that the model can be traced to its sources and later calibrated.

Effects included. The D435 measures disparity d between its two infrared imagers, with baseline $B = 50\,\text{mm}$, and reports depth $Z = fB/d$. Three effects are applied in the order in which they arise in the camera.

1. *Edge fattening.* A stereo matcher compares windows of pixels; at a depth step the window straddles both sides and the foreground wins, so the foreground grows into the background and narrow gaps close. No value is published for the D435. We use the only measured value, from Intel's previous R200 camera [3]: gaps narrower than 5 px merge, i.e. the foreground grows by 2 px.
2. *Axial noise*, added to the disparity of each pixel:

$$d' = d + s\,\xi, \quad \xi \sim \mathcal{N}(0,1) \qquad \Rightarrow \qquad \sigma_Z \approx \frac{Z^2}{fB}\,s, \tag{1}$$

   with $s = 0.08\,\text{px}$, the subpixel error of Intel's D435 noise curve [2], giving $\sigma_Z = 0.9\,\text{mm}$ at 0.5 m.
3. *Depth bias* at the datasheet's accuracy limit of ±2 %: $Z' = (1 + b)\,Z$ with $b = \pm 0.02$, the sign drawn with equal probability. Since back-projection is linear in Z, every 3D point moves along its own viewing ray; shapes and orientations are preserved and the part shifts by about 10 mm.

The datasheet's output rules are applied last: the invalid band at the left image edge, the minimum depth of 195 mm and the 1 mm depth unit. Lateral error needs no separate term: in stereo the depth map lies on a fixed pixel grid, and lateral error arises from the axial noise through back-projection and from edge fattening at depth steps.

Effects left out. Several effects do not matter for a static, indoor, single-frame, depth-only task: temporal noise, rolling shutter and motion blur (the depth imagers have a global shutter), ambient infrared, interference between cameras, defocus, colour-sensor effects and post-processing filters (off by default). Dropouts (pixels without depth) are left out for lack of a usable number. The datasheet bounds them only on its test target: a fill rate of at least 99 % on a flat, matte white wall within 2 m [1], with no rule for where invalid pixels occur. At that level they would mostly be isolated pixels, which fail the detector's size and roundness tests; the real data in Section 5 suggest far more. No measurement exists for anodized aluminium; dropout patches on the profile, where its faces may reflect the projector pattern away at steep angles, would probably add false-hole candidates on the profile, which the CAD fit rejected in 99–100 % of draws in our sweep. The bracket is matte powder-coated, close to the datasheet target, and false depth on the profile's T-slots would likely be rejected the same way. For the remaining effects no usable number exists: the dependence on incidence angle (the only published term [4] is hand-set and does not reproduce its own measurements), occlusion shadows inside the image, and the spatially correlated "egg carton" noise that Intel describes without a correlation length.

The noise level itself is uncertain. Ahn et al. [4] fitted the axial noise of a real D435 to about 2.7 times Intel's value at 0.5 m, still within the range Intel measures on different surfaces (0.085–0.32 px). On the development scenes this level alone collapses the pipeline (CAD fit in 4 of 150 draws, against 143 with Intel's value), so on these 15 scenes the choice of published noise level decides between a working and a failing perception stage.

4 Experiment: does the camera model change the downstream outcome?

The experiment asks whether the camera model changes the outcome of the three stages of Section 2: hole detection, CAD fit and grasp. The detector's thresholds lie at the D435's noise level ($\sigma_Z \approx 0.9\,\text{mm}$), so an effect of the noise on detection is expected.

Protocol. The pipeline, the camera model and the hypotheses were developed on 15 scenes, which were then closed. The test protocol was fixed before any test run (git tag `final-experiment`). The 30 test scenes are the first seeds from 201 on for which every stage succeeds with ideal depth, with a collision-free arm motion, so that every failure is caused by the camera model. Seven depth conditions are compared: ideal, datasheet rules only, each effect alone, edge fattening with axial noise, and the full model. Each scene is run with 5 noise draws, the same in every condition, giving 150 draws per condition. Because the bias moves every position by about 10 mm, detection and pose count as correct within 15 mm; the strict 3 mm and 5 mm criteria are reported as accuracy.

Results. Table 1 and Fig. 3 summarise the sweep. The datasheet rules leave perception almost unchanged (fit error below 1 mm; the rounding flips the detector's pick in one scene) but lower the grasp to 77 %: the 1 mm rounding nudges the fitted pose, and the grasp search switches to a candidate the arm cannot reach. This row is the control for the grasp planner's own sensitivity, against which the camera effects on the grasp should be read. Axial noise causes the largest single drop in detection, to 63 %; in the cases we inspected it leaves enclosed gaps on the profile's flat top face that pass as holes, and it breaks up the bracket's faces so that the real hole is no longer enclosed (Fig. 4). Edge fattening alone does not prevent detection, since the plug it puts into the hole still stands out on noise-free depth, but it tilts the hole axis (median error 0.67° to 1.06°) and with noise it lowers detection further, from 63 % to 39 % (Fig. 5). Since our edge model is likely too strong (Section 5), this drop may overstate the effect on a real D435. The depth bias is invisible to detection but shifts the whole pose by 10.7 mm along the viewing ray. The full model combines both: 54 % detection and an 11 mm pose offset. Throughout, the CAD fit absorbs the detection errors, because it tries every candidate and keeps the one that matches the bracket.

The grasp was more robust than we expected. Every grasp that was executed lifted the bracket (raised by more than 50 mm with both jaws touching), also with the 11 mm offset of the bias and the full model: the open jaws (54 mm for the 40 mm bracket) mostly absorb it. Not always cleanly: the offset can make the jaws catch the bracket by a corner, so that it swings in the grip (Fig. 6), a grasp that would not survive a placement. All grasp failures are planning failures: the grasp target moves by a few millimetres and the planner finds no reachable arm motion, or only one through the robot's own body (6 draws, all with the bias). The camera conditions reach 69–79 % against 77 % for the rules control, so we see no clear effect of the camera model on the grasp beyond the planner's own sensitivity.

Second renderer. The sweep was repeated with Isaac Sim RTX depth for the same 30 scenes and noise draws. Ideal depth again succeeds in every stage. Hole detection reaches 63 % with axial noise (as with PyBullet), 97 % with edge fattening, 46 % with both, 98 % with the bias and 49 % with the full model; the pose is found in every draw and the bias shifts it by 10.7 mm, as with PyBullet. The pattern and the sizes of the effects agree within a few percentage points, which suggests that they come from the camera model and not from the renderer. The grasp runs in PyBullet in both cases and is not an independent check.

Condition	Hole detected	Pose found	Grasp lifted
ideal	100 %	100 %	100 %
datasheet rules	97 %	100 %	77 %
axial noise	63 %	100 %	70 %
edge fattening	100 %	100 %	73 %
edge + axial	39 %	100 %	78 %
depth bias ±2 %	100 %	100 % (10.7 mm off)	79 %
full model	54 %	99 % (11.1 mm off)	69 %

Table 1: Success per stage, 30 test scenes × 5 noise draws. Detection and pose within 15 mm. Every executed grasp lifted the bracket; the grasp failures are planning failures.

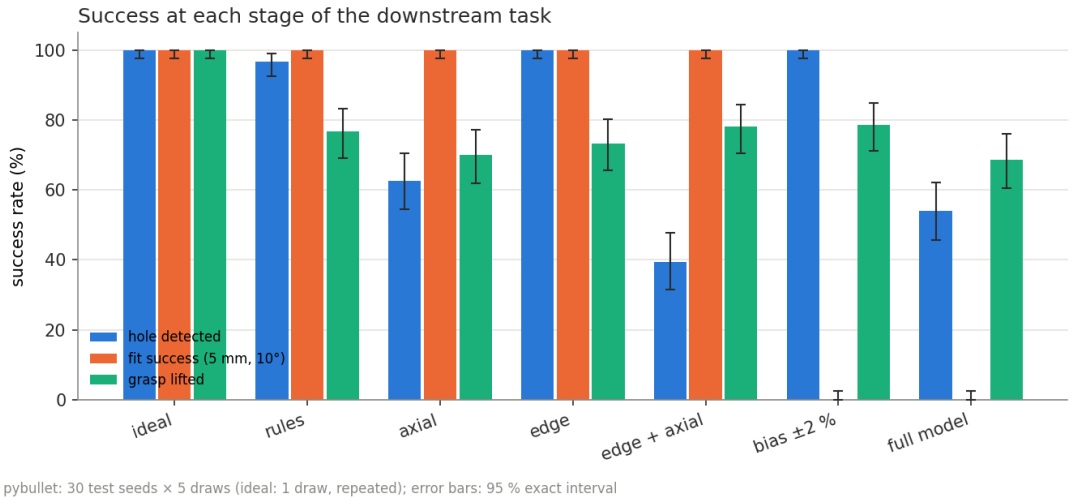


Figure 3: Success per stage and condition with 95 % exact intervals.

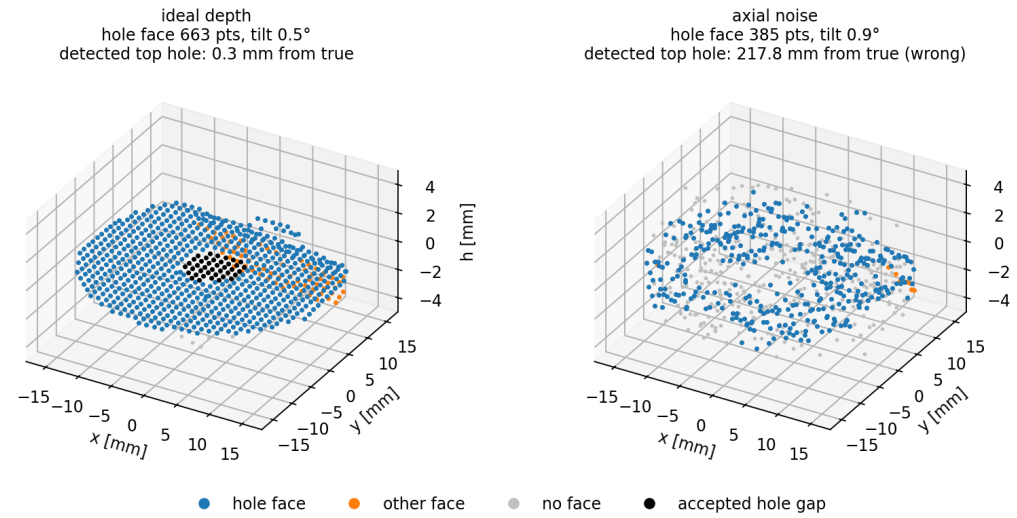


Figure 4: How detection can fail under axial noise: depth points within 18 mm of the true top hole, in the hole's frame (height h stretched about 4×), coloured by what the detector made of them. With ideal depth the face is one clean plane and the hole is an enclosed gap (black). With axial noise ($\sigma_Z \approx 0.9$ mm) many points fall outside the 1 mm face band, the face breaks up, no gap is enclosed, and the detector picks a false hole 218 mm away. Development scene (seed 8, draw 22).

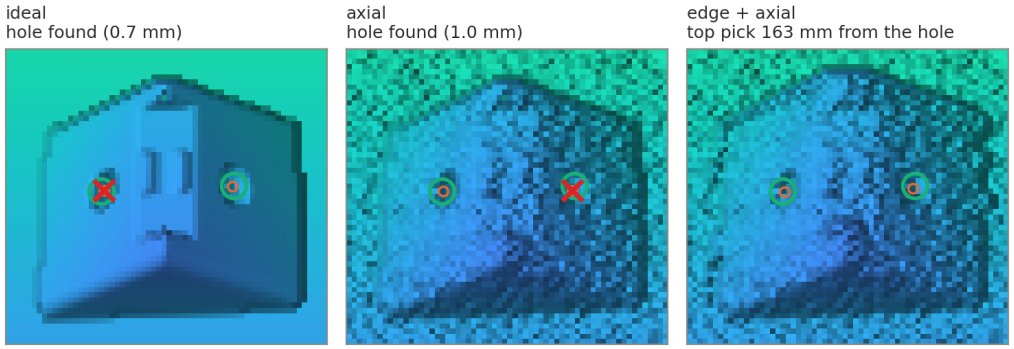


Figure 5: The same noise draw (seed 299) under three conditions. Green ring: true top hole; orange: hole candidates; red cross: the detector's pick. With axial noise the hole is still found; adding edge fattening fills it, and a false hole on the profile 163 mm away (outside the crop) wins.

What did not work. When all hole candidates are false, the CAD fit can lock onto the profile (once in 150 draws under the full model, 253 mm and 43° off); the grasp planner then finds no reachable grasp, so the robot does not move. The grasp planner is the weakest part: it tries one grasp candidate and one hand orientation per arm, so millimetre changes of the pose decide between a plan and none. Its first version also had no check against the robot's own body. In a first sweep, 7 of the 30 ideal grasps passed the elbow through the torso, and so did every grasp that pushed or tipped the bracket over instead of lifting it; those failures had looked like camera effects. With the collision check and a new scene selection, no executed grasp fails. The pipeline also has its own limits, which the test-scene selection hides. On scenes filtered only for a visible hole, ideal depth reaches 90 % detection (the misses pick a round gap in the bracket's cap) but only 47 % grasp success, mostly from IK failures (measured before the collision check).

Implications for policies trained on such synthetic data. The two perception stages respond to the camera very differently. Hole detection depends on a local cue a few pixels wide and drops from 100 % to 54 % under the full model. The CAD fit integrates over the whole visible surface and still finds the bracket in 99 % of the cases. This suggests caution with training an end-to-end policy directly on depth images: such a policy has to read the same local cues, the hole and the face edges, and would likely inherit their fragility, while its training data would also have to carry the right sensor effects. An explicit reconstruction step, model-based fitting such as ICP against CAD or any other module that recovers the object's state from the whole surface,

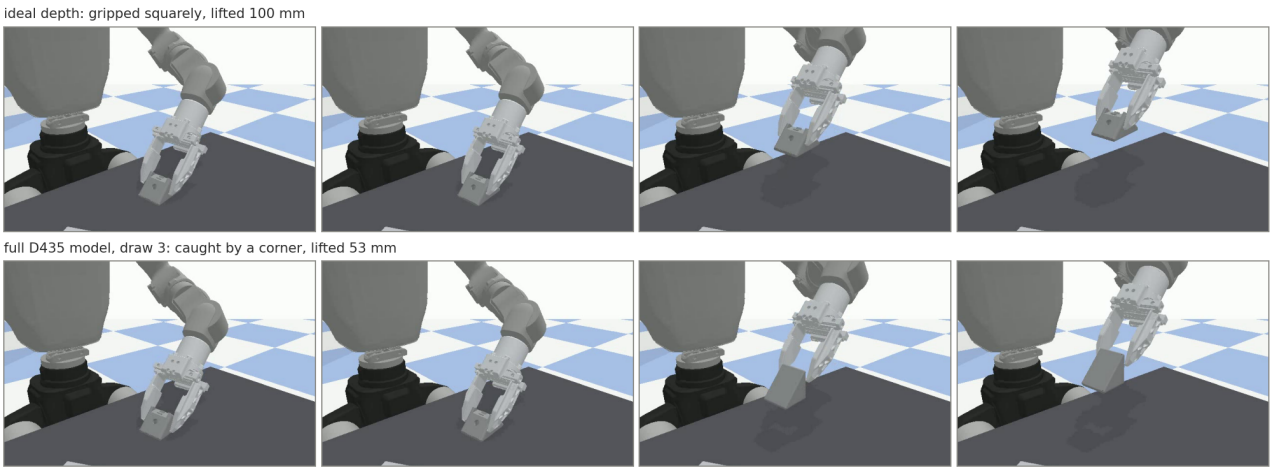


Figure 6: One scene (seed 473) grasped with ideal depth (top) and with the full camera model (bottom, draw 3). The pose is 8.6 mm off: the jaws catch the bracket by a corner, it swings in the grip and is lifted 53 mm instead of 100 mm. The draw counts as lifted.

absorbed most of the random sensor error in our pipeline, and a policy trained on that state may see less of the sim-to-real gap. It does not remove everything: a systematic error such as the depth bias passes through the fit as an 11 mm offset, which our jaws absorb but a tighter grasp would not, and which moves the target the arm has to reach. We did not train a policy; this is an argument from the contrast between the two stages, not a measured result.

Limitations. The evaluation is synthetic: it shows how sensitive the pipeline is to the model. It covers one bracket, one profile and 30 scenes, so the rates carry intervals of about ±8 percentage points. How close the model is to a real D435 is checked in Section 5. The edge-fattening width comes from the R200, the noise is independent per pixel, there is no angle dependence, and PyBullet renders no material effects.

5 How realistic is the camera model?

The model is built from Intel's documentation, not fitted to real data. As a basic check we applied it to the ground truth of HAMMER [5], which pairs real D435 depth with depth rendered from 3D scans of the same view (108 frames, 13 indoor scenes, 0.4–1.4 m; `camera_model/validate_hammer.py`, Fig. 7). The documented effects appear with comparable size: the noise grows with distance as Intel's formula predicts, though about 1.7 times larger (2.0 against 1.2 mm plane residual at 0.53 m), and the real unit shows a scale bias of +3.1 %, somewhat above our ±2 % (part of it may come from the dataset's calibration). Two effects differ: the real noise is spatially correlated, and at depth edges the foreground bleeds in only partially (about a third of the pixels, another 40 % invalid) against almost all of them in our model, so our edge fattening is likely too strong. Missing depth (10–40 % of pixels on walls and the dark table), for which the documentation gives no number, is absent from the model. The check uses one unit and household objects, so it suggests the model is of the right kind and size, not that it predicts real success rates.

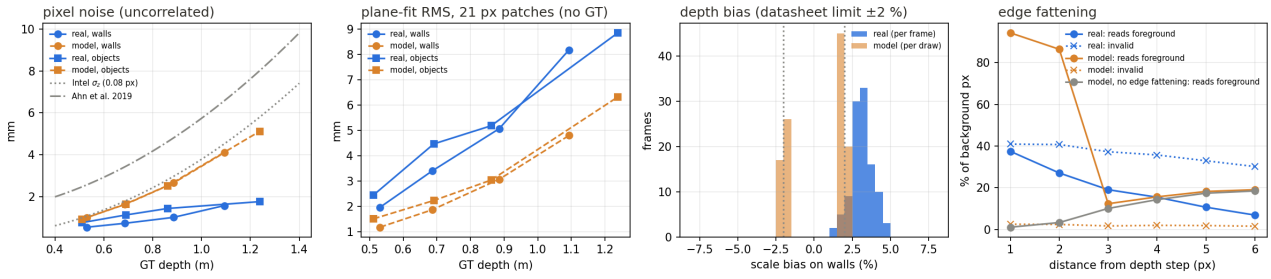


Figure 7: Real D435 depth (HAMMER, blue) against our model applied to HAMMER's ground truth (orange), 108 frames. From left: pixel-to-pixel noise, plane-fit residual in 21×21 px patches (no ground truth needed), per-frame scale bias on walls (dotted: datasheet limit ±2 %), and background pixels near depth steps that read the foreground depth or are invalid.

6 Riskiest sim-to-real assumption (draft)

A perception model adapts its parameters to the data it was developed on. The baseline detector, tuned on ideal depth, fails on D435 noise, much as a network or a robot policy trained on ideal synthetic depth could be expected to fail on the real camera. Generating the training data through a camera model adapts the parameters to the sensor that will be deployed: targeted data quality rather than the broad domain randomisation most sim-to-real approaches rely on, which brings its own difficulties for training.

The risk is that the adaptation is only as good as the camera model. The two published noise levels for the D435 differ by a factor of 2.7, and parameters adapted to the lower one meet the higher one as the ideal-tuned detector met Intel's noise. The riskiest assumption is therefore that the simulated sensor matches the real one where it matters for the task.

First six months (draft). The work so far suggests measuring before modelling: validate the camera model against real D435 depth with ground truth, per depth range and separately at edges; calibrate the edge fattening on the D435 itself; and measure the angle dependence between 60° and 75°, where no data exist.

Use of AI tools

I used Claude Code throughout. It found, read and summarised the sources (datasheet, tuning guide, papers), looked up values and page references, and wrote and ran the code under my decisions. It drafted the report's prose from my notes and decisions; I revised and rewrote every section myself. I did not read the sources in full myself. I proofread the sources of the noise models: for each effect I checked the quoted passages, values and page references against the documents. I did not read the code of the task pipeline (scene, rendering, perception, grasping) line by line; I confirmed that its functions do what they should from their outputs. Claims were also checked against the source text, which found wrong page numbers, a citation attributed to the wrong camera (Keselman's values are for the R200) and a miscounted result. The main disagreement concerned edge fattening: the AI recommended modelling it with a swept width from the start and later ranked it first again. I declined, because no D435 value exists and an invented width would break traceability. In the end I tested it only with the one published number and marked it as needing calibration. The AI also recommended BlenderProc as the simulator; I chose Isaac Sim for its physics and robot integration and kept PyBullet so that the work runs on a laptop.

References

[1] Intel, *Intel RealSense D400 Series Datasheet*, rev. 017, 2026.

[2] A. Grunnet-Jepsen, J. N. Sweetser, J. Woodfill, *Best-Known-Methods for Tuning Intel RealSense D400 Depth Cameras for Best Performance*, Intel, rev. 2.0.

[3] L. Keselman, J. I. Woodfill, A. Grunnet-Jepsen, A. Bhowmik, Intel RealSense Stereoscopic Depth Cameras, *CVPR Workshops*, 2017.

[4] M. S. Ahn, H. Chae, D. Noh, H. Nam, D. Hong, Analysis and Noise Modeling of the Intel RealSense D435 for Mobile Robots, *Int. Conf. on Ubiquitous Robots (UR)*, 2019.

[5] H. Jung, P. Ruhkamp, G. Zhai, N. Brasch, Y. Li, Y. Verdie, J. Song, Y. Zhou, A. Armagan, S. Ilic, A. Leonardis, N. Navab, B. Busam, On the Importance of Accurate Geometry Data for Dense 3D Vision Tasks, *CVPR*, pp. 780–791, 2023 (HAMMER dataset).